電子電腦塑膠五金零件

PLASTIC & ELECTRONIC COMPONENTS

2020
EDITION



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISES CO.,LTD.

2020 EDITION


www.kangyang.com.tw



Kang Yang Hardware Enterprises Co., Ltd was founded in 1987 and has been manufacturing plastic components for 33 years. Kang Yang's headquarter is located in Taipei, Taiwan; and has 3 factories, one factory located in Taiwan and two factories in China. Kang Yang has achieved many certifications such as ISO 9001, ISO14001, QC080000, IATF 16949 and etc.

Kang Yang Hardware Enterprises has been one of the world's leading and prestigious manufacturers specializing in plastic hardware and electronic components with over ten thousand types of products developed. Our engineering team is capable of developing new products within few weeks with state of the art machinery in our own in-house tool shops. With the OEM/ODM capability to help clients design products.

Kang Yang is a truly international corporation with premises in Taiwan, United States and China. KY is proudly serving our clients in more than 100 countries and has increased its global presence in the IT, computer, electronics, automotive, medical and many other industries.

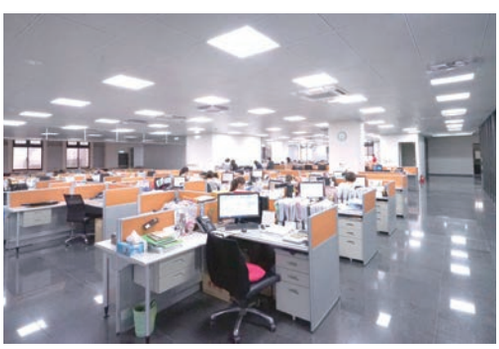





Milestones:

1987	Kang Yang Hardware Enterprises Co., Ltd. established in September 1987 in Taiwan
1991	Taichung Factory established in Taiwan
1994	Dong Guang Factory established in China
1999	Achieved ISO 9001 Certification
2003	Suzhou Factory established in China
2006	All factories are capable of mold design and manufacturer
2007	Achieved QC080000 Certification
2008	Equipped 3D Prototype Mock up Sample Machine
2009	Achieved OHSAS 180001, SA 8000, and Sony Green Partner
2012	Suzhou Factory Phase 2 expansion completed
2013	Taipei Headquarters New Building completed
2014	All production lines are computerized Implemented 2D Barcode Label System in ERP System
2017	Achieved IATF 16949 Certification

康揚企業股份有限公司

設 立 日 期：1987年9月
電　　話：886-2-2692-1498 (代表號)
傳　　真：886-2-2692-2498
產 品 專 利：台灣80+, 中國80+, 美國3+, 日本3+
UL QMMY2工廠認證：UL E336444
UL成品認證：UL E127489、UL E217732
認證：ISO9001、ISO14001、SA8000、
IECQ QC 080000、OHSAS 18001、
QC 080000、IATF 16949



3D模型機 3D Printer

Kang Yang Hardware Enterprises Co.,Ltd.


Established：September, 1987
Tel Number：886-2-2692-1498
Fax Number：886-2-2692-2498
UL QMMY2：UL E336444
UL Product：UL E127489、UL E217732
Certifications：ISO 9001、ISO 14001、
SA8000、IECQ QC080000、
OHSAS 18001、IATF 16949



影像測量儀 Image Measuring System

台北總公司

地址：新北市汐止區環河街187號
面積：9570 m²
設有：國內業務部、國外業務部、研發部、工程部、
品保部、會計部、資財管理部、人事部、倉庫

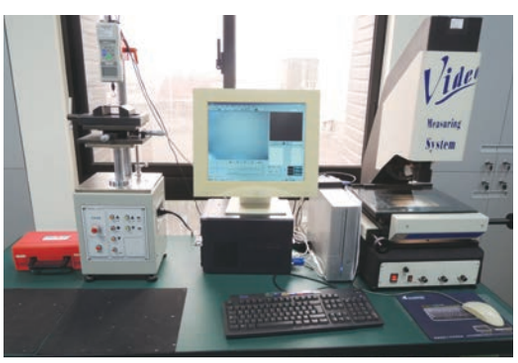


推拉力計，二次元影像式量測儀
Force Gauge, Video Measuring System

Taipei Headquarters

Address：No.187,Huanhe St.,Xizhi Dist.,
New Taipei City,Taiwan
Area：9570 m²
Departments：Local Sales Dept, Export Sales
Dept, R & D, Engineering Dept.,
Q.C. Dept., Accounting Dept.,
Procurement Dept., HR Dept.,
Warehouse

儀器設備：電腦繪圖機、日製投影機、影像式精密測繪儀、硬度計、AC/DC高壓絕緣測試機、拉力計、
電子式卡尺、各種牙規、柱規、塊規、螺絲扭力計、點膠機、扭力測試機……

Equipment：Computer plotters, Overhead projectors, Video measuring system, Durometer, AC/DC High-Voltage Insulator Tester, Force Gauge, Digital Calipers, Pin gauge, Gauge block sets, Torsion Tester, Glue Dispensing Robot, Force Gauge, Prototype Sample Making Machine, etc

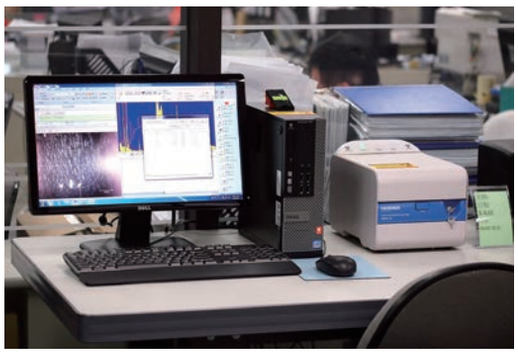

[堀場] X射線螢光分析儀 (XRF)
[Horiba] X-Ray Fluorescence Analyzer



小型恆濕恆溫試驗機
Bench-top Type Temperature & Humidity Chamber



台中工廠

面　　積：12850 m²
UL QMMY2工廠認證：UL E336444
認　　證：ISO 9001、ISO 14001、
　　QC 080000、IATF 16949
設　　有：射出成型部、模具部、品管部、
　　加工部、包裝部、倉庫

Taichung Factory

Area：12850 m²
UL QMMY2：UL E336444
Certifications：ISO 9001、ISO 14001、
　　QC 080000
Departments：Injection Molding Dept., Mold Dept., Q.C Dept., Processing Dept., Packaging Dept. Warhouse,



射出車間
Injection Work Shop



[東京精密] 三次元測量儀
[Tokyo Seimitsu] 3D Coordinate Measuring Machine

機器設備：射出成型機、機械手臂、自動供料機、CNC機、CNC放電加工機、模溫機、裁切機、除濕乾燥機、攪拌機、粉碎機

Equipment：Injection Molding Machine, Robotic Arm, Automatic Material Feeder, CNC Machine, CNC EDM Machine, Mold Temperature Controller, Cutting Machine, Dehumidifying Dryer, Material Mixer, Plastic Shedder Machine.



射出車間
Injection Work Shop



大型進口射出機
Large Injection Machine



射出車間
Injection Work Shop



射出車間
Injection Work Shop



［發那科］CNC機
[Fanuc] CNC Machine



［夏米爾］放電機
[Charmilles] EDM Machine



［蘇比克］放電加工機
[Sodick] EDM Machine



［蘇比克］線切割機
[Sodick] Wire EDM Machine





中國東莞廠

廣東省東莞市長安鎮上角社區紅棉路2號
電　　話：86-769-8530-5187
傳　　真：86-769-8530-5190
面　　積：22800 m²
設立日期：1994年5月
UL QMMY2工廠認證：UL E336444
認　　證：ISO 9001、ISO 14001、
IECQ QC 080000.
SA 8000、OHSAS 18001.
設　　有：業務部、射出成型部、模具部、品管部、加工部、會計部、資材管理部、包裝部、倉庫

Dong Guan Factory, China

Address：No2, Hong Mian Road.,Shang Jiao Management District, Chang An Town,Dong Guan City, Guang Dong Province
Tel Number：86-769-8530-5187
Fax Number：86-769-8530-5190
Area：22800 m²
Established：May, 1994
UL QMMY2：UL E336444
Certifications：ISO 9001、ISO 14001、IECQ QC 080000.
SA 8000、OHSAS 18001.
Departments：Sales Dept., Injection Molding Dept., Mold Dept., Q.C. Dept.,Process Dept., Accounting Dept., Procurement Dept. Packaging Dept., Warehouse

機器設備：射出成型機、機械手臂、自動供料機、CNC機、CNC放電加工機、模溫機、裁切機、除濕乾燥機、攪拌機、粉碎機

Equipment：Injection Molding Machine, Robotic Arm, Automatic Material Feeder, CNC Machine, CNC EDM Machine, Mold Temperature Controller, Cutting Machine, Dehumidifying Dryer, Material Mixer, Plastic Shedder Machine



［夏米爾］放電機
[Charmilles] EDM Machine




［米克朗］CNC加工機
[Mikron] CNC Machine



［牧野］ 放電加工機
[Makino] EDM Machine



［發那科］ CNC加工機
[Fanuc] CNC Machine

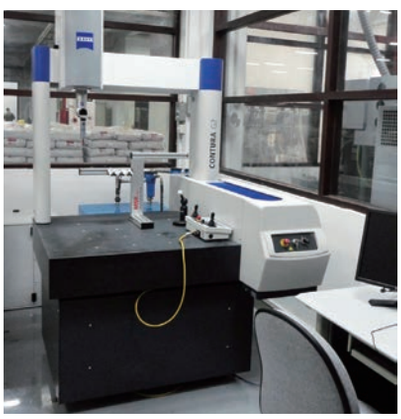

［蔡司］ 三次元測量儀
[Carl Zeiss] 3D Coordinate Measuring Machine



［蘇比克］ 線切割機
[Sodick] Wire EDM Machine



射出車間
Injection Work Shop



射出車間
Injection Work Shop



射出車間
Injection Work Shop



射出車間
Injection Work Shop





中國蘇州廠

江蘇省蘇州市吳江區松陵鎮花港路877號
電　　話：86-512-8067-0100
傳　　真：86-512-6343-4598~9
面　　積：39805 m²
設立日期：2003年1月
UL QMMY2工廠認證：UL E336444
認　　證：ISO 9001、ISO 14001、
QC 080000.
SA 8000、OHSAS 18001.
設　　有：業務部、射出成型部、模具部、品管部、加工部、會計部、資材管理部、包裝部、倉庫

Suzhou Factory, China

Address：No.877, Hua Gang Rd.,Song Ling Town,Suzhou City,Wujiang Dist,Jiang Su Province
Tel Number：86-512-80670100
Fax Number：86-512-63434598~9
Area：39805 m²
Established：January, 2003
UL QMMY2：UL E336444
Certifications：ISO 9001、ISO 14001、QC 080000.
SA 8000、OHSAS 18001.
Departments：Sales Dept., Injection Molding Dept., Mold Dept., Q.C. Dept., Process Dept., Accounting Dept., Procurement Dept. Packaging Dept., Warehouse

機器設備：射出成型機、機械手臂、自動供料機、CNC機、CNC放電加工機、模溫機、裁切機、除濕乾燥機、攪拌機、粉碎機、沖床40頓

Equipment：Injection Molding Machine, Robotic Arm, Automatic Material Feeder, CNC Machine, CNC EDM Machine, Mold Temperature Controller, Cutting Machine, Dehumidifying Dryer, Material Mixer, Plastic Shedder Machine, 40T Punch Press Machine



[夏米爾] 放電機
[Charmilles] EDM Machine



[米克朗] CNC加工機
[Mikron] CNC Machine



潔淨車間
Work Shop In Clean Surrounding



射出車間
Injection Work Shop



射出車間
Injection Work Shop



射出車間
Injection Work Shop




[蘇比克] 放電加工機
[Sodick] EDM Machine



[蘇比克] 線切割機
[Sodick] Wire EDM Machine



[牧野] 放電加工機
[Makino] EDM Machine

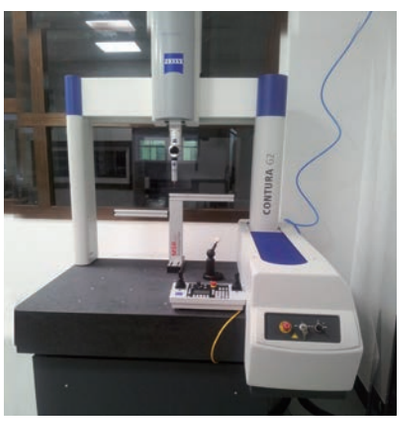

[蔡司] 三次元量測儀
[Carl Zeiss] 3D Coordinate Measuring Machine

◎ 產品尺寸、規格以本公司製作之承認書為主，目錄為輔。
◎ 本目錄之包裝數量僅供參考，實際數量以本公司之產品包裝標示為主。
◎ 標★與 NEW，則為新產品。
◎ 如要開發新產品，歡迎來電詢問。
◎ 2019.12.1編輯・發行。

◎ Specifications are subject to change without prior notice.
◎ Catalogue standard package Q'ty are served as reference only.
◎ Items marked In ★ and NEW ,are new products.
◎ Custom-made and OEM services are also available.
◎ Issued on 2019.12.1

康揚公司環保理念與政策實施

我們在環保減廢的層面上，做到了辦公室無紙化，部門間的訊息傳遞使用電子傳輸及閱讀，且工廠端製程管控已導入電腦化的數據登錄，可大幅降低紙張用量。

在節能減碳的層面上，做到了整棟大樓採用LED照明以及感測器開關，暫時無人使用的區域可以感應電源開與關，相較傳統燈泡、燈管..等節省了40%~50%的電能耗用。另外，主要的製造設備：塑膠射出成型機逐步更新使用電動機，相較於傳統的油壓機更可節能50%以上，同時並倡導全體員工隨手關燈節水，善盡環保節能愛地球的企業責任。

在控制與降低環保衝擊的層面上，我們選用了符合EU RoHS及ECHA REACH法規，並遵循各國際大廠環保材料規範及國際衝突礦產錫(Sn)、鉭(Ta)、鎢(W)、金(Au)不使用法規，持續並依據ISO 14001系統的管理要求，確保環保法令及法規的更新與管控，內部先期導入X射線螢光分析儀檢測管控，外部主動要求原料及合格供應商提供環境管理物質的檢測報告，以監測、監控產品實現的過程有效運作。

Kang Yang's Environmental Policy and Practice:

Kang Yang has been practicing environmental policies in perspective of conservation, energy saving, and controlling and reducing environment impact.


In conservation perspective, we are paperless office that communicates information by e-documentations between departments. A great portion of paper has been reduced by using computerized data input in production control in factories.


In energy saving perspective, the Kang Yang building is equipped with LED and light sensors that save electricity in the area that is temporarily not in use. This saved 40%~50% electricity consumption comparing with traditional lightning. Furthermore, our manufacturing machines use electric generators instead of traditional hydraulic cylinder which save 50% energy. In Addition, we advocate all Kang Yang employees to turn off light when not in use and save water to fulfill our corporate social responsibility.


In controlling and reducing environmental impact perspective, all of Kang Yang products are EU RoHS, ECHA REACH compliant and we use materials that are compliant to EU RoHS, ECHA REACH and follow International Companies' Regulations and Conflict Minerals (Tin, Tantalum, Tungsten, and Gold) Non-Using Law. Based on QC 08000 and ISO14001's requirement, we ensure all environmental law and regulation are updated and controlled in company. From the internal perspective, we use many different testing instruments to ensure our products are EU RoHS, ECHA REACH compliant. From the external perspective, we request our material suppliers to provide environmental test reports in order to ensure their production process are environmental friendly as well.


Spacer Support, Round Spacer, Threaded Spacer, Pillar Support, Conductive Spacer Support

PC板間隔柱、圓體間隔柱、塑膠銅柱、導光板間隔柱、導電PC板間隔柱



1-1


1-2


1-3


1-4


1-5



1-6


1-7



1-8


1-9


1-10


1-11


1-12


1-13


1-14


1-15


1-16


1-17


1-18



1-19


1-20


1-21


1-22



1-23


1-24


1-25


1-26



1-27



1-28


1


Spacer Support, Round Spacer, Threaded Spacer, Pillar Support,
Conductive Spacer Support


PC板間隔柱、圓體間隔柱、塑膠銅柱、導光板間隔柱、導電PC板間隔柱



1-29


1-30



1-31



1-32


1-33



1-34



1-35



1-36



1-37



1-38



1-39



1-40



1-41



1-42



1-43



1-44



1-45



1-46



1-47



1-48



1-49



1-50



1-51


1-52


1-53


1-54


1-55


1-56

Spacer Support, Round Spacer, Threaded Spacer, Pillar Support, Conductive Spacer Support

PC板間隔柱、圓體間隔柱、塑膠銅柱、導光板間隔柱、導電PC板間隔柱


1-57


1-58


1-59


1-60



1-61


1-62


1-63


1-64



1-65


1-66


1-67



1-68


1-69


1-70


1-71


1-72


1-73


1-74


1-75



1-76



1-77


1-78


1-79


1-80


1-81


1-82


1-83


1-84

1

Spacer Support, Round Spacer, Threaded Spacer, Pillar Support,
Conductive Spacer Support

PC板間隔柱、圓體間隔柱、塑膠銅柱、導光板間隔柱、導電PC板間隔柱



1-85



1-86



1-87



1-88



1-89


1-90


1-91



1-92


1-93


1-94


1-95



1-96



1-97


1-98


1-99


1-100


1-101


1-102


1-103



1-104



1-105


1-106


1-107


1-108


1-109


1-110


1-111


1-112

Spacer Support, Round Spacer, Threaded Spacer, Pillar Support, Conductive Spacer Support

PC板間隔柱、圓體間隔柱、塑膠銅柱、導光板間隔柱、導電PC板間隔柱



1-113



1-114


1-115



1-116



1-117


1-118


1-119


1-120


1-121


1-122


1-123


1-124


1-125


1-126


1-127


1-128


1-129


1-130


1-131


1-132


1-133


1-134


1-135


1-136


1-137


1-138


1-139


1-140

1


Spacer Support, Round Spacer, Threaded Spacer, Pillar Support, Conductive Spacer Support

PC板間隔柱、圓體間隔柱、塑膠銅柱、導光板間隔柱、導電PC板間隔柱


1-141



1-142


1-143


1-144


1-145



1-146



1-147


1-148



1-149



1-150


1-151



1-152


1-153


1-154


1-155


1-156


1-157


1-158


1-159


1-160



1-161


1-162


1-163

90° LED Spacer Support, LED Holder, LED Mask, Light Pipe

90° LED間隔柱、LED座、LED擋板、導光柱


2-1


2-2


2-3


2-4


2-5


2-6


2-7


2-8


2-9


2-10


2-11


2-12


2-13


2-14


2-15


2-16


2-17


2-18


2-19


2-20


2-21


2-22


2-23


2-24


2-25


2-26


2-27



2-28

2


90° LED Spacer Support, LED Holder, LED Mask, Light Pipe


90° LED間隔柱、LED座、LED擋板、導光柱



2-29



2-30


2-31


2-32


2-33



2-34


2-35


2-36


2-37


2-38


2-39



2-40


2-41



2-42


2-43


2-44


2-45


2-46


2-47


2-48


2-49


2-50


2-51


2-52


2-53


2-54


2-55


2-56

90° LED Spacer Support, LED Holder, LED Mask, Light Pipe


90° LED間隔柱、LED座、LED擋板、導光柱



2-57



2-58



2-59



2-60



2-61


2-62



2-63


2-64



2-65


2-66


2-67


2-68


2-69



2-70


2-71

3


90° LED Holder

90° LED燈座



3-1



3-2


3-3


3-4


3-5



3-6



3-7


3-8


3-9


3-10


3-11


3-12


3-13


3-14



3-15


3-16


3-17



3-18



3-19


3-20


3-21


3-22


3-23


3-24


3-25



3-26



3-27


3-28

90° LED Holder


90° LED燈座


3-29


3-30


3-31


3-32


3-33



3-34


3-35

4

Mount, Lock, Wire Saddle Side Entry, Wire Lock, F.B.T Clip


固定座、束線座、隔離束線座、束線環、防落下固定帶、防高壓線環


4-1



4-2


4-3


4-4


4-5



4-6


4-7



4-8



4-9



4-10


4-11


4-12



4-13


4-14


4-15



4-16


4-17



4-18



4-19



4-20


4-21


4-22



4-23


4-24


4-25



4-26


4-27



4-28


Mount, Lock, Wire Saddle Side Entry, Wire Lock, F.B.T Clip


固定座、束線座、隔離束線座、束線環、防落下固定帶、防高壓線環



4-29



4-30



4-31



4-32



4-33


4-34


4-35


4-36



4-37


4-38


4-39


4-40


4-41


4-42


4-43



4-44


4-45



4-46



4-47



4-48



4-49



4-50


4-51


4-52


4-53


4-54


4-55



4-56

4

Mount, Lock, Wire Saddle Side Entry, Wire Lock, F.B.T Clip


固定座、束線座、隔離束線座、束線環、防落下固定帶、防高壓線環



4-57



4-58



4-59


4-60



4-61



4-62


4-63


4-64


4-65



4-66



4-67



4-68


4-69


4-70



4-71


4-72



4-73



4-74



4-75


4-76



4-77


4-78



4-79


4-80


4-81



4-82



4-83



4-84

Mount, Lock, Wire Saddle Side Entry, Wire Lock, F.B.T Clip

固定座、束線座、隔離束線座、束線環、防落下固定帶、防高壓線環


4-85



4-86



4-87



4-88



4-89



4-90



4-91



4-92



4-93


4-94


4-95


4-96


4-97


4-98


4-99



4-100


4-101


4-102


4-103


4-104


4-105


4-106



4-107


4-108


4-109



4-110


4-111


4-112


Mount, Lock, Wire Saddle Side Entry, Wire Lock, F.B.T Clip


固定座、束線座、隔離束線座、束線環、防落下固定帶、防高壓線環



4-113



4-114



4-115



4-116



4-117



4-118



4-119


4-120



4-121



4-122



4-123


4-124


4-125


4-126


4-127



4-128


4-129



4-130



4-131



4-132


4-133


4-134


4-135


4-136


4-137


4-138


4-139


4-140

Mount, Lock, Wire Saddle Side Entry, Wire Lock, F.B.T Clip

固定座、束線座、隔離束線座、束線環、防落下固定帶、防高壓線環



4-141



4-142


4-143


4-144


4-145



4-146


4-147



4-148



4-149


4-150



4-151


4-152



4-153



4-154



4-155



4-156



4-157



4-158


4-159


4-160


4-161


4-162


4-163

5

Hole Plugs, Strain Relief Bushing, Wire Label, Snap Bushing, Cable Ties, PVC Tubing, Heat Shrink Tubing, Silicon Glass Fiber Sleeving, Handle, Moveable Bushing, Box Handle

扣式塞頭、電源線扣、黏貼標誌貼紙、護線環、束線帶、PVC套管、熱縮套管、織布管、把手、活用護線環、外箱扣


5-1


5-2


5-3


5-4


5-5



5-6


5-7



5-8


5-9



5-10


5-11


5-12



5-13


5-14


5-15


5-16


5-17


5-18


5-19


5-20


5-21


5-22


5-23


5-24



5-25


5-26


5-27


5-28


Hole Plugs, Strain Relief Bushing, Wire Label, Snap Bushing, Cable Ties, PVC Tubing, Heat Shrink Tubing, Silicon Glass Fiber Sleeving, Handle, Moveable Bushing, Box Handle


扣式塞頭、電源線扣、黏貼標誌貼紙、護線環、束線帶、PVC套管、熱縮套管、織布管、把手、活用護線環、外箱扣


5-29



5-30


5-31


5-32


5-33


5-34



5-35


5-36


5-37


5-38


5-39


5-40


5-41



5-42



5-43



5-44



5-45



5-46



5-47


5-48



5-49



5-50



5-51


5-52


5-53


5-54



5-55



5-56


5


Hole Plugs, Strain Relief Bushing, Wire Label, Snap Bushing, Cable Ties, PVC Tubing, Heat Shrink Tubing, Silicon Glass Fiber Sleeving, Handle, Moveable Bushing, Box Handle


扣式塞頭、電源線扣、黏貼標誌貼紙、護線環、束線帶、PVC套管、熱縮套管、織布管、把手、活用護線環、外箱扣



5-57



5-58



5-59



5-60



5-61



5-62



5-63



5-64



5-65



5-66


5-67


5-68


5-69



5-70


5-71


5-72


5-73


5-74


5-75


5-76



5-77



5-78



5-79


5-80


5-81



5-82



5-83


5-84


Hole Plugs, Strain Relief Bushing, Wire Label, Snap Bushing, Cable Ties, PVC Tubing, Heat Shrink Tubing, Silicon Glass Fiber Sleeving, Handle, Moveable Bushing, Box Handle

扣式塞頭、電源線扣、黏貼標誌貼紙、護線環、束線帶、PVC套管、熱縮套管、織布管、把手、活用護線環、外箱扣



5-85



5-86


5-87


5-88


5-89


5-90


5-91



5-92



5-93

6

Parts Washer, Holder, Parts Housing, Silicon Insulator, Soft PVC Sleeves, VCP Cap, Fuse Holder, Tact Switch Cap, Mic Holder, Connector Holder

電晶體墊片、電晶體座、零件墊座、矽膠帽套、矽膠片、PVC 軟質保護套、末端套管、保險絲座、開關蓋、帽蓋、麥克風套、連接器座



6-1


6-2



6-3


6-4


6-5


6-6



6-7


6-8


6-9


6-10


6-11


6-12


6-13


6-14


6-15


6-16


6-17


6-18


6-19



6-20



6-21



6-22



6-23


6-24


6-25


6-26


6-27

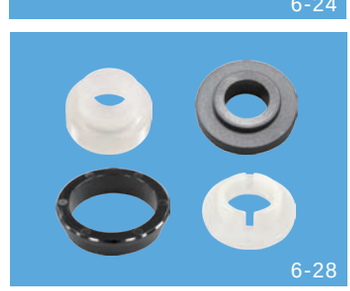

6-28


Parts Washer, Holder, Parts Housing, Silicon Insulator, Soft PVC Sleeves, VCP Cap, Fuse Holder, Tact Switch Cap, Mic Holder, Connector Holder


電晶體墊片、電晶體座、零件墊座、矽膠帽套、矽膠片、PVC 軟質保護套、末端套管、保險絲座、開關蓋、帽蓋、麥克風套、連接器座


6-29


6-30


6-31



6-32



6-33


6-34



6-35



6-36



6-37



6-38



6-39



6-40



6-41



6-42



6-43



6-44


6-45


6-46



6-47


6-48


6-49


6-50


6-51


6-52


6-53


6-54



6-55



6-56


6


Parts Washer, Holder, Parts Housing, Silicon Insulator, Soft PVC Sleeves, VCP Cap, Fuse Holder, Tact Switch Cap, Mic Holder, Connector Holder


電晶體墊片、電晶體座、零件墊座、矽膠帽套、矽膠片、PVC 軟質保護套、末端套管、保險絲座、開關蓋、帽蓋、麥克風套、連接器座



6-57



6-58



6-59



6-60



6-61



6-62



6-63


6-64



6-65



6-66


6-67



6-68


6-69


6-70


6-71


6-72


6-73


6-74


6-75


6-76


6-77


6-78



6-79


6-80


6-81



6-82



6-83



6-84


Parts Washer, Holder, Parts Housing, Silicon Insulator, Soft PVC Sleeves, VCP Cap, Fuse Holder, Tact Switch Cap, Mic Holder, Connector Holder


電晶體墊片、電晶體座、零件墊座、矽膠帽套、矽膠片、PVC 軟質保護套、末端套管、保險絲座、開關蓋、帽蓋、麥克風套、連接器座


6-85


6-86


6-87


6-88



6-89



6-90



6-91



6-92


6-93


6-94


6-95



6-96



6-97



6-98


6-99


6-100


6-101


6-102


6-103



6-104



6-105


7


Screw Switch, Speaker Holder, Usb Housing, Snap Rivet, Door Lock, Plastic Conical Anchors


螺絲帽蓋、喇叭座、USB座護蓋、鉚釘、門扣、螺絲固定座



7-1


7-2



7-3



7-4



7-5




7-6



7-7


7-8


7-9


7-10


7-11


7-12


7-13


7-14


7-15



7-16


7-17



7-18



7-19


7-20


7-21



7-22


7-23


7-24


7-25



7-26


7-27



7-28


Screw Switch, Speaker Holder, Usb Housing, Snap Rivet, Door Lock, Plastic Conical Anchors


螺絲帽蓋、喇叭座、USB座護蓋、鉚釘、門扣、螺絲固定座



7-29



7-30



7-31



7-32


7-33



7-34



7-35



7-36


7-37


7-38


7-39



7-40


7-41


7-42


7-43


7-44



7-45



7-46



7-47


7-48


7-49


7-50


7-51


7-52


7-53


7-54


7-55


7-56

7

Screw Switch, Speaker Holder, Usb Housing, Snap Rivet, Door Lock, Plastic Conical Anchors

螺絲帽蓋、喇叭座、USB座護蓋、鉚釘、門扣、螺絲固定座


7-57



7-58



7-59


7-60


7-61


7-62


7-63


7-64


7-65


7-66


7-67


7-68


7-69


7-70


7-71


7-72


7-73


7-74


7-75


7-76


7-77



7-78


7-79


7-80


7-81


7-82


7-83



7-84

Screw Switch, Speaker Holder, Usb Housing, Snap Rivet, Door Lock, Plastic Conical Anchors

螺絲帽蓋、喇叭座、USB座護蓋、鉚釘、門扣、螺絲固定座


7-85


7-86



7-87


7-88


7-89


7-90


7-91


7-92



7-93


7-94



7-95



7-96


7-97


7-98


7-99



7-100



7-101



7-102


7-103



7-104


7-105


7-106



7-107


7-108


7-109


7-110


7-111


7-112


7


Screw Switch, Speaker Holder, Usb Housing, Snap Rivet, Door Lock, Plastic Conical Anchors


螺絲帽蓋、喇叭座、USB座護蓋、鉚釘、門扣、螺絲固定座


7-113


7-114


7-115


7-116


7-117

Screw, Card Puller, Card Guide

螺絲、PC板拉柄、PC板導槽



8-1



8-2


8-3



8-4


8-5


8-6


8-7


8-8


8-9


8-10


8-11


8-12


8-13


8-14


8-15



8-16


8-17


8-18


8-19


8-20



8-21



8-22


8-23


8-24


8-25



8-26



8-27



8-28

Screw, Card Puller, Card Guide


螺絲、PC 板拉柄、PC 板導槽


8-29



8-30



8-31



8-32



8-33


8-34



8-35



8-36



8-37


8-38


8-39


8-40



8-41



8-42



8-43


Plastic Foot, Rubber Foot, Gold Covering Foot, Silver Covering Foot, Eva Foam, CPU Exclude Heat Silicon

腳墊、金框腳墊、銀框腳墊、橡膠腳墊、EVA泡棉、CPU散熱矽膠片



9-1


9-2



9-3


9-4



9-5



9-6


9-7


9-8



9-9


9-10



9-11



9-12


9-13


9-14


9-15


9-16


9-17


9-18



9-19



9-20



9-21



9-22



9-23


9-24


9-25


9-26



9-27



9-28


9

Plastic Foot, Rubber Foot, Gold Covering Foot, Silver Covering Foot, Eva Foam, CPU Exclude Heat Silicon

腳墊、金框腳墊、銀框腳墊、橡膠腳墊、EVA泡棉、CPU散熱矽膠片


9-29


9-30



9-31


10

Connector, Terminal Block, Close End Connector, Wire Clamp, Test Pin, P.C.B Terminal, Ground Terminal, Plastic Gear


接線夾、端子台、閉端端子、電線固定片夾、測試針、PC板焊接端子、接地片、塑膠齒輪



10-1



10-2


10-3


10-4


10-5


10-6



10-7



10-8



10-9


10-10



10-11


10-12


10-13



10-14



10-15



10-16


Connector, Terminal Block, Close End Connector, Wire Clamp, Test Pin, P.C.B Terminal, Ground Terminal, Plastic Gear


接線夾、端子台、閉端端子、電線固定片夾、測試針、PC板焊接端子、接地片、塑膠齒輪


10-17



10-18



10-19


10-20



10-21



10-22



10-23



10-24



10-25



10-26



10-27


10-28


10-29



10-30


10-31



10-32



10-33



10-34


10-35



10-36


10-37


10-38


10-39


10-40


10-41


10-42



10-43



10-44


Connector, Terminal Block, Close End Connector, Wire Clamp, Test Pin, P.C.B Terminal, Ground Terminal, Plastic Gear


接線夾、端子台、閉端端子、電線固定片夾、測試針、PC 板焊接端子、接地片、塑膠齒輪



10-45



10-46



10-47



10-48



10-49


10-50


10-51


10-52


10-53


10-54


10-55


10-56


10-57



10-58


10-59




1

- PC 板間隔柱
  Spacer Support
- 圓體間隔柱
  Round Spacer
- 塑膠銅柱
  Threaded Spacer
- 導光板間隔柱
  Pillar Support
- 導電PC板間隔柱
  Conductive Spacer Support

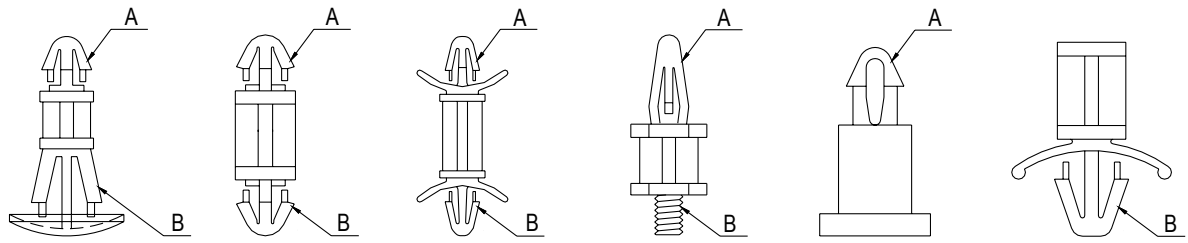


Part No.	A	B	Page	Note
LIJ-4		Ø2.5	1-82	
LBS-		Ø3.0	1-54	
MSA-		Ø3.0	1-56	
TCBA-		Ø3.0	1-60	
LIO-		Ø3.0	1-82	
LIO-8		Ø3.0	1-82	
MSPE-7		Ø3.2	1-33	
DCCB-4.1		Ø3.2	1-61	
MCIA-12		3.2X4.8	1-70	橢圓孔
SOR-3		3.2X6.0	1-89	M2.5 or M2.6 Screw
LCUA-11		Ø3.4	1-99	
EDC-		Ø3.5	1-2	
LASE-		Ø3.5	1-55	
LASH-22		Ø3.5	1-55	
LASJ-		Ø3.5	1-55	
SSUL-8		Ø3.5	1-89	
LIES-1		Ø3.8	1-90	
LASB-3.7		Ø4.0	1-54	
LASF-18		Ø4.0	1-56	
RAMA-		Ø4.0	1-1	
RAMC-		Ø4.0	1-3	
SOR-2		Ø4.0	1-89	
TCBC-		Ø4.0	1-70	
TCBE-		4.0X5.41	1-70	
KVD-05		4.0X5.5	1-24	
LCU-18		Ø4.3	1-105	
LASD-8.3		Ø4.5	1-54	
RAD-		Ø4.8	1-1	
RAMD-15.5		Ø4.8	1-3	
LAS-		Ø4.8	1-56	
LASY-		Ø4.8	1-55	
ULCF-		Ø4.8	1-91	
ULCBB-7.9		Ø4.8	1-99	
WLCF-		Ø4.8	1-91	
LASA-9.5		Ø4.8~5.0	1-56	
TCBD-4.8		Ø4.8~5.0	1-70	
CUS-5		Ø5.0	1-88	
KVD-		5.0X6.5	1-24	
RAM-13.5L		Ø5.5	1-1	
RAM-		Ø5.5	1-1	
RAML-		Ø5.5	1-2	
RAS-		Ø5.5	1-2	
SOR-1		Ø5.5	1-89	
KVLM3-		5.5X7.1	1-69	M3X0.5P
KVLMA-10		5.5X7.1	1-69	
KVLM4-10		5.5X7.1	1-69	M4X0. 7P
RAMB-9		Ø5.6	1-3	
LDD-		Ø6.0	1-91	
PAA-11		6.0X7.0	1-81	

Part No.	A	B	Page	Note
MASD-	Ø1.5		1-57	
MASS-	Ø1.5		1-57	
MASSD-	Ø1.5	Ø1.5	1-14	
MAEB-3.2	Ø1.5	Ø3.0	1-23	
LCMB-8	Ø1.5	Ø3.0	1-23	
MADSA-3	Ø1.6	Ø1.6	1-14	
MADSB-3	Ø1.6	Ø1.6	1-14	
MADS-	Ø1.6	Ø2.0	1-14	
MAS-9	Ø1.6	Ø2.0	1-14	
MAD1.7-9.8	Ø1.7	Ø1.7	1-15	
MA-	Ø2.0		1-15	
MA-XXDL	Ø2.0		1-58	
MAB-4	Ø2.0		1-59	
MAL-8	Ø2.0		1-59	
MAST-	Ø2.0		1-61	
MASL-5.4	Ø2.0		1-62	
MS-	Ø2.0		1-62	
ISS-	Ø2.0		1-92	Double Adhesive Tape
MAD1-	Ø2.0	Ø2.0	1-15	
MAD1.2-	Ø2.0	Ø2.0	1-15	
MADX-9.5	Ø2.0	Ø2.0	1-16	
MADB-	Ø2.0	Ø2.0	1-16	
MAD-	Ø2.0	Ø2.0	1-16	
MADG-5.4	Ø2.0	Ø2.0	1-42	
MAMDA-	Ø2.0	Ø2.5	1-17	
LCMA-	Ø2.0	Ø3.0~3.2	1-46	
RCAB-	Ø2.0	Ø4.0	1-13	
MCSH-7.2	2.2X3.0		1-65	
PCLS-25	Ø2.2		1-62	
MAHA-7	Ø2.2	Ø2.2	1-17	
MSB-2.8	Ø2.3		1-62	
ULCBA-5	Ø2.35	Ø4.0	1-97	
ULCSD-5	Ø2.4	Ø2.8	1-98	
MAMS-	Ø2.5		1-58	
MAM-	Ø2.5		1-58	
MAMS-7.5	Ø2.5		1-59	
MAM-	Ø2.5		1-58	
MSM-2.5	Ø2.5		1-62	
MAE2.5-6.5	Ø2.5		1-63	
MAE2.5-6.5T	Ø2.5		1-63	M2X0.4P
GSS-	Ø2.5		1-92	Double Adhesive Tape
ULCI-11	Ø2.5		1-95	
ULCI J-4	Ø2.5		1-95	
MADA-18S	Ø2.5	Ø2.5	1-17	
MADAA-14	Ø2.5	Ø2.5	1-18	
MAMDL-9	Ø2.5	Ø2.5	1-18	
MAMDF-7	Ø2.5	Ø2.5	1-19	
MADA-	Ø2.5	Ø2.5	1-18	
MADM-	Ø2.5	Ø2.5	1-19	

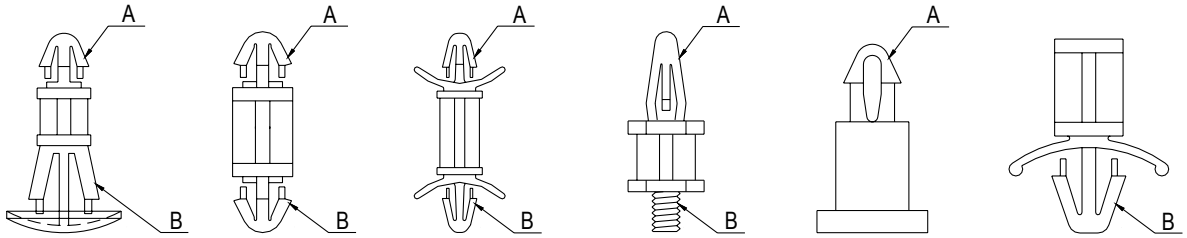


Part No.	A	B	Page	Note
MADE-2.8	Ø2.5	Ø2.5	1-19	
MAC-	Ø2.5	Ø2.5	1-20	
MAHC-14.3	Ø2.5	Ø2.5	1-20	
MADMK-5	Ø2.5	Ø2.5	1-24	
MADJ-6	Ø2.5	Ø2.5	1-17	
LCMC-7	Ø2.5	Ø3.0	1-24	
LCAB-14	Ø2.5	Ø3.0	1-46	
LCMD-	Ø2.5	Ø3.0~3.2	1-47	
RCAC-	Ø2.5	Ø4.0	1-13	
MAEE-4.5	Ø2.5	Ø4.0	1-23	
SCBS632	Ø2.5		1-147	6-32 UNC
MADAB-4.3	Ø2.6	Ø2.5	1-20	
MADM1-2.2	Ø2.6	Ø2.6	1-20	
MSPA-1.6	Ø2.6	Ø2.8	1-36	
LCUE-3.3	Ø2.6	Ø3.2	1-98	
MAMA-3.5	Ø2.7		1-58	
MSPA-6.3L	Ø2.8	Ø2.8	1-37	
LCUAE-16L	Ø2.8	3.2X4.8	1-103	
MAL-34	Ø3.0		1-59	
DCC-	Ø3.0		1-60	
DCE-4	Ø3.0		1-60	
DCC-20S	Ø3.0		1-60	
MAE-	Ø3.0		1-63	
MAE-XXT	Ø3.0		1-63	M3X0.5P
MAE-7-440	Ø3.0		1-64	
MAE-7-440T	Ø3.0		1-64	4-40 UNC
DCB-	Ø3.0		1-66	
DCBA-3.5	Ø3.0		1-66	
SS1-	Ø3.0		1-86	M2 Screw
SS3-7(1.3)	Ø3.0		1-86	M2 Screw
BSS-	Ø3.0		1-93	Double Adhesive Tape
CSSA-2	Ø3.0	Ø3.0	1-93	Double Adhesive Tape
CSS-	Ø3.0	Ø3.0	1-93	Double Adhesive Tape
MADL-27.8	Ø3.0	Ø3.0	1-21	
MAMDC-12	Ø3.0	Ø3.0	1-21	
MSPC3-	Ø3.0	Ø3.0	1-25	
MSPC3-3.2L	Ø3.0	Ø3.0	1-25	
MSPF3-	Ø3.0	Ø3.0	1-25	
SSDU1-3.5	Ø3.0	Ø3.0	1-33	
LCV-	Ø3.0	Ø3.0	1-34	
LCVA-	Ø3.0	Ø3.0	1-34	
LCVU-	Ø3.0	Ø3.0	1-34	
LCJ-	Ø3.0	Ø3.0	1-34	
LMSA-6	Ø3.0	Ø3.0	1-37	
LCGA-	Ø3.0	Ø3.0	1-39	
LCF-	Ø3.0	Ø3.0	1-39	
CBSA-13	Ø3.0	Ø3.0	1-39	
LCA-	Ø3.0	Ø3.0	1-43	
LCG-	Ø3.0	Ø3.0	1-47	

Part No.	A	B	Page	Note
LCUAC-7	Ø3.0	3.2X4.8	1-101	
LCUAE-12	Ø3.0	3.2X4.8	1-102	橢圓孔
LCFO-	Ø3.0	Ø3.5	1-39	
RCI-2.6	Ø3.0	Ø4.0	1-3	
RCO-	Ø3.0	Ø4.0	1-4	
RCA-	Ø3.0	Ø4.0	1-4	
MAEA-3.5M	Ø3.0	Ø4.0	1-23	
LCX-31	Ø3.0	Ø4.0	1-34	
LCH-	Ø3.0	Ø4.0	1-43	
RCC-	Ø3.0	Ø4.8	1-4	
MAEA-	Ø3.0	Ø4.8	1-23	
LCBT-	Ø3.0	Ø4.8	1-48	
KLCBS-	Ø3.0	Ø4.8	1-49	
LCBUA-13.9	Ø3.0	Ø4.8~5.0	1-47	
RCG-	Ø3.0	Ø5.5	1-5	
SCBA-	Ø3.0		1-147	M3X0.5P
MSPA3-9.7	Ø3.0		1-148	M3X0.5P
DCBA-8	Ø3.1		1-66	
MADD-2	Ø3.1	Ø3.0	1-21	
LCUAC-11	Ø3.1	3.2X4.8	1-102	橢圓孔
LCUAE-	Ø3.1	3.2X4.8	1-102	橢圓孔
JSS-	Ø3.2		1-94	Double Adhesive Tape
LCPL-6.4	Ø3.2	Ø2.0	1-38	
LCSE-	Ø3.2	Ø3.0~3.2	1-51	
MSPP-	Ø3.2	Ø3.2	1-25	
MSPB3.2-6.4	Ø3.2	Ø3.2	1-26	
MSP3	Ø3.2	Ø3.2	1-29	
MSPS3-T	Ø3.2	Ø3.2	1-29	
DMSB-	Ø3.2	Ø3.2	1-28	
DMSS-	Ø3.2	Ø3.2	1-28	
MSPL-11	Ø3.2	Ø3.2	1-29	
MSPS3S-7.5	Ø3.2	Ø3.2	1-28	
MSPMA-12	Ø3.2	Ø3.2	1-30	
LMSB-4	Ø3.2	Ø3.2	1-37	
LMSP-	Ø3.2	Ø3.2	1-37	
MADN-24	Ø3.2	Ø3.2	1-21	
LCUAC-	Ø3.2	3.2X4.8	1-101	橢圓孔
LCUAE-	Ø3.2	3.2X4.8	1-102	橢圓孔
RCMB-2.8	Ø3.2	Ø4.0	1-5	
LCUAD-1	Ø3.2	Ø4.1	1-100	
ULCSE-6.6	Ø3.2	Ø4.2	1-98	
ULCSE-7	Ø3.2	3.2X4.8	1-98	
RCBS-	Ø3.2	Ø4.8	1-8	
RCV-11.1	Ø3.2	Ø4.8	1-8	
RCW-	Ø3.2	Ø4.8	1-9	
ULCD-7.8	Ø3.3		1-95	M3X0.5P
MSPB-8	Ø3.3	Ø3.2	1-26	
MSPH-7.5	Ø3.3	Ø3.2	1-30	
MSPN-	Ø3.3	3.2X4.8	1-30	橢圓孔

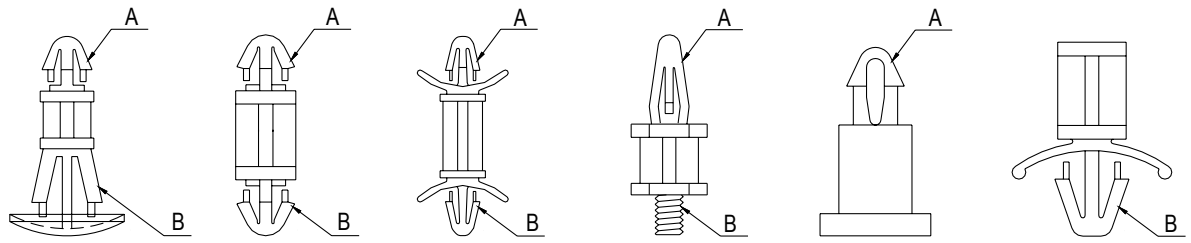

Part No.	A	B	Page	Note
MSPD-	Ø3.3	3.2X4.8	1-30	橢圓孔
ULCH-	Ø3.3	3.2X4.8	1-96	M2.5
ULCSA-	Ø3.3	3.3X4.8	1-97	
MSPF3.3-	Ø3.3	Ø3.3	1-27	
LCOA-28.8	Ø3.3	Ø3.3	1-38	
MSPCA-16	Ø3.3	Ø3.3	1-26	
MSPCA3.3-12	Ø3.3	Ø3.3	1-26	
MSPF3.3-8L	Ø3.3	Ø3.3	1-27	
DMSC-4.5	Ø3.3	Ø3.3	1-30	
KEMS-11.3	Ø3.3	5.5X5.5	1-104	
LCIA-3.5	Ø3.4	Ø3.7	1-35	
ULCBA-7.8	Ø3.4	Ø4.8	1-99	
SCB3-38	Ø3.4		1-149	M3X0.5P
MCM-	Ø3.5		1-60	
PDC-	Ø3.5		1-66	
MCN-10	Ø3.5		1-68	
FSS-	Ø3.5		1-93	Double Adhesive Tape
FSSA-15	Ø3.5		1-93	
FSL-25	Ø3.5		1-94	Double Adhesive Tape
LCPLB-11	Ø3.5	Ø2.6	1-38	
MAFA-6	Ø3.5	Ø3.5	1-22	
MAD3.5-12	Ø3.5	Ø3.5	1-22	
MDLS-4.5	Ø3.5	Ø3.5	1-22	
MAF-	Ø3.5	Ø3.5	1-22	
MAMDD-6	Ø3.5	Ø3.5	1-24	
LCI-	Ø3.5	Ø3.5	1-35	
LDE-33	Ø3.5	Ø3.5	1-35	
LCO-	Ø3.5	Ø3.5	1-40	
CBCS-14	Ø3.5	Ø3.5	1-40	
LCD-	Ø3.5	Ø3.5	1-40	
CBSS-	Ø3.5	Ø3.5	1-43	
LCPA-8.2	Ø3.5	Ø4.0	1-52	
LCBU-	Ø3.5	Ø4.8	1-48	
KLCBM-	Ø3.5	Ø4.8	1-49	
RCT-	Ø3.5	Ø4.8~5.0	1-11	
RCH-	Ø3.5	Ø5.5	1-5	
RCTA-4.5	Ø3.5	Ø5.5	1-11	
SCBC-	Ø3.5		1-147	M3X0.5P
SCBB-3	Ø3.5		1-147	M3X0.5P
DCCA-4.3	Ø3.7		1-61	
UCBS-5A	Ø3.8	Ø4.8	1-53	
MSMA-3.5	Ø3.9		1-63	
MSP-15.9S	Ø3.9	Ø3.9	1-31	
MSPG3-	Ø3.9~4.0		1-149	M3X0.5P
MSPG4-	Ø3.9~4.0		1-149	M4X0.7P
MSPS-	Ø3.9~4.0		1-149	6-32 UNC
MCO-16	Ø4.0		1-61	
MAE4D-6	Ø4.0		1-64	
MAE4D-6T	Ø4.0		1-64	M3X0.5P

Part No.	A	B	Page	Note
MAE4-	Ø4.0		1-64	
MAE4-XXT	Ø4.0		1-64	M4X0. 7P
MAE43-	Ø4.0		1-65	M3X0.5P
MAE43-XXT	Ø4.0		1-65	M3X0.5P
MAE43-4.8LT	Ø4.0		1-65	
MCI-4.7	Ø4.0		1-65	
MC-	Ø4.0		1-67	
MCE-1.9	Ø4.0		1-68	
MCEA-1.9	Ø4.0		1-68	
MCH-	Ø4.0		1-68	
ACBR-6	Ø4.0		1-71	
ACB-	Ø4.0		1-71	
MCB-6	Ø4.0		1-72	
TCBS-	Ø4.0		1-73	M3 Screw
TCBS-18	Ø4.0		1-73	M3 Screw
TCBT-3.6	Ø4.0		1-73	
TCBT-7	Ø4.0		1-73	4-40 UNC
TCBT-	Ø4.0		1-73	M3 Screw
TCBT-16	Ø4.0		1-73	4-40 UNC
MBS-	Ø4.0		1-74	
BS-	Ø4.0		1-75	
BS-10-1	Ø4.0		1-75	M3.5~4.0 Screw
BSB-6	Ø4.0		1-75	
BSCL-9.5	Ø4.0		1-76	
SRLCB-	Ø4.0		1-76	
BSCB-	Ø4.0		1-78	M3X0.5P
BSCB-20	Ø4.0		1-78	M3X0.5P
BSCB4-	Ø4.0		1-78	M4X0.7P
BSC632-15.9	Ø4.0		1-78	6-32 UNC
BSC632	Ø4.0		1-79	6-32 UNC
BSCM4-	Ø4.0		1-79	M4X0.7P
BSD632-	Ø4.0		1-79	6-32 UNC
BSDM4-	Ø4.0		1-79	M4X0.7P
SS2-	Ø4.0		1-86	M2.6 Screw
SS2-2.5U	Ø4.0		1-86	M2 Screw
ASS-	Ø4.0		1-94	Double Adhesive Tape
ULCC-	Ø4.0		1-96	M3 Screw
ULCBM4-9.5	Ø4.0		1-96	M4X0.7P
WBHC-6.4	Ø4.0		1-80	
LCBL-8	Ø4.0		1-105	
LCBA-	Ø4.0	2.7X7.2	1-50	
LCSF-15	Ø4.0	Ø4.0	1-38	
LCFB-8	Ø4.0	Ø4.0	1-40	
LCEO-	Ø4.0	Ø4.0	1-41	
LCBJ-9	Ø4.0	Ø4.0	1-41	
LCL-3.2	Ø4.0	Ø4.0	1-43	
CBLSS-	Ø4.0	Ø4.0	1-44	
LCGB-17.5	Ø4.0	Ø4.0	1-48	
WBHB-1.8	Ø4.0	Ø4.0	1-80	

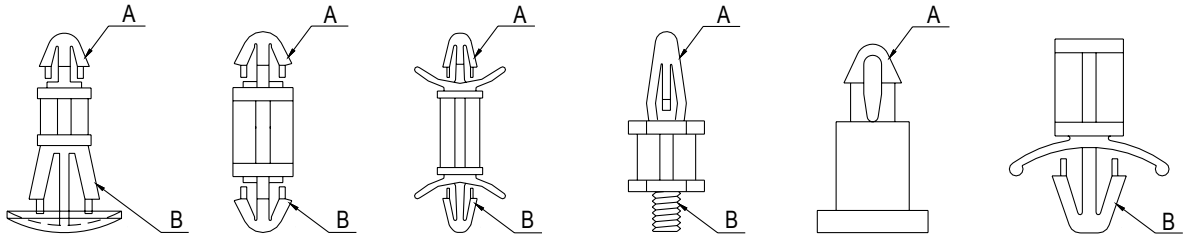


Part No.	A	B	Page	Note
ULCE-9	Ø4.0	Ø4.0	1-99	
MSPR-3	Ø4.0	Ø4.0	1-107	
LCTA-	Ø4.0	Ø4.0	1-41	
MSP-	Ø4.0	Ø4.0	1-31	
DMSPS-	Ø4.0	Ø4.0	1-31	
DMSP-	Ø4.0	Ø4.0	1-31	
SP1-4.8	Ø4.0	Ø4.0	1-31	
MSPM-	Ø4.0	Ø4.0	1-32	
MSP1-	Ø4.0	Ø4.0	1-32	
SSDUA-16.5	Ø4.0	Ø4.0	1-33	
DMSA-9	Ø4.0	Ø4.0	1-33	
LCK-1	Ø4.0	Ø4.0	1-35	
LCC-	Ø4.0	Ø4.0	1-36	
ULCH-1	Ø4.0	4.0X6.8	1-96	
LCT-9	Ø4.0	Ø4.5	1-41	
DRCB-18	Ø4.0	Ø4.5~5.0	1-13	
LCSA-	Ø4.0	Ø4.75	1-51	
LCBD-12.7	Ø4.0	Ø4.8	1-42	
LCBSA-	Ø4.0	Ø4.8	1-44	
RCD-	Ø4.0	Ø4.8	1-6	
MSPK45-	Ø4.0	Ø4.8	1-32	
LCBM-	Ø4.0	Ø4.8	1-36	
LCBZ-	Ø4.0	Ø4.8	1-42	
LCB-	Ø4.0	Ø4.8	1-44	
CBS-	Ø4.0	Ø4.8	1-45	
LCBS-	Ø4.0	Ø4.8	1-45	
VCBS-	Ø4.0	Ø4.8	1-45	
VCBSL-	Ø4.0	Ø4.8	1-46	
VCBA-14.4F	Ø4.0	Ø4.8	1-46	
LCBC-8	Ø4.0	Ø4.8	1-49	
KLCBL-	Ø4.0	Ø4.8	1-49	
HLCS-	Ø4.0	Ø4.8	1-51	
LCSLR-9.5	Ø4.0	Ø4.8	1-51	
LCS-	Ø4.0	Ø4.8	1-52	
LCSD-	Ø4.0	Ø4.8	1-52	
LCSL-4.8	Ø4.0	Ø4.8	1-52	
LCP-	Ø4.0	Ø4.8	1-52	
LCY-4.8	Ø4.0	Ø4.8	1-53	
UCBS-	Ø4.0	Ø4.8	1-53	
ULCB-	Ø4.0	Ø4.8	1-100	
RCS-	Ø4.0	Ø5.0	1-6	
RCWA-	Ø4.0	Ø5.4	1-9	
RCTL-	Ø4.0	Ø5.4	1-12	
RCJ-	Ø4.0	Ø5.4	1-12	
UCBSL-	Ø4.0	Ø5.4	1-53	
RCI-5	Ø4.0	Ø5.5	1-7	
RCMA-3	Ø4.0	Ø5.5	1-5	
RCB-	Ø4.0	Ø5.5	1-6	


Part No.	A	B	Page	Note
RCBL-6	Ø4.0	Ø5.5	1-7	
RCM-	Ø4.0	Ø5.5	1-7	
RCMD-6	Ø4.0	Ø5.5	1-8	
RCR-12.7	Ø4.0	Ø5.5	1-9	
PCBT-	Ø4.0	Ø5.5	1-10	
PCBS-	Ø4.0	Ø5.5	1-10	
RBT-	Ø4.0	Ø5.5	1-12	
RBS-	Ø4.0	Ø5.5	1-12	
KEML-	Ø4.0	5.5X5.5	1-104	
RCF-	Ø4.0	Ø6.0	1-8	
PCBTA-4.8	Ø4.0	Ø6.0	1-10	
RCFL-	Ø4.0	Ø6.0	1-11	
ACBW-6.8	Ø4.0	Ø6.0	1-80	
PCC-6	Ø4.0	6.0X7.0	1-81	
PCC-11	Ø4.0	6.0X7.0	1-81	
RCFA-7	Ø4.0	6.3X6.3	1-11	
RCRA-9.5	Ø4.0	Ø6.35	1-9	
KES-15	Ø4.0	6.5X7.0	1-100	
RCQC-7	Ø4.0	Ø7.0	1-28	
WBH-	Ø4.0	Ø7.9	1-80	
MSPS-	Ø4.0		1-148	6-32 UNC
SCB-	Ø4.0		1-149	6-32 UNC
SCB-6SM3	Ø4.0		1-149	M3X0.5
SCB4-	Ø4.0		1-150	M4X0.7P
SCB832-15.9	Ø4.0		1-149	8-32 UNC
SRLA-	Ø4.1	Ø4.75~4.8	1-76	
BSB-8.5	Ø4.2		1-75	
MBC-11	Ø4.5		1-72	
TCBT-19	Ø4.5		1-74	M3 Screw
MTD-11	Ø4.5		1-74	
MBD-10	Ø4.5~4.8		1-72	
MCL-	Ø4.8		1-68	
SS-	Ø4.8		1-87	M3 Screw
SSA-12.7	Ø4.8		1-87	
MSPK4.8-	Ø4.8	Ø4.8	1-32	
LCBY-	Ø4.8	Ø4.8	1-42	
LCBYR-4.8	Ø4.8	Ø4.8	1-42	
MAFB5-	Ø5.0	Ø5.0	1-23	
SSDU-	Ø5.2	Ø5.2	1-33	
SSA4-5.5	Ø5.8		1-87	M3.5 or M4 Screw
SS4-	Ø5.9		1-88	M3.5 or M4 Screw
SSU4--6.3	Ø5.9		1-88	
SS3.5-	Ø5.9		1-88	M3.5 Screw
TCEB3-		Ø4.1	1-77	M3X0.5P
TCEB4-		Ø4.1	1-77	M4X0.7P
TCEB632-		Ø4.1	1-77	6-32 UNC
LCDS3-		Ø4.8	1-50	M3X0.5P
LCDS4-		Ø4.8	1-50	M4X0.7P

PC 板間隔柱 SPACER SUPPORT

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

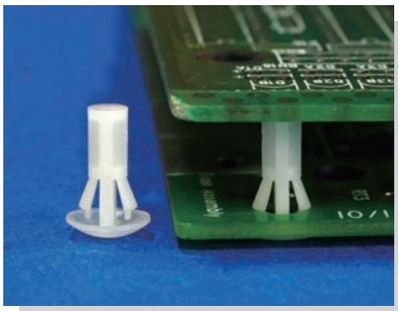


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø4.0
THICKNESS 0.8~1.6

◆ **RAMA-3,RAMA-4.5, RAMA-5.5**




CHASSIS Ø4.0
THICKNESS 0.8~1.6


Part No.	A	Package
RAMA-3	3.2	1000
RAMA-4.5	4.5	
RAMA-5.5	5.5	
RAMA-6.4	6.4	
RAMA-7	7.0	
RAMA-7.5	7.5	
RAMA-9.5	9.5	
RAMA-11.1	11.1	
RAMA-12.7	12.7	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





◆ **RAD-3,RAD-4**



CHASSIS Ø4.8
THICKNESS 0.8~1.2


Part No.	A	Package
RAD-3	3.0	1000
RAD-4	4.0	
RAD-6	6.3	
RAD-8	8.0	
RAD-10	10.0	
RAD-11	11.0	

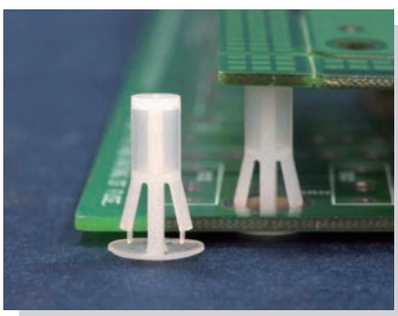




CHASSIS Ø5.5
THICKNESS 1.2~1.8


Part No.	A	Package
RAM-13.5L	13.5	1000

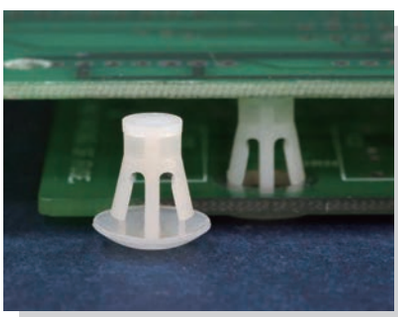

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



◆ **RAM-3~RAM-5**




CHASSIS Ø5.5
THICKNESS 0.8~1.6

Part No.	A	Package
RAM-3	3.5	1000
RAM-5	5.0	
RAM-6	6.35	
RAM-7	7.0	
RAM-8	8.0	
RAM-8.5	8.5	


Part No.	A	Package
RAM-10	10.0	1000
RAM-12A	12.0	
RAM-12	12.7	
RAM-13.5	13.5	
RAM-14	14.0	
RAM-15	15.2	
RAM-16	15.9	
RAM-18	18.0	
RAM-19	19.0	
RAM-20	20.0	
RAM-22	21.7	500
RAM-24	24.0	
RAM-25	25.4	
RAM-30	30.0	

PC 板間隔柱 SPACER SUPPORT

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

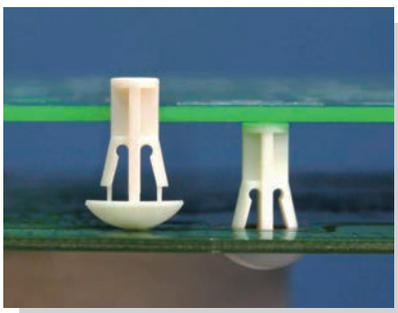


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø5.5
THICKNESS 1.6~2.5


Part No.	A	B	Package
RAML-11	11.0	3.0	1000
RAML-12	12.0	2.45	

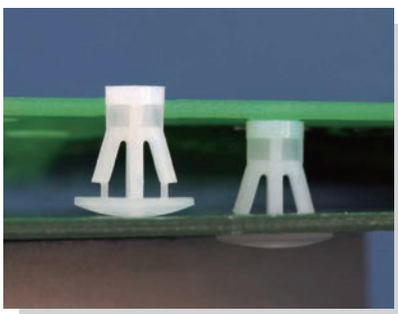


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø5.5
THICKNESS 1.2~1.8



CHASSIS Ø5.5
THICKNESS 1.2~1.8
◆ **RAS-5**



CHASSIS Ø5.5
THICKNESS 0.8~1.6
◆ **RAS-7**



CHASSIS Ø5.5
THICKNESS 1.5~2.0
◆ **RAS-7.2**


Part No.	A	Package
RAS-5	5.4	1000
RAS-6	6.0	
RAS-7	7.0	
RAS-7.2	7.2	
RAS-8	8.0	
RAS-10	10.0	
RAS-12	12.0	
RAS-14	14.0	
RAS-18	18.0	
RAS-20	20.0	

PC 板間隔柱 SPACER SUPPORT

用途：用於P.C.B板之架高間隔，體積小，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø3.5
THICKNESS 1.6


Part No.	A	B	Package
EDC-4	4.0	2.5	1000
EDC-5	5.0		
EDC-6	6.0		
EDC-7	7.0		
EDC-8	8.0		
EDC-9	9.0		
EDC-10	10.0		
EDC-11.4	11.4		
EDC-12.7	12.7		
EDC-13.5	13.5		
EDC-14.5	14.5		
EDC-15	15.0		
EDC-15-4	15.0	4.0	
EDC-15.9	15.9	2.5	

PC 板間隔柱 SPACER SUPPORT

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

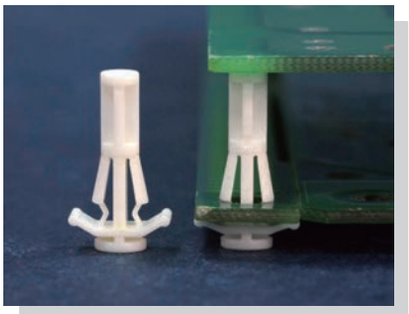


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE Ø4.0
THICKNESS 1.2~1.6

Part No.	A	B	Package
RAMC-12.5	12.5	2.5	1000
RAMC-15.5	15.5		
RAMC-18-4	18.0	4.0	
RAMC-18-8.5	18.0	8.5	
RAMC-19	19.0	2.5	
RAMC-24	24.0		

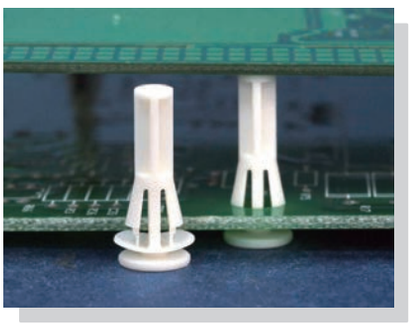


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE Ø4.8
THICKNESS 1.6

Part No.	Package
RAMD-15.5	1000

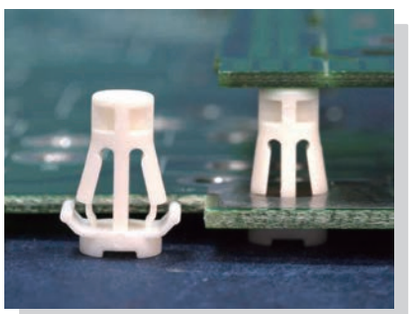

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø5.6
THICKNESS 0.8~1.6

Part No.	Package
RAMB-9	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定 PC 板於機板上，不會突出機板底部，外觀美麗。

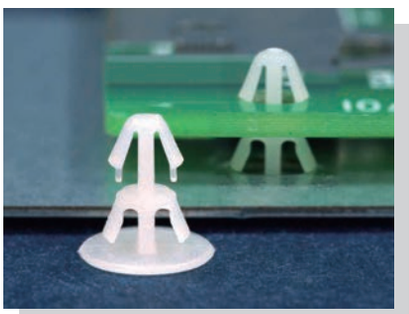

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.6




CHASSIS Ø4.0
THICKNESS 0.5

Part No.	Package
RCI-2.6	2000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

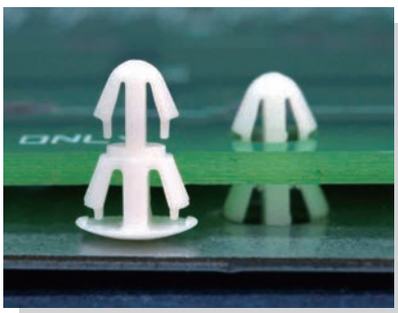

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.0
THICKNESS 1.6



CHASSIS Ø4.0
THICKNESS 0.6~0.8


Part No.	Package
RCO-2.5	2000

P.C.B Ø3.0
THICKNESS 1.6~2.0




CHASSIS Ø4.0
THICKNESS 0.8~1.2

Part No.	Package
RCO-2.5L	2000

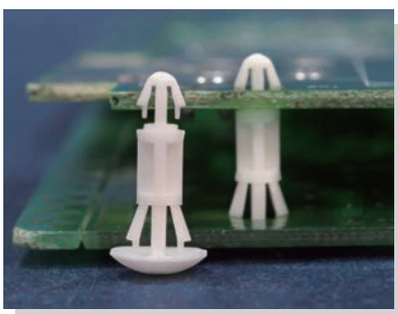


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS: E



CHASSIS Ø4.0
THICKNESS 0.8~1.6

P.C.B Ø3.0
THICKNESS: E




P.C.B Ø4.0
THICKNESS 1.6~2.2


◆ **RCA-65.5**

Part No.	A	E	Package
RCA-6	6.0	1.6	2000
RCA-6.4	6.4		
RCA-7	7.0		1000
RCA-7.5	7.5		
RCA-8	8.0		
RCA-8L	8.0	1.83	
RCA-9	9.0	1.6	
RCA-9.5	9.5		
RCA-10	10.0		
RCA-11.1	11.1		
RCA-12	12.0		
RCA-12.7	12.7		
RCA-14	14.0		
★ RCA-15.5	15.5		
RCA-16	16.0		
RCA-65.5	65.5		

P.C.B Ø3.0
THICKNESS 1.6




CHASSIS Ø4.0
THICKNESS 0.8~1.6




◆ **RCA-2.5, RCA-2.5U**

Part No.	A	B	Package
RCA-2.5U	2.5	1.8	2000
RCA-2.5	2.5	2.0	
RCA-3	3.2	2.0	
RCA-4	4.0	2.0	
RCA-4.5	4.5	2.0	
RCA-5	5.0	2.0	
RCA-5.5	5.5	2.0	

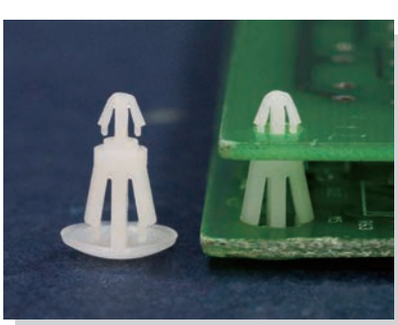

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.0
THICKNESS 1.6



CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
RCC-5	5.0	2000
RCC-6	6.3	

P.C.B Ø3.0
THICKNESS 1.6




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
RCC-8	8.0	1000
RCC-10	10.0	
RCC-12	12.7	


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

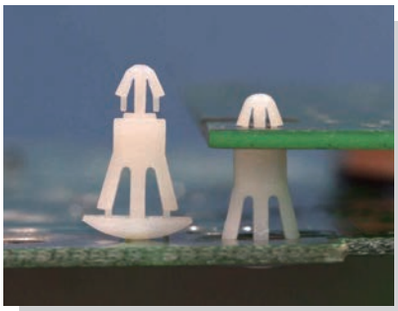


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø 3.0
THICKNESS 1.2~1.7




CHASSIS Ø5.5
THICKNESS 0.6~1.2

Part No.	A	Package
RCG-3.5	3.5	1000
RCG-5	4.8	
RCG-6.35	6.35	
RCG-7	7.0	
RCG-8	8.0	
RCG-10	10.0	
RCG-11	11.0	
RCG-12.7	12.7	
RCG-15.9	15.9	

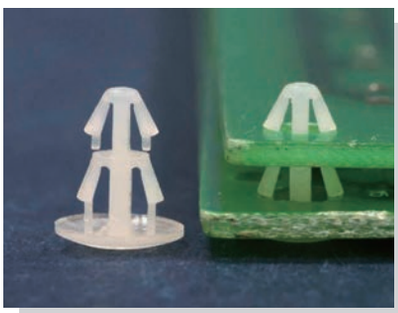


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.2
THICKNESS 0.8~1.0




CHASSIS Ø4.0
THICKNESS 1.8

Part No.	Package
RCMB-2.8	1000

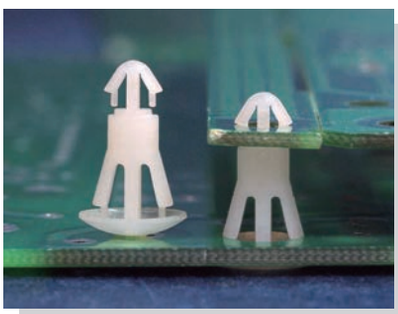

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.5
THICKNESS 1.6



CHASSIS Ø5.5
THICKNESS 0.8~1.2

◆ **RCH-3.5~RCH-8**


P.C.B Ø3.5
THICKNESS 1.6



CHASSIS Ø5.5
THICKNESS 0.8~1.2


◆ **RCH-10~RCH-15.9**

Part No.	A	Package
RCH-3.5	3.5	1000
RCH-5	4.8	
RCH-6.35	6.35	
RCH-7	7.0	
RCH-8	8.0	
RCH-10	10.0	
RCH-11	11.0	
RCH-12.7	12.7	
RCH-15.9	15.9	

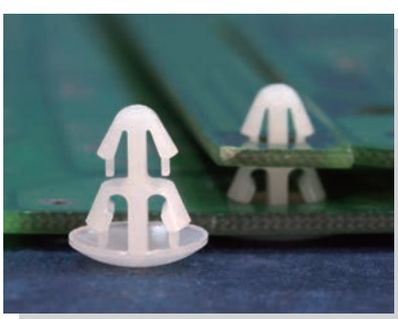

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.6




CHASSIS Ø5.5
THICKNESS 0.8~1.6

Part No.	Package
RCMA-3	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

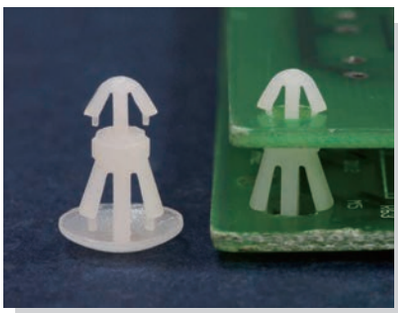


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.7




CHASSIS Ø5.0
THICKNESS 0.8~1.8

Part No.	A	B	C	Package
RCS-6	6.0	2.3	9.7	1000
RCS-13.8	13.8	2.2	10.0	
RCS-16	16.0	2.3	9.7	

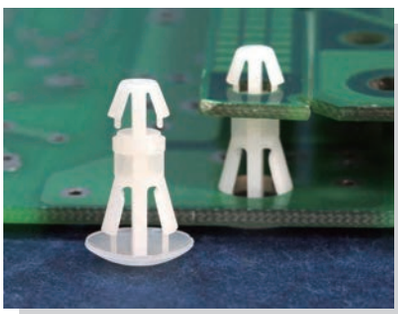

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.0~1.8



CHASSIS Ø4.8
THICKNESS 0.8~1.2


◆ **RCD-3,RCD-4**

P.C.B Ø4.0
THICKNESS 1.0~1.8




CHASSIS Ø4.8
THICKNESS 0.8~1.2

Part No.	A	Package
RCD-3	3.0	2000
RCD-4	4.0	
RCD-6	6.3	
RCD-8	8.0	
RCD-10	10.0	
RCD-11	11.0	

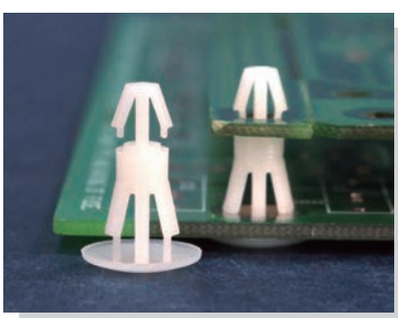

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.6



CHASSIS Ø5.5
THICKNESS 1.5~2.2

◆ **RCB-3~RCB-8**

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø5.5
THICKNESS 1.5~2.2

Part No.	A	Package
RCB-3	3.5	1000
RCB-5	5.0	
RCB-6	6.35	
RCB-8	8.0	
RCB-10	10.0	
RCB-12	12.7	
RCB-15	15.9	
RCB-19	19.0	
RCB-25	25.4	500
RCB-35	35.5	


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

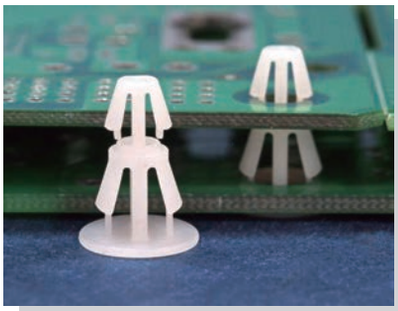


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø5.5
THICKNESS 1.5~2.2

Part No.	Package
RCI-5	2000

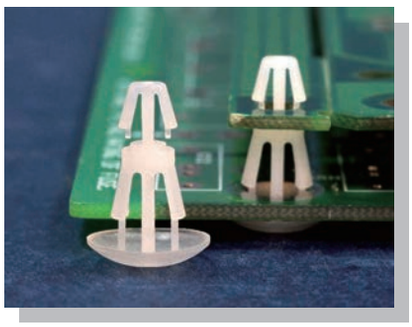


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø5.5
THICKNESS 2.0~3.0

Part No.	Package
RCBL-6	1000

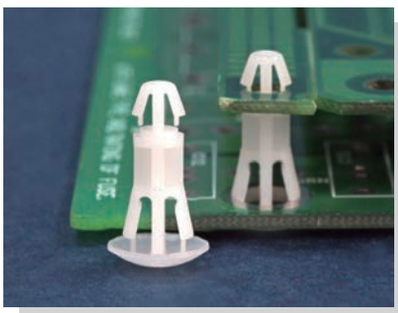

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.2~1.7



CHASSIS Ø5.5
THICKNESS: F

◆ **RCM-3~RCM-5SP**

P.C.B Ø4.0
THICKNESS 1.2~1.7




CHASSIS Ø5.5
THICKNESS: F

Part No.	A	B	C	F	Package
RCM-3	3.5	2.2	10.0	0.8~1.6	1000
RCM-5	5.0				
RCM-5SP	5.0	1.5	8.0		
RCM-6	6.35	2.2	10.0		
RCM-6L	6.35			1.6~2.0	
RCM-7	7.0			0.8~1.6	
RCM-8	8.0				
RCM-8.5	8.5				
RCM-10	10.0				
RCM-12A	12.0				
RCM-12	12.7				


Part No.	A	B	C	F	Package
RCM-13.5	13.5	2.2	10.0	0.8~1.6	1000
RCM-14	14.0				
RCM-15	15.2				
RCM-16	15.9				
RCM-18	18.0				
RCM-19	19.0				
RCM-20	20.0				
RCM-22	21.7				
RCM-24	24.0				
RCM-25	25.4				
RCM-30	30.0				

PC 板間隔柱 SPACER SUPPORT


用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

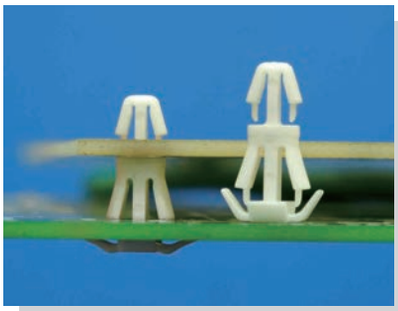


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
RCMD-6	1000

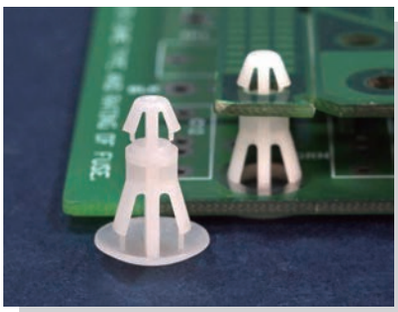


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ **RCF-5S**




Part No.	A	Package
RCF-5	5.0	2000
RCF-5S	5.0	
RCF-6	6.35	
RCF-8	8.0	1000
RCF-10	10.0	
RCF-12	12.7	
RCF-15	15.9	

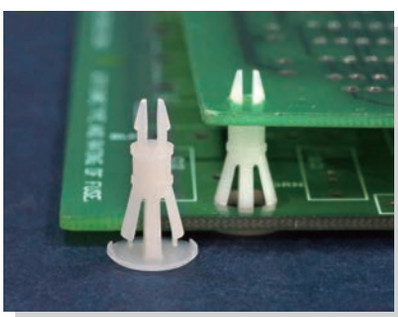


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
RCBS-6.5	6.5	1000
RCBS-9.5	9.5	
RCBS-12.7	12.7	

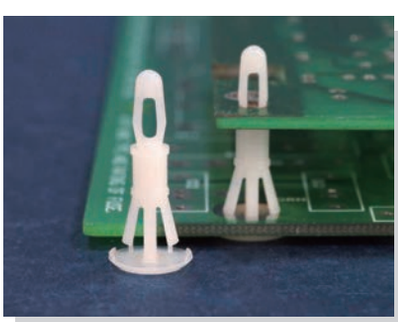


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
RCV-11.1	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

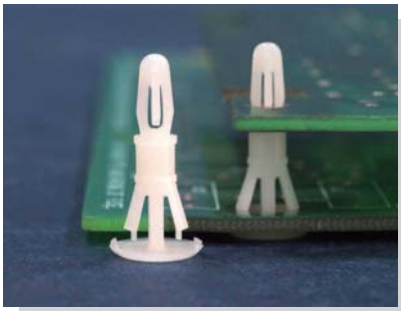


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.2
THICKNESS 1.2~1.7




P.C.B Ø4.8
THICKNESS 1.5~1.6

Part No.	A	Package
RCW-6.5	6.5	1000
RCW-7.9	7.9	
RCW-9.7	9.7	
RCW-11.1	11.1	
RCW-12.7	12.7	
RCW-14.3	14.3	
RCW-15.9	15.9	

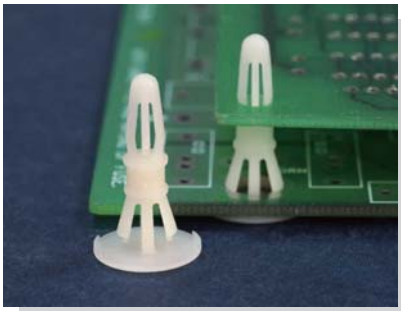


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø5.4
THICKNESS 1.5~1.6

Part No.	A	Package
RCWA-6.4	6.4	1000
RCWA-9.5	9.5	
RCWA-12.7	12.7	
RCWA-15.9	15.9	
RCWA-19	19.1	
RCWA-22.2	22.2	
RCWA-25.4	25.4	

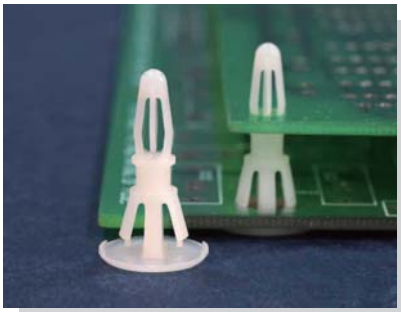


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.6




P.C.B Ø6.35
THICKNESS 1.0~1.6

Part No.	Package
RCRA-9.5	1000

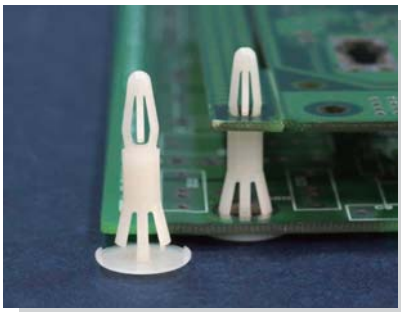

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.7




P.C.B Ø5.5
THICKNESS 1.0~1.5


Part No.	Package
RCR-12.7	1000

PC 板間隔柱 SPACER SUPPORT


用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

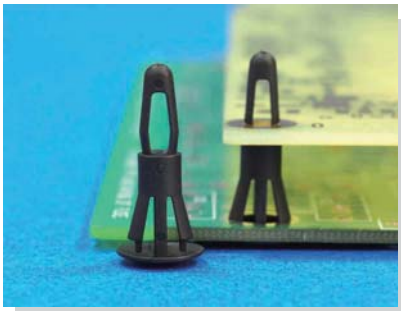


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

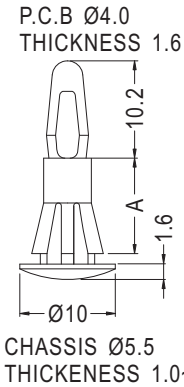


Part No.	A	Package
PCBT-4.8	4.8	1000
PCBT-10	10.0	

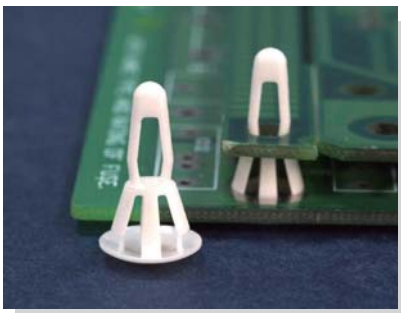


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

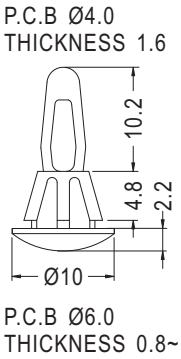


Part No.	Package
PCBTA-4.8	1000

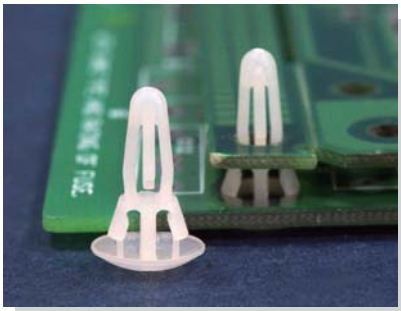


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PCBS-3	1000



Part No.	Package
PCBS-6.4	1000

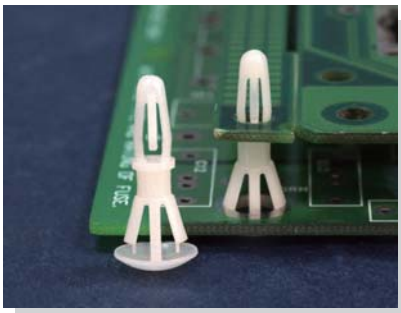

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
PCBS-6	6.3	1.6	1000
PCBS-8	7.9	2.1	
PCBS-10	10.0	1.6	
PCBS-12A	12.0	1.6	
PCBS-12	12.7	1.6	

PC 板間隔柱 SPACER SUPPORT


用途：固定PC板於機板上，不會突出機板底部，外觀美麗。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ **RCFL-4.8,RCFL-6.4**




Part No.	A	Package
RCFL-4.8	4.8	1000
RCFL-6.4	6.4	
RCFL-8	8.0	
RCFL-9.5	9.5	
RCFL-12.7	12.7	
RCFL-19	19.0	

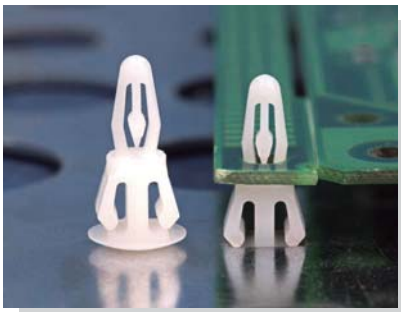


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

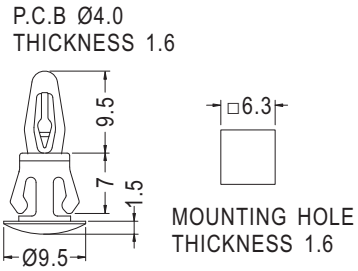


Part No.	Package
RCFA-7	1000

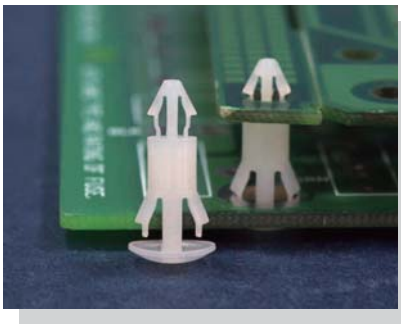


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

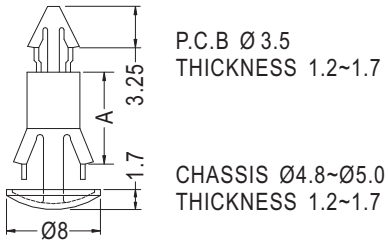

Part No.	A	Package
RCT-4.5	4.5	1000
RCT-8	7.9	

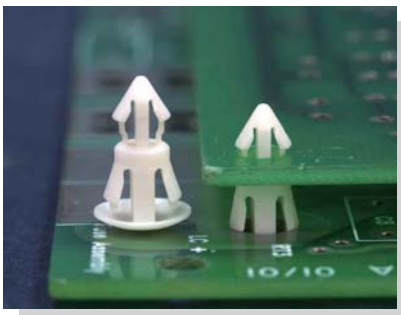

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

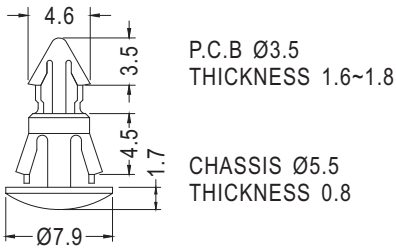


Part No.	Package
RCTA-4.5	1000

PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.6

CHASSIS Ø5.4
THICKNESS 0.8~1.6

Part No.	A	B	Package
RCJ-8	8.0	2.1	1000
RCJ-10	10.0	1.7	
RCJ-12	12.0	1.7	
RCJ-12.7	12.7	1.7	

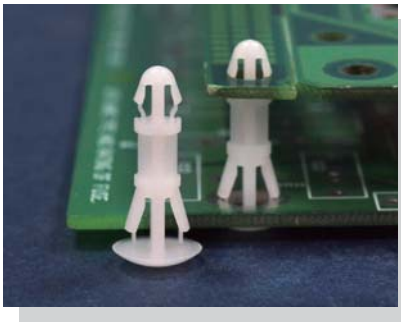


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø4.0
THICKNESS 1.2~1.7


CHASSIS Ø5.4
THICKNESS 2.0

Part No.	A	C	Package
RCTL-6S	6.0	3.9	1000
RCTL-6	6.3	4.0	
RCTL-12	12.0	3.9	

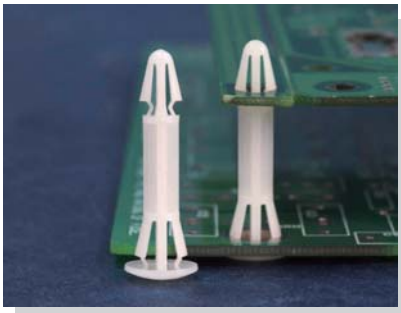

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.2~1.6



CHASSIS Ø5.5
THICKNESS 1.2~1.6


Part No.	A	Package
RBT-19	19.0	1000
RBT-28.2	28.2	

P.C.B Ø4.0
THICKNESS 3.0




CHASSIS Ø5.5
THICKNESS 1.2~1.6

Part No.	A	Package
RBT-16L	16.0	1000
RBT-25L	25.0	

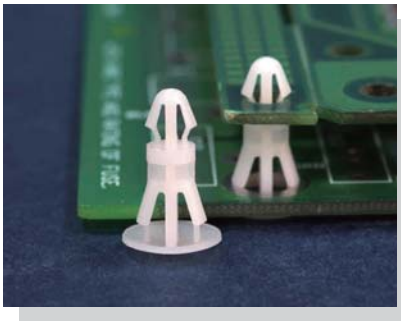

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.7




CHASSIS Ø5.5
THICKNESS 1.2~1.8


Part No.	A	Package
RBS-5	5.0	1000
RBS-6	6.0	
RBS-7	7.0	
RBS-8	8.0	
RBS-10	10.0	
RBS-11	11.0	
RBS-12	12.0	
RBS-14	14.0	
RBS-18	18.0	
RBS-20	20.0	
★RBS-23	23.0	

PC 板間隔柱 SPACER SUPPORT

用途：用於兩層PC板，與機板間之固定，方便、節省空間。

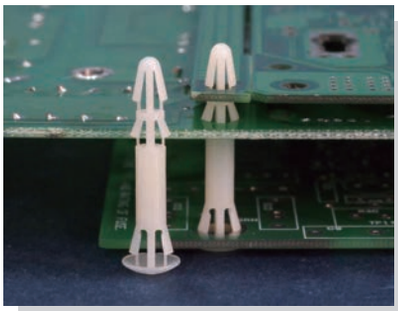

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø4.0
THICKNESS 1.6


P.C.B Ø4.5
THICKNESS 1.6

CHASSIS Ø5.0
THICKNESS 1.6

Part No.	Package
DRCB-18	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

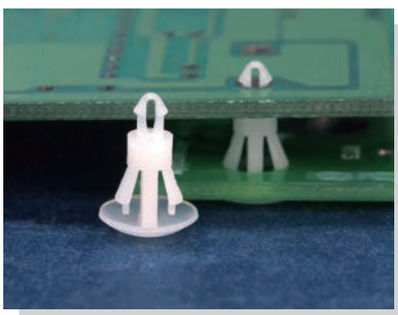

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø2.0
THICKNESS: T



CHASSIS Ø4.0
THICKNESS 0.8~1.6


Part No.	A	D	T	Package
RCAB-3	3.2	1.74	1.6	1000
★RCAB-4	4.0			
RCAB-4.5	4.5			
RCAB-4.5S	4.5	1.75	1.0	
★RCAB-5	5.0	1.74	1.6	
RCAB-5.5	5.5			

P.C.B Ø2.0
THICKNESS 1.6




CHASSIS Ø4.0
THICKNESS 0.8~1.6

Part No.	A	Package
★RCAB-6	6.0	1000
RCAB-6.4	6.4	
★RCAB-7	7.0	
RCAB-7.5	7.5	
★RCAB-8	8.0	
★RCAB-9	9.0	
RCAB-9.5	9.5	
★RCAB-10	10.0	
RCAB-11.1	11.1	
★RCAB-12	12.0	
RCAB-12.7	12.7	
★RCAB-14	14.0	
★RCAB-16	16.0	

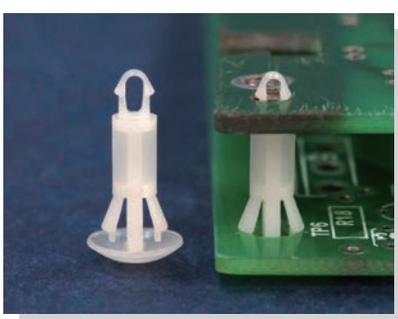

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø2.5
THICKNESS 1.6



CHASSIS Ø4.0
THICKNESS 0.8~1.6

◆ **RCAC-3~RCAC-5.5**

P.C.B Ø2.5
THICKNESS 1.6




CHASSIS Ø4.0
THICKNESS 0.8~1.6


Part No.	A	Package
RCAC-3	3.0	1000
RCAC-4.5	4.5	
RCAC-5.5	5.5	
RCAC-6	6.0	
RCAC-6.4	6.4	
RCAC-7	7.0	
RCAC-7.5	7.5	
RCAC-9.5	9.5	
RCAC-10	10.0	
RCAC-11.1	11.1	
RCAC-12.7	12.7	
RCAC-14	14.0	

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

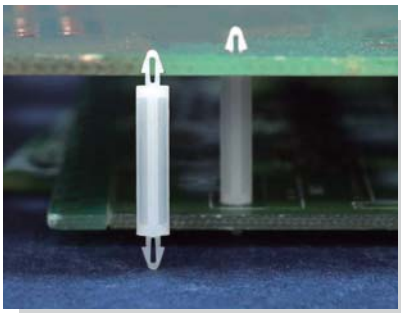


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
MASSD-14	14.0	2000
MASSD-18	18.0	

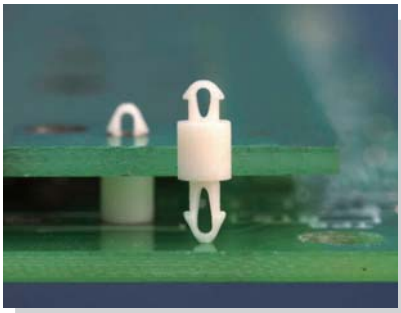


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MADSA-3	1000




Part No.	Package
MADSB-3	2000

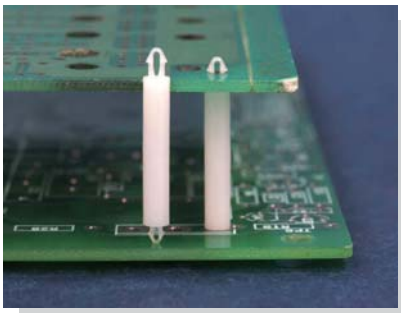


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
MADS-6.5	6.5	2000
MADS-19.2	19.2	1000

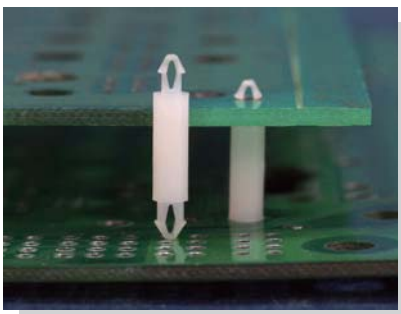


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MAS-9	1000

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

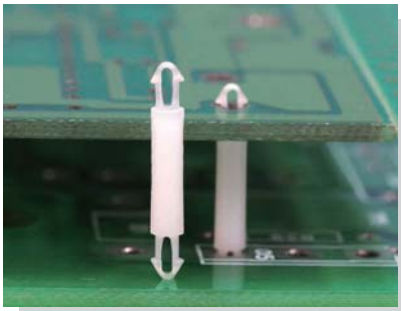


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MAD1.7-9.8	1000

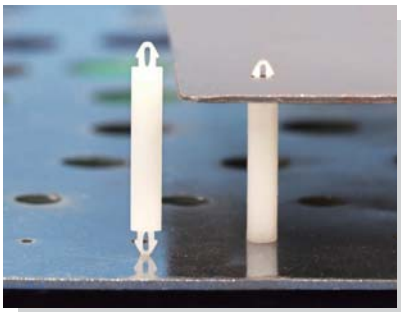


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
MAD1-3	3.0	2000
MAD1-19	19.0	1000

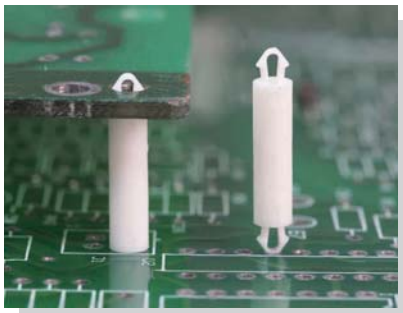


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MAD1.2-12.9	1000

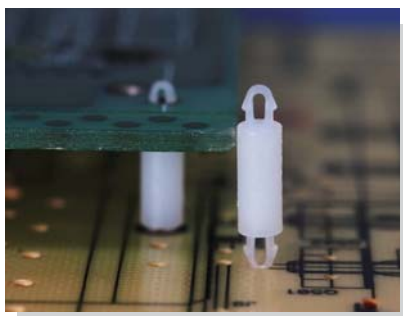

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MAD1.2-6	1000

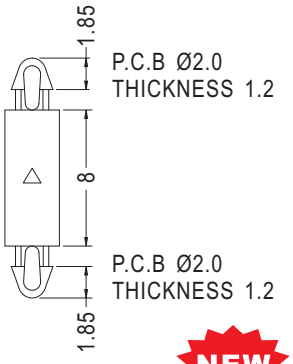


NEW


Part No.	Package
MAD1.2-8	1000

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

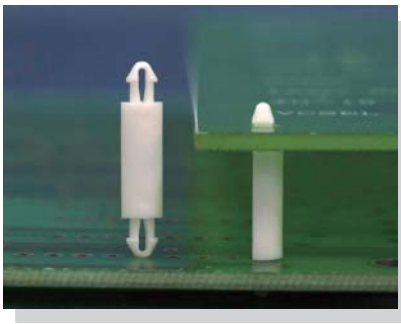


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

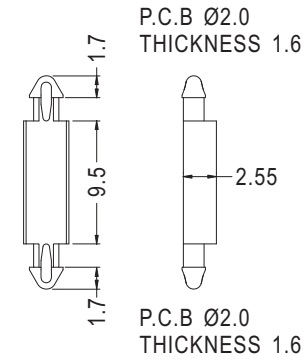


Part No.	Package
MADX-9.5	1000

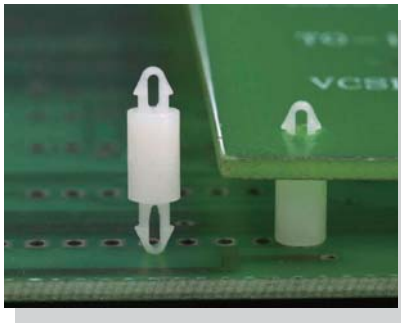


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	E	Package
MADB-3.5	3.5	2.0	2.0	0.9	2000
MADB-6	6.0	1.9	1.9	0.8	

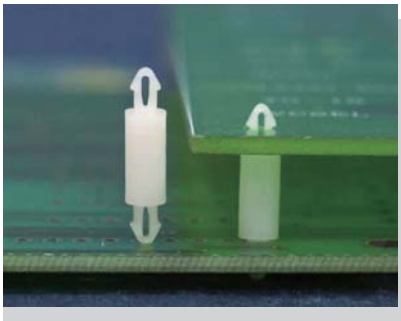

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

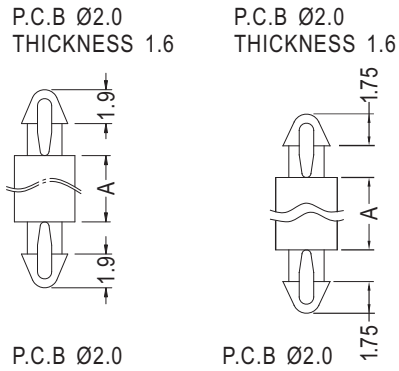


◆ **MAD-14**


Part No.	A	Package
MAD-1.6	1.6	2000
MAD-2.2	2.2	
MAD-3	3.0	
MAD-3.5	3.5	
MAD-4	4.0	
MAD-5	5.0	
MAD-6	6.0	
MAD-6.5	6.5	
MAD-7	7.0	
MAD-8	8.0	
MAD-10S	10.0	
MAD-10	10.5	
MAD-12.5	12.5	
MAD-14	14.0	
MAD-25	25.0	

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

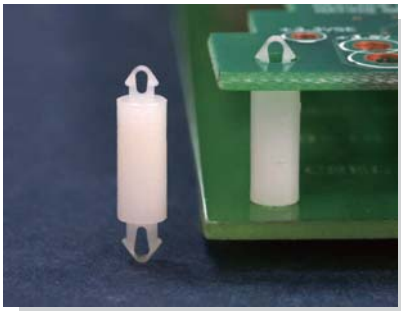


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

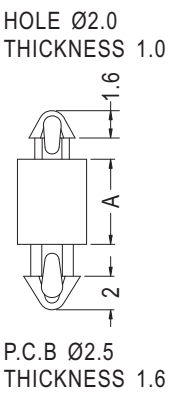


Part No.	A	Package
MAMDA-1.6	1.6	1000
MAMDA-2.5	2.5	
MAMDA-3.2	3.2	
MAMDA-4	4.0	
MAMDA-4.8	4.8	
MAMDA-5.5	5.5	
MAMDA-6.4	6.4	
MAMDA-7	7.0	
MAMDA-7.9	7.9	
MAMDA-9.5	9.5	
MAMDA-10	10.0	
MAMDA-12.7	12.7	

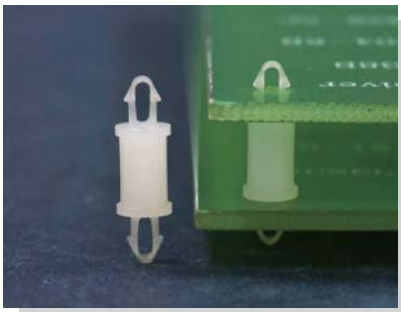


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MAHA-7	1000

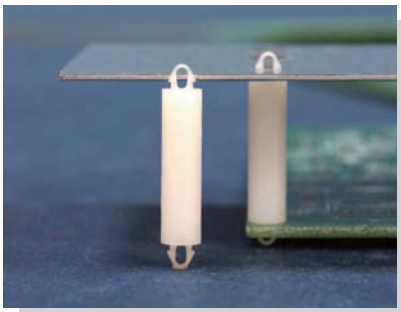


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MADA-18S	2000

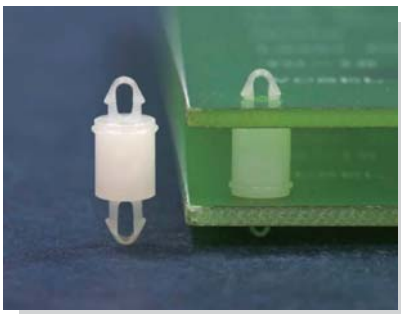


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MADJ-6	2000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

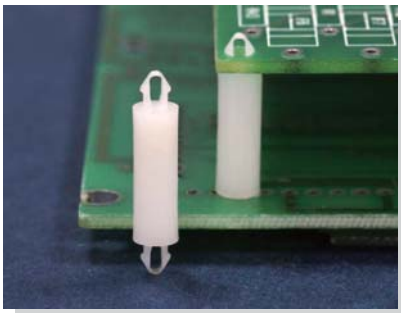


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.6




P.C.B Ø2.5
THICKNESS 1.6

Part No.	Package
MADAA-14	1000

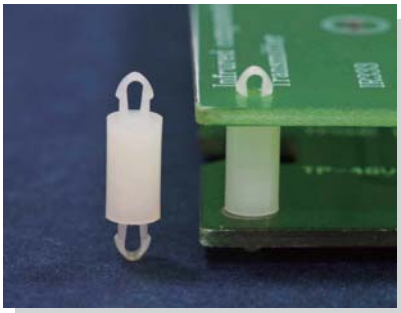

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø2.5
THICKNESS 1.6



P.C.B Ø2.5
THICKNESS 1.6

Part No.	A	Package
MADA-2	2.0	2000
MADA-3	3.0	
MADA-3-1	3.0	
MADA-3.5	3.5	
MADA-4	4.0	
MADA-5	5.0	
MADA-6	6.0	
MADA-6.7	6.7	
MADA-7	7.0	
MADA-8	8.0	
MADA-8.5	8.5	


P.C.B Ø2.5
THICKNESS 1.6



P.C.B Ø2.5
THICKNESS 1.6


◆ **MADA-3-1**

Part No.	A	Package
MADA-9	9.0	2000
MADA-10	10.0	
MADA-11	11.0	
MADA-12	12.0	
MADA-12.7	12.7	
MADA-14	14.0	
MADA-16	16.0	
MADA-18	18.0	
MADA-20	20.0	
MADA-22	22.0	

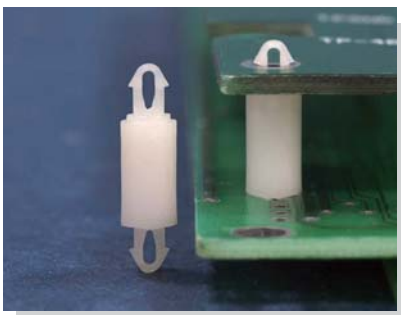

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 2.0




P.C.B Ø2.5
THICKNESS 1.2~1.7

Part No.	Package
MAMDL-9	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

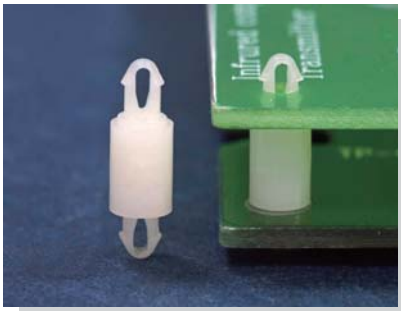


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 2.2




P.C.B Ø2.5
THICKNESS 1.7

Part No.	Package
MAMDF-7	1000

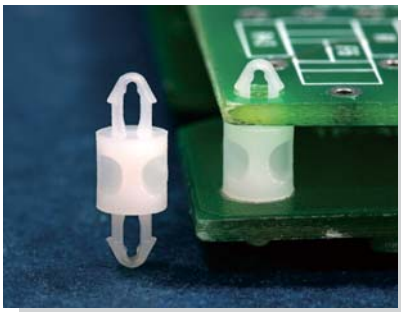


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.6




P.C.B Ø2.5
THICKNESS 1.6

P.C.B Ø2.5
THICKNESS 1.6




P.C.B Ø2.5
THICKNESS 1.6

◆ **MADM-2~MADM-5**

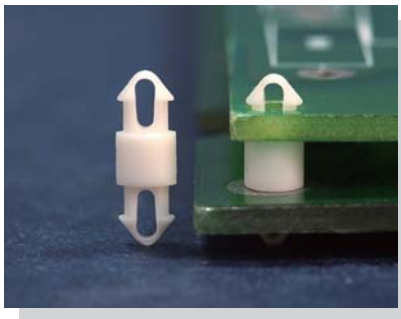


P.C.B Ø2.5
THICKNESS 1.6



P.C.B Ø2.5
THICKNESS 1.6

◆ **MADM-2.7S, MADM-3S**


P.C.B Ø2.5
THICKNESS 1.6



P.C.B Ø2.5
THICKNESS 1.6


◆ **MADM-12.7**

Part No.	A	Package
MADM-2	2.0	2000
MADM-2.7S	2.7	
MADM-3	3.0	
MADM-3S	3.0	
MADM-4	4.0	
MADM-4.5	4.5	
MADM-5	5.0	
MADM-6	6.0	
MADM-6.5	6.5	
MADM-7.5	7.5	
MADM-8	8.0	
MADM-9.5	9.5	
MADM-10A	10.0	
MADM-10	10.5	
MADM-12.7	12.7	
MADM-27	27.0	

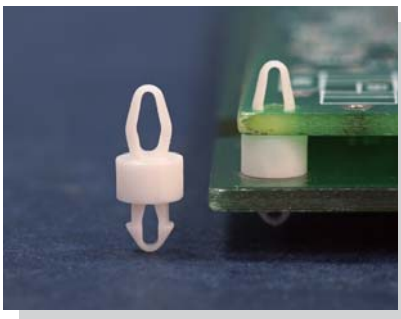

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.6




P.C.B Ø2.5
THICKNESS 1.6

Part No.	Package
MADE-2.8	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

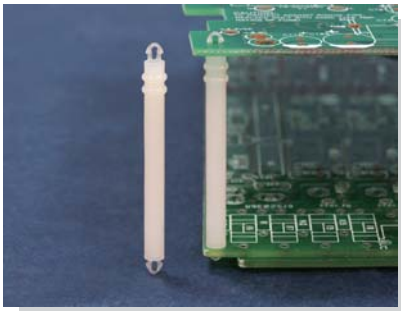


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.6




P.C.B Ø2.5
THICKNESS 1.0

Part No.	B	C	Package
MAC-40	1.8	1.2	500
MAC-40S	1.5	1.0	

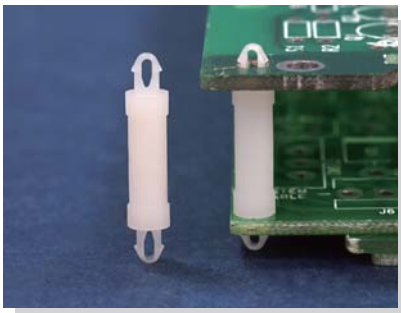


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 2.0




P.C.B Ø2.5
THICKNESS 2.0

Part No.	Package
MAHC-14.3	1000

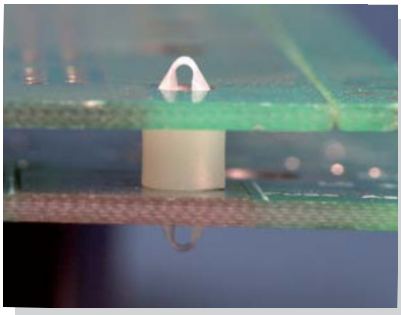


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.6
THICKNESS 1.0




P.C.B Ø2.5
THICKNESS 1.6

Part No.	Package
MADAB-4.3	1000

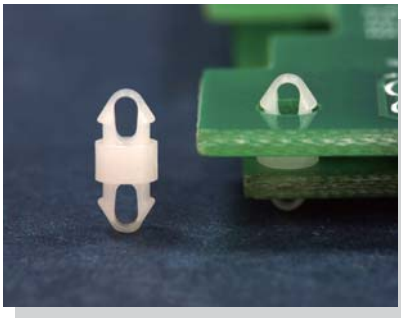

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.6
THICKNESS 1.0




P.C.B Ø2.6
THICKNESS 1.0

Part No.	Package
MADM1-2.2	2000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

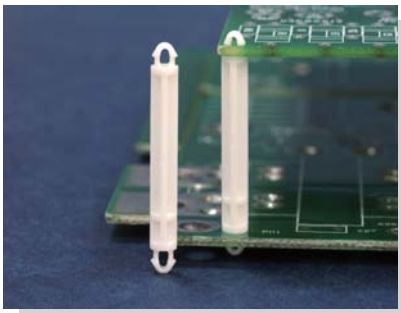


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.2




P.C.B Ø3.0
THICKNESS 1.6

Part No.	Package
MADL-27.8	1000

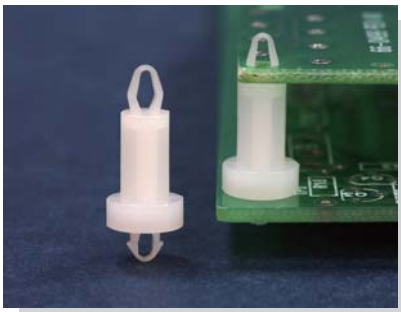


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.2




P.C.B Ø3.0
THICKNESS 1.6

Part No.	Package
MAMDC-12	1000

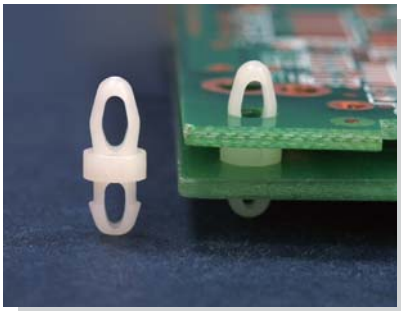


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.1
THICKNESS 1.4~1.6



P.C.B Ø3.0
THICKNESS 1.45~1.6

Part No.	Package
MADD-2	1000

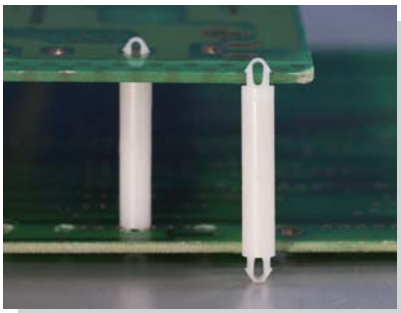

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.2
THICKNESS 1.6




P.C.B Ø3.2
THICKNESS 1.6

NEW


Part No.	Package
MADN-24	1000

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

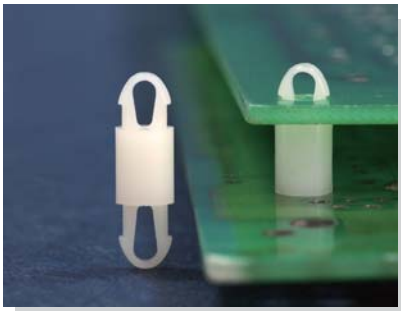


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- UNIT:mm




Part No.	A	Package
MAF-2	2.0	1000
MAF-3	3.0	
MAF-4	4.0	
MAF-5	5.0	
MAF-6	6.0	
MAF-7	7.0	
MAF-8	8.0	
MAF-10	10.0	
MAF-12	12.0	
MAF-14	14.0	
MAF-16	16.0	
MAF-18	18.0	
MAF-20	20.0	
MAF-22	22.0	

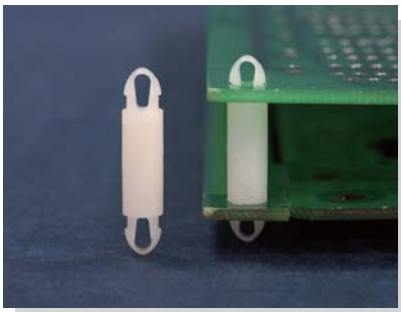


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- UNIT:mm




Part No.	Package
MAD3.5-12	1000

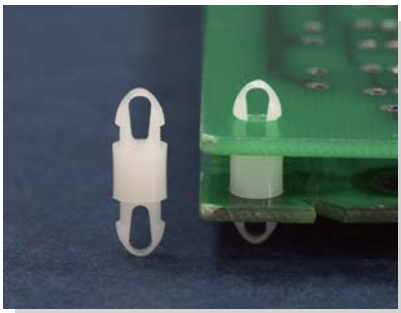


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- UNIT:mm



Part No.	Package
MDLS-4.5	1000

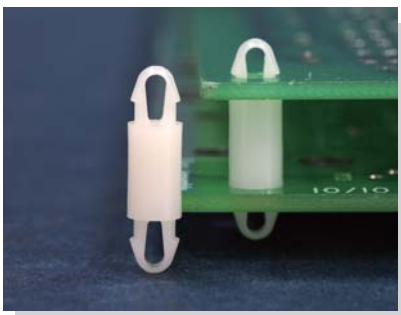


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- UNIT:mm



Part No.	Package
MAFA-6	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

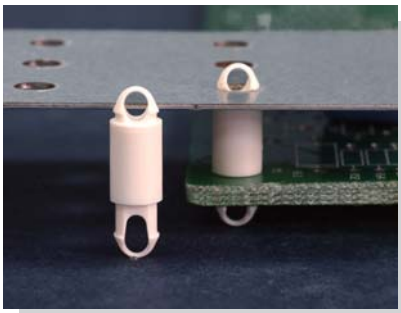


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø5.0
THICKNESS 0.8




P.C.B Ø5.0
THICKNESS 4.0

Part No.	A	B	Package
MAFB5-0.8	0.8	11.8	1000
MAFB5-9.7	9.7	20.7	

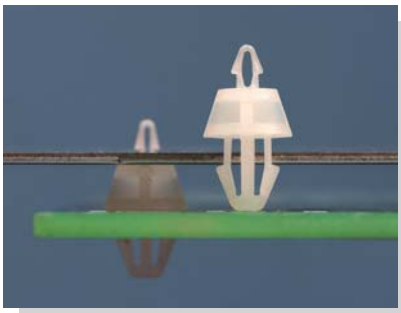


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø1.5
THICKNESS 0.8

CHASSIS Ø3.0
THICKNESS 1.6


Part No.	Package
MAEB-3.2	1000




P.C.B Ø2.5
THICKNESS 1.0

CHASSIS Ø4.0
THICKNESS 1.6

Part No.	Package
MAEE-4.5	1000

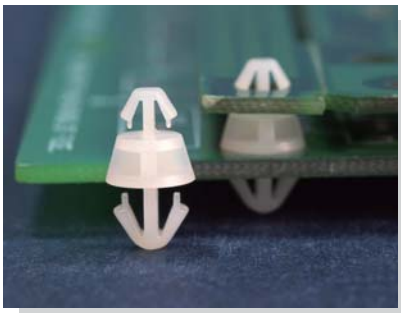


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø3.0
THICKNESS 1.0

CHASSIS Ø4.0
THICKNESS 1.6


Part No.	Package
MAEA-3.5M	1000



P.C.B Ø3.0
THICKNESS 1.0


CHASSIS Ø4.8
THICKNESS: E

Part No.	B	E	Package
MAEA-3.5	6.0	1.2	1000
MAEA-3.5L	6.0	1.6	
MAEA-3.5LS	4.1	1.6	

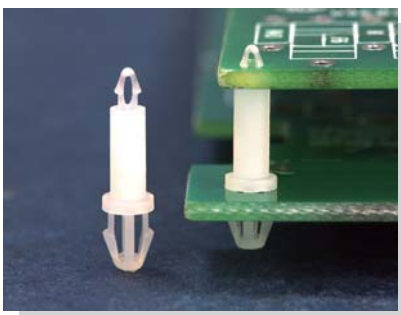

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø1.5
THICKNESS 1.0




CHASSIS Ø3.0
THICKNESS 1.6


Part No.	Package
LCMB-8	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

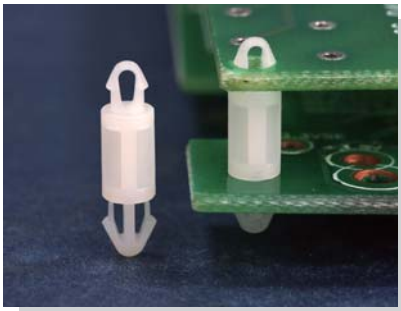


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.5
THICKNESS 1.6

P.C.B Ø3.0
THICKNESS 1.6

Part No.	Package
LCMC-7	1000

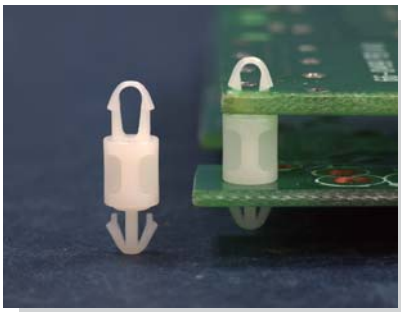


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.5
THICKNESS 2.4

P.C.B Ø3.5
THICKNESS 1.6

Part No.	Package
MAMDD-6	1000

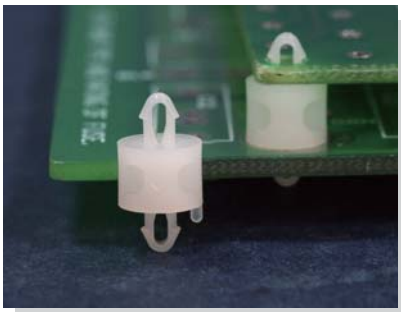


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.5
THICKNESS 1.6

P.C.B Ø2.5
THICKNESS 1.6




MOUNTING HOLES


Part No.	Package
MADMK-5	2000

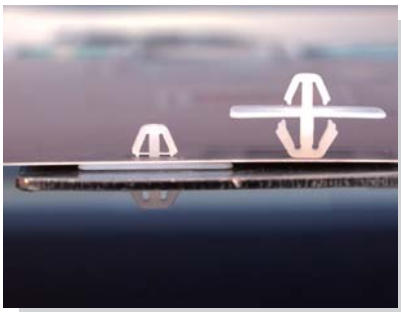



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE
THICKNESS: E








MOUNTING HOLE
THICKNESS 1.0~1.5


Part No.	B	C	E	Package
KVD-05	3.5	3.4	0.5	1000
KVD-10	3.6	3.5	1.0	

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

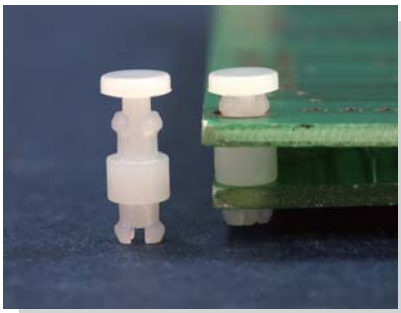


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
MSPC3-3.2	1.6	1000
MSPC3-3.2M	3.0	

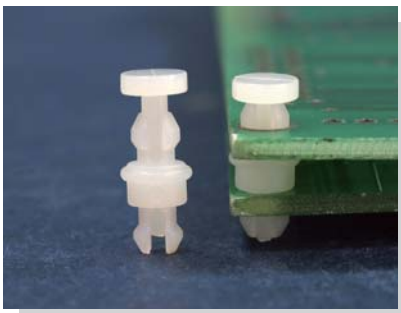


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MSPC3-3.2L	1000

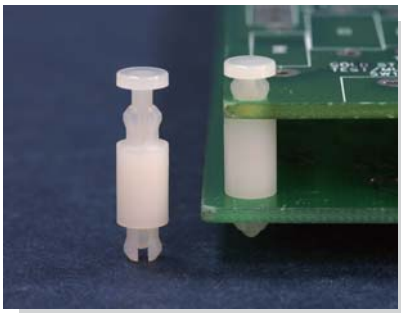


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

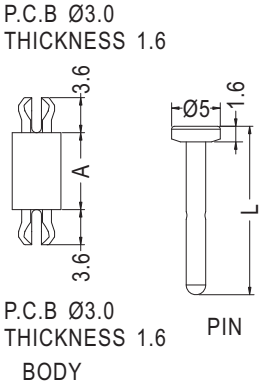


Part No.	A	B	Package
MSPF3-6.4	6.35	15.75	2000
MSPF3-8	7.9	17.3	
MSPF3-10	10.0	19.4	
MSPF3-12.7	12.7	22.1	
MSPF3-15.9	15.9	25.3	

導電 PC 板間隔柱 CONDUCTIVE SPACER SUPPORT

用途：快速固定PC板於機板上，上下板可導電，抗E.M.I 美觀。

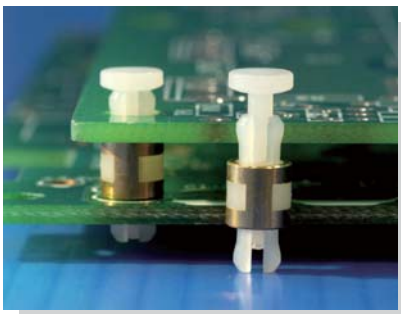

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P A T.)

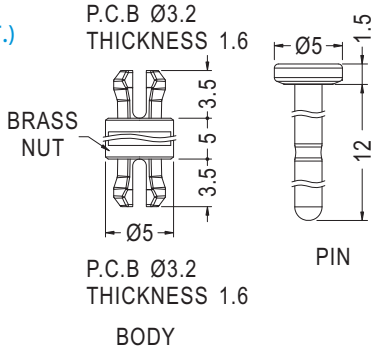


NEW


Part No.	Package
MSPP-5	1000

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

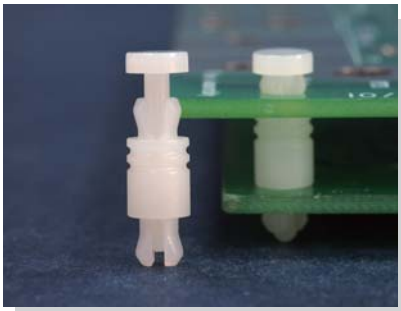


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MSPB3.2-6.4	1000

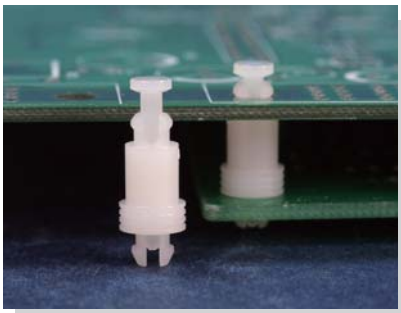


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

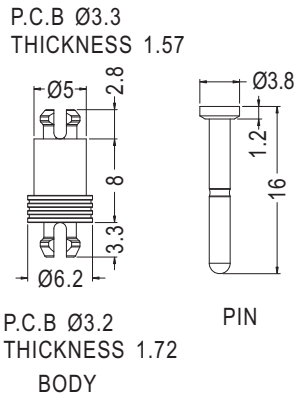


Part No.	Package
MSPB-8	1000

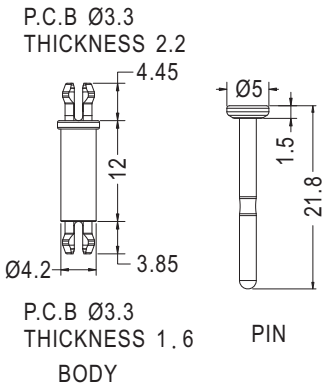


Part No.	Package
MSPCA3.3-12	1000

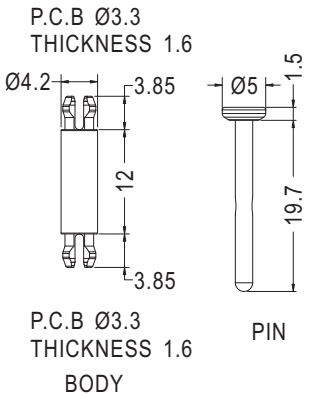


Part No.	Package
★MSPCA3.3-12S	1000

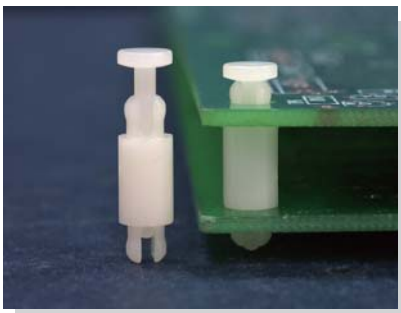

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	Package
MSPCA-16	16.0	25.2	1000




Part No.	A	B	Package
MSPF3.3-8	8.0	17.35	1000
MSPF3.3-17.5	17.5	26.3	

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MSPF3.3-8L	1000

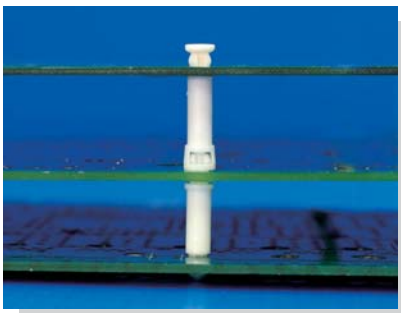


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P A T.)

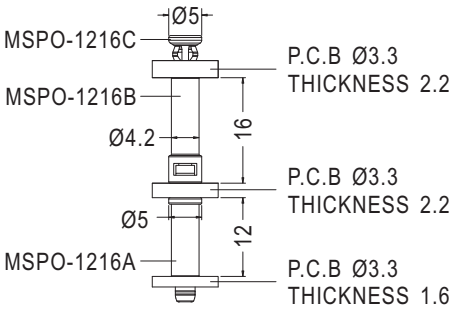

NEW

Part No.	Part No.	Package
MSPO-1216	MSPO-1216A	1000
	MSPO-1216B	
	MSPO-1216C	


P.C.B Ø3.3
THICKNESS 2.2



P.C.B Ø3.3
THICKNESS 1.6

◆**MSPO-1216A**

P.C.B Ø3.3
THICKNESS: E




Part No.	A	B	E
MSPO-1216B	20.5	4.6	2.2
MSPO-1216BS	19.6	3.7	1.6




◆**MSPO-1216C**

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

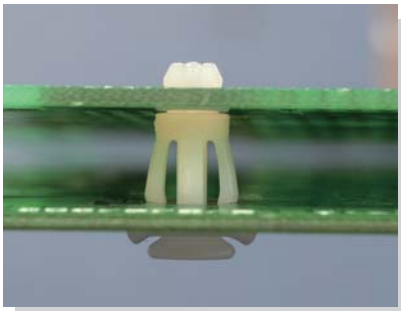


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P A T.)

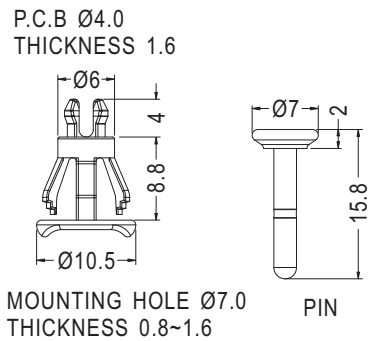


Part No.	Package
RCQC-7	1000

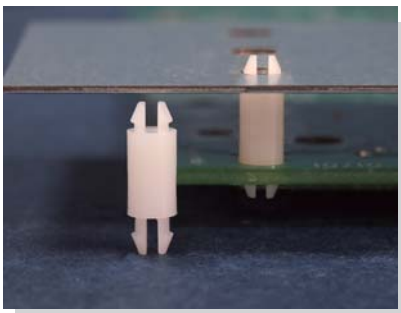


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
DMSB-5	5.0	1000
DMSB-8	8.0	

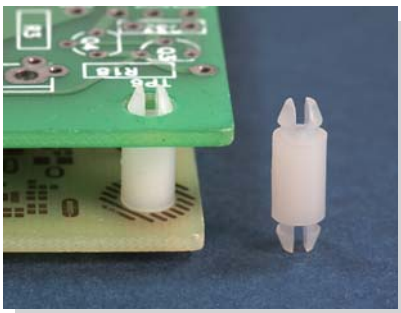


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MSPS3S-7.5	1000

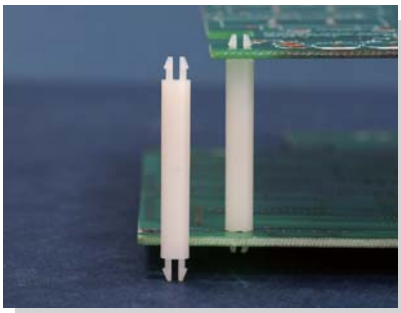


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
DMSS-28	28.6	1000
DMSS-38	38.1	


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

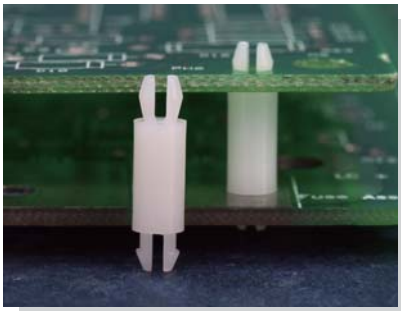

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.2
THICKNESS 1.6



P.C.B Ø3.2
THICKNESS 1.6

Part No.	A	Package
MSP3-10	10.0	1000
MSP3-11	11.1	
MSP3-12S	12.0	
MSP3-12	12.7	
MSP3-14	14.3	
MSP3-15.9	15.9	
MSP3-16	16.0	
MSP3-17	17.5	
MSP3-19	19.1	
MSP3-20	20.6	
MSP3-21	21.0	
MSP3-22	22.2	
MSP3-25	25.4	
MSP3-27	27.0	
MSP3-28	28.5	
MSP3-29.2	29.2	
MSP3-31.7	31.7	
MSP3-31.8	31.8	
MSP3-34	34.9	
MSP3-38	38.1	


P.C.B Ø3.2
THICKNESS 1.73



P.C.B Ø3.2
THICKNESS 1.6


◆ **MSP3-8L**

Part No.	A	Package
MSP3-3	3.2	1000
MSP3-4	4.0	
MSP3-5	4.8	
MSP3-5.8	5.8	
MSP3-6	6.4	
MSP3-8	7.9	
MSP3-8L	7.9	
MSP3-8.5	8.6	
MSP3-9.5	9.5	

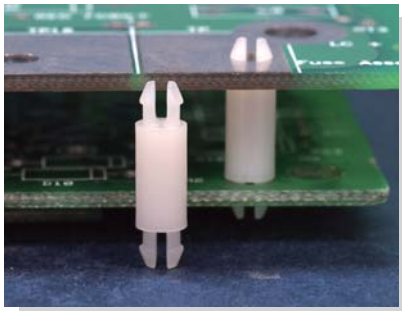


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.2
THICKNESS 1.6



P.C.B Ø3.2
THICKNESS 1.6

Part No.	L	Package
MSPS3-3.2	3.2	1000
MSPS3-4	4.0	
MSPS3-4.8	4.8	
MSPS3-6.4	6.4	
MSPS3-8	7.9	
MSPS3-9.5	9.5	
MSPS3-11.1	11.1	
MSPS3-12.7	12.7	
MSPS3-14.3	14.3	
MSPS3-15.9	15.9	
MSPS3-19.1	19.1	
MSPS3-20.6	20.6	
MSPS3-22.2	22.2	
MSPS3-25.4	25.4	
MSPS3-31.8	31.8	
MSPS3-34.9	34.9	




P.C.B Ø3.2
THICKNESS 0.8


P.C.B Ø3.2
THICKNESS 0.8

◆ **MSPS3-3S,MSPS3-3.2S**

Part No.	L	Package
★MSPS3-3S	3.0	1000
★MSPS3-3.2S	3.2	

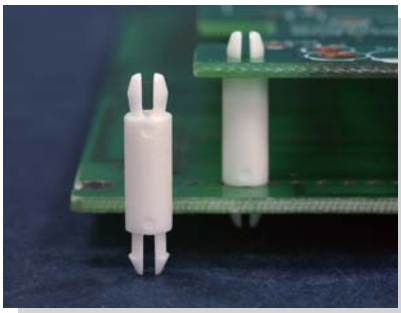

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.2
THICKNESS 1.6

P.C.B Ø3.2
THICKNESS 2.4


Part No.	Package
MSPL-11	1000

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

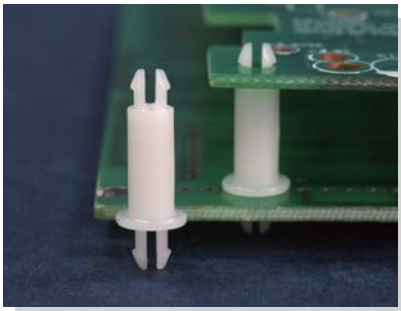


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MSPMA-12	1000

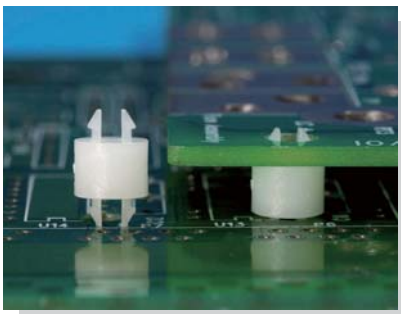


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




NEW


Part No.	Package
DMSC-4.5	1000

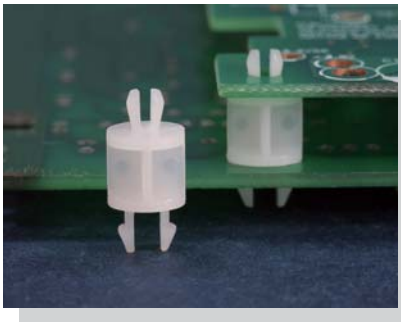


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	B	C	E	Package
MSPD-7.9	7.9	2.6	2.16	1000
MSPD-7.9S	7.9	2.55	1.6	
★MSPD-7.9L	7.9	2.55	2.34	
MSPD-12	12.0	2.55	2.16	
MSPD-16	16.0	2.45	2.16	

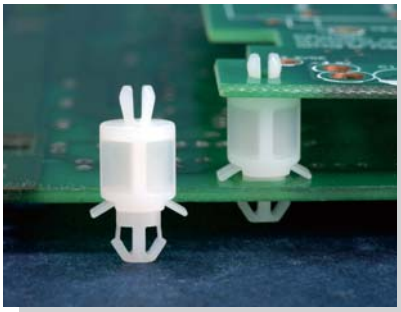


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

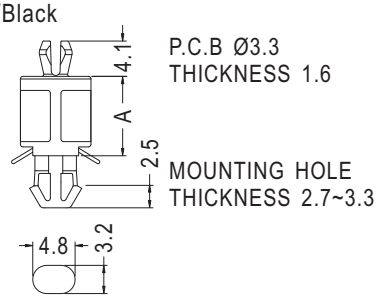

Part No.	A	Package
MSPN-9	9.0	1000
MSPN-12	12.0	

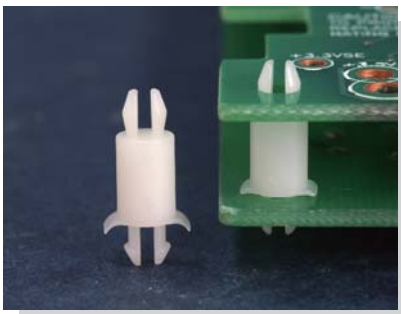


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

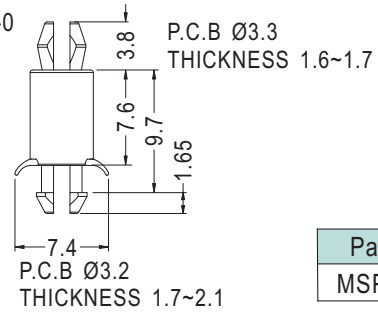

Part No.	Package
MSPH-7.5	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

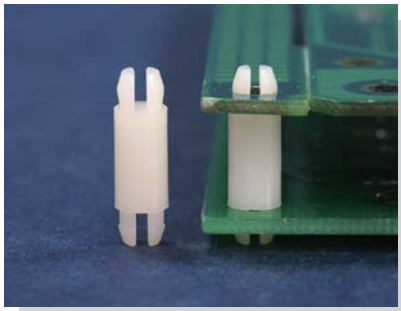


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6



P.C.B Ø4.0
THICKNESS 1.6


P.C.B Ø3.9
THICKNESS 1.6



P.C.B Ø3.9
THICKNESS 1.6


◆ **MSP-15.9S**

Part No.	A	Package
MSP-3	3.2	1000
MSP-4	4.0	
MSP-4.5	4.5	
MSP-5	5.0	
MSP-6	6.3	
MSP-7	7.0	
MSP-8	8.0	
MSP-9	9.5	
MSP-10	10.5	
MSP-12	12.7	
MSP-14	14.0	
MSP-15	15.9	
MSP-15.9S	15.9	
MSP-19	19.0	
MSP-22	22.0	

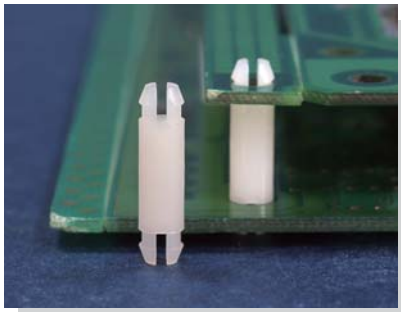


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




P.C.B Ø4.0
THICKNESS 1.6

Part No.	A	Package
DMSP-4.8	4.8	1000
DMSP-6.4	6.4	
DMSP-11.1	11.1	

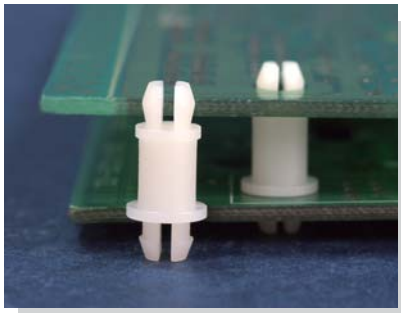

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




P.C.B Ø4.0
THICKNESS 1.6

Part No.	A	B	C	Package
DMSPS-5	5.0	4.3	4.6	1000
DMSPS-6.4	6.4	4.4		
DMSPS-7.9	7.9	4.3		
DMSPS-12.7	12.7			
DMSPS-17.5	17.5			
DMSPS-17.5S	17.5	4.2	4.25	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.57




P.C.B Ø4.0
THICKNESS 1.57


Part No.	Package
SP1-4.8	2000

PC 板間隔柱 SPACER SUPPORT


用途：PC板與PC板間之固定，不佔空間。

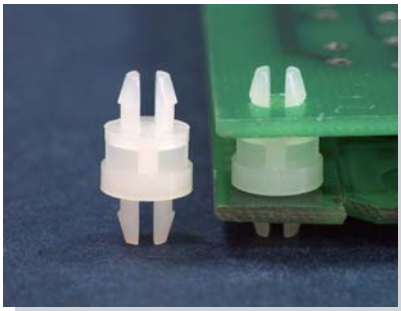


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
MSPM-5	4.8	1000
MSPM-24	23.8	

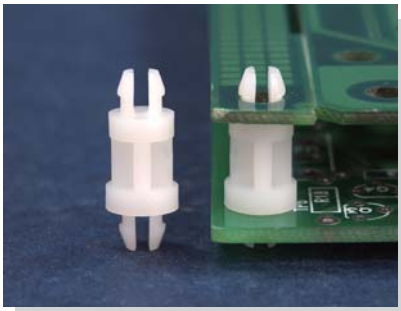


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	L	Package
MSP1-6.4	6.4	1000
MSP1-9.5	9.5	
MSP1-10	10.0	
MSP1-12.7	12.7	
MSP1-15.9	15.9	
MSP1-19.1	19.1	
MSP1-22.2	22.2	
MSP1-25.4	25.4	

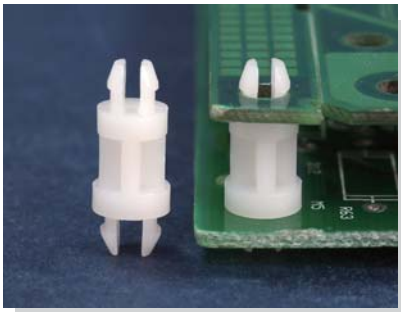


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ **MSPK45-4.8**

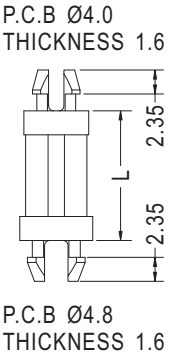


Part No.	L	Package
MSPK45-4.8	4.8	2000
MSPK45-6.4	6.4	
MSPK45-9.5	9.5	
MSPK45-12.7	12.7	1000
MSPK45-15.9	15.9	
MSPK45-19.1	19.1	
MSPK45-22.2	22.2	
MSPK45-25.4	25.4	

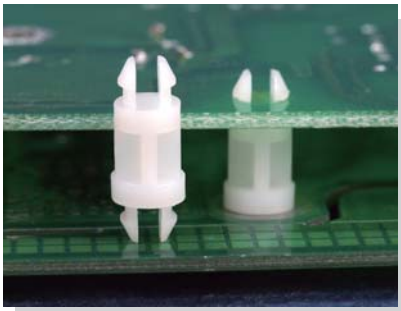

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ **MSPK4.8-4.8**

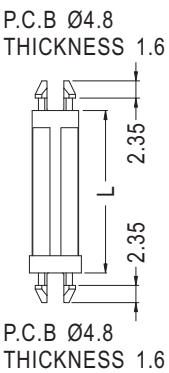

Part No.	L	Package
MSPK4.8-4.8	4.8	2000
MSPK4.8-6.4	6.4	
MSPK4.8-9.5	9.5	
MSPK4.8-12.7	12.7	
MSPK4.8-15.9	15.9	1000
MSPK4.8-19.1	19.1	
MSPK4.8-22.2	22.2	
MSPK4.8-25.4	25.4	
MSPK4.8-31.7	31.75	


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

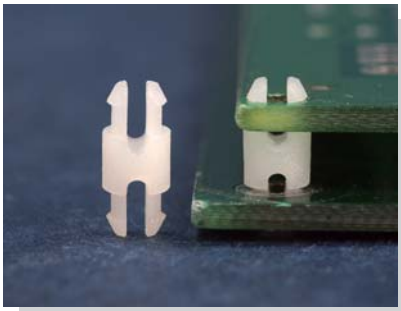

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.0
THICKNESS 1.6



P.C.B Ø3.0
THICKNESS 1.6


Part No.	Package
SSDU1-3.5	1000

P.C.B Ø4.0
THICKNESS 1.6




P.C.B Ø4.0
THICKNESS 1.6

Part No.	Package
★SSDUA-16.5	1000

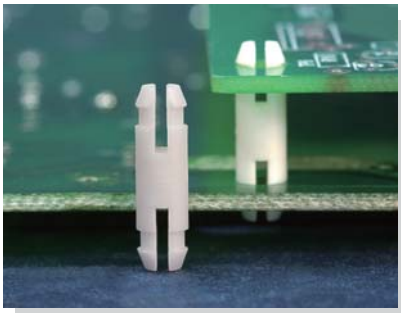


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




P.C.B Ø4.0
THICKNESS 1.6

Part No.	Package
DMSA-9	1000

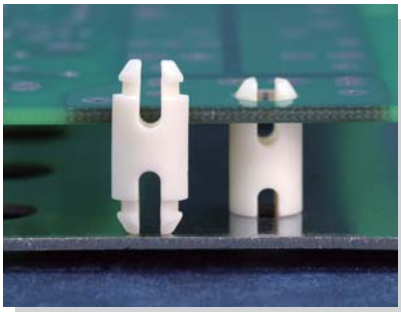


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø5.2
THICKNESS: E




P.C.B Ø5.2
THICKNESS: F

Part No.	A	B	C	E	F	Package
SSDU-9.2	9.2	1.55	1.55	1.6	1.6	1000
SSDU-9.6	9.6	1.85	1.85	1.2	1.2	

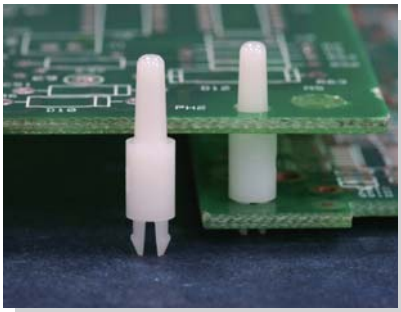

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.2
THICKNESS 1.6


Part No.	Package
MSPE-7	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

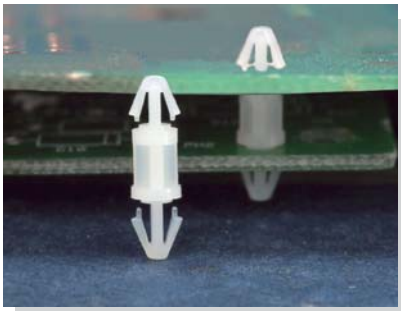


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø3.0
THICKNESS: E

P.C.B Ø3.0
THICKNESS: F


Part No.	A	B	C	E	F	Package
LCVU-8	8.0	3.7	3.7	1.2~1.8	1.2~1.8	1000
LCVU-9	9.0	3.55	3.55	2.0	2.0	
LCVU-10	10.0	3.7	3.7	1.2~1.8	1.2~1.8	



P.C.B Ø3.0
THICKNESS: E

CHASSIS Ø3.0
THICKNESS: F


Part No.	A	B	C	E	F	Package
LCVA-2	2.0	3.1	2.4	1.6	0.8~1.0	2000
LCVA-2.5	2.5	3.0		0.8~1.0	1.6	
LCVA-4	4.0	3.1		1.6	0.8~1.0	
LCVA-5	5.0					




P.C.B Ø3.0
THICKNESS: E

P.C.B Ø3.0
THICKNESS: F

Part No.	A	B	C	E	F	Package
LCV-2.5	2.5	3.4	3.4	1.6	1.6	1000
LCV-3	3.0	3.55	3.55	1.6	1.6	
LCV-5	5.0	3.4	3.4	1.8	1.8	
LCV-6	6.0	3.6	3.6	1.2~1.7	0.8~1.0	

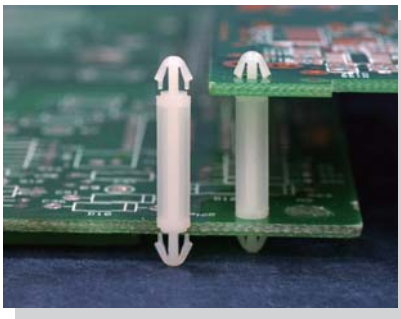


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B: ØB
THICKNESS 1.2~1.7

P.C.B Ø3.0
THICKNESS 1.2~1.7

Part No.	A	B	Package
LCJ-14	14.0	3.0	1000
LCJ-15	15.0	3.2	
LCJ-19	19.0	3.0	
LCJ-21	21.0	3.0	

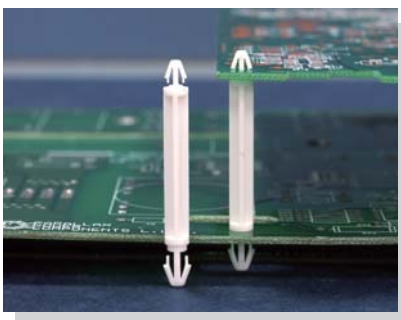

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.0
THICKNESS 1.2~1.6

P.C.B Ø4.0
THICKNESS 3.6~4.0


Part No.	Package
LCX-31	2000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

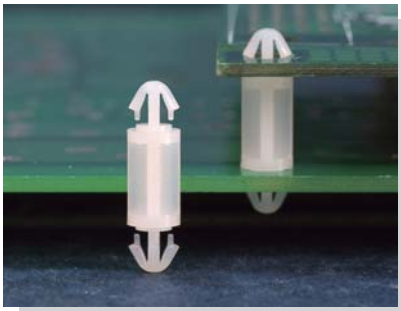

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.5
THICKNESS: E


P.C.B Ø3.5
THICKNESS: F

Part No.	A	B	C	Package
LCI-2.5	2.5	1.2~1.7	1.2~1.7	2000
LCI-3	3.0			
LCI-3.5	3.5			
LCI-4	4.0			
LCI-4.5	4.5			
LCI-5	5.0			

Part No.	A	B	C	Package
LCI-5.5	5.5	1.2~1.7	1.2~1.7	1000
LCI-6	6.0			
LCI-6.5	6.35			
LCI-7	7.0			
LCI-8	8.0			
LCI-9	9.0			
LCI-10	10.0			
LCI-11	11.0			
LCI-12	12.0			
LCI-15	15.0			
LCI-15(2)	15.0	1.6~2.4	1.6~2.4	
LCI-20	20.0	1.2~1.7	1.2~1.7	
LCI-30L	30.0	1.6~2.4	1.6~2.4	500

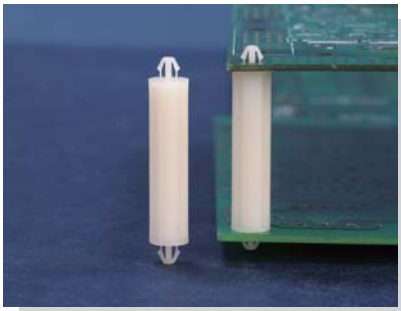


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.5
THICKNESS 1.6

P.C.B Ø3.5
THICKNESS 1.6

Part No.	Package
LDE-33	1000

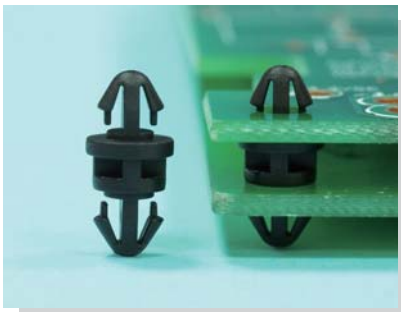


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.4
THICKNESS 1.2~1.7

P.C.B Ø3.7
THICKNESS 1.2~1.7

Part No.	Package
LCIA-3.5	1000

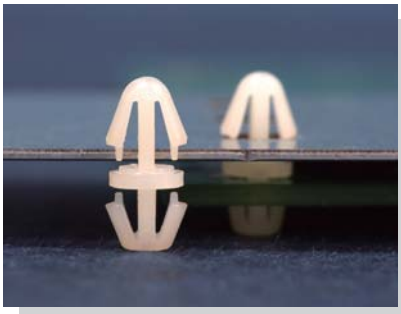

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.2~1.6

CHASSIS Ø4.0
THICKNESS 0.8

Part No.	Package
LCK-1	2000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

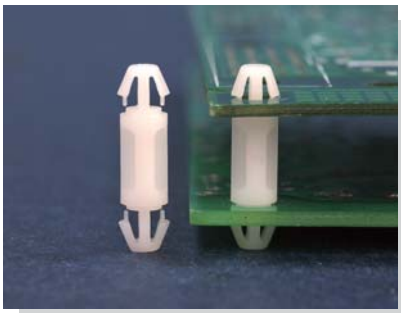

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.2~1.7




P.C.B Ø4.0
THICKNESS 1.2~1.7

Part No.	A	Package
LCC-3S	3.0	2000
LCC-3	3.5	
LCC-4	4.0	
LCC-5	5.0	
LCC-6S	6.0	
LCC-6	6.4	
LCC-7	7.0	1000
LCC-8	8.0	
LCC-9.5	9.5	
LCC-10S	10.0	
LCC-10	10.5	
LCC-11.5	11.5	
LCC-12S	12.0	

Part No.	A	Package
LCC-12	12.7	1000
LCC-14	14.0	
LCC-15	15.9	
LCC-18	18.0	
LCC-19	19.0	
LCC-20	20.0	
LCC-25	25.0	
LCC-25.4	25.4	
LCC-27	27.0	
LCC-30	30.0	
LCC-34	34.0	
LCC-40	40.0	
LCC-45	45.0	500
LCC-55	55.0	
LCC-69	69.0	
LCC-71	71.2	
LCC-72	72.0	
LCC-74	74.2	
LCC-80	80.0	

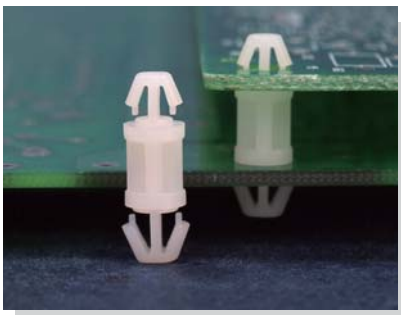


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø4.0
THICKNESS 1.6

CHASSIS Ø4.8
THICKNESS 1.6




P.C.B Ø4.0
THICKNESS 1.6


CHASSIS Ø4.8
THICKNESS 2.4

Part No.	A	Package
LCBM-3	3.0	1000
LCBM-4	4.0	
LCBM-6	6.0	
LCBM-8	8.0	
LCBM-10	10.0	
LCBM-12	12.0	
LCBM-14	14.0	
LCBM-16	16.0	
LCBM-18	18.0	

Part No.	A	Package
LCBM-19L	19.0	1000

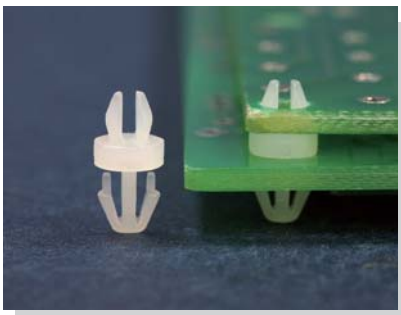

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.6
THICKNESS 1.0

P.C.B Ø2.8
THICKNESS 1.6


Part No.	Package
MSPA-1.6	2000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

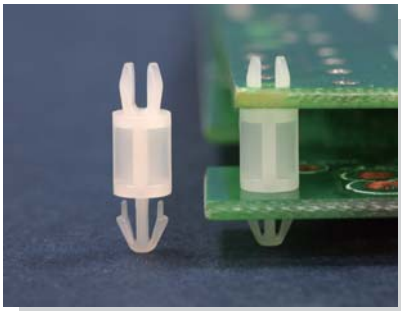


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.8
THICKNESS 1.6

P.C.B Ø2.8
THICKNESS 1.6

Part No.	Package
MSPA-6.3L	1000

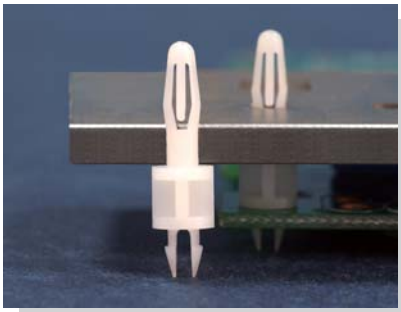


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.0
THICKNESS 4.0

P.C.B Ø3.0
THICKNESS 1.6

Part No.	Package
LMSA-6	1000

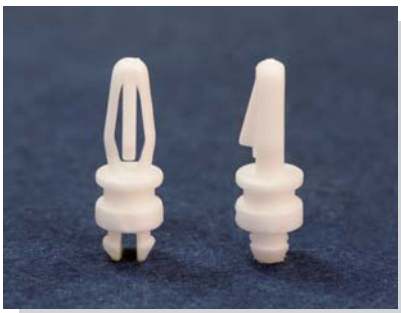


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.B.C Ø3.2
THICKNESS 1.6

P.B.C Ø3.2
THICKNESS 1.0~1.2

Part No.	Package
LMSB-4	1000

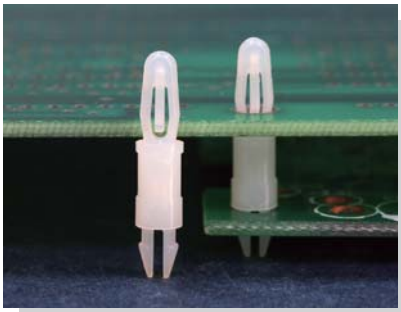

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.2
THICKNESS 1.6~1.8

P.C.B Ø3.2
THICKNESS 1.6


Part No.	A	Package
LMSP-8	7.9	1000
LMSP-16	15.9	

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

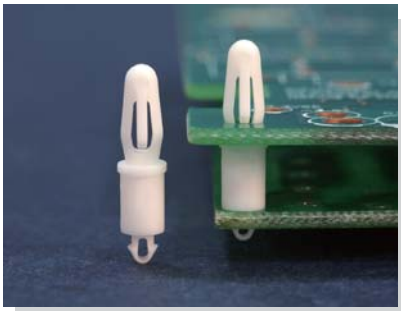


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.2
THICKNESS 1.6~1.7

P.C.B Ø2.0
THICKNESS 1.0~1.2

Part No.	Package
LCPL-6.4	1000

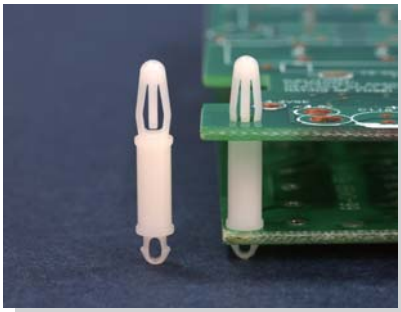


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: Ø3.5
THICKNESS 1.6


MOUNTING HOLE: Ø2.6
THICKNESS 1.6


Part No.	Package
LCPLB-11	1000

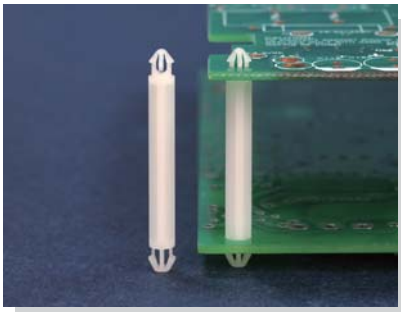

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.3
THICKNESS 1.6~2.1






P.C.B Ø3.3
THICKNESS 1.6

Part No.	Package
LCOA-28.8	1000

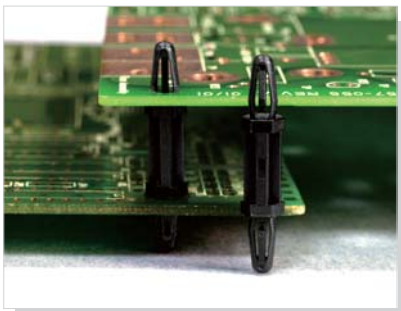

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.6

P.C.B Ø4.0
THICKNESS 1.6


Part No.	Package
LCSF-15	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

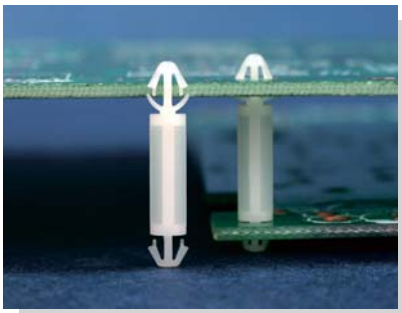


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.0
THICKNESS 1.6

P.C.B Ø3.0
THICKNESS: E

Part No.	A	Package
LCGA-14	0.8~1.0	1000
LCGA-14S	0.6	

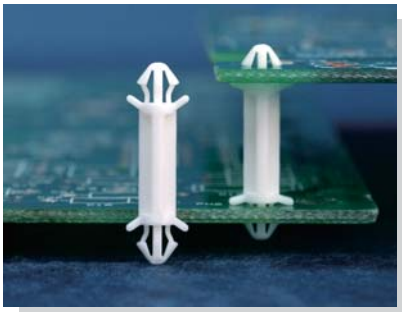


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø3.0
THICKNESS 1.2~1.6


CHASSIS Ø3.0
THICKNESS 1.2~1.6

Part No.	Package
CBSA-13	1000

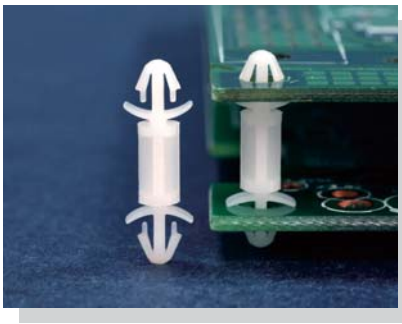


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.2~2.0




P.C.B Ø3.0
THICKNESS 1.2~2.0

Part No.	A	Package
LCF-3	3.2	1000
LCF-4	4.0	
LCF-5	5.0	
LCF-6	6.35	
LCF-7	7.0	
LCF-8	8.0	
LCF-9	9.5	
★LCF-10.6	10.6	
LCF-11	11.2	
LCF-12	12.0	
LCF-15	15.0	
LCF-16	16.0	
LCF-17	17.0	
LCF-20	20.2	
LCF-22	22.0	
LCF-25	25.4	

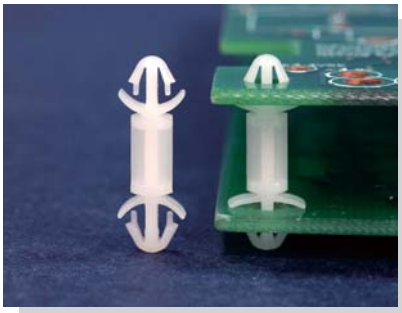

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.0
THICKNESS 1.2~2.0




CHASSIS Ø3.5
THICKNESS 1.6~2.0

Part No.	A	Package
LCFO-3	3.0	1000
LCFO-3.5	3.5	
LCFO-4	4.0	
LCFO-4.8	4.8	
LCFO-6	6.0	
LCFO-6.4	6.4	
LCFO-7	7.0	
LCFO-8	8.0	
LCFO-9	9.0	
LCFO-10	10.0	
LCFO-11.5	11.5	
LCFO-12.7	12.7	
LCFO-14	14.0	
LCFO-16	16.0	

用途：PC板與PC板間之固定，不佔空間。

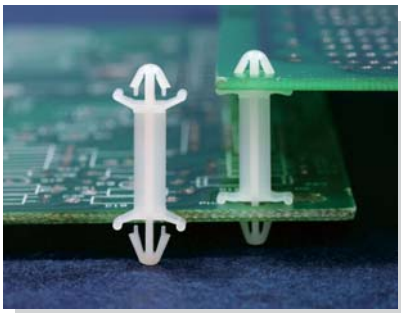


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.5
THICKNESS 1.0

P.C.B Ø3.5
THICKNESS 1.6

Part No.	Package
CBCS-14	1000

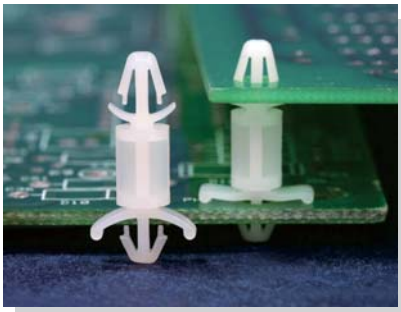


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø3.5
THICKNESS 1.6


CHASSIS Ø3.5
THICKNESS 0.8~2.0


Part No.	A	Package
LCD-3	3.2	2000
LCD-4	4.0	
LCD-5	4.8	1000
LCD-6	6.4	
LCD-7	7.0	
LCD-8	8.0	
LCD-9	9.6	
LCD-11	11.2	
LCD-12	12.7	
LCD-14	14.0	
LCD-16	16.0	
LCD-18	18.0	
LCD-19	19.1	
LCD-27	27.5	

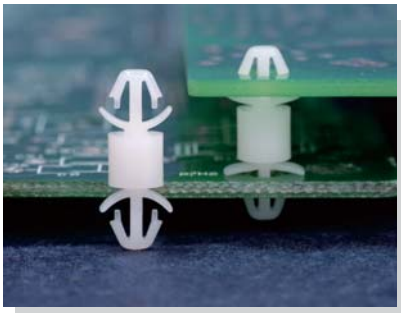

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.5
THICKNESS 1.6~2.0







◆LCO-5~LCO-8

P.C.B Ø3.5
THICKNESS 1.6~2.0

Part No.	A	D	Package
LCO-5	5.0	8.2	1000
LCO-6.4	6.4	9.6	
LCO-8	8.0	11.2	
LCO-10	10.0	13.2	
LCO-11	11.0	14.2	
LCO-12.7	12.7	15.9	
LCO-15.9	15.9	19.1	

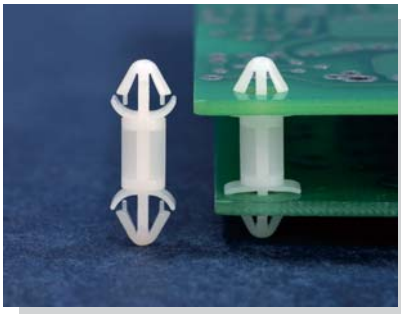

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.6

P.C.B Ø4.0
THICKNESS 1.6


Part No.	Package
LCFB-8	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

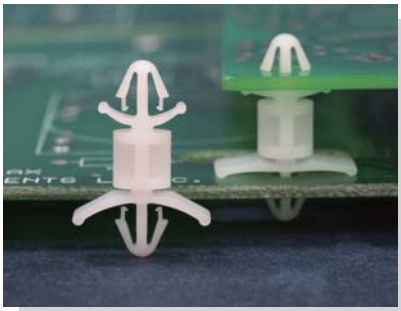


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.6

CHASSIS Ø4.0
THICKNESS 1.6

Part No.	Package
LCBJ-9	1000

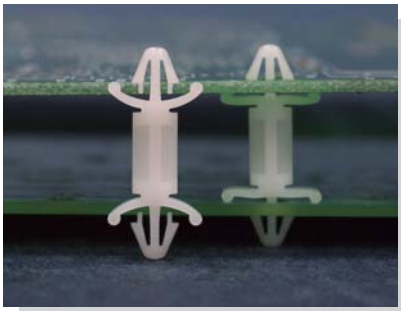


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø4.0
THICKNESS 0.8~1.7


CHASSIS Ø4.0
THICKNESS 0.8~1.7

Part No.	A	Package
LCTA-4.8	4.8	2000
LCTA-12.7	12.7	1000

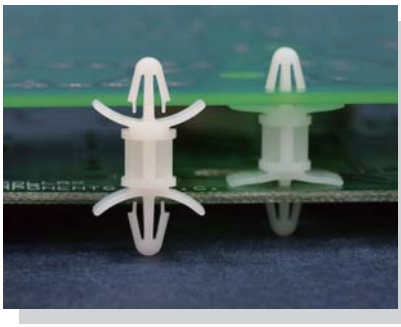


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS: E




CHASSIS Ø4.0
THICKNESS: F

Part No.	A	E	F	Package
LCEO-5	4.8	0.8~2.0	0.8~2.0	1000
LCEO-6	6.4			
LCEO-8	7.9			
LCEO-9	9.5			
LCEO-12	12.7			
LCEO-12L	11.9	1.2~2.3	1.2~2.3	
LCEO-15	15.9	0.8~2.0	0.8~2.0	
LCEO-19	19.0			
LCEO-22	22.2			

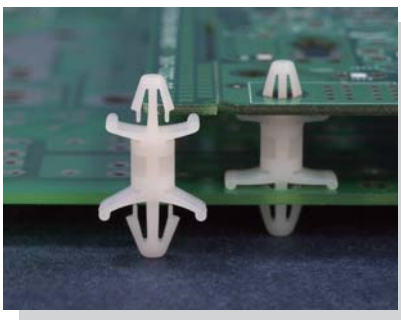

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 0.8~2.0

CHASSIS Ø4.5
THICKNESS 0.8~2.0


Part No.	Package
LCT-9	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

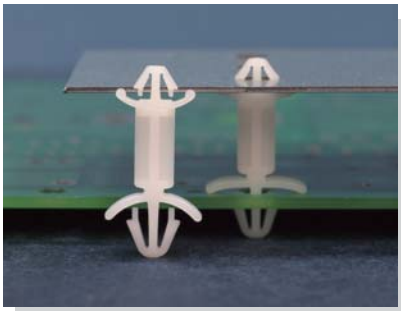


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.0

CHASSIS Ø4.8
THICKNESS 1.6

Part No.	Package
LCBD-12.7	1000

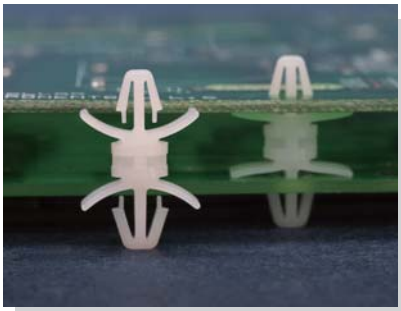


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø4.0
THICKNESS 1.6~2.0


P.C.B Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCBZ-4.8	4.8	1000
LCBZ-6.4	6.4	

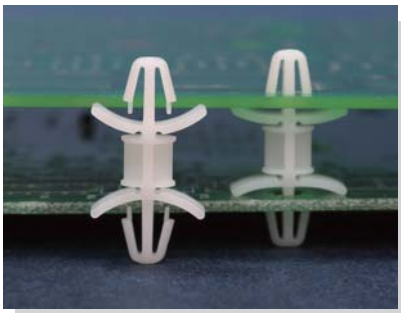

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


CHASSIS Ø4.8
THICKNESS 0.8~2.0



CHASSIS Ø4.8
THICKNESS 0.8~2.0
◆ **LCBYR-4.8**


Part No.	A	Package
LCBYR-4.8	4.4	1000

CHASSIS Ø4.8
THICKNESS 0.8~2.0




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCBY-4.8	4.8	1000
LCBY-6.4	6.4	
LCBY-9.5	9.5	
LCBY-12.7	12.7	
LCBY-15.9	15.9	
LCBY-19.1	19.1	
LCBY-22.2	22.2	

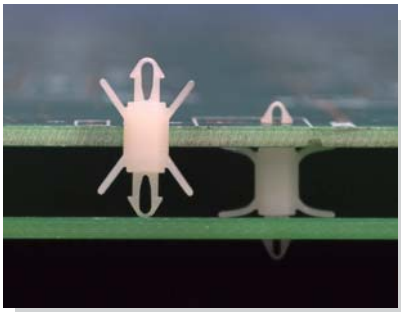

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.0
THICKNESS 0.8~1.6

P.C.B Ø2.0
THICKNESS 0.8~1.6


Part No.	Package
MADG-5.4	2000

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

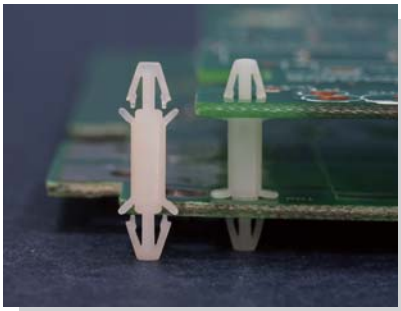


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.0
THICKNESS 1.6

P.C.B Ø3.0
THICKNESS 1.6

Part No.	A	Package
LCA-6	6.3	1000
LCA-8	8.0	
LCA-10	10.0	
LCA-12	12.7	

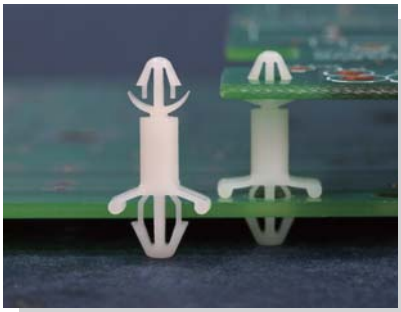


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø3.0
THICKNESS 0.8~2.0


CHASSIS Ø4.0
THICKNESS 1.2~2.6

Part No.	A	Package
LCH-3	3.5	2000
LCH-4	4.0	
LCH-5	5.0	
LCH-6	6.3	1000
LCH-7	7.4	
LCH-8	8.5	
LCH-10	10.0	
LCH-11	11.0	
LCH-12	12.7	
LCH-15	15.9	

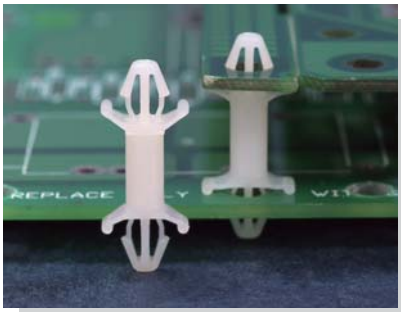

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.5
THICKNESS 0.8~2.0



P.C.B Ø3.5
THICKNESS 0.8~2.0

◆ **CBSS-2S**

P.C.B Ø3.5
THICKNESS 0.8~2.0




P.C.B Ø3.5
THICKNESS 0.8~2.0

Part No.	A	Package
CBSS-2	2.1	2000
CBSS-2S	2.1	
CBSS-2.2	2.2	
CBSS-4.8	4.8	
CBSS-7	7.0	
CBSS-10	10.0	
CBSS-12.7	12.7	
CBSS-14	14.0	
CBSS-17	17.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.6

CHASSIS Ø4.0
THICKNESS 0.8

Part No.	Package
LCL-3.2	2000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間。

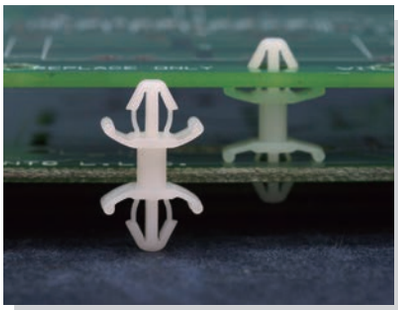


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

CHASSIS Ø4.0
THICKNESS 1.6




CHASSIS Ø4.0
THICKNESS 1.6

Part No.	A	B	Package
CBLSS-6	4.2	9.2	1000
CBLSS-8	6.2	11.2	
CBLSS-10	8.2	13.2	
CBLSS-12	10.2	15.2	
CBLSS-13	11.2	16.2	
CBLSS-14	12.2	17.2	
CBLSS-16	14.2	19.2	
CBLSS-16.8	15.0	20.0	
CBLSS-18	16.2	21.2	
CBLSS-20	18.2	23.2	
CBLSS-42	40.2	45.2	

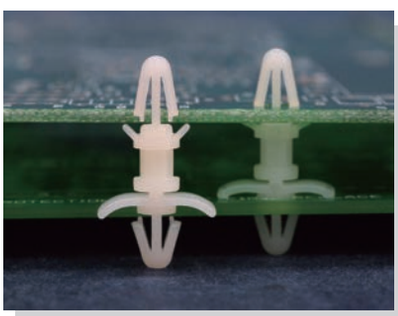

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCB-5	5.0	1000
LCB-6	6.3	
LCB-8	8.0	
LCB-10	10.0	
LCB-12	12.7	
LCB-15	15.9	
LCB-20	20.0	
LCB-25	25.0	


PC 板間隔柱 SPACER SUPPORT

用途: 固定PC板於機板上，免工具易拆卸。

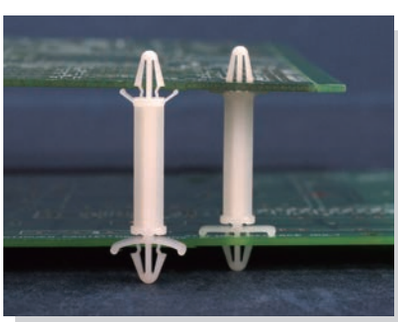

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 0.8~1.7



CHASSIS Ø4.8
THICKNESS 0.8~1.7

Part No.	Package
LCBSA-28.5	500

P.C.B Ø4.0
THICKNESS 0.8~1.7




P.C.B Ø4.8
THICKNESS 1.8~2.7

Part No.	Package
LCBSA-20L	500


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具易拆卸。

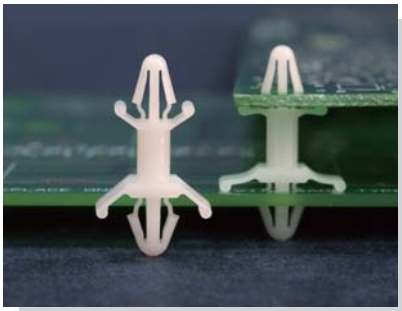


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø4.8
THICKNESS 0.8~2.2

Part No.	A	Package
CBS-3.8	3.8	1000
CBS-5	4.6	
CBS-6	6.3	
CBS-8	7.93	
CBS-9	9.2	
CBS-12	12.5	
CBS-15	15.7	
CBS-19	19.0	
CBS-22	22.0	
CBS-25	25.4	
CBS-28	28.6	

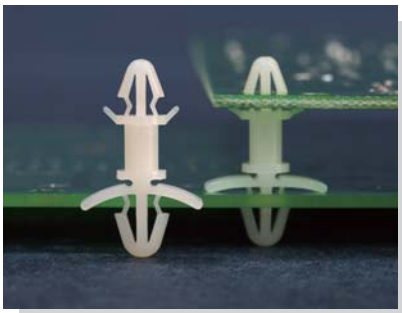


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø4.8
THICKNESS 0.8~2.2

Part No.	A	Package
LCBS-4	4.0	1000
LCBS-5	5.0	
LCBS-6	6.35	
LCBS-7	7.0	
LCBS-9	9.2	
LCBS-10	10.0	
LCBS-12	12.5	
LCBS-15	15.7	
LCBS-19	19.0	
LCBS-20	20.0	500
LCBS-22	22.0	
LCBS-25	25.4	
LCBS-28	28.6	
LCBS-30	30.0	
LCBS-35	35.0	
LCBS-38	38.0	
LCBS-45	45.0	

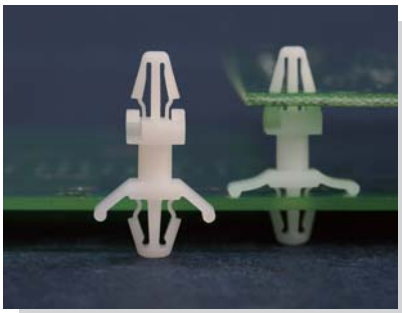

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~2.0




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	A	E	F	Package
VCBS-9	5.9	9.8		1000
VCBS-11	7.5	11.4	4.0	
VCBS-14	10.5	14.4	4.0	
VCBS-16	12.7	16.6	4.0	
VCBS-17	13.8	17.7	4.0	
VCBS-20	17.0	20.9	4.0	
VCBS-24	20.2	24.1	4.5	
VCBS-27	23.3	27.2	4.5	
VCBS-30	26.5	30.4	4.5	
VCBS-33	29.7	33.6	4.5	
VCBS-39	36.0	39.9	4.5	


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具易拆卸。

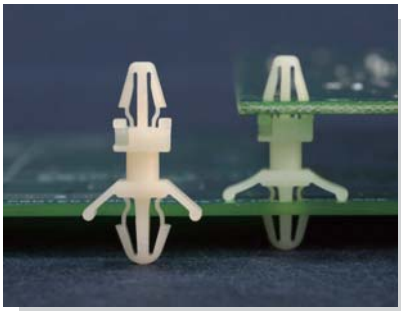


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~2.0




CHASSIS Ø4.8
THICKNESS 0.8~3.0

Part No.	A	D	G	Package
VCBSL-9	5.0	9.8		1000
VCBSL-11	6.6	11.4	4.0	
VCBSL-14	9.6	14.4	4.0	
VCBSL-16	11.8	16.6	4.0	
VCBSL-17	12.9	17.7	4.0	
VCBSL-24	19.3	24.1	4.5	
VCBSL-27	22.4	27.2	4.5	
VCBSL-30	25.6	30.4	4.5	
VCBSL-33	28.8	33.6	4.5	
VCBSL-39	35.1	39.9	4.5	

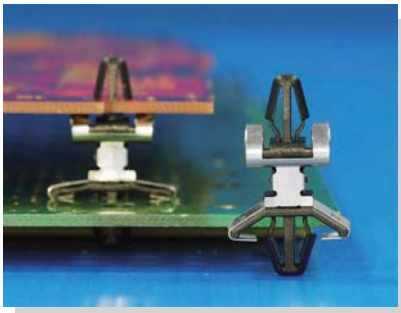


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6~2.0




CHASSIS Ø4.8
THICKNESS 1.0~2.0




NEW

Part No.	Part No.	Package
VCBA-14.4F	VCBA-14.4ST	1000
	VCBA-14.4	

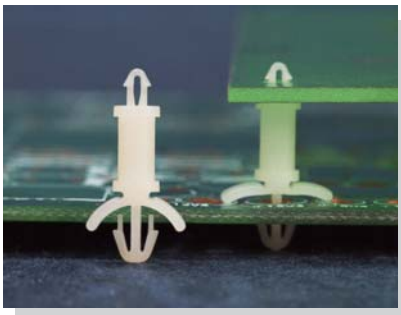


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.0
THICKNESS 1.6

CHASSIS Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	A	Package
LCMA-3.2	3.2	1000
LCMA-4.8	4.8	
LCMA-6.4	6.4	
LCMA-7.9	7.9	
LCMA-9.5	9.5	
LCMA-11.1	11.1	
LCMA-12.7	12.7	
LCMA-14.3	14.3	
LCMA-15.9	15.9	
LCMA-17	17.0	

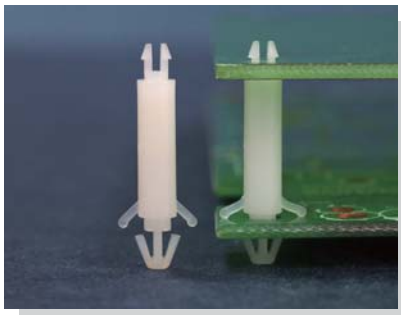

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.5
THICKNESS 1.0~1.7

P.C.B Ø3.0
THICKNESS 1.0~1.7

Part No.	Package
LCAB-14	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具易拆卸。

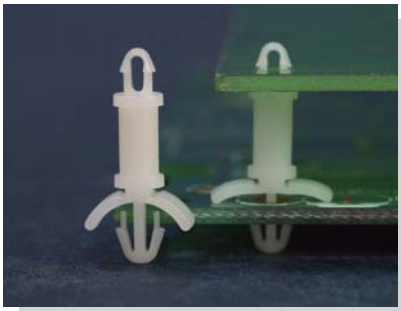


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.6




CHASSIS Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	A	Package
LCMD-3.2	3.2	1000
LCMD-4.8	4.8	
LCMD-6.4	6.4	
LCMD-7.9	7.9	
LCMD-9.5	9.5	
LCMD-11.1	11.1	
LCMD-12.7	12.7	
LCMD-14.3	14.3	
LCMD-15.9	15.9	
LCMD-17	17.0	

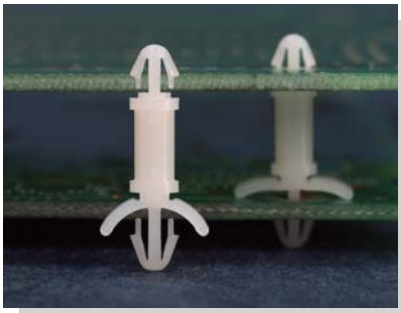


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.2~1.7




CHASSIS Ø3.0
THICKNESS 0.8~2.0

Part No.	A	Package
LCG-3	3.2	1000
LCG-5	4.8	
LCG-6	6.4	
LCG-8	7.9	
LCG-9	9.5	
LCG-11	11.1	
LCG-12	12.7	
LCG-14	14.3	
LCG-15	15.9	
LCG-17	17.0	
LCG-18	18.0	
LCG-19	19.0	
LCG-20	20.0	
LCG-26	26.0	

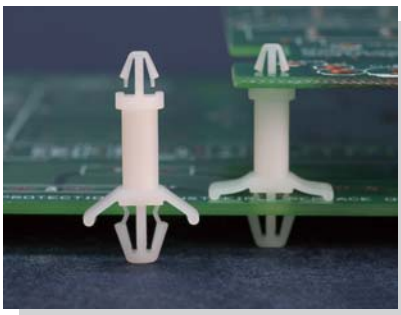

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.4~1.6




CHASSIS Ø4.8~Ø5.0
THICKNESS 0.8~2.0

Part No.	Package
LCBUA-13.9	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具易拆卸。

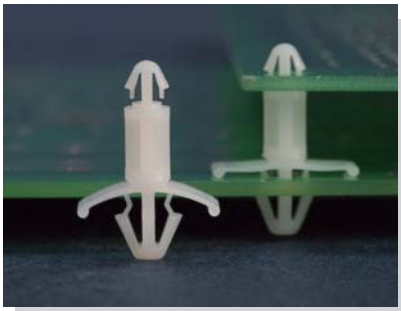


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.2~1.7




CHASSIS Ø4.8
THICKNESS 0.8~2.2

Part No.	A	Package
LCBT-3	3.2	1000
LCBT-5	4.8	
LCBT-6	6.3	
LCBT-8	8.0	
LCBT-10	10.0	
LCBT-12	12.0	
LCBT-14	14.0	
LCBT-16	16.0	
LCBT-18	18.0	
LCBT-25	25.0	

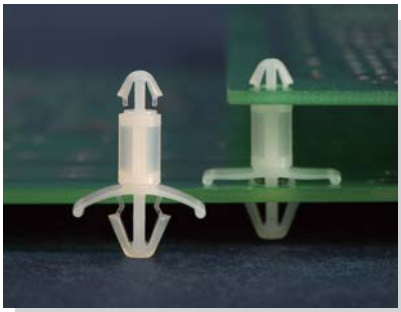


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.5
THICKNESS 1.2~1.7




CHASSIS Ø4.8
THICKNESS 0.8~2.2

Part No.	A	Package
LCBU-3	3.2	1000
LCBU-5	5.0	
LCBU-6	6.3	
LCBU-8	8.0	
LCBU-10	10.0	
LCBU-12	12.0	
LCBU-14	14.0	
LCBU-16	16.0	
LCBU-18	18.0	
LCBU-25	25.0	

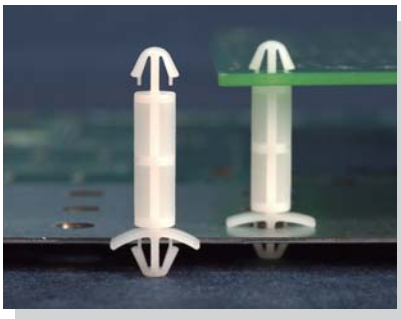

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




P.C.B Ø4.0
THICKNESS 0.5~1.2

Part No.	Package
LCGB-17.5	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具易拆卸。

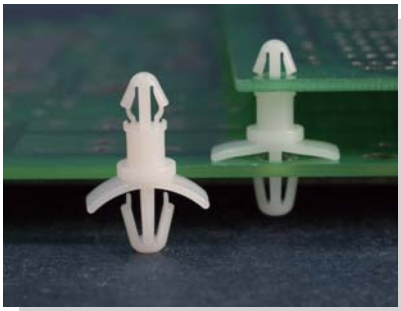

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	Package
LCBC-8	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間，可在板上拆卸。

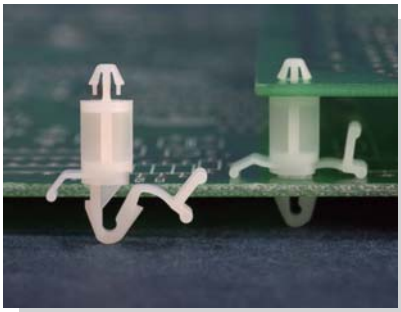

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)


P.C.B Ø3.0
THICKNESS 1.6



CHASSIS Ø4.8
THICKNESS 0.8~1.6

Part No.	A	Package
KLCBS-9.5	9.5	1000
KLCBS-12.7	12.7	
KLCBS-15.9	15.9	
KLCBS-19.1	19.1	


P.C.B Ø3.5
THICKNESS 1.6



CHASSIS Ø4.8
THICKNESS 0.8~1.6

Part No.	A	Package
KLCBM-9.5	9.5	1000
KLCBM-12.7	12.7	
KLCBM-15.9	15.9	
KLCBM-19.1	19.1	

P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø4.8
THICKNESS 0.8~1.6


Part No.	A	Package
KLCBL-9.5	9.5	1000
KLCBL-12.7	12.7	
KLCBL-15.9	15.9	
KLCBL-19.1	19.1	


PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板間之固定，不佔空間，可在板上拆卸。

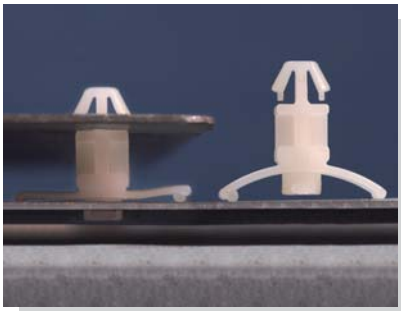

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	A	Package
LCBA-5.6	5.6	1000
LCBA-7.6	7.6	


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，一頭配合螺母使用，不旋轉。

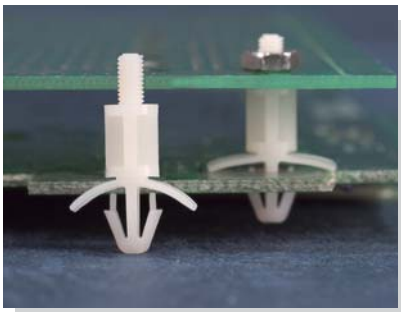


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



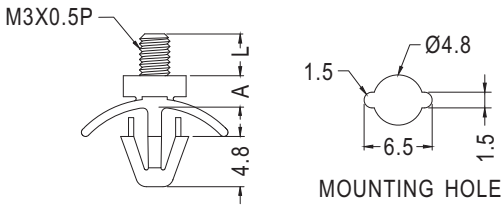



◆ **LCDS3-3,LCDS3-4**

Part No.	A	L	Package
LCDS3-3	3.0	4.0	1000
LCDS3-4	4.0	4.0	
LCDS3-5	5.0	4.0	
LCDS3-6	6.0	6.0	
LCDS3-7	7.0	6.0	
LCDS3-8	8.0	6.0	
LCDS3-9	9.0	6.0	
LCDS3-10	10.0	6.0	
LCDS3-11	11.0	6.0	
LCDS3-12	12.0	6.0	
LCDS3-13	13.0	6.0	
LCDS3-14	14.0	6.0	
LCDS3-15	15.0	6.0	

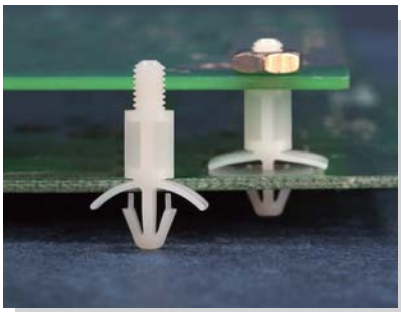

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



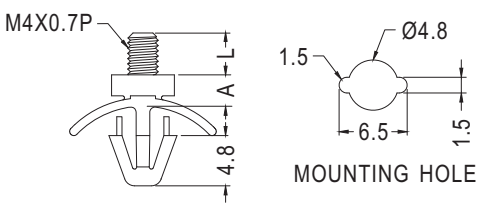


◆ **LCDS4-3,LCDS4-4**


Part No.	A	L	Package
LCDS4-3	3.0	4.0	1000
LCDS4-4	4.0	4.0	
LCDS4-5	5.0	4.0	
LCDS4-6	6.0	6.0	
LCDS4-7	7.0	6.0	
LCDS4-8	8.0	6.0	
LCDS4-9	9.0	6.0	
LCDS4-10	10.0	6.0	
LCDS4-11	11.0	6.0	
LCDS4-12	12.0	6.0	
LCDS4-13	13.0	6.0	
LCDS4-14	14.0	6.0	
LCDS4-15	15.0	6.0	

PC 板間隔柱 SPACER SUPPORT


用途：固定PC板於機板上，免工具易拆卸。

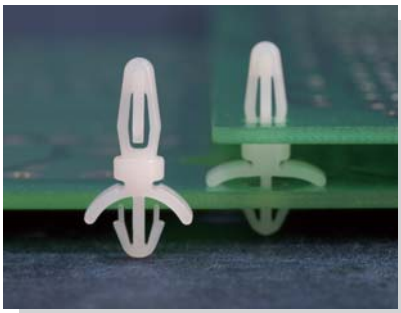


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LCSE-3.2	3.2	1000
LCSE-4.8	4.8	
LCSE-6.4	6.4	
LCSE-7.9	7.9	
LCSE-9.5	9.5	
LCSE-11.1	11.1	
LCSE-12.7	12.7	
LCSE-14.3	14.3	
LCSE-15.9	15.9	
LCSE-17	17.0	

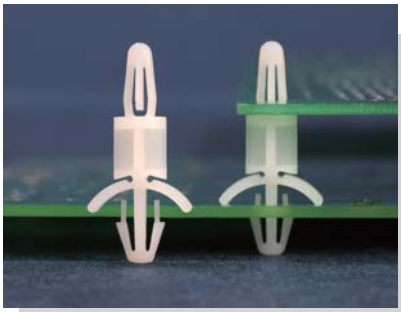


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LCSA-6.4	6.4	1000
LCSA-9.5	9.5	

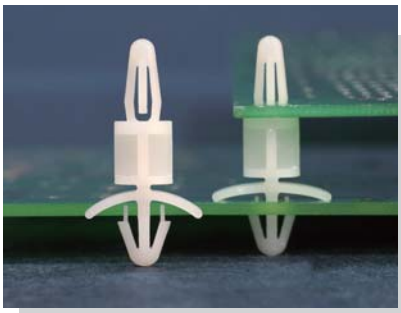


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
HLCS-4.8	4.8	1000
★ HLCS-6.4	6.4	
HLCS-9.5	9.5	
HLCS-12.7	12.7	
HLCS-15.9	15.9	
HLCS-25.4	25.4	
HLCS-40	40.0	500

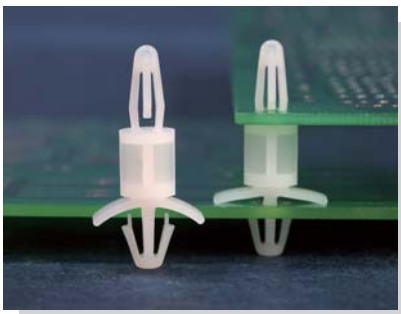


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LCSLR-9.5	1000


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具易拆卸。

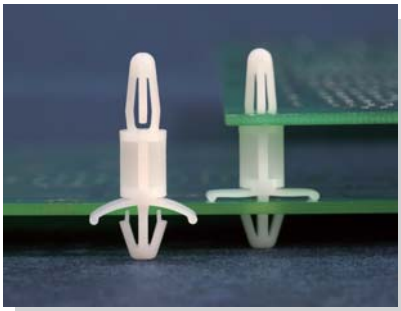

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.6




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LCS-3	3.5	1000
LCS-5	4.8	
LCS-6	6.0	
LCS-6A	6.4	
LCS-8	7.9	
LCS-9	9.5	

Part No.	A	Package
LCS-11	11.1	1000
LCS-12	12.7	
LCS-16	15.9	
LCS-19	19.1	
LCS-22	22.2	
LCS-24	24.0	
LCS-25	25.4	
LCS-27.5	27.5	
LCS-28	28.6	
LCS-31.1	31.1	
LCS-31.7	31.7	
LCS-35	34.9	

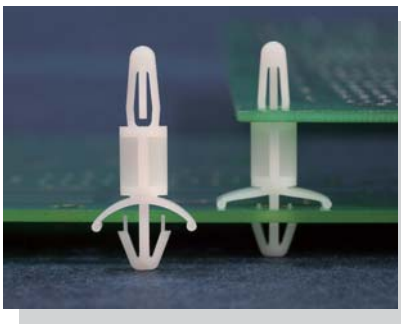


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS: E

CHASSIS Ø4.8
THICKNESS 2.0~3.2

Part No.	A	E	Package
LCSD-4.8	4.8	1.6	1000
LCSD-9.5	9.5		
LCSD-12.7	12.7		
LCSL-4.8	4.8	2.0~3.2	

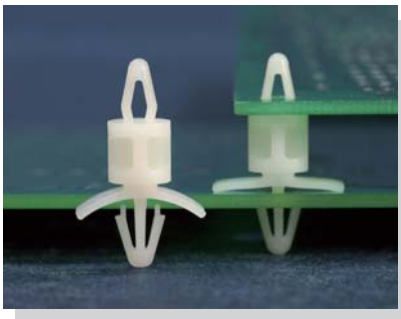


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø3.5
THICKNESS 1.6

CHASSIS Ø4.0
THICKNESS 0.8~1.6

Part No.	Package
LCPA-8.2	1000

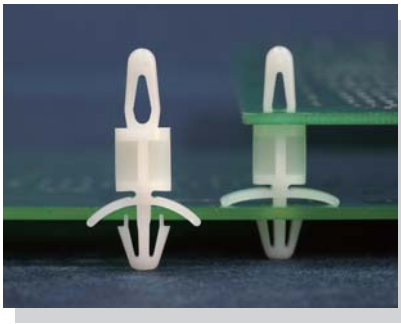

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.0
THICKNESS 1.2~1.7

P.C.B Ø4.8
THICKNESS 0.8~2.5

Part No.	A	Package
LCP-7.9	7.9	1000
LCP-9	9.5	
LCP-12.7	12.7	
LCP-22	22.2	


PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具易拆卸。

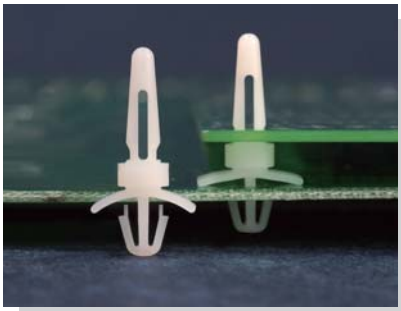


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.7




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	Package
LCY-4.8	1000

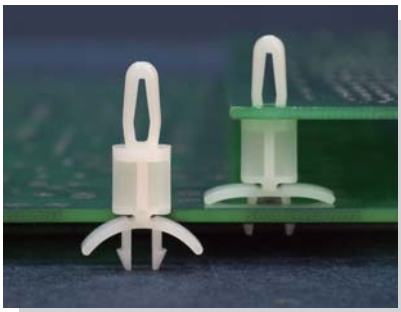


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.7



P.C.B Ø4.8
THICKNESS 0.8~2.5


P.C.B Ø3.8
THICKNESS 1.6



CHASSIS Ø4.8
THICKNESS 0.8~2.5


◆**UCBS-5A**

Part No.	A	Package
UCBS-5	4.8	1000
UCBS-5A	4.8	
UCBS-6	6.4	
UCBS-9	9.5	
UCBS-12	12.7	
UCBS-15	15.9	
UCBS-19	19.1	
UCBS-22	22.2	

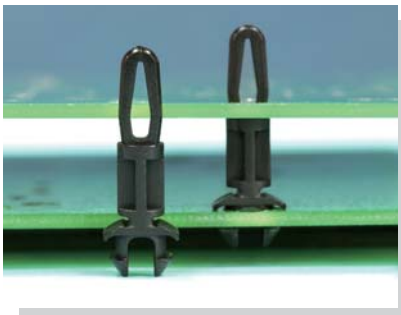

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.7




P.C.B Ø5.4
THICKNESS: F


Part No.	D	F	Package
UCBSL-9	11.7	1.6	1000
UCBSL-10	12.0	2.2	

PC 板間隔柱 SPACER SUPPORT

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

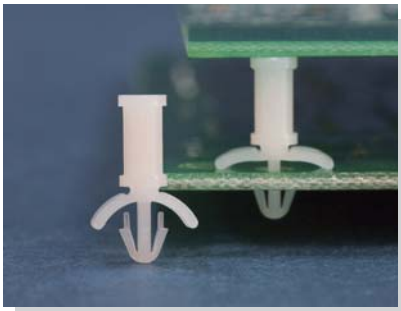


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø3.0
THICKNESS 0.8~2.0

Part No.	A	Package
LBS-3	3.2	1000
LBS-5	4.8	
LBS-6	6.4	
LBS-8	7.9	
LBS-9	9.5	
LBS-11	11.1	
LBS-12	12.7	
LBS-14	14.3	
LBS-15	15.9	
LBS-17	17.0	
LBS-19	19.0	
LBS-20	20.0	
LBS-26	26.0	

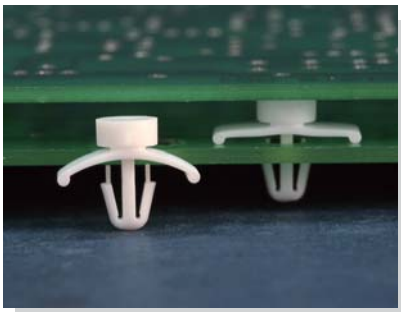


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.0
THICKNESS 1.0~2.0

Part No.	Package
LASB-3.7	1000

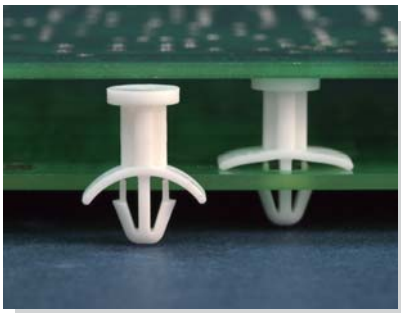

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.5
THICKNESS 0.8~2.0


Part No.	Package
LASD-8.3	1000

PC 板間隔柱 SPACER SUPPORT

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

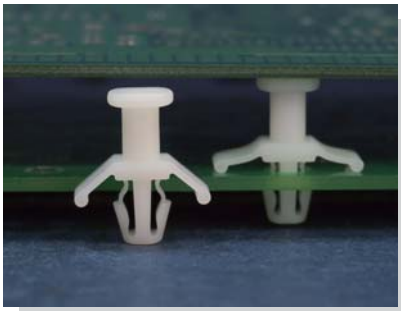


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø4.8
THICKNESS: F


Part No.	A	B	F	Package
LASY-4.6	4.6	4.6	0.8~2.5	1000
LASY-9.3	9.3	4.5	0.5~2.3	
LASY-12.6	12.6	4.5		

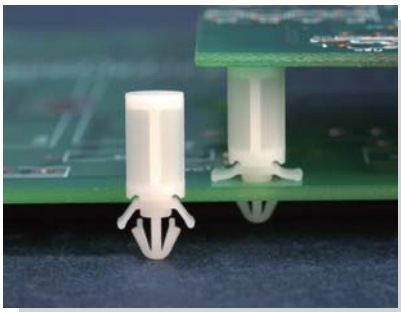

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ **LASE-4.5**




Part No.	A	B	Package
LASE-4.5	4.5	3.5	1000
LASE-7	7.0	6.0	
LASE-12	12.0	11.0	

MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.6

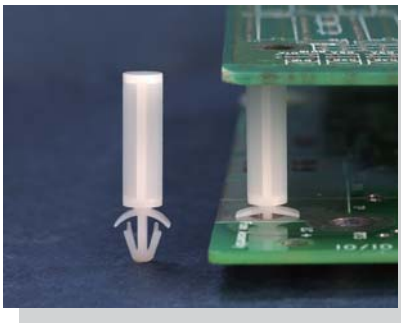


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.5
THICKNESS 1.6

Part No.	A	B	Package
★LASJ-17	17.0	15.9	1000
LASJ-18	18.0	16.9	

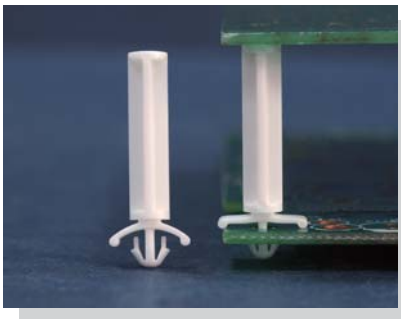

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø3.5
THICKNESS 0.8~1.8


Part No.	Package
LASH-22	1000

PC 板間隔柱 SPACER SUPPORT

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。

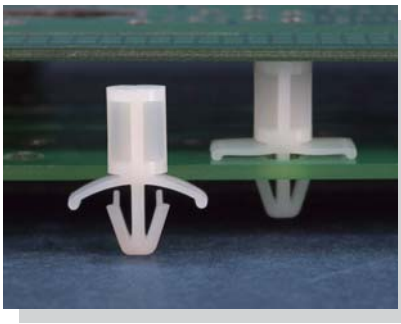


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.8
THICKNESS 0.8~2.0

Part No.	A	Package
LAS-3	3.5	1000
LAS-5	4.8	
LAS-6	6.0	
LAS-6A	6.4	
LAS-8	7.9	
LAS-9	9.5	
LAS-11	11.1	
LAS-12	12.7	
LAS-16	15.9	

Part No.	A	Package
LAS-19	19.1	1000
LAS-22	22.2	
LAS-24	24.0	
LAS-25	25.4	
LAS-27.5	27.5	
LAS-28	28.6	
LAS-31.1	31.1	
LAS-31.7	31.7	
LAS-35	34.9	

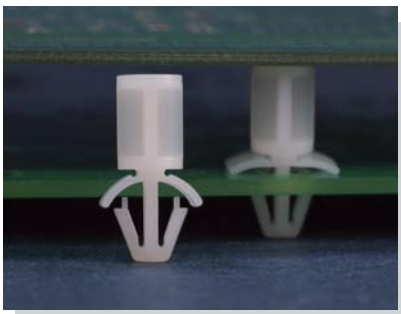


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.8~Ø5.0
THICKNESS 0.8~2.0

Part No.	Package
LASA-9.5	1000

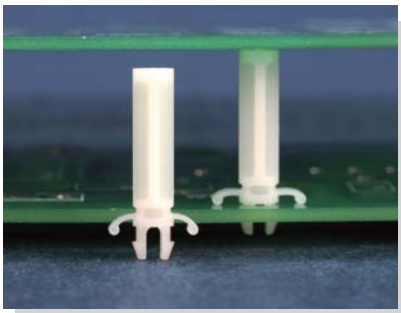


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.2~1.6

Part No.	Package
LASF-18	1000

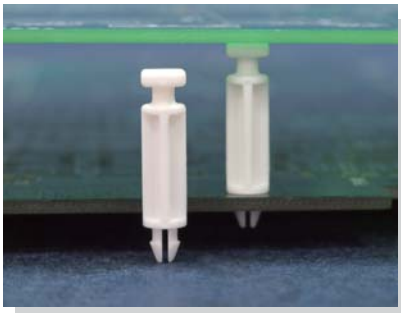

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	A	B	Package
MSA-14.1	14.1	22.3	1000
MSA-24.3	24.3	32.5	


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

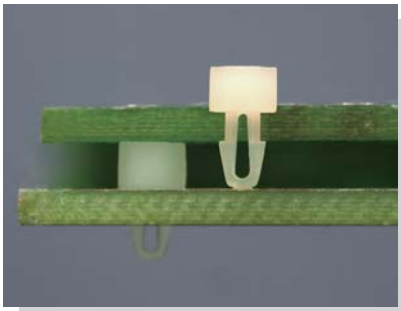


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø1.5
THICKNESS 1.0




Part No.	A	B	Package
MASD-0.8	0.8	4.0	2000
MASD-2	2.0	5.2	

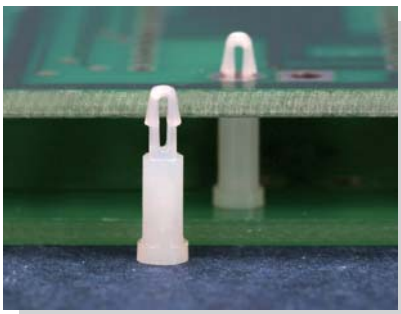



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø1.5
THICKNESS 1.6




Part No.	A	Package
MASS-2	2.0	2000
MASS-2.5	2.5	
MASS-3	3.0	
MASS-3.5	3.5	
MASS-4	4.0	
MASS-5	5.0	
MASS-6	6.0	
MASS-6.5	6.5	

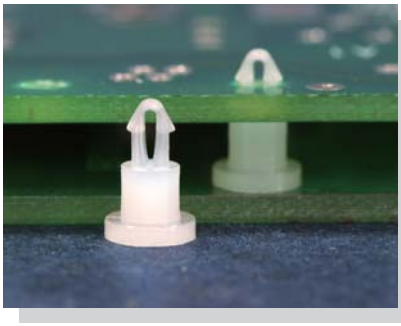

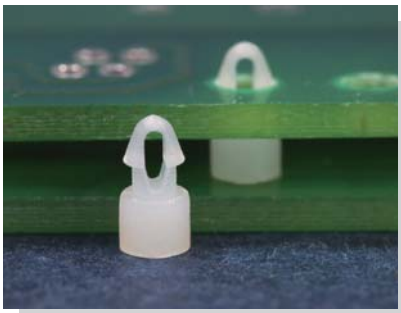


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.0
THICKNESS: E




P.C.B Ø2.0
THICKNESS: E



◆MA-2.5S,MA-3S-1

P.C.B Ø2.0
THICKNESS: E



◆MA-2.8S

Part No.	A	B	E	H	Package
MA-1.8	1.8	1.9	1.6	4.2	2000
MA-2	2.0	1.9	1.6	4.2	
MA-2L	2.0	2.05	2.0	4.8	
MA-2.5	2.5	1.9	1.6	4.1	
MA-2.5L	2.5	2.0	1.6	4.8	
MA-2.5S	2.5	2.05	1.0	3.0	
MA-2.8S	2.8	1.9	1.0	5.0	
MA-3	3.0	1.9	1.6	4.8	
MA-3SA	3.0	1.8	1.6	4.2	
MA-3S	3.0	1.8	1.6	4.2	
MA-3S-1	3.0	2.05	1.0	3.0	
MA-3.2	3.2	1.9	1.6	4.8	
MA-3.2-1	3.2	2.1	1.6	4.8	
MA-3.5	3.5	1.9	1.6	4.2	
MA-3.5L	3.5	2.0	1.6	4.8	
MA-3.75	3.75	2.0	1.6	4.8	
MA-4	4.0	1.9	1.6	4.8	
MA-4.5	4.5	1.9	1.6	4.2	
MA-4.7	4.7	1.9	1.6	4.8	
MA-5	5.0	1.9	1.6	4.8	
MA-5.6	5.6	2.0	1.6	4.2	
MA-6	6.0	1.9	1.6	5.0	
MA-6.5	6.5	1.9	1.6	5.0	
MA-6.75	6.75	1.9	1.6	5.0	
MA-8	8.0	1.9	1.6	5.0	
MA-9	9.0	1.9	1.6	5.0	


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.0
THICKNESS 1.6




Part No.	A	B	Package
MA-2.7DL	2.7	1.9	2000
MA-3.5DL	3.5	1.75	
MA-3.85DL	3.85	1.9	
MA-4.5DL	4.5	1.9	
MA-5DL	5.0	1.9	
MA-6.5DL	6.5	1.9	

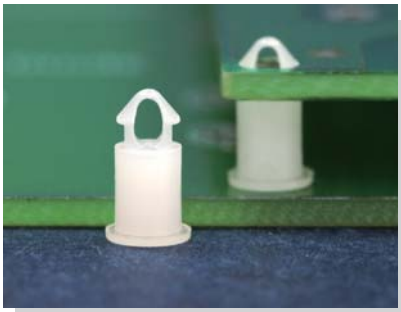


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.0




Part No.	A	Package
MAMS-1.5	1.5	2000
MAMS-1.7	1.7	
MAMS-5	5.0	

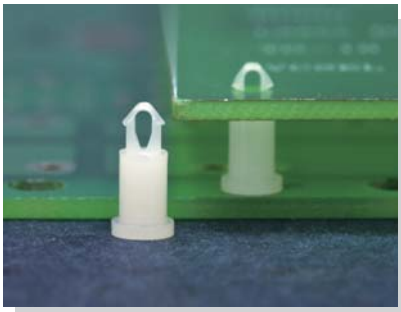


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.6~1.8




◆**MAM-1.5L**

P.C.B Ø2.5
THICKNESS 1.6~1.8




P.C.B Ø2.5
THICKNESS 1.6




◆**MAM-4.8,MAM-6.4**

P.C.B Ø2.5
THICKNESS 1.4~1.6




◆**MAM-2.6**

Part No.	A	Package
MAM-1.5	1.5	2000
MAM-1.5L	1.5	
MAM-2	2.0	
MAM-2.5	2.5	
MAM-2.6	2.6	
MAM-2.7	2.7	
MAM-3	3.0	
MAM-3.2	3.2	
MAM-3.5	3.5	
MAM-4	4.0	
MAM-4.5	4.5	
MAM-4.8	4.8	
MAM-5	5.0	
MAM-5.7	5.7	
MAM-6	6.0	
MAM-6.4	6.4	

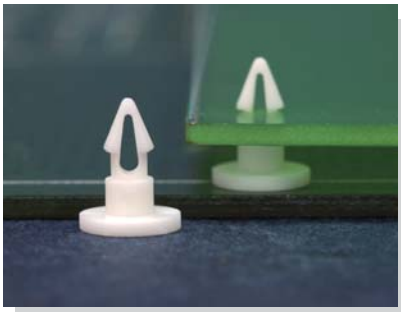

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø2.7
THICKNESS 1.6



Part No.	Package
MAMA-3.5	1000


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

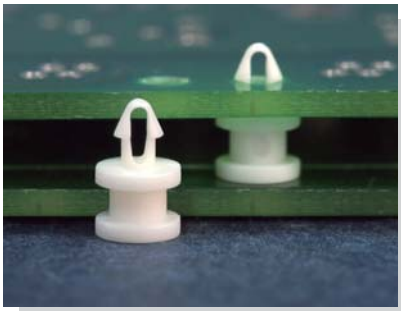


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.0
THICKNESS 1.6




Part No.	Package
MAB-4	1000

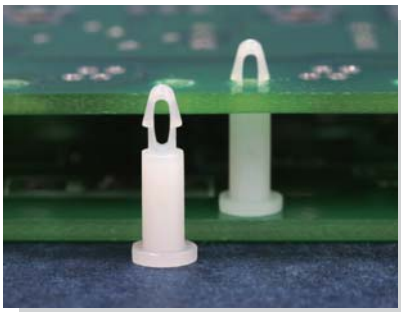


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.0
THICKNESS 1.6




Part No.	Package
MAL-8	1000

P.C.B Ø3.0
THICKNESS 1.6




Part No.	Package
MAL-34	1000

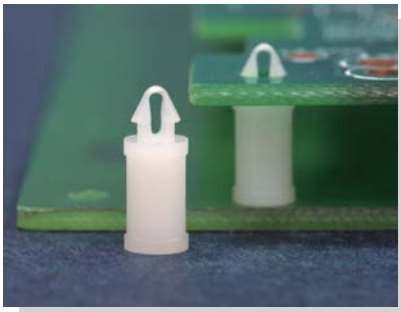


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.5
THICKNESS 1.0




Part No.	Package
MAMS-7.5	1000

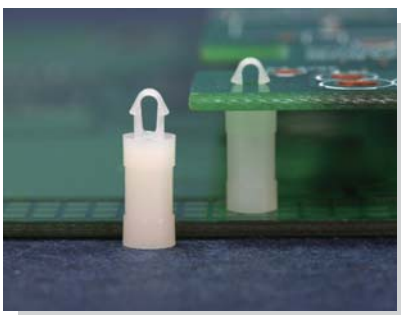

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø2.5
THICKNESS 1.6



Part No.	A	Package
MAM-6.8	6.8	2000
MAM-7	7.0	
MAM-8	8.0	
MAM-8.4	8.4	
MAM-9	9.0	
MAM-11	11.1	
MAM-12.7	12.7	
MAM-15.9	15.9	


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

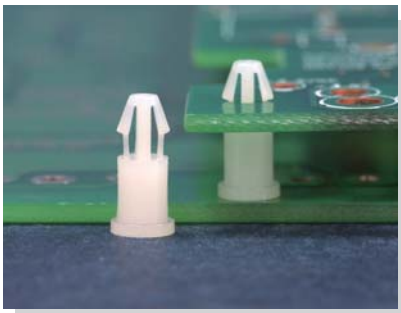


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS: E




P.C.B Ø3.0
THICKNESS: E




◆DCC-20S

Part No.	A	B	E	H	Package
DCC-2	2.0	3.05	1.2~1.6	5.0	2000
DCC-2.5	2.5				
DCC-2.7	2.7				
DCC-3	3.0				1000
DCC-3.2	3.2				
DCC-3.5	3.5				
DCC-4	4.0				
DCC-4.5	4.5				
DCC-5	5.0				
DCC-5S	5.0	2.6	0.8~1.2		
DCC-5.5	5.5	3.05	1.2~1.6		
DCC-6	6.0				
DCC-6.2	6.2				
DCC-6.5	6.5				
DCC-9.5L	9.5	3.05	1.2~1.6	6.0	
DCC-20S	20.0	3.05	0.8	5.0	

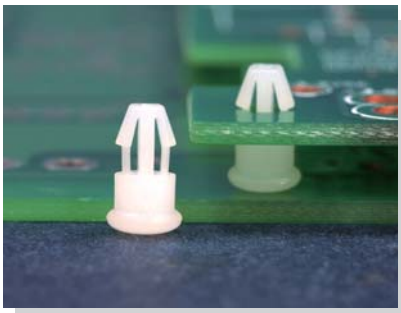


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.0
THICKNESS 1.6



Part No.	Package
DCE-4	1000

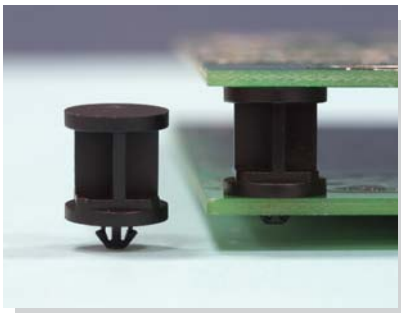


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE Ø3.0
THICKNESS: E

Part No.	A	B	E	Package
TCBA-10.5S	7.5	6.0	1.0	1000
TCBA-10.5	10.0	8.0	1.0	
TCBA-10.5L	10.0	8.0	1.6	

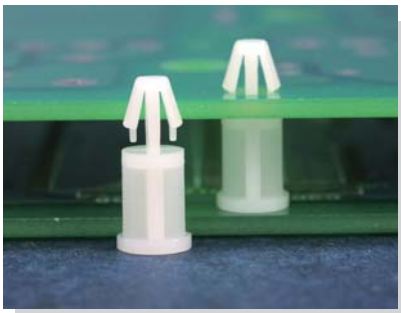

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.5
THICKNESS 0.8~1.6



Part No.	A	Package
MCM-8	8.0	1000
MCM-14.5	14.5	


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.7
THICKNESS 1.6




Part No.	Package
DCCA-4.3	1000

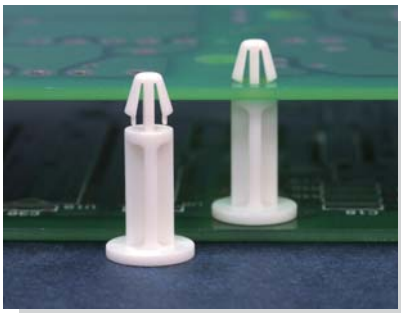


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.2~1.6




Part No.	Package
MCO-16	1000

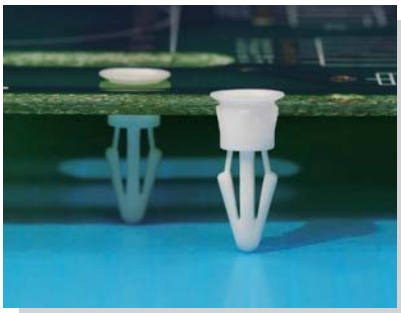

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.8

MOUNTING HOLE: Ø3.0~Ø3.18
THICKNESS 1.6


NEW

Part No.	Package
DCCB-4.1	1000

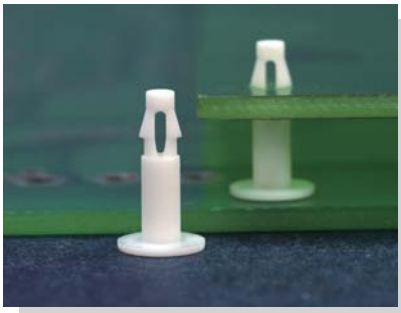

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø2.0
THICKNESS: E



Part No.	A	E	Package
MAST-6	5.5	1.0	1000
MAST-18	18.3	1.6	


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

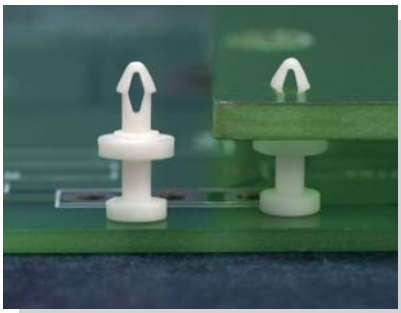


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.0
THICKNESS 2.4




Part No.	Package
MASL-5.4	1000

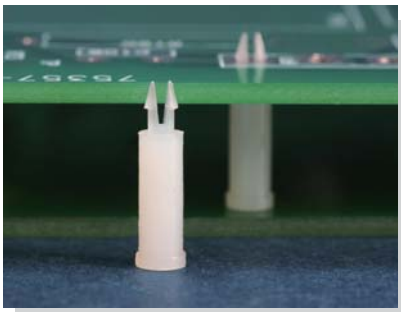


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.0
THICKNESS 1.2~1.8




Part No.	A	Package
MS-4	4.0	2000
MS-5	5.0	
MS-10	10.0	

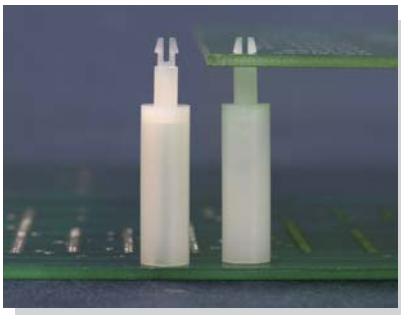


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

CHASSIS Ø2.2
THICKNESS 1.6




Part No.	Package
PCLS-25	1000

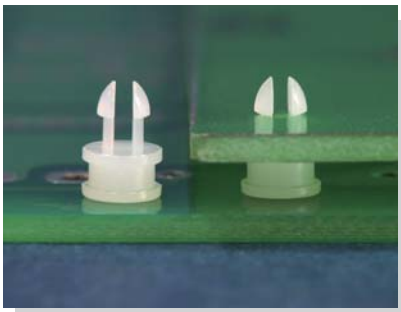


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.3
THICKNESS 1.6




Part No.	Package
MSB-2.8	1000

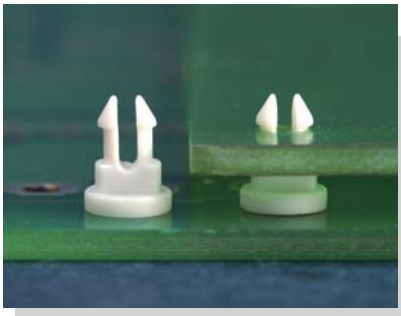

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm


P.C.B Ø2.5
THICKNESS 1.6




Part No.	Package
MSM-2.5	1000

PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

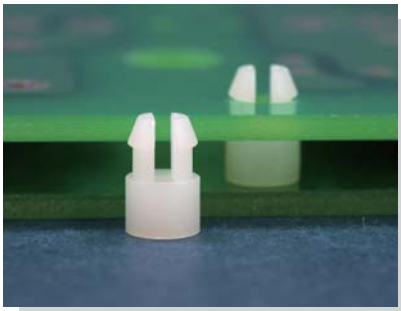

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MSMA-3.5	2000

PC 板間隔柱 SPACER SUPPORT


用途：PC板端直接壓入固定，另一端可配合M2螺絲或自攻螺絲固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MAE2.5-6.5	2000




◆ **MAE-XT** 為已攻牙 **M2X0.4P**


Part No.	Package
MAE2.5-6.5T	2000

PC 板間隔柱 SPACER SUPPORT

用途：PC板端直接壓入固定，另一端可配合M3螺絲或自攻螺絲固定。

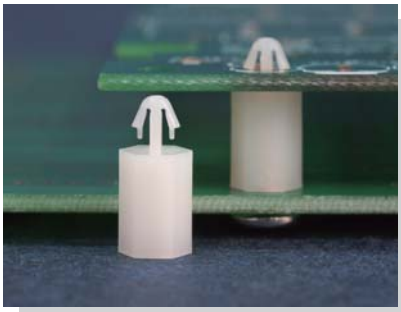


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
MAE-5	5.0	2000
MAE-6	6.0	
MAE-7	7.0	
MAE-8	8.0	
MAE-9	9.0	
MAE-10	10.0	
MAE-11	11.0	1000
MAE-12	12.0	
MAE-13	13.0	

Part No.	A	Package
MAE-14	14.0	1000
MAE-15	15.0	
MAE-16	16.0	
MAE-17	17.0	
MAE-18	18.0	
MAE-19	19.0	
MAE-20	20.0	
MAE-22	22.0	
MAE-23.5	23.5	
MAE-26	26.0	




Part No.	A	Package
MAE-5T	5.0	2000
MAE-6T	6.0	
MAE-7T	7.0	
MAE-8T	8.0	
MAE-9T	9.0	
MAE-10T	10.0	
MAE-11T	11.0	1000
MAE-12T	12.0	
MAE-13T	13.0	
MAE-14T	14.0	

Part No.	A	Package
MAE-15T	15.0	1000
MAE-16T	16.0	
MAE-17T	17.0	
MAE-18T	18.0	
MAE-19T	19.0	
MAE-20T	20.0	
MAE-22T	22.0	
MAE-23.5T	23.5	
MAE-26T	26.0	
MAE-26.5T	26.5	
MAE-27T	27.0	


◆ **MAE-XT** 為已攻牙**M3X0.5P**


PC 板間隔柱 SPACER SUPPORT

用途：PC板端直接壓入固定，另一端可配合螺絲或自攻螺絲固定。

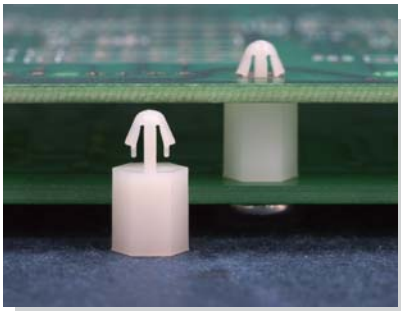

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

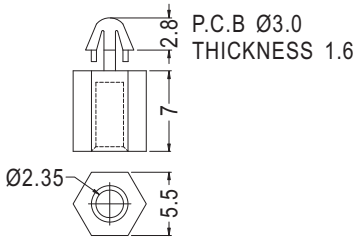




◆ **MAE-7-440T**為已攻牙 **4-40UNC**

Part No.	Package
MAE-7-440	2000


Part No.	Package
MAE-7-440T	2000


PC 板間隔柱 SPACER SUPPORT

用途：PC板端直接壓入固定，另一端可配合M3螺絲或自攻螺絲固定。

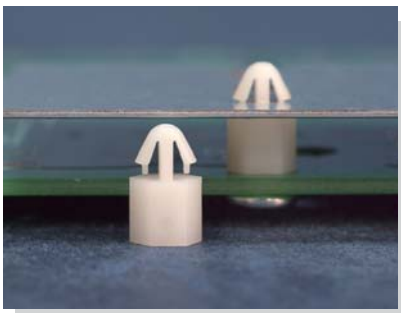

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






◆ **MAE4D-6T**為已攻牙 **M3X0.5P**

Part No.	Package
MAE4D-6	1000


Part No.	Package
MAE4D-6T	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板端直接壓入固定，另一端可配合M4螺絲或自攻螺絲固定。

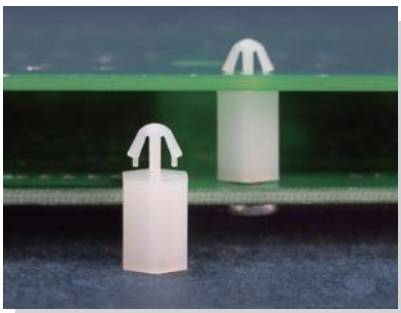

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






◆ **MAE4-XT**為已攻牙 **M4X0.7P**

Part No.	A	Package
MAE4-5	5.0	2000
MAE4-6	6.0	
MAE4-7	7.0	
MAE4-8	8.0	
MAE4-9	9.0	
MAE4-10	10.0	
MAE4-11	11.0	
MAE4-12.7	12.7	
MAE4-14	14.0	
MAE4-15	15.0	
MAE4-15.9	15.9	
MAE4-20	20.0	


Part No.	A	Package
MAE4-5T	5.0	2000
MAE4-6T	6.0	
MAE4-7T	7.0	
MAE4-8T	8.0	
MAE4-9T	9.0	
MAE4-10T	10.0	
MAE4-11T	11.0	
MAE4-12.7T	12.7	
MAE4-14T	14.0	
MAE4-15T	15.0	
MAE4-15.9T	15.9	
MAE4-20T	20.0	


PC 板間隔柱 SPACER SUPPORT

用途：PC板端直接壓入固定，另一端可配合M3螺絲或自攻螺絲固定。

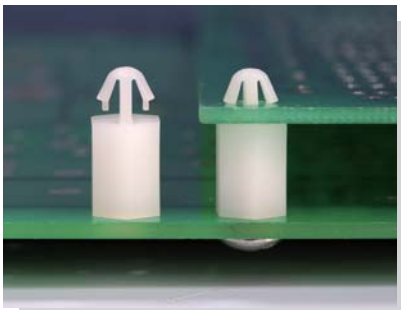


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

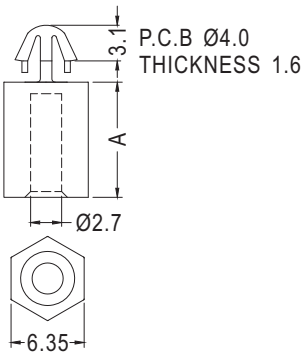

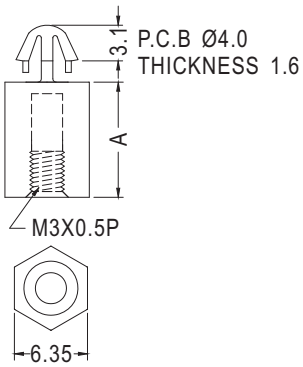

◆ **MAE43-XT**為已攻牙 **M3X0.5P**

P.C.B Ø4.0
THICKNESS 1.85




Part No.	Package
MAE43-4.8LT	1000

Part No.	A	Package
MAE43-5	5.0	2000
MAE43-6	6.0	
MAE43-7	7.0	
MAE43-8	8.0	
MAE43-9	9.0	
MAE43-10	10.0	
MAE43-11	11.0	
MAE43-12.7	12.7	
MAE43-14	14.0	
MAE43-15	15.0	
MAE43-15.9	15.9	
MAE43-20	20.0	

Part No.	A	Package
MAE43-5T	5.0	2000
MAE43-6T	6.0	
MAE43-7T	7.0	
MAE43-8T	8.0	
MAE43-9T	9.0	
MAE43-10T	10.0	
MAE43-11T	11.0	
MAE43-12.7T	12.7	
MAE43-14T	14.0	
MAE43-15T	15.0	
MAE43-15.9T	15.9	
MAE43-20T	20.0	


PC 板間隔柱 SPACER SUPPORT

用途：機板部分用鐵板自攻螺絲固定，另一頭直接壓入PC板。

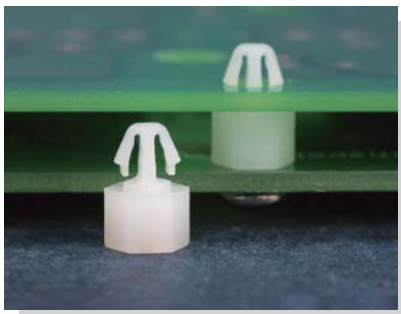


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.6




Part No.	Package
MCI-4.7	1000

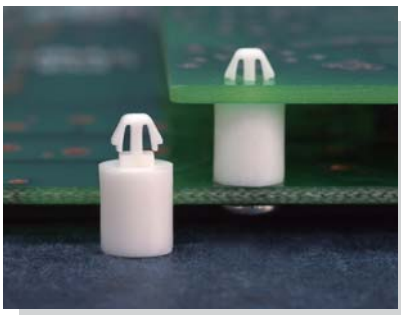

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
MCSH-7.2	1000

PC 板間隔柱 SPACER SUPPORT


用途：支撐PC板，使中間不致震動，載重而凹陷短路。

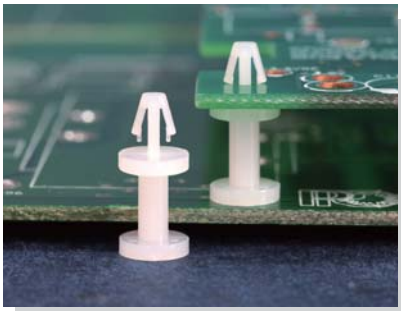

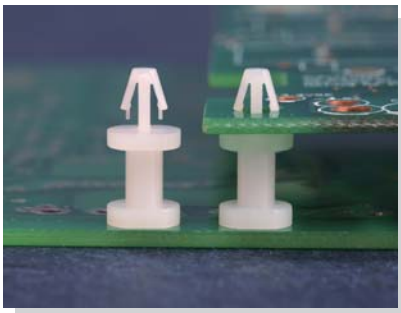


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS: E




◆ DCB-2~DCB-4

P.C.B Ø3.0
THICKNESS: E




Part No.	A	E	H	Package
DCB-2	2.0	1.6	6.5	2000
DCB-2.5	2.5	1.6	6.5	
DCB-3	3.0	1.6	6.8	1000
DCB-3.5	3.5	1.6	6.8	
DCB-4	4.0	1.6	6.8	
DCB-5	5.0	1.6	6.0	
DCB-5.8	5.8	1.6	6.9	
DCB-6	6.0	1.6	6.8	
DCB-6.5	6.5	1.6	6.0	
DCB-7	7.0	1.6	6.0	
DCB-8	8.0	1.6	6.8	
DCB-8(2)	8.0	2.1	6.8	
DCB-10	10.0	1.6	6.8	
DCB-15	15.0	1.6	6.0	
DCB-15L	15.0	1.6	15.0	
DCB-15S	15.0	1.6	6.0	

P.C.B Ø3.0
THICKNESS: E




◆ DCB-2D~DCB-3.5D

P.C.B Ø3.0
THICKNESS: E




P.C.B Ø3.0
THICKNESS: E




◆ DCB-15D

Part No.	A	B	E	Package
DCB-2D	2.0	3.5	1.2~1.7	2000
DCB-3D	3.0	3.7	1.2~1.6	
DCB-3.5D	3.5	4.0		
DCB-4D	4.0	3.6	1.2~1.7	1000
DCB-4.5D	4.5	3.6		
DCB-5D	5.0	3.6		
DCB-5.5D	5.5	4.0	1.2~1.6	
DCB-7D	7.0	4.0		
DCB-8D	8.0	3.85	1.2~1.7	
DCB-8.5D	8.5	4.0		
DCB-9D	9.0	4.0	1.2~1.6	
DCB-11D	11.0	3.7		
DCB-12D	12.0	4.0		
DCB-13D	13.0	4.0		
DCB-15D	15.0	3.7		

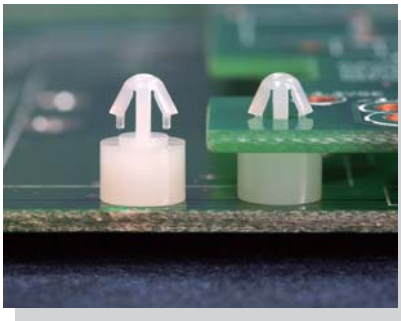


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.5
THICKNESS 1.6

Part No.	A	Package
PDC-3	3.0	2000
PDC-3.5	3.5	
PDC-4	4.0	




P.C.B Ø3.5
THICKNESS 1.6

Part No.	A	Package
PDC-4.5D	4.5	2000



P.C.B Ø3.0
THICKNESS 3.0

Part No.	Package
DCBA-3.5	1000




P.C.B Ø3.1
THICKNESS 1.6

Part No.	Package
DCBA-8	1000


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

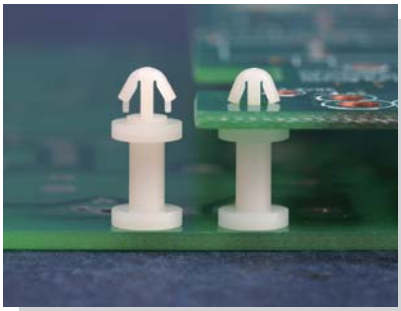


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø3.5
THICKNESS: E




Part No.	A	B	E	Package
PDC-5	5.0	2.8	1.6	2000
PDC-9	9.0	2.8	1.6	
PDC-10	10.0	2.6	1.8	

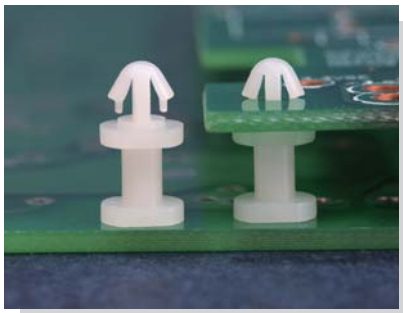

P.C.B Ø3.5
THICKNESS: E




Part No.	A	E	Package
PDC-5.5D	5.5	1.6	2000
PDC-6D	6.0	1.6	
PDC-6.5D	6.5	1.6	
PDC-7D	7.0	1.6	
PDC-13D	13.0	1.2~1.7	
PDC-13.5D	13.5	1.6	
PDC-26D	26.0	1.6	

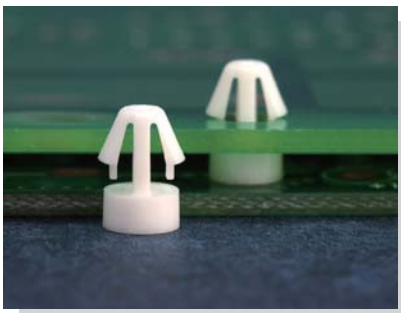


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS: E




Part No.	A	B	E	Package
MC-2	2.0	3.1	1.2~1.7	2000
MC-2-1.2	2.0	3.5	0.8~1.0	
MC-2.5	2.5	3.65	1.2~1.7	1000

P.C.B Ø4.0
THICKNESS: E




◆MC-3.5-1

P.C.B Ø4.0
THICKNESS: E




Part No.	A	B	E	Package
MC-3	3.0	3.1	1.6	2000
MC-3.2	3.2	3.1	1.6	
MC-3.5	3.5	3.1	1.6	
MC-3.5-1	3.5	3.5	1.2~1.6	
MC-4	4.0	3.1	1.6	
MC-5	5.0	3.1	1.6	

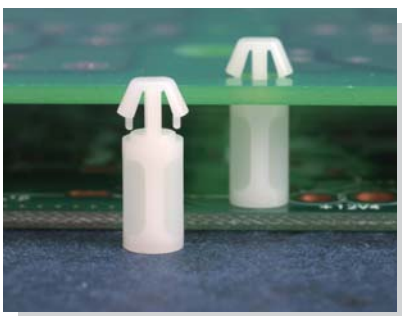

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.6




Part No.	A	Package
MC-6	6.3	2000
MC-7	7.0	
MC-7.5	7.5	
MC-8	8.0	
MC-8.5	8.5	
MC-9	9.0	
MC-10	10.0	
MC-11.5	11.5	1000
MC-12	12.7	
MC-16.4	16.4	

PC 板間隔柱 SPACER SUPPORT


用途：支撐PC板，使中間不致震動，載重而凹陷短路。

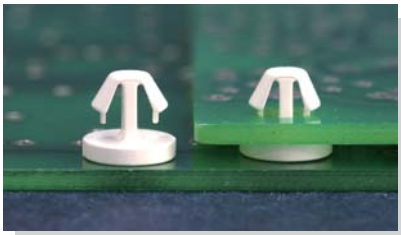

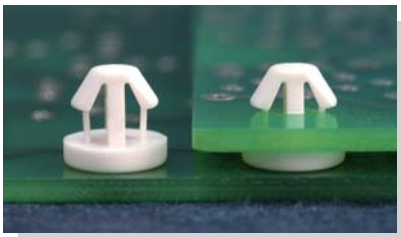


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm

P.C.B Ø4.0




Part No.	A	B	Package
MCE-1.9	3.0	2.05	1000

P.C.B Ø4.0




◆ **MATERIAL:NYLON 66 (UL)**

Part No.	A	B	Package
MCEA-1.9	2.8	2.2	1000

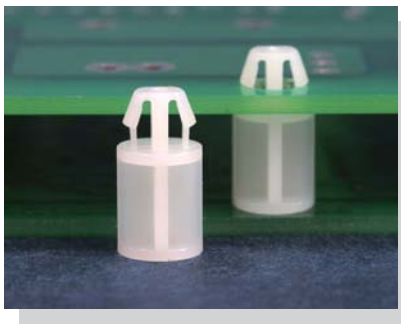

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.8
THICKNESS 1.6




Part No.	A	Package
MCL-9	9.0	2000
MCL-16	16.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


HOLE Ø3.5
THICKNESS 1.6



Part No.	Package
MCN-10	1000


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路，鐵板可鑽孔用螺絲固定。

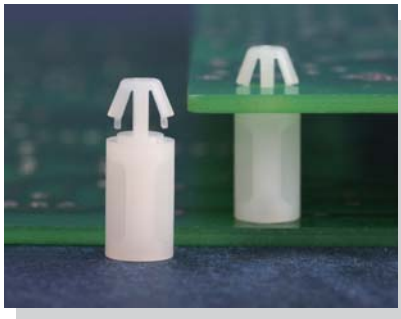

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.6




Part No.	A	Package
MCH-6	6.35	1000
MCH-10	9.7	
MCH-12	12.7	

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

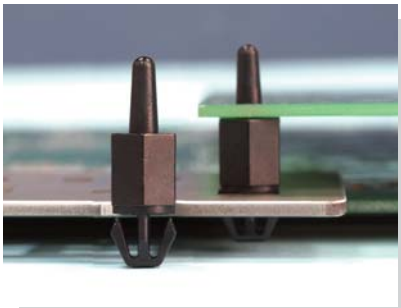


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

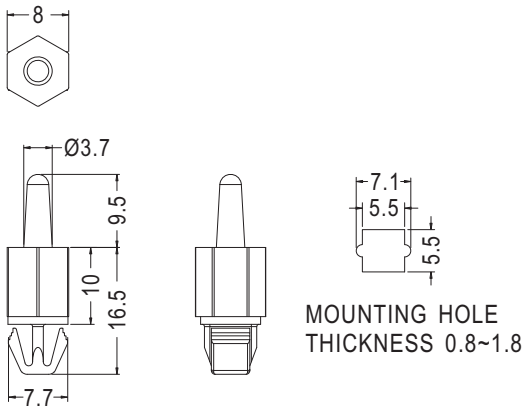


Part No.	Package
KVLMA-10	1000

PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，一頭配合螺絲使用，不旋轉。

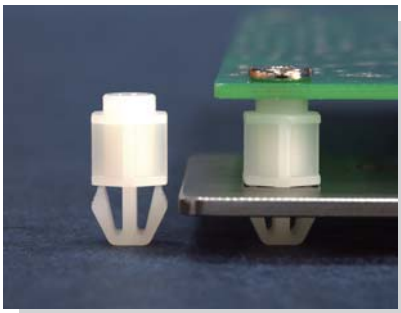


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品(P A T.)

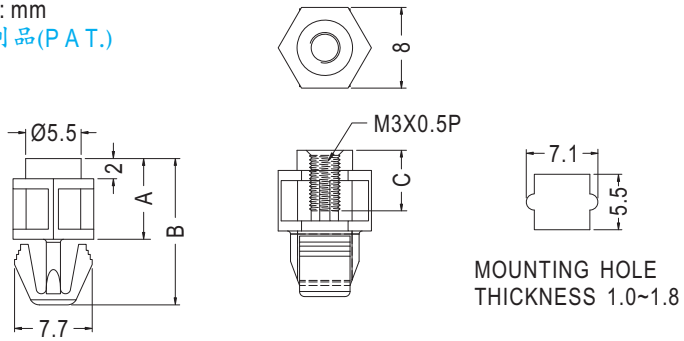


Part No.	A	B	C	Package
KVLM3-5	5.0	11.5	3.0	1000
KVLM3-6	6.0	12.5	4.0	
KVLM3-6.35	6.35	12.85	4.35	
KVLM3-8	8.0	14.5	6.0	
KVLM3-9.5	9.5	16.0	8.0	
KVLM3-10	10.0	16.5	8.0	

Part No.	A	B	C	Package
KVLM3-12	12.0	18.5	8.0	1000
KVLM3-12.7	12.7	19.2	8.0	
KVLM3-15.9	15.9	22.4	8.0	
KVLM3-18	18.0	24.5	8.0	
KVLM3-20	20.0	26.5	8.0	
KVLM3-22	22.0	28.5	8.0	
KVLM3-25.4	25.4	31.9	8.0	

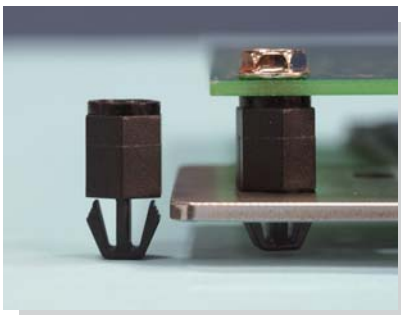


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

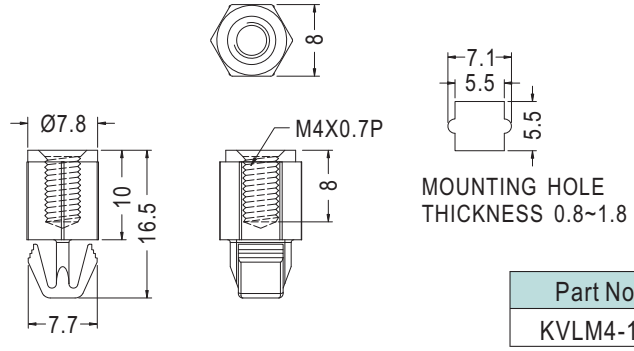


Part No.	Package
KVLM4-10	1000

PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，一頭配合螺絲使用。

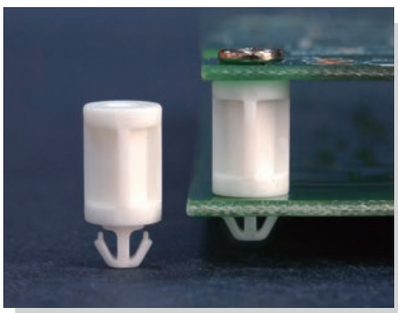


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE
THICKNESS 1.85

Part No.	Package
MCIA-12	1000

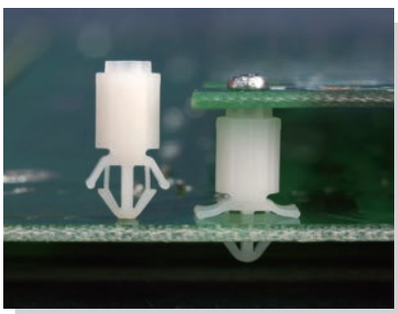


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 0.8~1.6

Part No.	L	Package
TCBC-8.7	8.7	1000
TCBC-13.7	13.7	

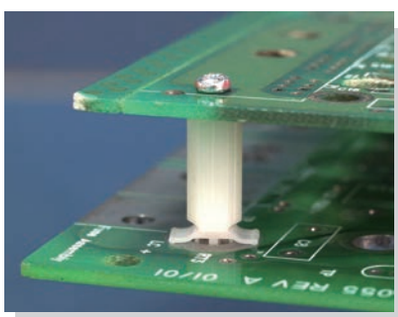


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE
THICKNESS 0.8

Part No.	L	Package
TCBE-8.7	8.7	1000
TCBE-13.7	13.7	

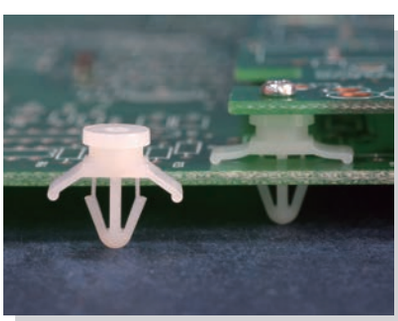

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 2.0

Part No.	Package
TCBD-4.8	1000


PC 板間隔柱 SPACER SUPPORT

用途：一般用於電腦機板固定。

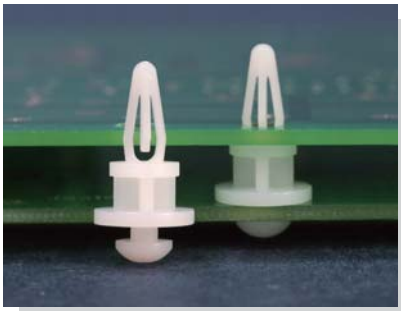


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6




THICKNESS 1.6




MOUNTING HOLE

Part No.	Package
ACBR-6	1000

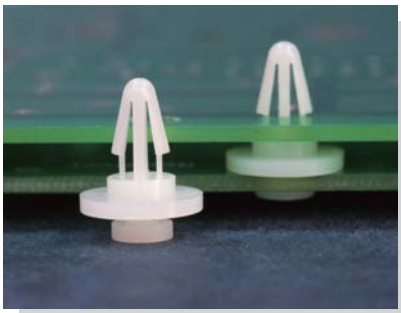


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.6~2.0



P.C.B Ø4.0
THICKNESS 2.6




◆ **ACB-2.3**




MOUNTING HOLE


Part No.	A	F	H	J	Package
★ACB-2.3	2.3	1.0	6.0	2.8	1000
ACB-2.5	2.5	1.4	11.5	2.8	
ACB-3	3.2	1.2	11.6	3.2	

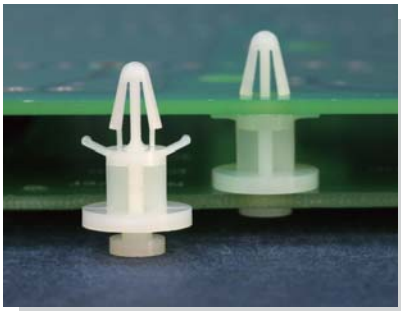

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS: E






MOUNTING HOLE

Part No.	A	B	E	F	H	Package
ACB-5	5.0	7.0	1.6	1.3	11.7	1000
ACB-6	6.3	7.0	1.6	1.3	11.6	
ACB-8	8.0	7.0	1.6	1.4	11.6	
ACB-60	60.0	7.3	1.2~1.7	2.8	11.3	250
ACB-68	68.0	7.3	1.6	1.3	11.3	
ACB-74	74.0	7.3	1.6	1.3	11.3	


PC 板間隔柱 SPACER SUPPORT


用途：一般用於電腦機板固定。

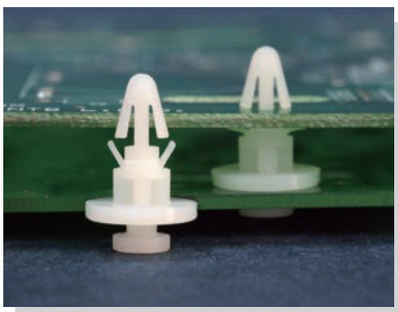

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.6






MOUNTING HOLE


Part No.	Package
MCB-6	500

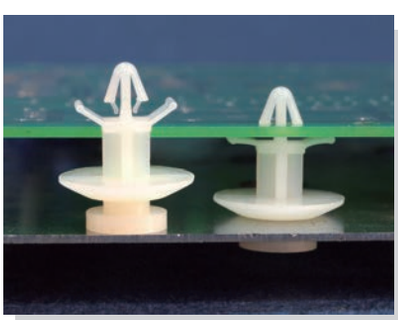

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.5
THICKNESS 1.2~2.0






MOUNTING HOLE


Part No.	Package
MBC-11	500

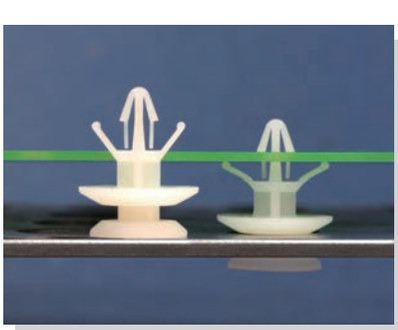

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.5~Ø4.8
THICKNESS 0.8~2.5






MOUNTING HOLE


Part No.	Package
MBD-10	500

PC 板間隔柱 SPACER SUPPORT

用途：機板部份用鐵板自攻螺絲固定，另一頭直接壓入PC板。

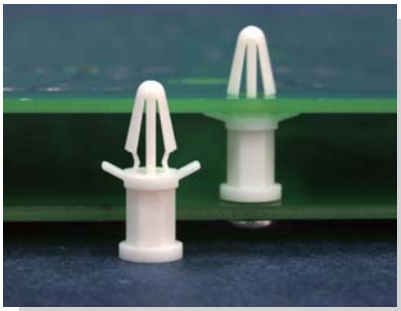


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

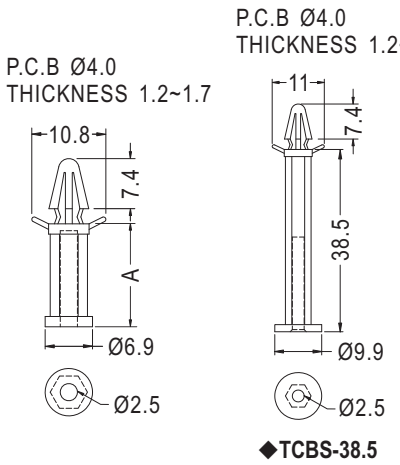


FOR M3 SELF TAPPED SCREW

Part No.	A	Package
TCBS-5	5.0	1000
TCBS-6A	6.0	
TCBS-6	6.35	
TCBS-7	7.0	
TCBS-9.5	9.5	
TCBS-10	10.0	
TCBS-12.5	12.5	
TCBS-15	15.0	
TCBS-20	20.0	
TCBS-24.5	24.5	
TCBS-25	25.0	
TCBS-26	26.0	
TCBS-30	30.0	
TCBS-35	35.0	
TCBS-38.5	38.5	

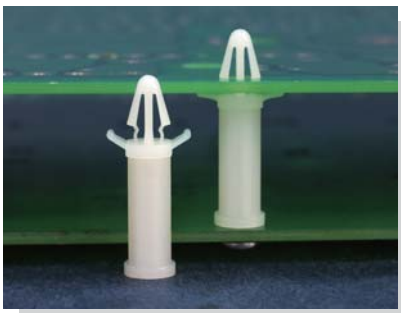


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





FOR M3 SELF TAPPED SCREW

Part No.	Package
TCBS-18	1000

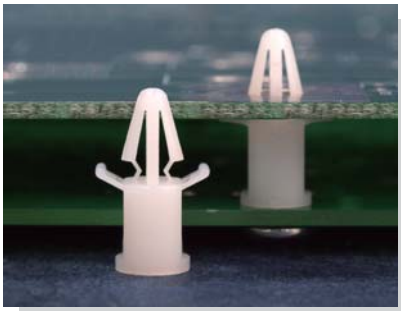

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

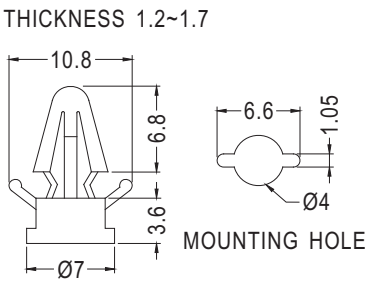

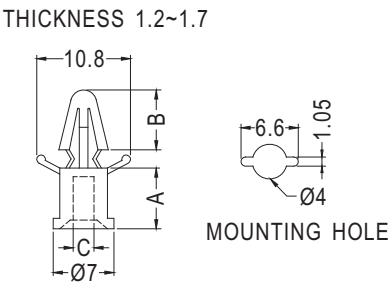


FOR SCREW: S

Part No.	Package
TCBT-3.6	1000


Part No.	A	B	C	S	Package
TCBT-7	7.0	6.9	2.4	4-40 UNC	1000
TCBT-7.7	7.7	5.9	2.6	M3	
TCBT-8.5	8.5	6.9	2.6		
TCBT-16	16.0	6.9	2.4	4-40 UNC	

PC 板間隔柱 SPACER SUPPORT

用途：機板部分用鐵板自攻螺絲固定，另一頭直接壓入PC板。

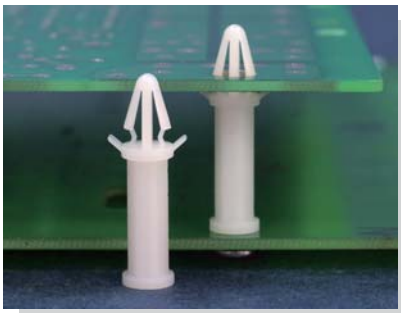


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



FOR M3 SCREW

P.C.B THICKNESS 1.2~1.9




MOUNTING HOLE

Part No.	Package
TCBT-19	1000


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

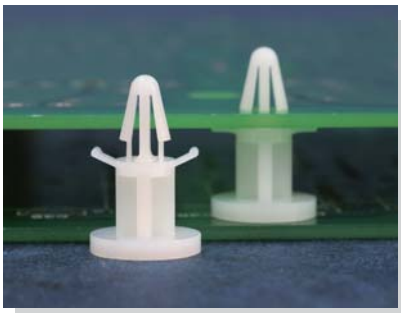


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.7





Part No.	A	B	H	Package
MBS-6	6.4	11.4	11.8	1000
MBS-8	8.0	11.4	11.8	
MBS-8.9	8.9	11.1	11.9	
MBS-8.9S	8.9	11.1	8.0	
MBS-9.5L	9.5	11.4	20.0	
MBS-10	10.0	11.4	12.0	
MBS-11	11.0	11.4	12.0	500
MBS-14	14.0	11.4	12.0	
MBS-74	74.0	10.4	11.3	250

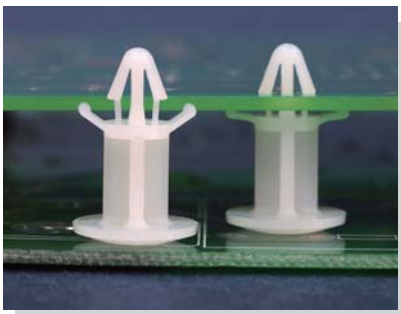

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.5
THICKNESS 1.2~1.7






MOUNTING HOLE

Part No.	Package
MTD-11	500

PC 板間隔柱 SPACER SUPPORT


用途：機板部分用M3.5鐵板自攻螺絲固定，另一頭直接壓入PC板。

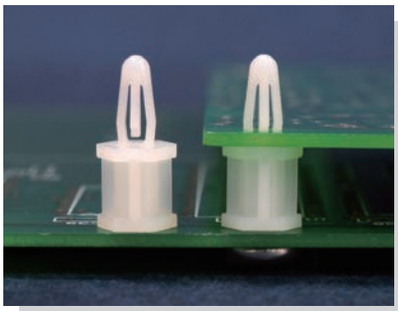


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


Part No.	A	B	Package
BS-6	6.4	4.8	1000
BS-8	8.0	7.0	
BS-9	9.5	8.0	
BS-10-1	10.0	8.0	
BS-12	12.7	11.0	
BS-14	14.0	12.7	
BS-15S	15.0	13.0	
BS-15	15.9	13.0	
BS-19	19.1	16.2	
BS-20-1	20.0	12.0	
BS-22	22.2	19.4	
BS-25	25.4	24.0	
BS-28	28.6	25.9	
BS-29	29.0	25.9	

P.C.B Ø4.0
THICKNESS 1.2~1.7



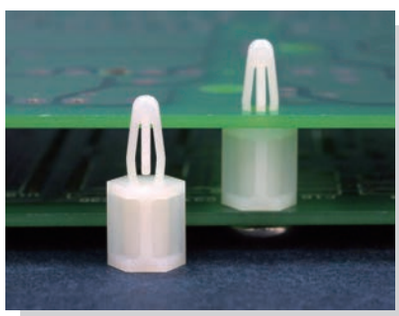


P.C.B Ø4.0
THICKNESS 2.0



◆BS-8


P.C.B Ø4.0
THICKNESS 2.0

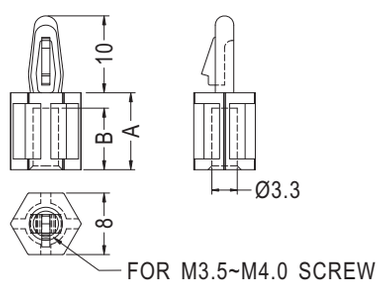

◆BS-10-1


PC 板間隔柱 SPACER SUPPORT

用途：機板部分用M3鐵板自攻螺絲固定，另一頭直接壓入PC板。

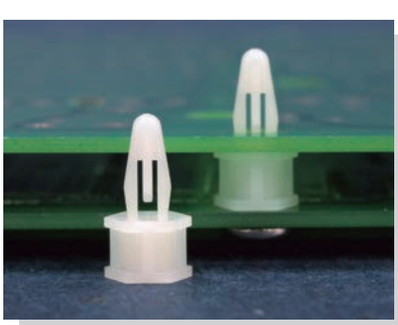

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.0
THICKNESS 1.2~1.7



Part No.	Package
BSB-6	1000


PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。

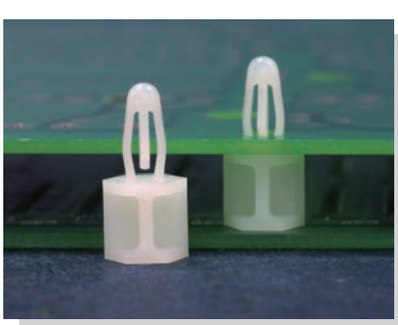

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.2
THICKNESS 1.6




Part No.	Package
BSB-8.5	1000

PC 板間隔柱 SPACER SUPPORT

用途：機板部分用M3.5鐵板自攻螺絲固定，另一頭直接壓入PC板。

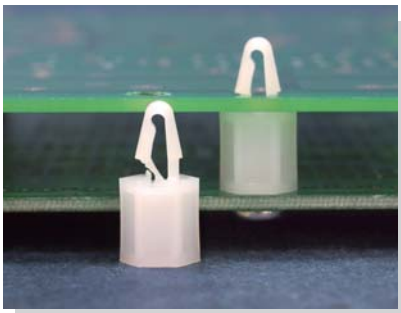


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

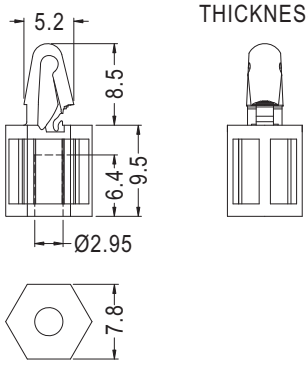


Part No.	Package
BSCL-9.5	1000

PC 板間隔柱 SPACER SUPPORT

用途：一端配合SR4系列鉚釘固定於機板上，一端固定於PC板上。

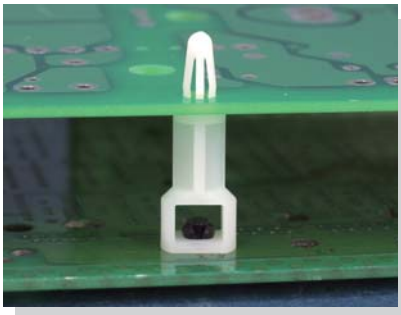


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

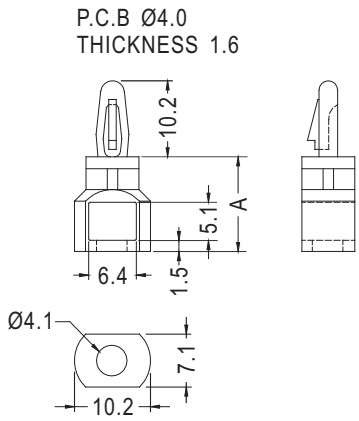

Part No.	A	Package
SRLCB-9	9.5	1000
SRLCB-11	11.1	
SRLCB-12	12.7	
SRLCB-15	15.9	
SRLCB-19.1	19.1	
SRLCB-22	22.2	
SRLCB-25	25.4	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

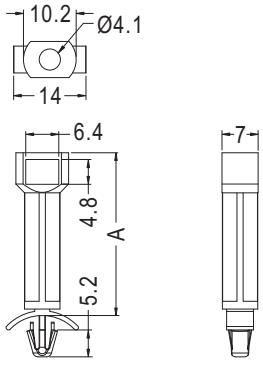


Part No.	A	Package
SRLA-29.5	29.5	1000
SRLA-31.5	31.5	

PC 板間隔柱 SPACER SUPPORT


用途：一端配合SR4系列鉚釘固定於機板上，一端固定於PC板上。

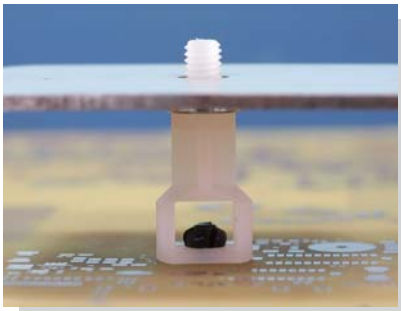


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

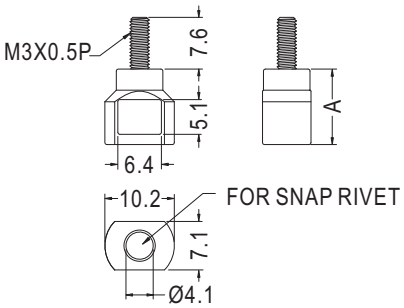


Part No.	A	Package
TCEB3-9.5	9.5	1000
TCEB3-11.1	11.1	

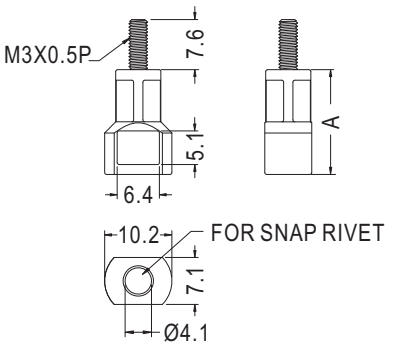


Part No.	A	Package
TCEB3-12.7	12.7	1000
TCEB3-15.9	15.9	
TCEB3-19.1	19.1	
TCEB3-22.2	22.2	
TCEB3-25.4	25.4	

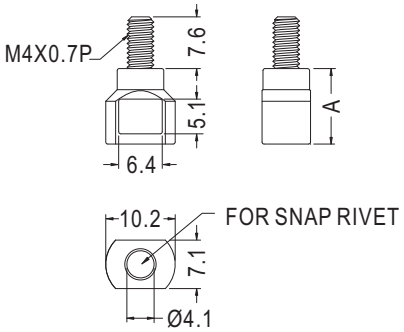


Part No.	A	Package
TCEB4-9.5	9.5	1000
TCEB4-11.1	11.1	

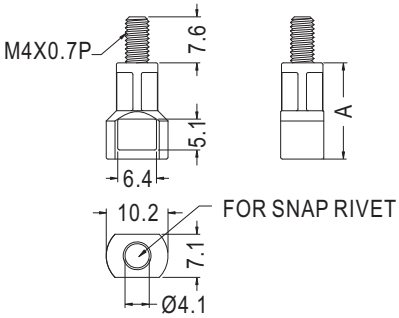

Part No.	A	Package
TCEB4-12.7	12.7	1000
TCEB4-15.9	15.9	
TCEB4-19.1	19.1	
TCEB4-22.2	22.2	
TCEB4-25.4	25.4	

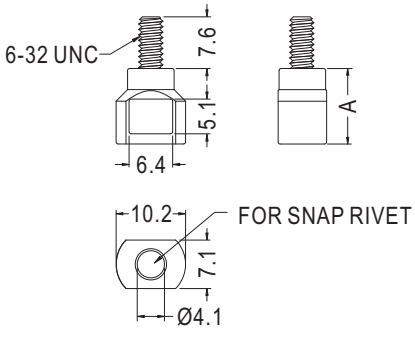


Part No.	A	Package
TCEB632-9.5	9.5	1000
TCEB632-11.1	11.1	

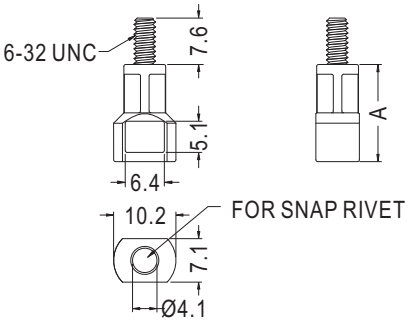


Part No.	A	Package
TCEB632-12.7	12.7	1000
TCEB632-15.9	15.9	
TCEB632-19.1	19.1	
TCEB632-22.2	22.2	
TCEB632-25.4	25.4	

PC 板間隔柱 SPACER SUPPORT

用途：機板部分用螺絲固定，另一頭直接壓入PC板。

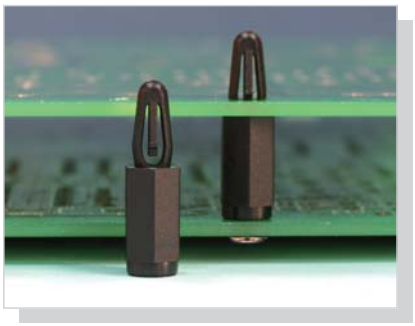



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

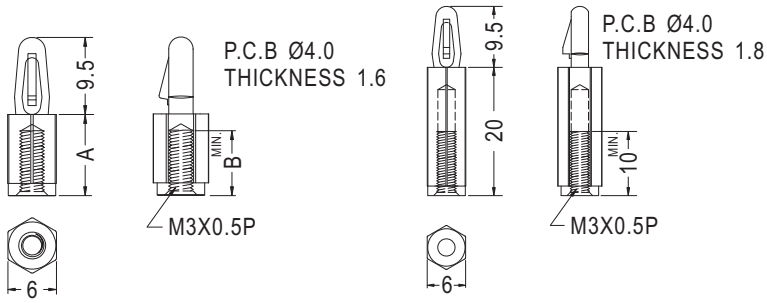


Part No.	A	B	Package
BSCB-10	10.0	8.0	1000
BSCB-12	12.0	8.0	
BSCB-15	15.0	10.0	

Part No.	Package
BSCB-20	1000

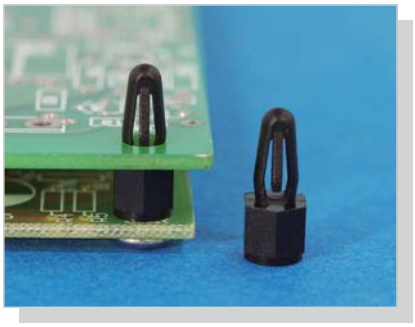


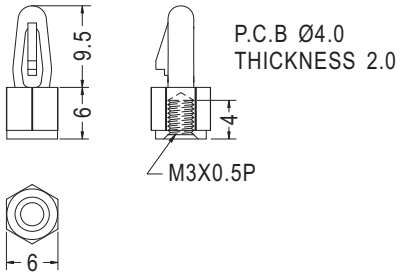

Part No.	Package
★BSCB-6	1000

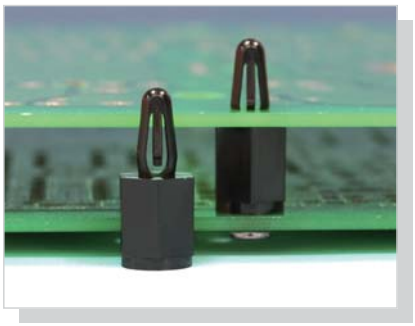


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
BSCB4-8	8.0	6.0	1000
BSCB4-10	10.0	8.0	

PC 板間隔柱 SPACER SUPPORT

用途：機板部分用 6-32鐵板自攻螺絲固定，另一頭直接壓入PC板。

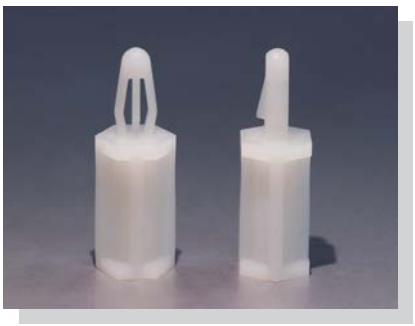

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

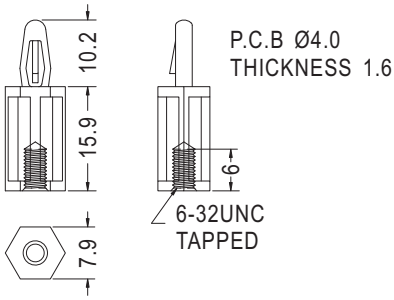


NEW


Part No.	Package
BSB632-15.9	1000

PC 板間隔柱 SPACER SUPPORT


用途：機板部分用螺絲固定，另一頭直接壓入PC板。

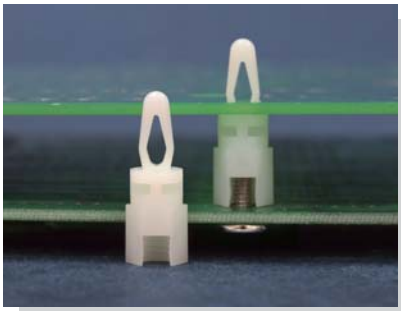


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
BSC632-9.5	9.5	1000
BSC632-12.7	12.7	
BSC632-15.9	15.9	
BSC632-19.1	19.1	
BSC632-22.2	22.2	
BSC632-25.4	25.4	

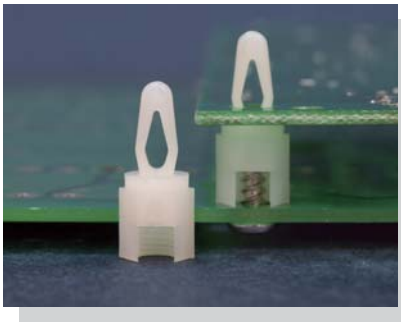


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
BSCM4-9.5	9.5	1000
BSCM4-12.7	12.7	
BSCM4-15.9	15.9	
BSCM4-19.1	19.1	
BSCM4-22.2	22.2	
BSCM4-25.4	25.4	

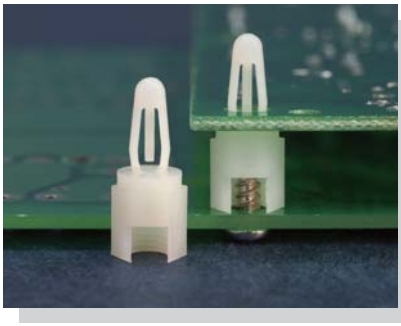


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
BSDM4-9.5	9.5	1000
BSDM4-12.7	12.7	
BSDM4-15.9	15.9	
BSDM4-19.1	19.1	
BSDM4-22.2	22.2	
BSDM4-25.4	25.4	

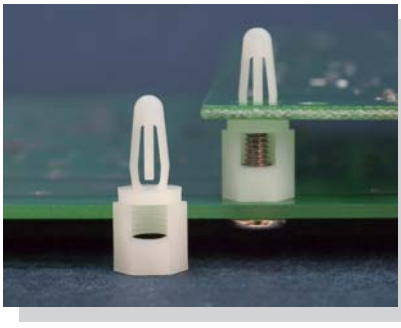


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
BSD632-9.5	9.5	1000
BSD632-12.7	12.7	
BSD632-15.9	15.9	
BSD632-19.1	19.1	
BSD632-22.2	22.2	
BSD632-25.4	25.4	


PC 板間隔柱 SPACER SUPPORT

用途：一端固定於木頭或音箱上，另一端固定於PC板上。

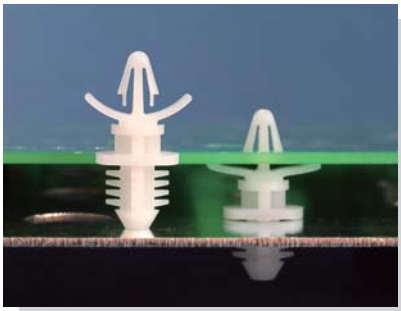


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 0.8~2.0

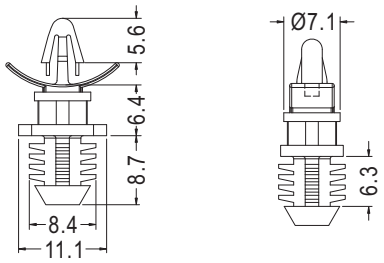


HOLE IN PANEL Ø7.9
THICKNESS 6.4

Part No.	Package
WBHC-6.4	1000

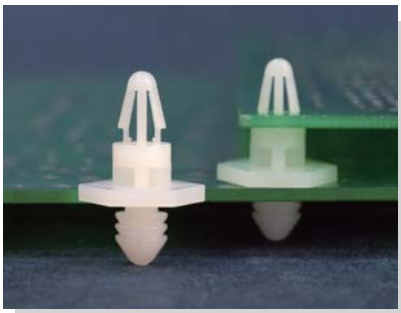


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

HOLE IN CHASSIS Ø4.0
THICKNESS 1.2~1.6

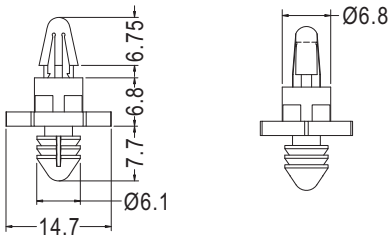


HOLE IN WOODENWARE: Ø6.0
THICKNESS 7.0

Part No.	Package
ACBW-6.8	1000

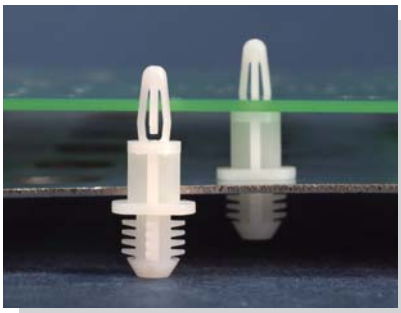


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.2~1.7




HOLE IN PANEL Ø7.9
THICKNESS 6.4

Part No.	A	Package
WBH-5	4.8	1000
WBH-6	6.4	
WBH-9	9.5	
WBH-11	11.1	
WBH-12	12.7	
WBH-16	15.9	
WBH-19	19.1	
WBH-22	22.2	
WBH-25	25.4	

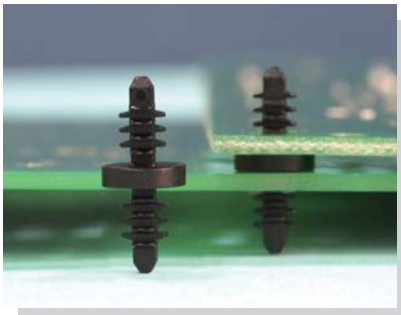

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

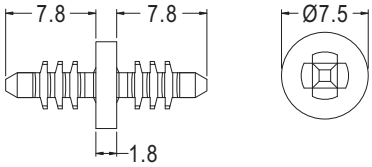

MOUNTING HOLE Ø4.0
THICKNESS 2.6~6.3


Part No.	Package
WBHB-1.8	1000

PC 板間隔柱 SPACER SUPPORT

用途：一端固定於機板上，另一端支撐PC板，避免下陷造成短路，PC板免鑽孔。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

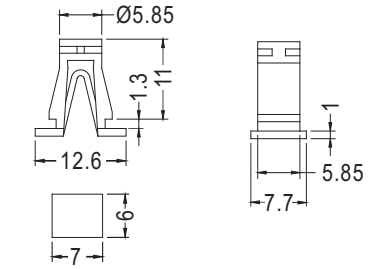


MOUNTING HOLE


Part No.	Package
PAA-11	1000

PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，不會突出機板底部，外觀美麗。

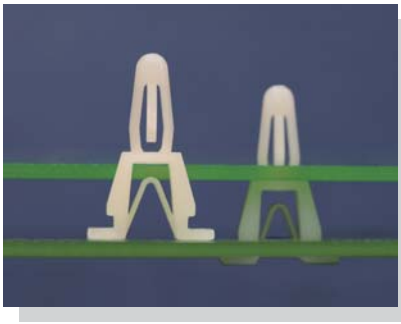


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE

Part No.	Package
PCC-6	2000

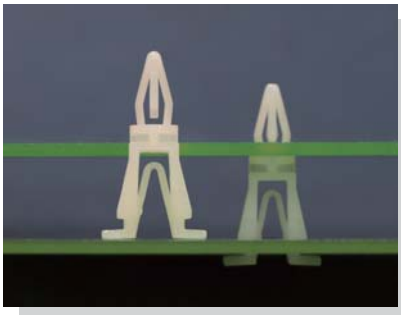

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

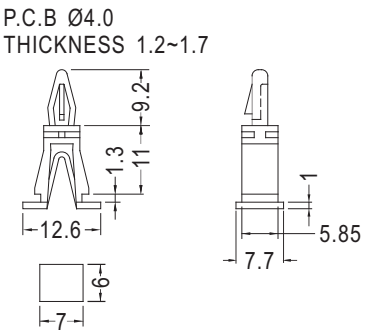

MOUNTING HOLE


Part No.	Package
PCC-11	1000

PC 板間隔柱 SPACER SUPPORT

用途：支撐 PC板，使中間不致震動，載重而凹陷短路，吸震力強。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

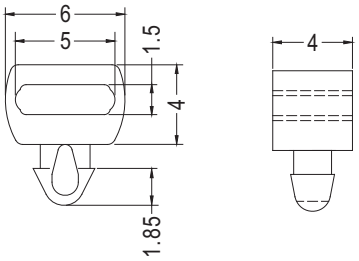


P.C.B Ø2.5
THICKNESS 1.0

Part No.	Package
LIJ-4	2000

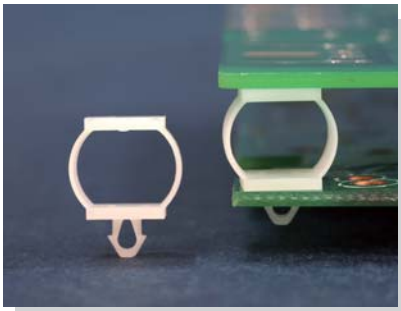


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

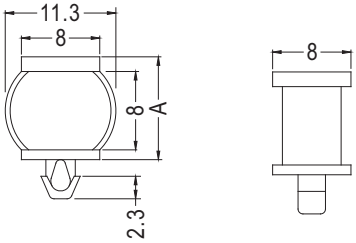


P.C.B Ø3.0
THICKNESS 1.6

Part No.	A	Package
LIO-10	10.0	2000
LIO-10.5	10.5	

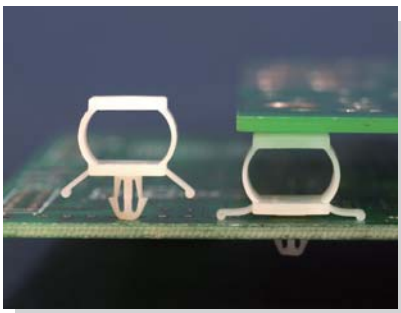

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

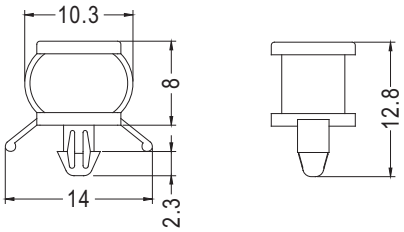


P.C.B Ø3.0
THICKNESS 1.1~1.6


Part No.	Package
LIO-8	2000

PC 板間隔柱 SPACER SUPPORT

用途：配合螺絲用於 PC板之固定。

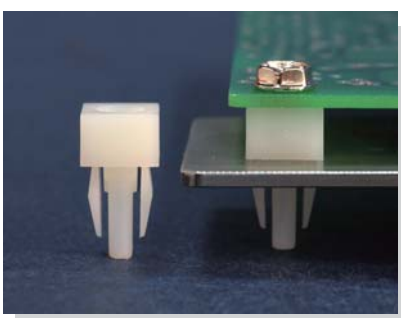


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
ES-1	2000

PC 板間隔柱 SPACER SUPPORT


用途：配合螺絲用於PC板之固定。

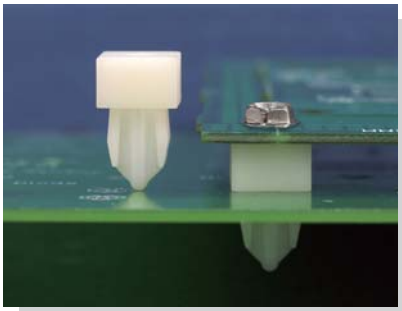


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

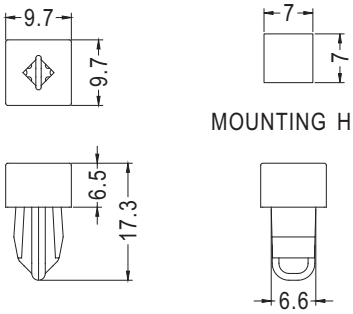

Part No.	Package
ES-2	1000

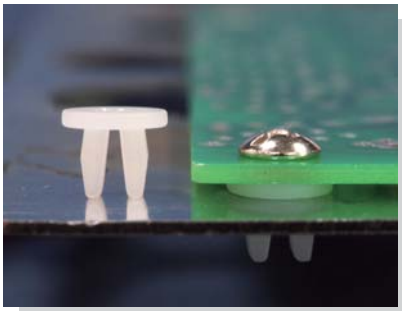


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

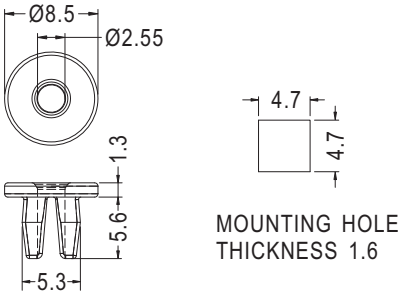


Part No.	Package
ESS-3	1000

PC 板間隔柱 SPACER SUPPORT

用途：配合螺絲用於PC板之固定或當螺絲固定座。

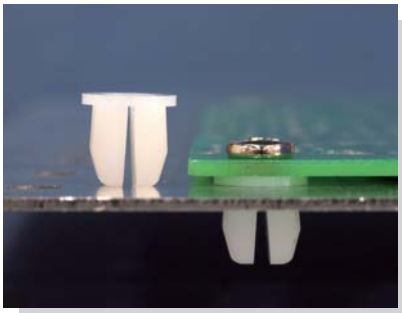

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

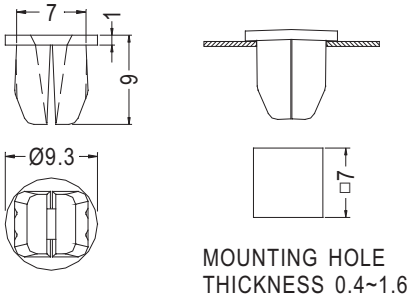


Part No.	Package
ESS-1	1000

PC 板間隔柱 SPACER SUPPORT


用途：配合螺絲固定電漿面板於機殼上，可靠不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

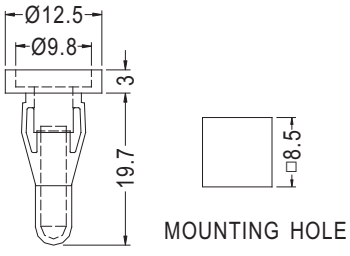


Part No.	Package
YES-3	500

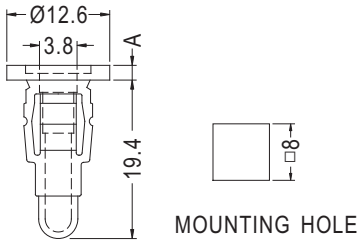


Part No.	A	Package
YES-08	0.8	500
YES-32	3.2	
YES-48	4.8	


PC 板間隔柱 SPACER SUPPORT


用途：配合螺絲用於PC板之固定。

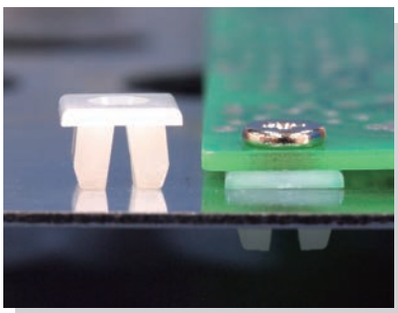


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm












Part No.	Package
ESS-2	1000

Part No.	Package
ESS-7.6	1000

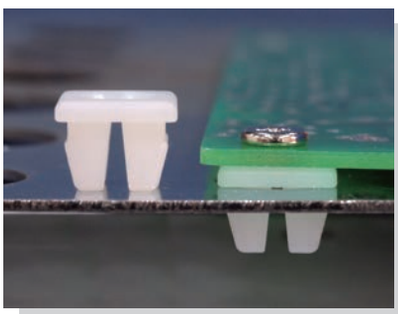


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








Part No.	Package
ESS6-2.5	1000

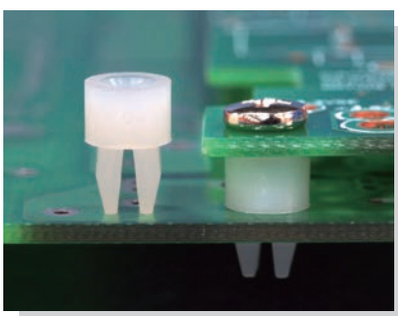

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm












◆ **ETS-7M**






◆ **ETS-3.2-2**

Part No.	A	B	C	Package
ETS-3	3.0	5.4	4.4	2000
ETS-3-1			5.0	
ETS-3.2	3.2		4.4	
ETS-3.2-1			5.0	
ETS-3.2-2		4.0		
ETS-3.4	3.4	5.4	4.4	
ETS-3.6	3.6		5.0	
ETS-4.6	4.6		4.4	
ETS-4.8	4.8			
ETS-6.3	6.3			1000
ETSS-6.5	6.5	4.0		
★ETS-7M	7.0		3.55	
ETS-8	8.0	5.4	4.4	
ETS-10	10.0			
ETS-12	12.7			
ETS-16	15.9			
ETS-19	19.1			

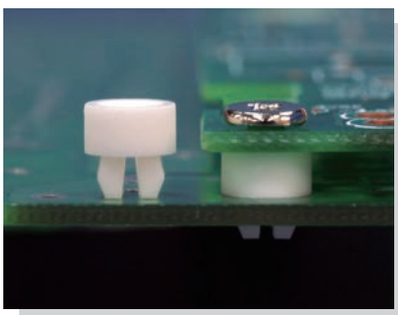

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
ETSA-3.5	1000

PC 板間隔柱 SPACER SUPPORT


用途：配合螺絲用於PC板之固定。

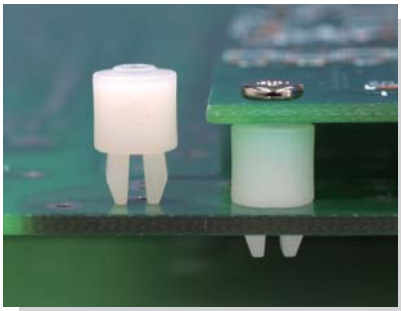


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

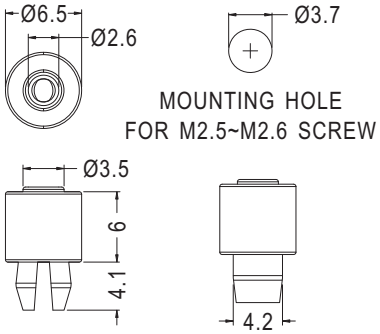


Part No.	Package
ETSB-6	1000

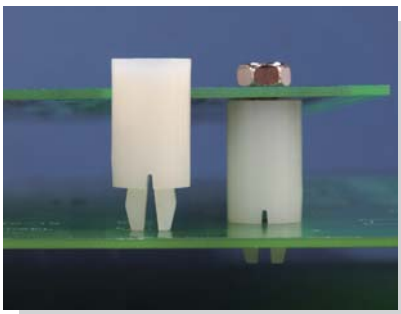


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
ESS-19	1000

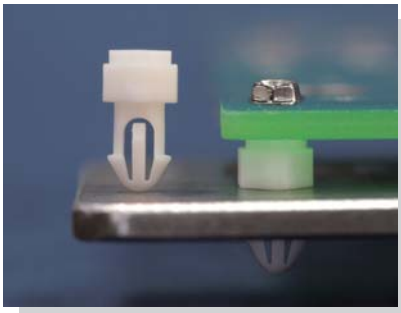


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

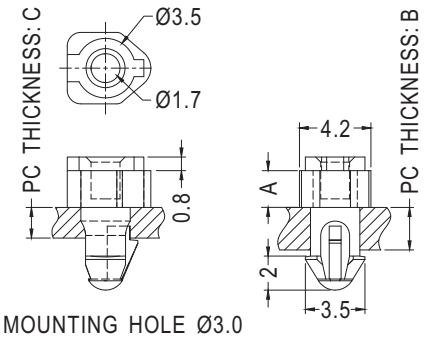


Part No.	A	B	C	E	Package
BSE-2.2	2.16	2.5	1.6	1.6 ~ 2.5	1000
BSE-2.2L	2.2	3.3	2.0	1.7~3.05	

PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，PC板用螺絲固定，易拆卸。

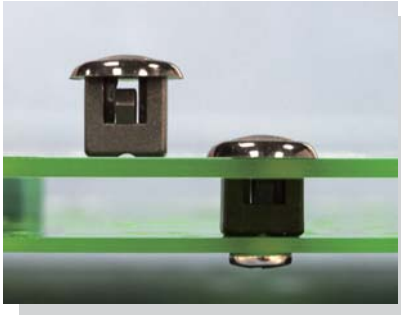


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




Part No.	A	B	Package
LHC-8	8.4	10.8	1000
LHC-12	12.5	14.9	

PC 板間隔柱 SPACER SUPPORT


用途：快速固定PC板於機板上，如配合螺絲可將PC板固定於木板上。

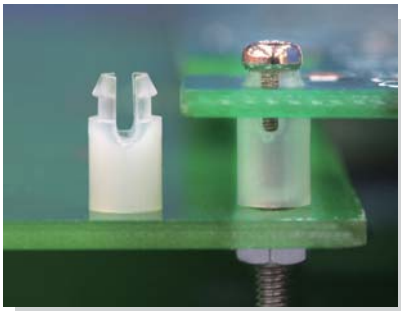

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.0
THICKNESS: E



FOR M2 SCREW


Part No.	A	B	E	Package
SS1-2	2.0	1.2	0.8~1.0	2000
SS1-2.5	2.5			
SS1-3	3.0			
SS1-3.5	3.5			
SS1-4	4.0			
SS1-4.5	4.5			
SS1-5	5.0			
SS1-5.5	5.5			
SS1-6	6.0			

Part No.	A	B	E	Package
SS1-2S	2.0	0.5	0.8~1.0	2000
SS1-2.5S	2.5			
SS1-3S	3.0			
SS1-3.5S	3.5			
SS1-4S	4.0			
SS1-4.5S	4.5			
SS1-5S	5.0			
SS1-5.5S	5.5			
SS1-6S	6.0			
SS1-2L	2.0	1.0	1.6	
SS1-2.5L	2.5			
SS1-3L	3.0			
SS1-3.5L	3.5			
SS1-4L	4.0			
SS1-4.5L	4.5			
SS1-5L	5.0			
SS1-5.5L	5.5			
SS1-6L	6.0			
SS1-8L	8.0			

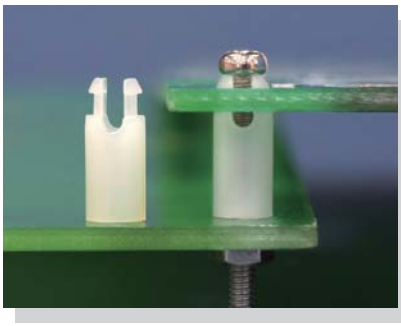


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø3.0
THICKNESS 1.3




FOR M2 SCREW


Part No.	Package
SS3-7(1.3)	1000

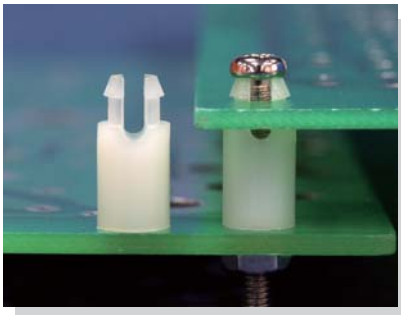

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø4.0
THICKNESS: E




FOR SCREW: S

Part No.	A	C	E	S	Package
SS2-2.5S	2.5	2.7	1.6	M2.6	2000
SS2-3S	3.0				
SS2-4S	4.0				
SS2-5S	5.0				
SS2-6S	6.0				
SS2-2.5U	2.5	2.1	1.6~1.8	M2	
SS2-2.5	2.5	2.8		M2.6	
SS2-3	3.0				
SS2-4	4.0				
SS2-5	5.0				
SS2-5.4	5.4				
SS2-6	6.0				
SS2-8	8.0				
SS2-9.5	9.5				


PC 板間隔柱 SPACER SUPPORT

用途：快速固定PC板於機板上，如配合螺絲可將PC板固定於木板上。

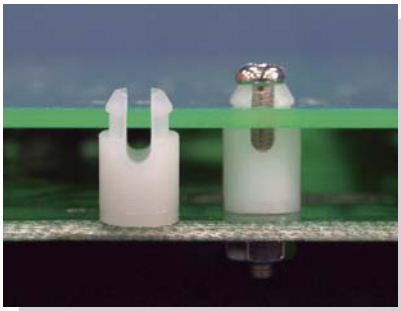

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


P.C.B Ø4.8
THICKNESS 1.2~1.7



FOR M3 SCREW


Part No.	A	B	Package
SS-3	3.2	1.5	1000
SS-3.5	3.5		
SS-4	4.0		
SS-4.5	4.5		
SS-5	4.8		
★ SS-5A	5.0		
SS-6	6.4		
SS-7	7.0	1.7	

Part No.	A	B	Package
SS-7.4	7.4	1.7	1000
SS-8	7.9	1.5	
SS-10	9.5		
SS-10A		1.7	
SS-11	11.1	1.5	
SS-12A	12.0		
SS-12	12.7		
SS-14	14.2		
★ SS-14.5	14.5		
SS-15	15.0		
SS-16	15.9		
★ SS-17.2	17.2		
SS-19	19.1		
SS-22	22.2		500
SS-25	25.4		

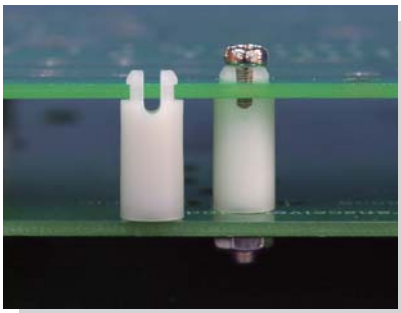


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.8
THICKNESS 1.6




Part No.	Package
SSA-12.7	1000

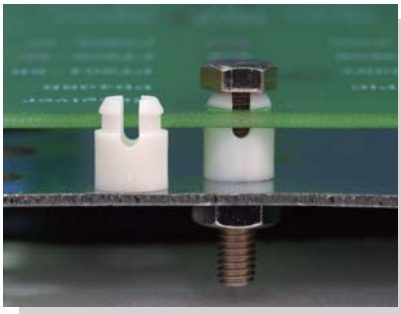

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø5.8
THICKNESS 1.6




FOR M3.5 OR M4 SCREW

Part No.	Package
SSA4-5.5	1000


PC 板間隔柱 SPACER SUPPORT

用途：快速固定PC板於機板上，如配合螺絲可將PC板固定於木板上。

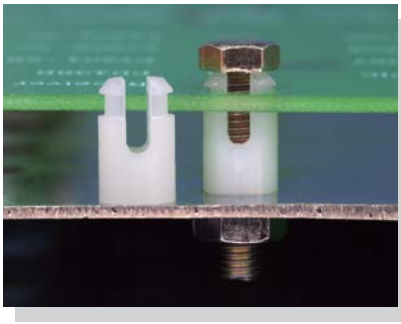




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




FOR M3.5 OR M4 SCREW




◆ **SS4-16L**


Part No.	A	Package
SS4-3	3.0	1000
SS4-4	4.0	
SS4-4.6	4.6	
SS4-5	5.0	
SS4-6	6.4	
SS4-8	7.9	
SS4-9	9.5	
SS4-11	11.1	
SS4-12S	12.0	
SS4-12	12.7	
SS4-16	15.9	
★SS4-16L	15.9	
SS4-17	17.0	
SS4-19	19.1	
SS4-22	22.2	500
SS4-25	25.4	
SS4-30	30.0	

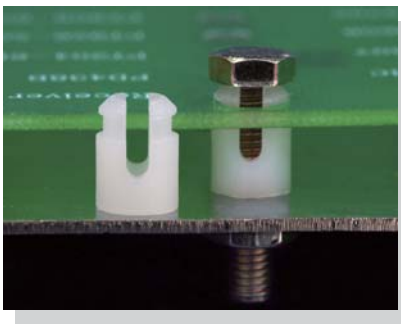


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
SSU4-6.3	1000

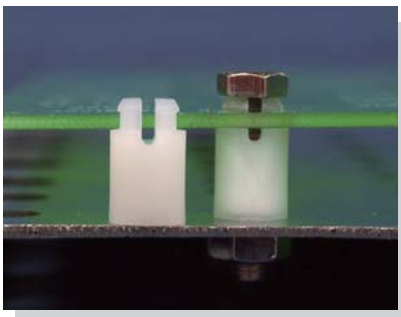

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




FOR M3.5 SCREW


Part No.	A	Package
SS3.5-6.3	6.3	1000
SS3.5-9.5	9.5	
SS3.5-12.7	12.7	
SS3.5-15	15.9	

PC 板間隔柱 SPACER SUPPORT

用途：直接壓入鐵板固定。

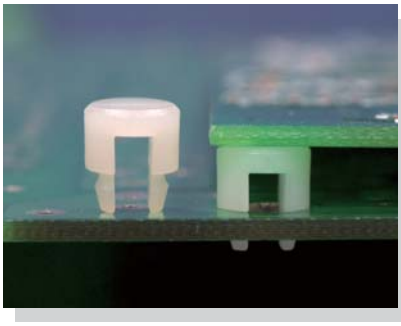

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø5.0
THICKNESS 0.8


Part No.	Package
CUS-5	2000

PC 板間隔柱 SPACER SUPPORT

用途：用於機器之面板固定，配合螺絲使用。

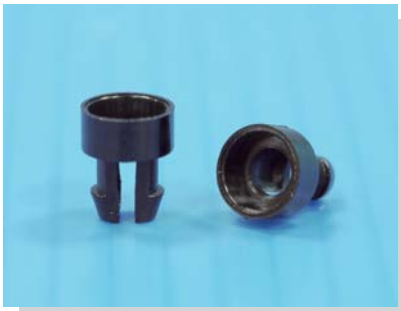

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.0
THICKNESS 2.3~2.5

Part No.	Package
SOR-2	2000





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø5.5
THICKNESS 2.3~2.5

Part No.	Package
SOR-1	2000






MOUNTING HOLE
THICKNESS 2.8

FOR
M2.5 or M2.6
SCREW


Part No.	Package
SOR-3	2000

PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，免工具，易拆卸。

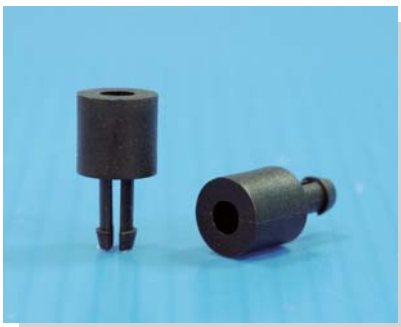

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø3.5
THICKNESS 5.5


Part No.	Package
SSUL-8	1000


PC 板間隔柱 SPACER SUPPORT


用途：一頭直接壓入機板固定，另一頭用螺絲貫穿固定於機板，一般用於DVD內部之PC板固定。

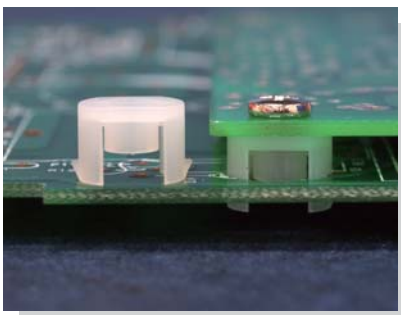

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





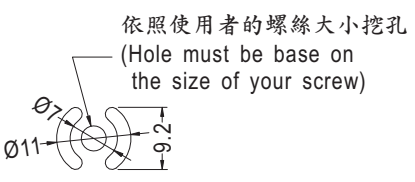


MOUNTING HOLE


Part No.	A	B	Package
DVDS-5	5.0	7.8	500
DVDS-9	9.4	14.7	
DVDS-12	12.7	18.1	

PC 板間隔柱 SPACER SUPPORT

用途：用於PC板墊高及支撐。

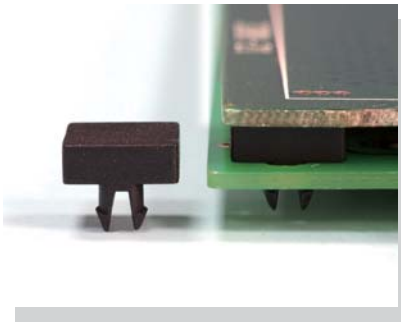


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LIES-1	1000

PC 板間隔柱 SPACER SUPPORT


用途：用於 主機板或PC板固定。

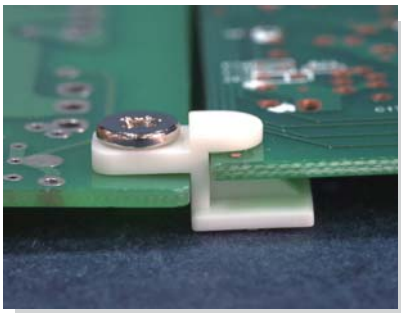


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

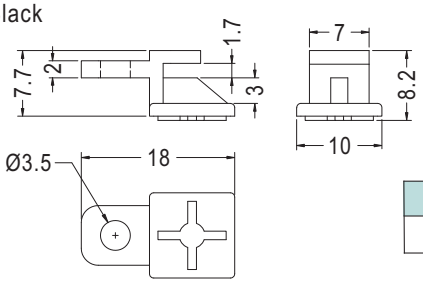

Part No.	Package
UBD-1	1000

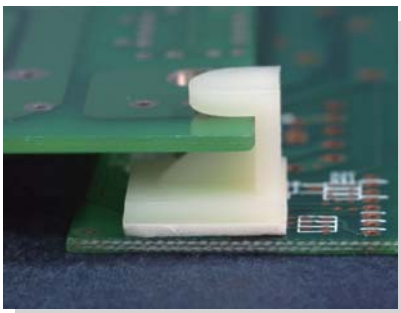



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

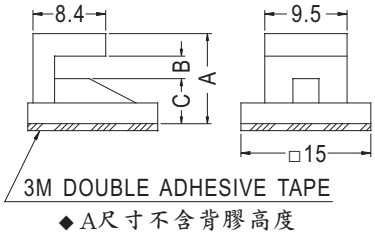


◆A尺寸不含背膠高度


Part No.	A	B	C	Package
UB-6A	10.4	2.6	5.1	1000
UB-8A	11.9	2.4	7.0	
UB-10A	14.1	2.5	9.1	
UB-11A	15.0	2.5	10.0	
UB-12A	16.1	2.5	11.1	

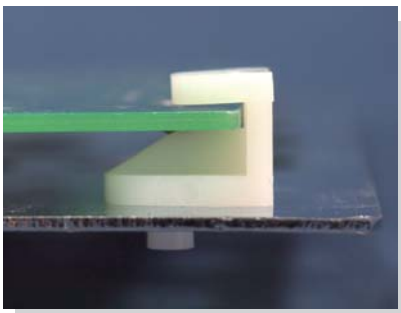

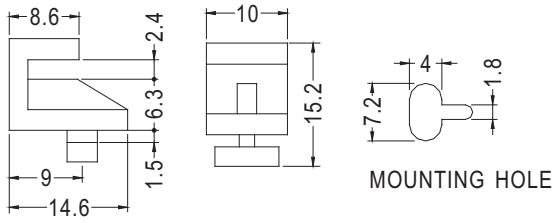


Part No.	Package
UB-6E	1000

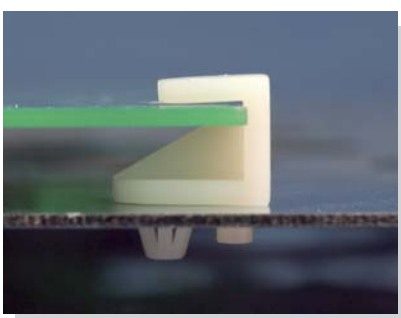

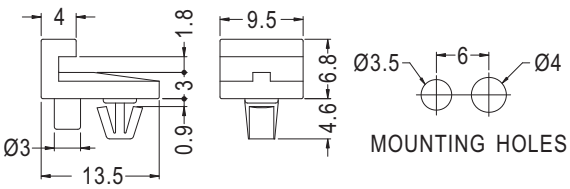


Part No.	Package
UB-3S	1000

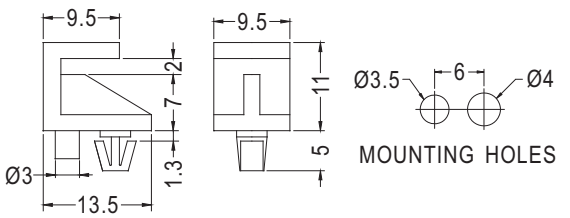


Part No.	Package
UB-6	1000

PC 板間隔柱 SPACER SUPPORT


用途：用於主機板或PC板固定。

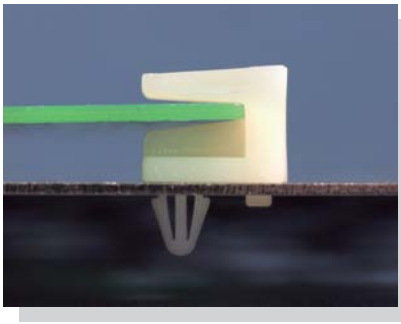

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

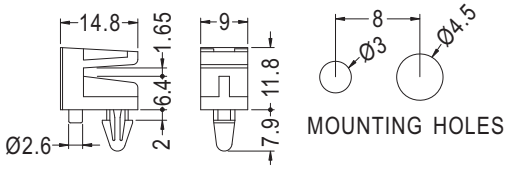


Part No.	Package
UB-6D	1000

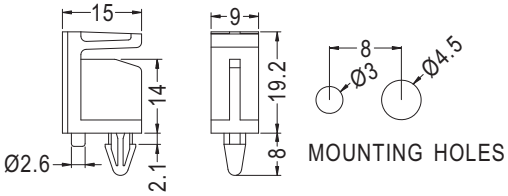


Part No.	Package
UB-14D	1000

PC 板間隔柱 SPACER SUPPORT


用途：支撐PC板，使中間不致震動，載重而凹陷短路。

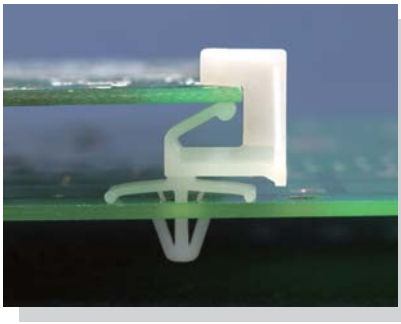


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

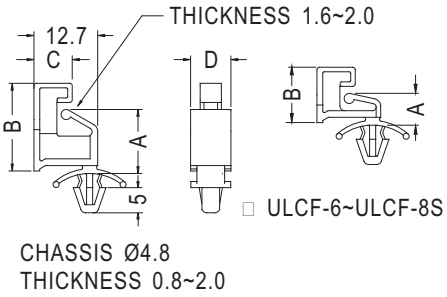

Part No.	A	B	C	D	Package
ULCF-6	6.3	11.0	9.0	8.0	1000
ULCF-8	8.0	12.7	9.0	8.0	
ULCF-8S	8.0	12.7	7.6	6.0	
ULCF-9	9.5	14.2	9.0	8.0	
ULCF-12	12.7	17.4	9.0	8.0	
ULCF-16	15.9	20.6	9.0	8.0	

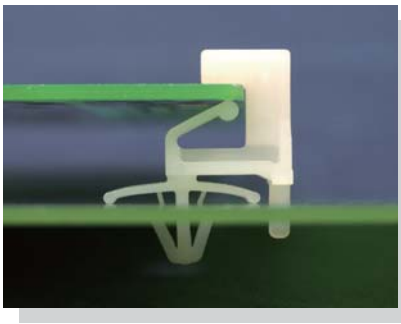


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

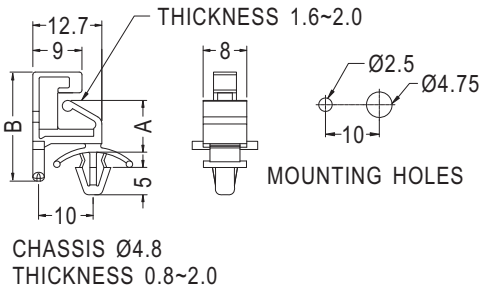


Part No.	A	B	Package
WLCF-6	6.3	16.8	1000
WLCF-8	8.0	18.5	
WLCF-9	9.5	20.0	
WLCF-12	12.7	23.2	
WLCF-16	15.9	26.4	

PC 板間隔柱 SPACER SUPPORT

用途：固定PC板於機板上，維修方便，不佔空間。

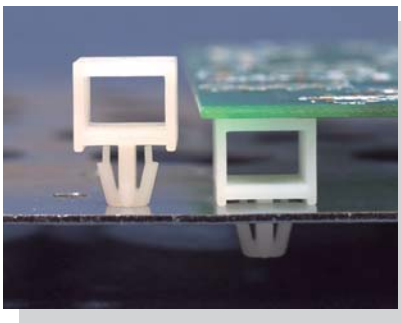


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

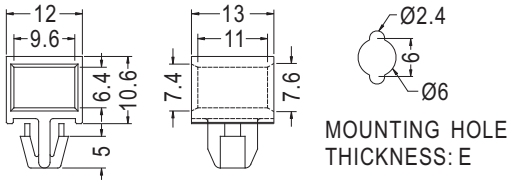


Part No.	E	Package
LDD-10	1.6~1.8	500
LDD-10(2)	1.8~2.0	

PC 板間隔柱 SPACER SUPPORT

用途：背膠式，用於不能鑽孔之機板與PC板間之固定，配合螺絲使用，拆卸方便。

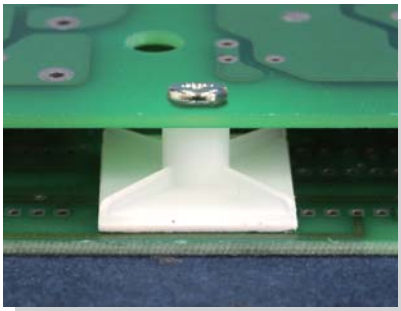

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

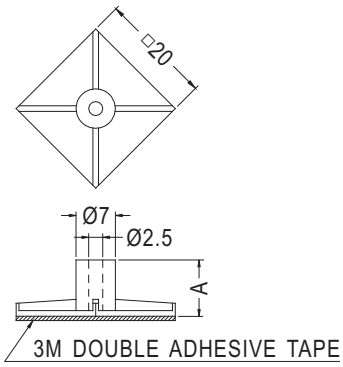


◆A尺寸不含背膠高度


Part No.	A	Package
ASR-5	4.2	500
ASR-6	5.6	
ASR-7	6.2	
ASR-8	7.2	
ASR-9	8.2	
ASR-11	10.0	
ASR-12.7	11.9	
ASR-14.5	13.6	
ASR-15.9	15.1	
ASR-17.5	16.3	
ASR-19.1	18.3	

PC 板間隔柱 SPACER SUPPORT

用途：背膠式，用於不能鑽孔之機板與PC板間之固定。

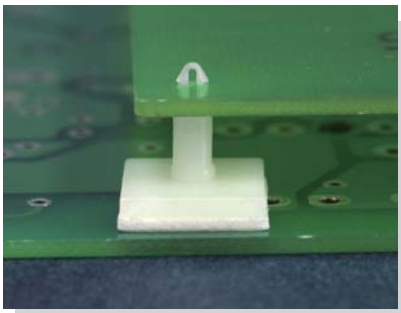


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆A尺寸不含背膠高度

Part No.	A	Package
ISS-4.8	4.0	1000
ISS-6.4	5.6	
ISS-8	7.2	
ISS-9.5	8.7	
ISS-11.1	10.3	
ISS-12.7	11.9	
ISS-15.9	15.1	
ISS-19.1	18.3	

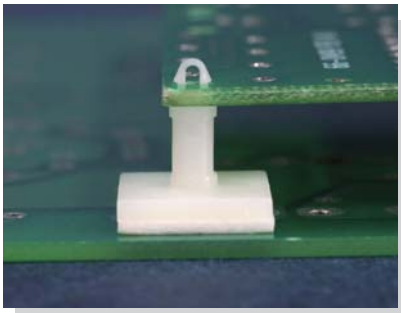

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆A尺寸不含背膠高度


Part No.	A	Package
GSS-4.8	4.0	1000
GSS-6.4	5.6	
GSS-8	7.2	
GSS-9.5	8.7	
GSS-11.1	10.3	
GSS-12.7	11.9	
GSS-14.3	13.5	
GSS-15.9	15.1	
GSS-19.1	18.3	

PC 板間隔柱 SPACER SUPPORT

用途：背膠式，用於不能鑽孔之機板與PC板間之固定。

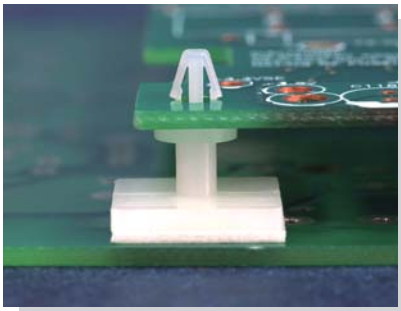


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

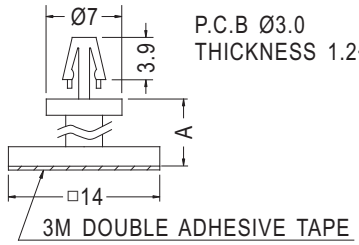


◆A尺寸不含背膠高度

Part No.	A	Package
BSS-6	5.6	1000
BSS-9	8.0	
BSS-12	11.9	

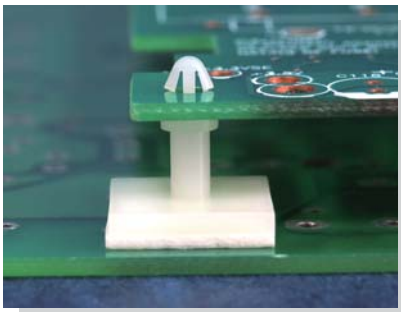


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

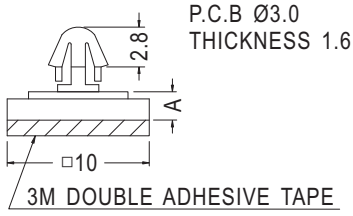


◆A尺寸不含背膠高度

Part No.	A	Package
CSSA-2	2.0	1000

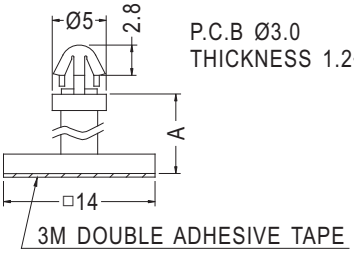


◆A尺寸不含背膠高度

Part No.	A	Package
CSS-3.5	2.7	1000
CSS-5	4.0	
CSS-6.4	5.6	
CSS-8	7.2	
CSS-10	9.2	
CSS-11	9.7	
CSS-12.7	11.9	

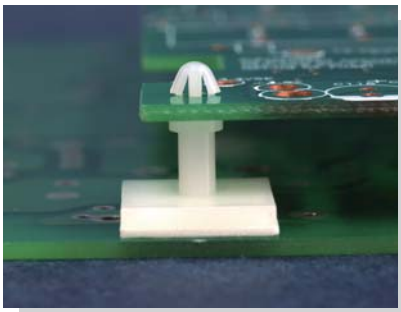



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

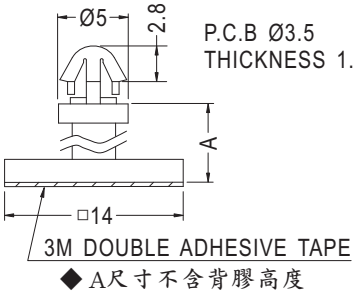

◆A尺寸不含背膠高度

Part No.	A	Package
FSS-3.5	2.7	1000
FSS-5	4.0	
FSS-6.4	5.6	
FSS-8	7.2	
FSS-10	9.2	
FSS-12.7	11.9	

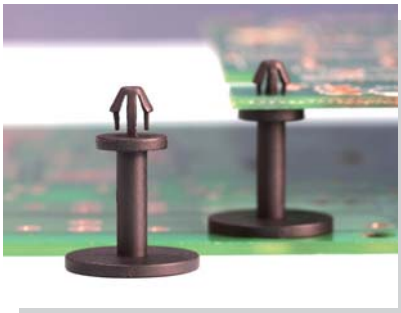





Part No.	Package
FSSA-15	1000

PC 板間隔柱 SPACER SUPPORT

用途：背膠式，用於不能鑽孔之機板與PC板間之固定。

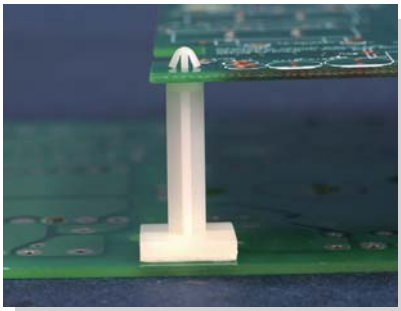


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

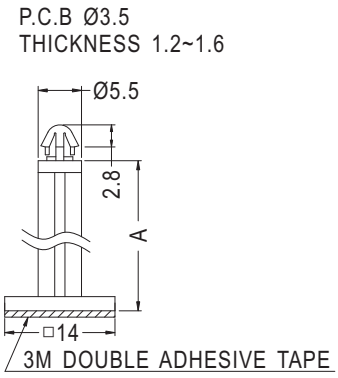


◆A尺寸不含背膠高度

Part No.	A	Package
FSL-25	24.4	1000

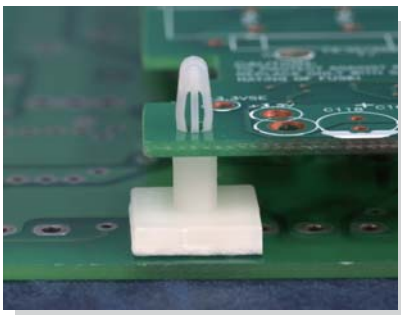


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆A尺寸不含背膠高度

Part No.	A	Package
JSS-4.8	4.0	500
JSS-6.4	5.6	
JSS-7.9	6.8	
JSS-8.4	7.5	
JSS-9.5	8.5	
JSS-11	10.6	
JSS-12.7	11.7	
JSS-15.9	15.0	

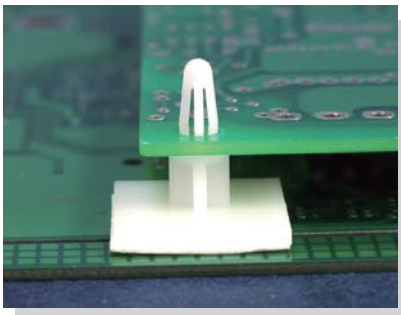

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

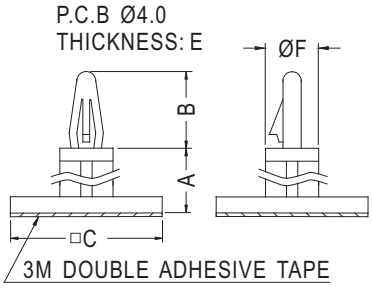


◆A尺寸不含背膠高度


Part No.	A	B	C	E	F	Package
ASS-5	4.6	10.0	20.0	1.2~1.7	7.0	500
ASS-6	5.5					
ASS-8	7.2					
ASS-10	9.0					
ASS-12.7L	11.8	10.2	18.0	1.6	6.9	
ASS-12	12.0	10.0	20.0	1.2~1.7	7.0	
ASS-15	15.4					
ASS-15.3S	15.34	8.0	17.8	1.6	7.1	
ASS-18.5	18.5	10.0	18.0	1.2~2.0	6.8	


PC 板間隔柱 SPACER SUPPORT

用途：背膠式，用於不能鑽孔之機板與PC板間之固定。

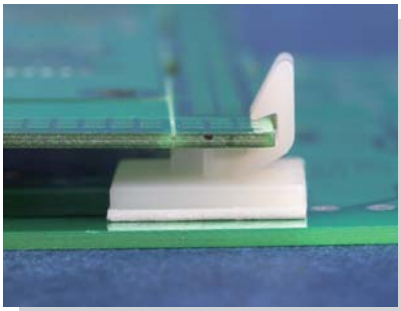

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



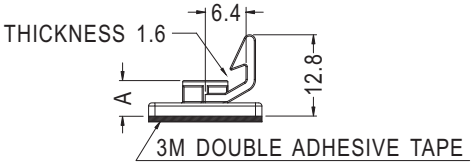

Part No.	A	Package
ULCK-6.4	5.6	1000


◆A尺寸不含背膠高度

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭用螺絲固定，省時，易拆卸。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
ULCI-11	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
ULCIJ-4	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

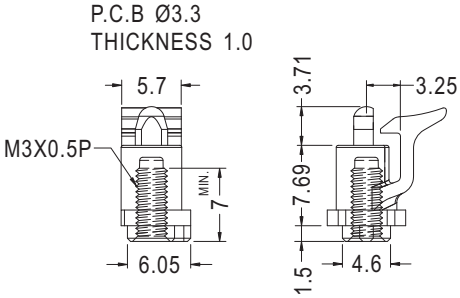


Part No.	Package
ULCD-7.8	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

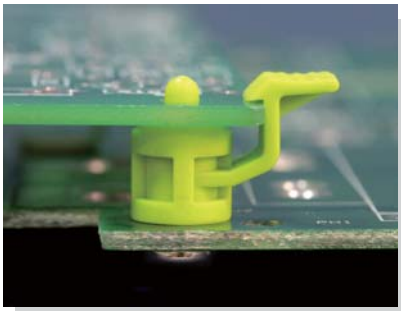


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green
- Unit: mm

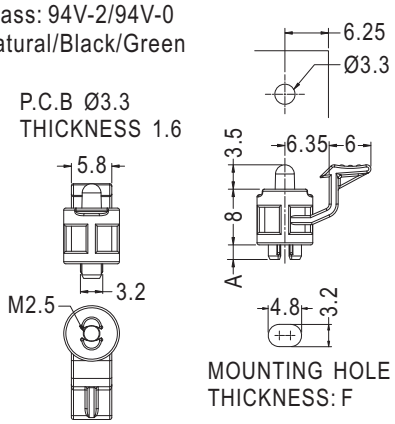


Part No.	A	F	Package
ULCH-2	2.1	2.16	1000
ULCH-2S	1.5	1.6	

PC 板間隔柱 SPACER SUPPORT

用途：PC板與PC板之固定，加強導電，幫助接地，不佔空間。

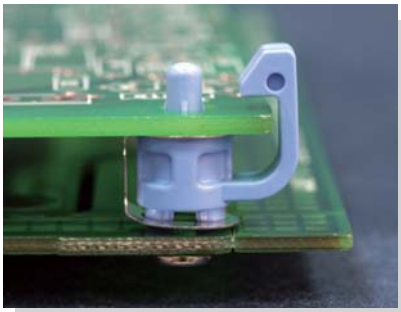

- Material: Nylon 66 (UL)
- Ground Terminal Material: SPTE
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm

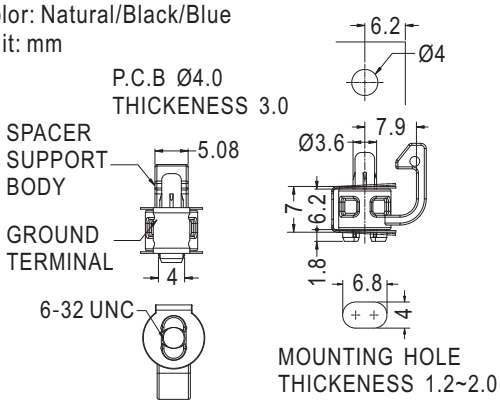


Part No.	Package
ULCH-1	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭用螺絲固定，省時易拆裝。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	E	F	Package
ULCC-6	6.3	1.73	14.8	1.3	5.25	500
ULCC-8	8.0	1.7	16.5			
ULCC-10	10.0	2.24	19.0	1.4		
ULCC-12	12.0	1.75	19.8			
ULCC-19	18.55	1.9	27.05	1.3	5.5	

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一端可配合螺絲或攻牙。

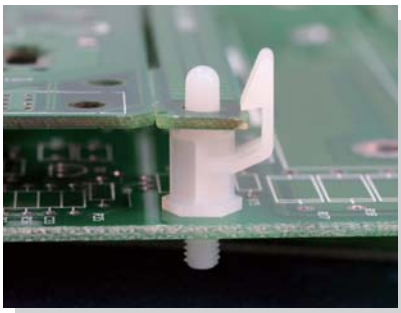

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

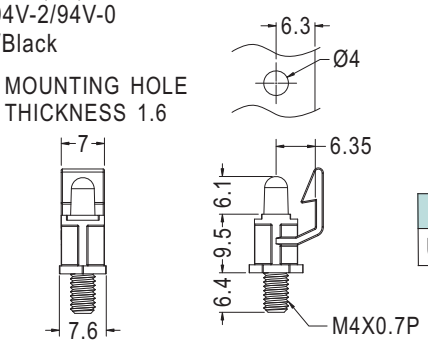


Part No.	Package
ULCBM4-9.5	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

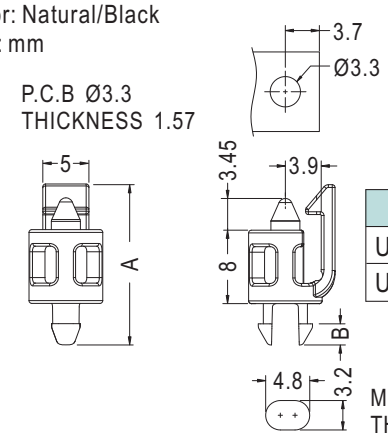



Part No.	A	B	T	Package
ULCSA-8	17.45	2.3	2.13	1000
ULCSA-8S	16.5	1.9	1.57	



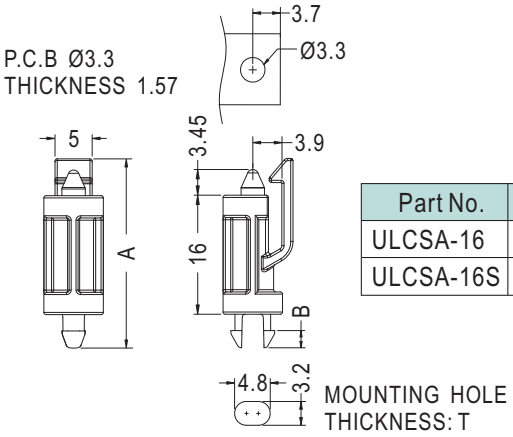

Part No.	A	B	T	Package
ULCSA-16	25.45	2.3	2.13	1000
ULCSA-16S	24.5	1.9	1.57	

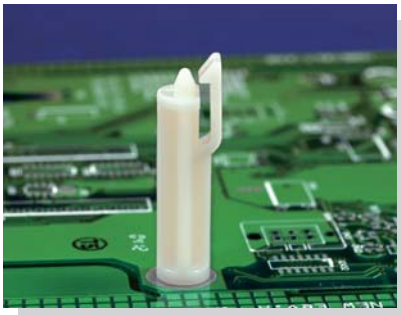


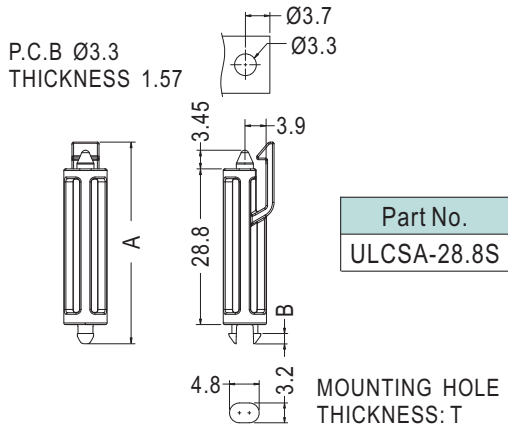

Part No.	A	B	T	Package
ULCSA-28.8S	37.3	1.9	1.57	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm

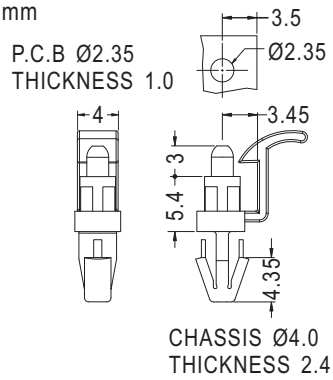

Part No.	Package
ULCBA-5	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green
- Unit: mm

HOLE IN P.C.B
THICKNESS 1.3

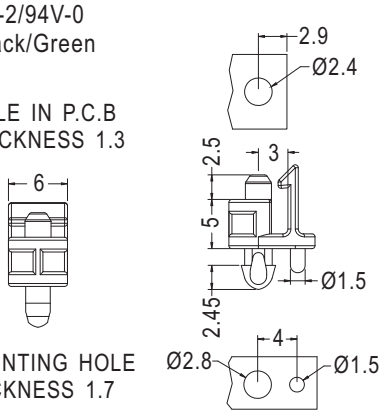


MOUNTING HOLE
THICKNESS 1.7

Part No.	Package
ULCSD-5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

HOLE IN P.C.B
THICKNESS 1.6

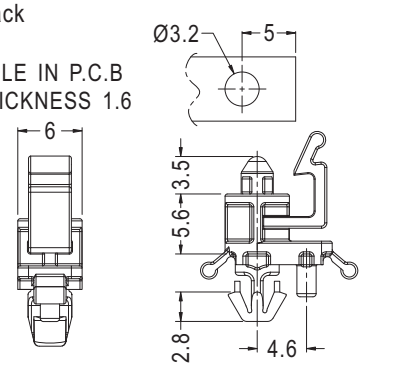


HOLE IN P.C.B
THICKNESS 1.93




NEW

Part No.	Package
ULCSF-6.6	1000

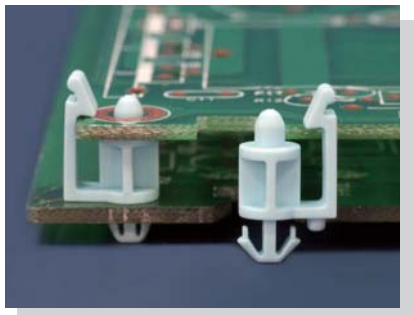

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


HOLE IN P.C.B
THICKNESS 1.6

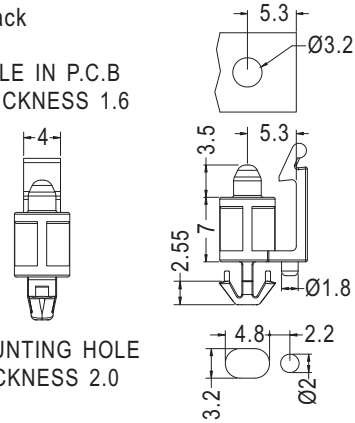

MOUNTING HOLE
THICKNESS 2.0


NEW

Part No.	Package
ULCSE-7	1000

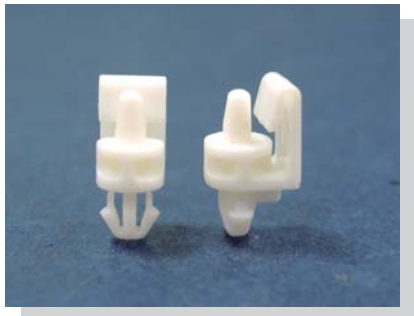

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø2.6
THICKNESS 0.8~1.0

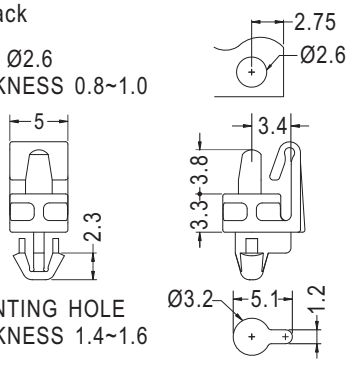

MOUNTING HOLE
THICKNESS 1.4~1.6


Part No.	Package
LCUE-3.3	2000

PC 板間隔柱 SPACER SUPPORT


用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

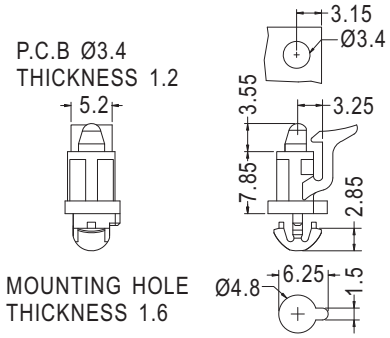

Part No.	Package
ULCBA-7.8	1000

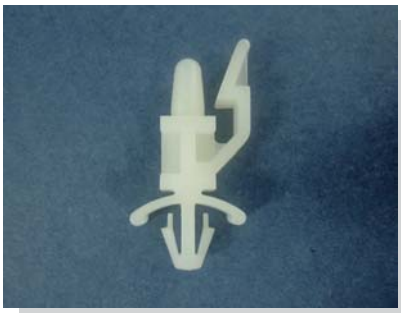


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

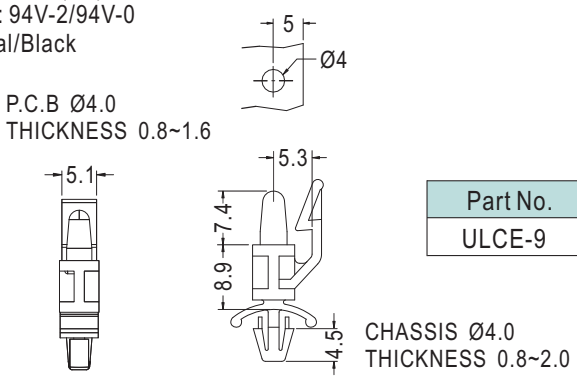


Part No.	Package
ULCE-9	1000

PC 板間隔柱 SPACER SUPPORT

用途：用於不能鑽孔之機板與PC板間之固定。

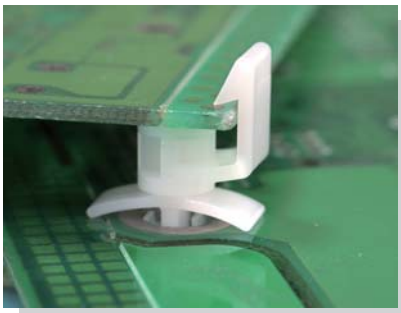

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

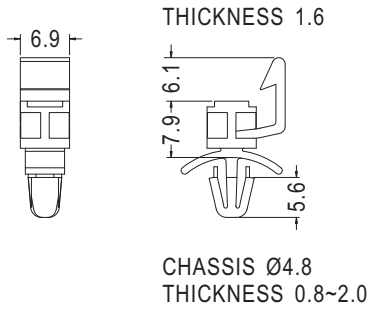


Part No.	Package
ULCBB-7.9	1000

PC 板間隔柱 SPACER SUPPORT

用途：支撐PC板，使中間不致震動，載重而凹陷短路。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm

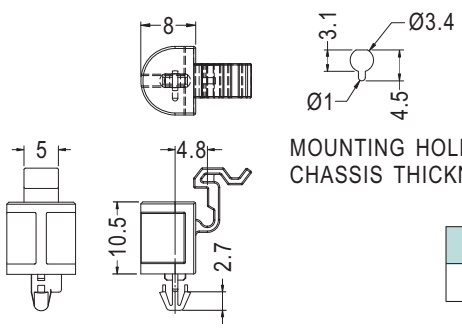


Part No.	Package
LCUA-11	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green
- Unit: mm

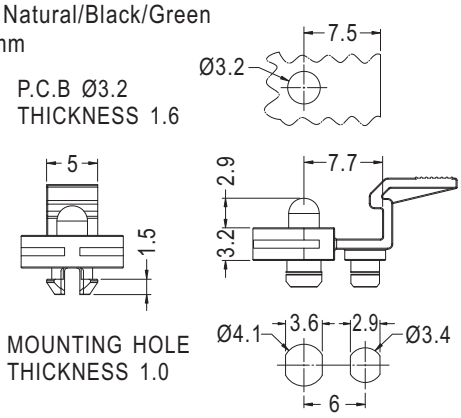


Part No.	Package
LCUAD-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

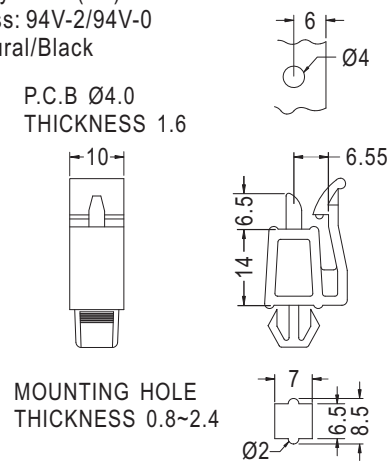


Part No.	Package
KES-15	500

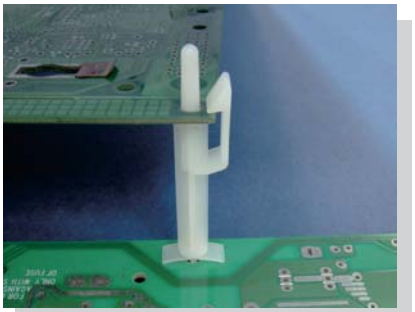


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

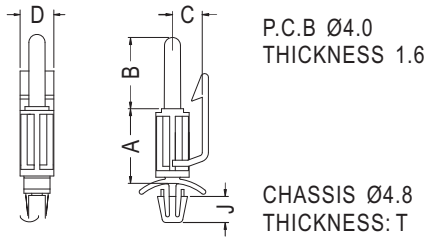

Part No.	A	B	C	D	J	T	Package
ULCB-9S	9.3	6.1	6.2	6.9	5.6	1.6~2.2	1000
ULCB-15	15.9	15.2	6.35	7.1	5.55	1.6	
ULCB-38	38.1						

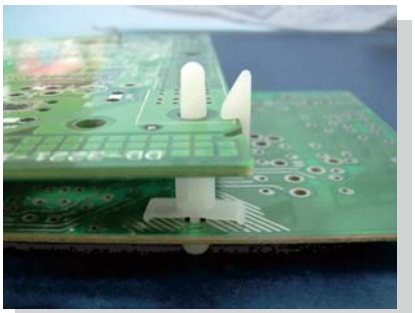


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

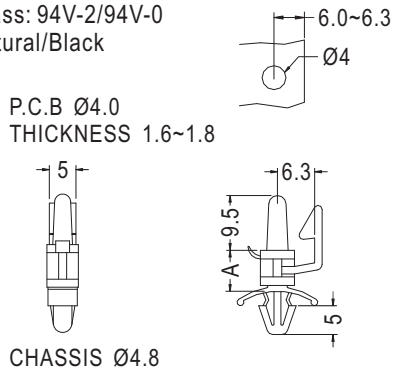


Part No.	A	Package
ULCB-6	6.3	1000
ULCB-8	8.0	
ULCB-9	9.5	
ULCB-10	10.0	
ULCB-12	12.7	
ULCB-16	15.9	
ULCB-19.1	19.1	
ULCB-23	23.0	

PC 板間隔柱 SPACER SUPPORT


用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

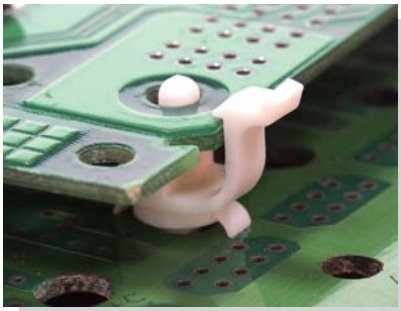

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green
- Unit: mm




Part No.	Package
LCUAC-2L	1000

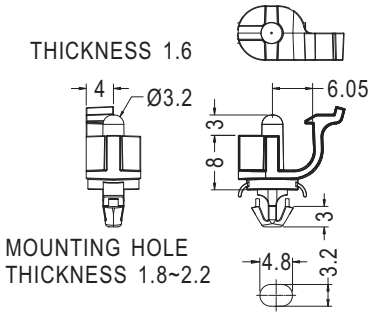


◆ **COLOR:NATURAL/BLACK/ GREEN/GARY**

Part No.	Package
LCUAC-2R	1000



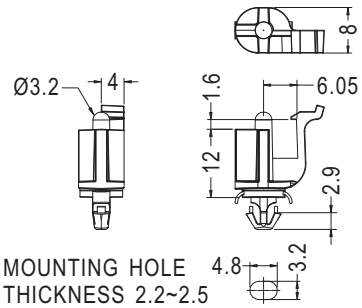


Part No.	Package
LCUAC-3L	1000

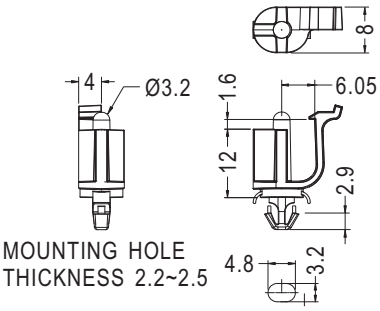


Part No.	Package
LCUAC-3R	1000




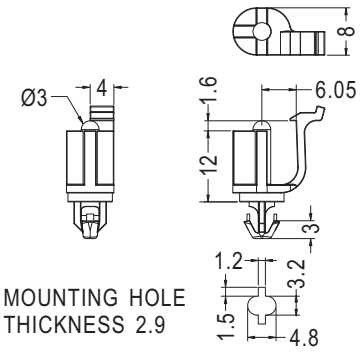


Part No.	Package
LCUAC-7L	1000

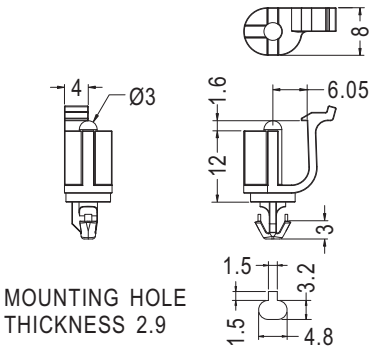


Part No.	Package
LCUAC-7R	1000

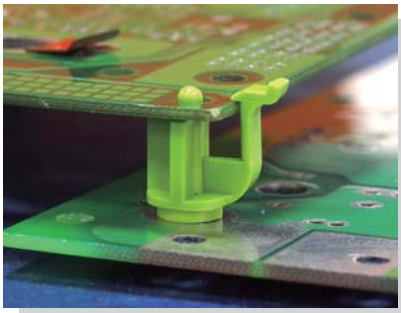

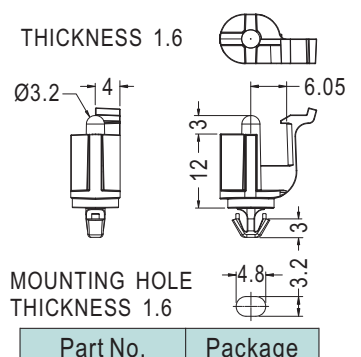


Part No.	Package
LCUAC-8L	1000

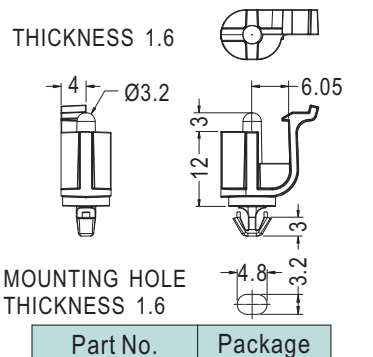

Part No.	Package
LCUAC-8R	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

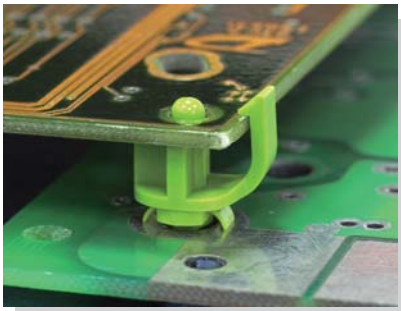


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green
- Unit: mm

THICKNESS 1.6

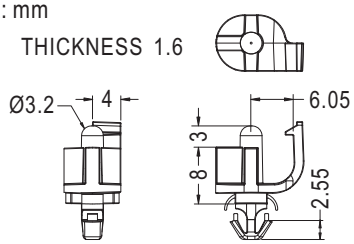


MOUNTING HOLE
THICKNESS 1.8~2.2



Part No.	Package
LCUAC-9L	1000


THICKNESS 1.6




MOUNTING HOLE
THICKNESS 1.8~2.2




Part No.	Package
LCUAC-9R	1000

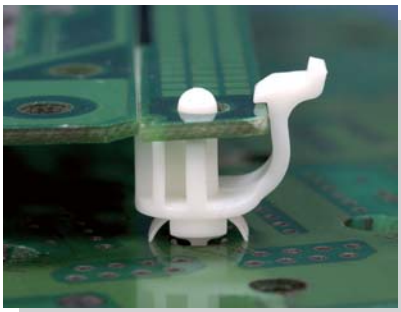


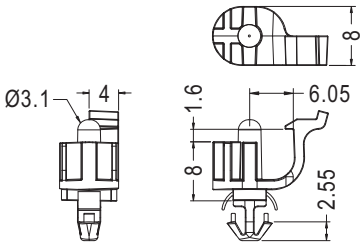

MOUNTING HOLE
THICKNESS 2.16~2.64




Part No.	Package
LCUAC-11L	1000

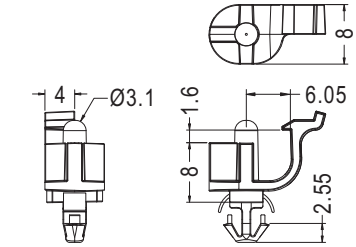


MOUNTING HOLE
THICKNESS 2.16~2.64



Part No.	Package
LCUAC-11R	1000

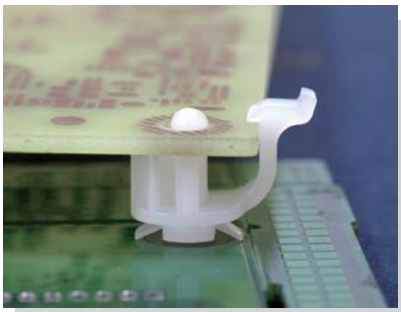


- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- Unit: mm

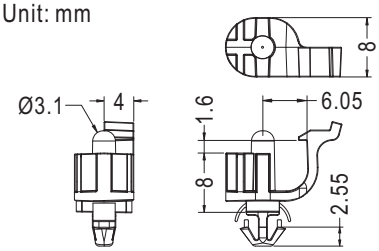


MOUNTING HOLE
THICKNESS 1.81




Part No.	Package
LCUAE-8L	1000

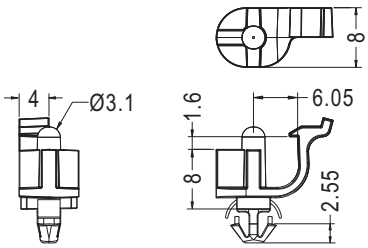


MOUNTING HOLE
THICKNESS 1.81




Part No.	Package
LCUAE-8R	1000

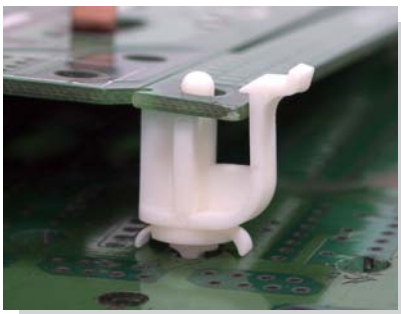

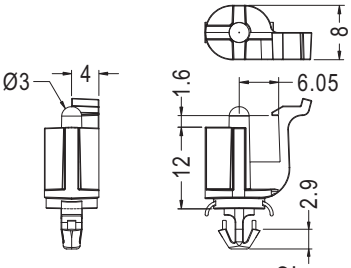


MOUNTING HOLE
THICKNESS 2.5~2.8




Part No.	Package
LCUAE-12L	1000

◆ COLOR:DARK GARY

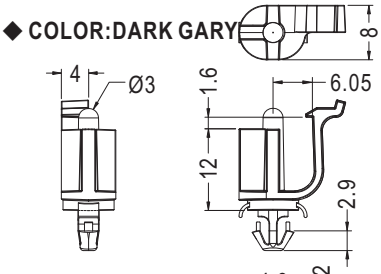


MOUNTING HOLE
THICKNESS 2.5~2.8




Part No.	Package
LCUAE-12R	1000

PC 板間隔柱 SPACER SUPPORT

用途：PC板直接壓入固定，另一頭直接壓入機板固定，省時易拆裝。

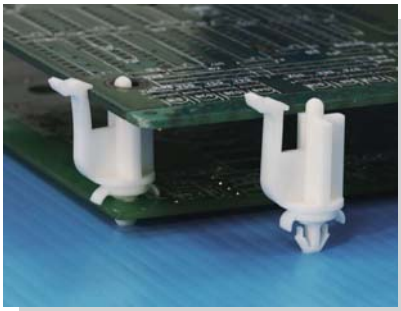

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

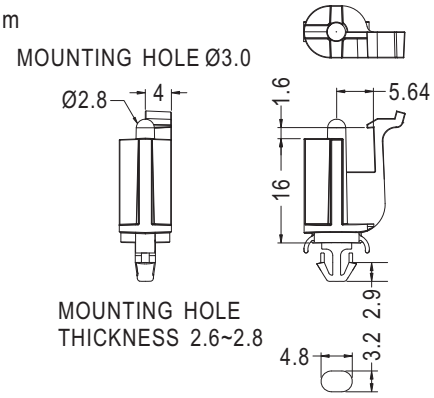


NEW


Part No.	Package
LCUAE - 16L	1000

PC 板間隔柱 SPACER SUPPORT


用途：用於PC板固定及墊高，拆卸方便。

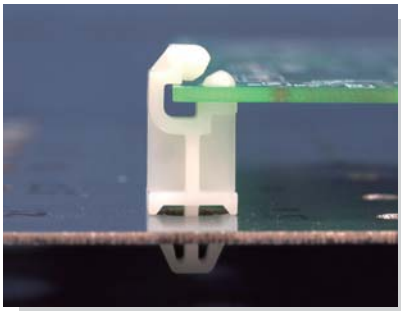


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

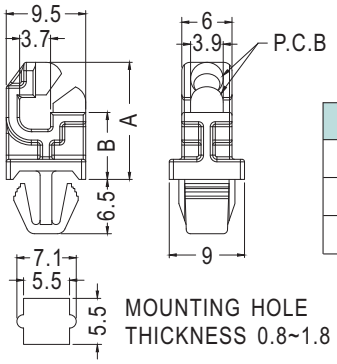

Part No.	A	B	Package
LCMM-8	14.0	8.0	1000
LCMM-12	18.0	12.0	
LCMM-18	24.0	18.0	

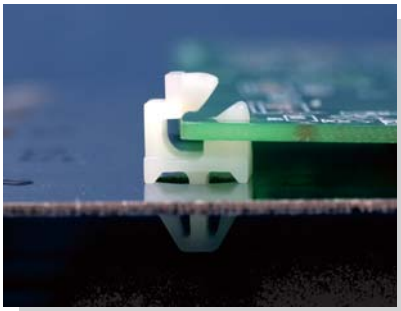

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

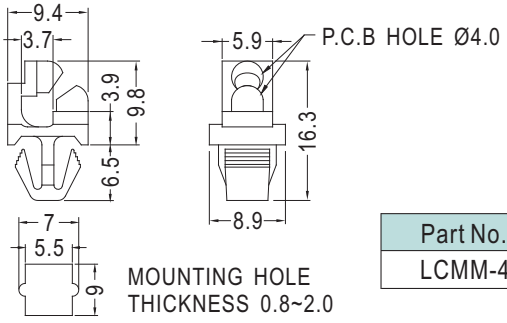


Part No.	Package
LCMM-4	1000

PC 板間隔柱 SPACER SUPPORT

用途：將PC板固定於機殼上，PC板可前後30°移動。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PS-16	500


用途：用於PC板固定及墊高，拆卸方便。

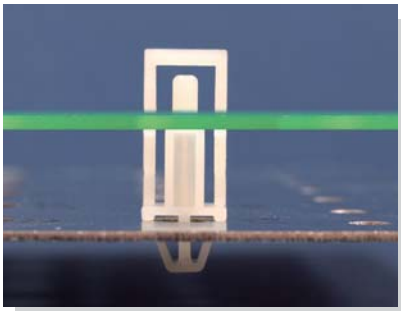


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

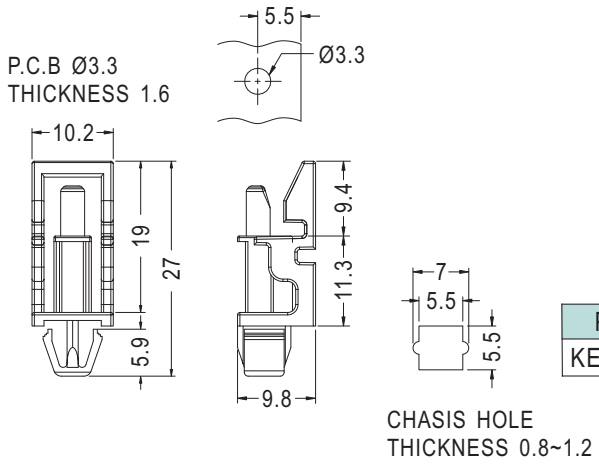


Part No.	Package
KEMS-11.3	500

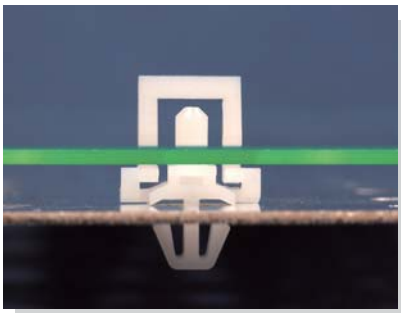


- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- Unit: mm

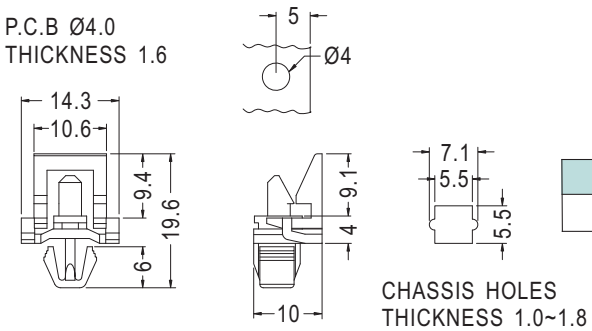

Part No.	Package
KEML-4	500

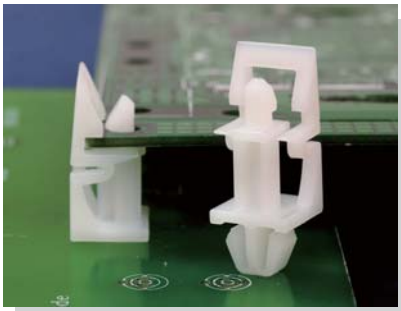


- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- Unit: mm

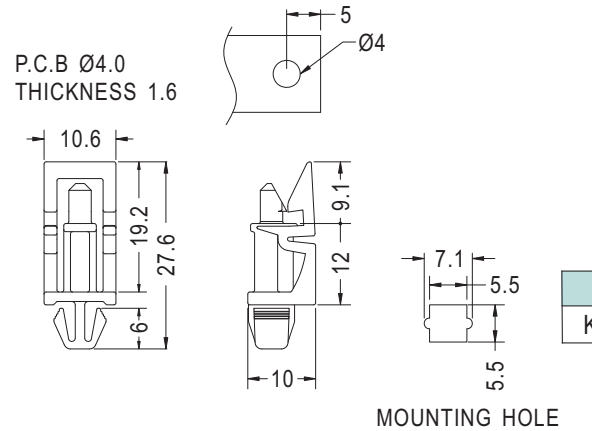


Part No.	Package
KEML-12	1000

PC 板間隔柱 SPACER SUPPORT

用途：用於 PC板與機板之固定。

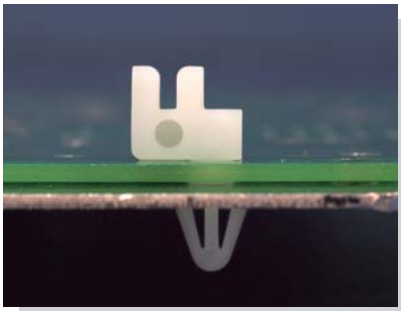

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

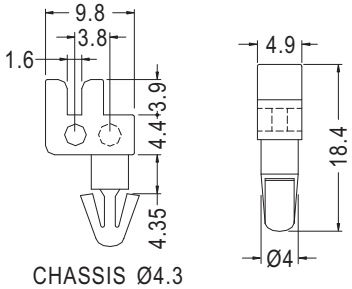

CHASSIS Ø4.3
THICKNESS 4.0


Part No.	Package
LCU-18	2000

PC 板間隔柱 SPACER SUPPORT

用途：背膠式，用於PC板端直接壓入固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

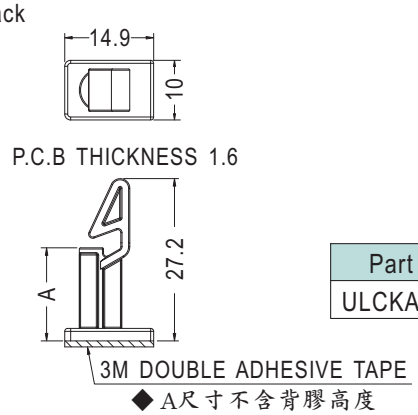


◆A尺寸不含背膠高度


Part No.	A	Package
ULCKA-15.6	15.6	1000

間隔柱 SPACER SUPPORT

用途：用於 P.C.B固定及墊高，拆裝方便。

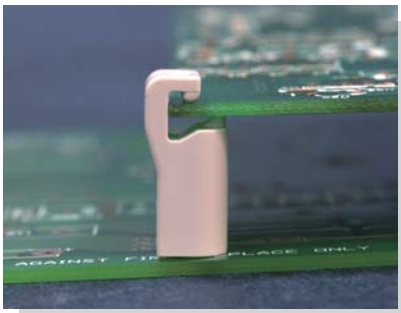


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Gray
- Unit: mm

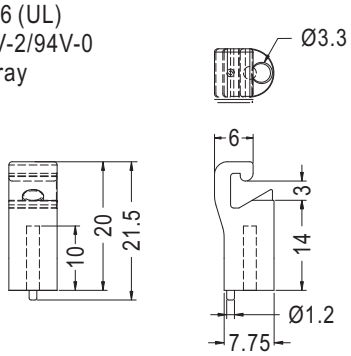


Part No.	Package
KESS-19	500

PC 板間隔柱 SPACER SUPPORT

用途：機板部分用螺絲固定，另一頭直接壓入 PC板。

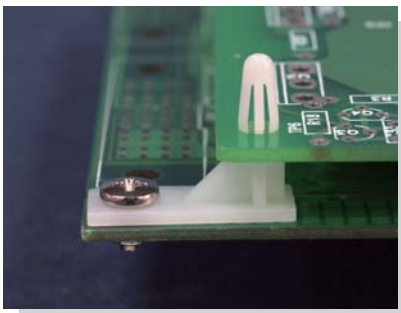

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø4.0
THICKNESS 1.6~1.8


Part No.	Package
LCBL-8	1000

PC 板間隔柱 SPACER SUPPORT


用途：用於PC板與機板之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LIH-8	2000




Part No.	Package
MOU-01	2000

PC 板間隔柱 SPACER SUPPORT

用途：用於PC板與機板間墊高，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ **SRMA-2A**

CHASSIS Ø1.8
THICKNESS 1.0~1.2




◆ **SRMA-2B**





組裝示意圖

Part No.	組裝方式	Package
SRMA-2	不組裝	2000
SRMA-2F	SRMA-2A	
	SRMA-2B	
	組裝	

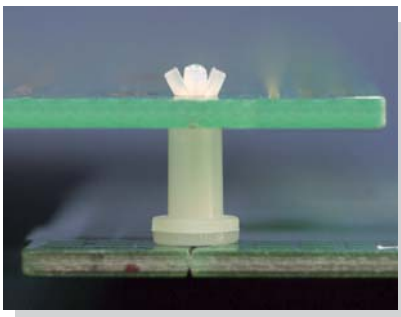

- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- Unit: mm






組裝示意圖

CHASSIS Ø2.0
THICKNESS 0.8~1.6


Part No.	A	Package
SRMA-3	3.0	2000
SRMA-3.5	3.5	
SRMA-4	4.0	
SRMA-5	5.0	
SRMA-6	6.5	
SRMA-9	9.0	

PC 板間隔柱 SPACER SUPPORT

用途：用於PC板與機板間之固定易裝卸。

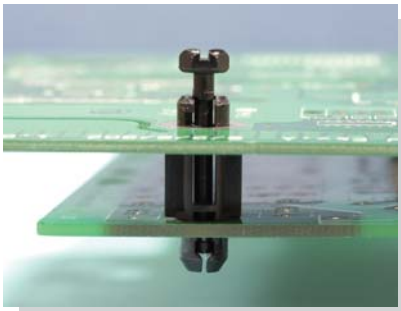

- Clip Material: PC(UL)/94V-2
- Pin Material: Nylon66(UL)/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø6.4~Ø6.5
THICKNESS 0.8~1.6


Part No.	A	B	Package
SCMB-6.3	6.35	18.3	1000
SCMB-9.5	9.5	21.45	
SCMB-12.7	12.7	24.65	
SCMB-15.9	15.9	27.85	
SCMB-19.1	19.1	31.05	

間隔柱 SPACER

用途：用於零件之固定。




- Material: PC(UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm




Part No.	Package
SMHC-1	1000

導電間隔柱 SUPPORT

用途：配合焊接，做為 PC板與 PC板之導電與間隔之用或測試端點。

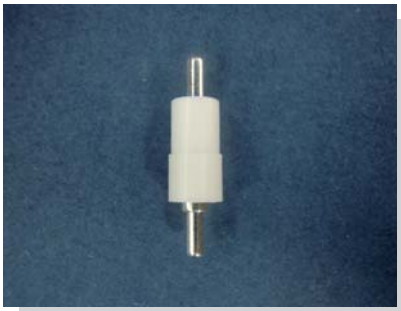


- Material: Nylon 66 (UL)/94-0
- Pin Material: Brass
- Color: Natural
- Unit: mm



Part No.	Package
ROFF-10F	1000


PC 板間隔柱 SPACER SUPPORT

用途：PC板與 PC板間之固定，不佔空間。

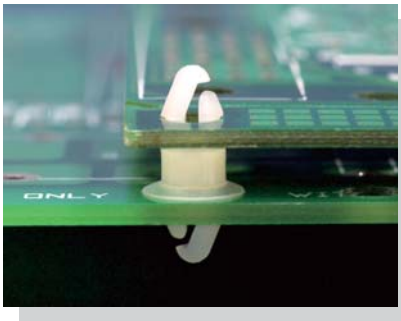

- Material: Nylon 66 (UL)/PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

P.C.B Ø4.0
THICKNESS 1.6~1.9




P.C.B Ø4.0
THICKNESS 1.6~1.9


Part No.	Package
MSPR-3	1000


固定片 BRACKET

用途：快速固定 PC板於機板上。

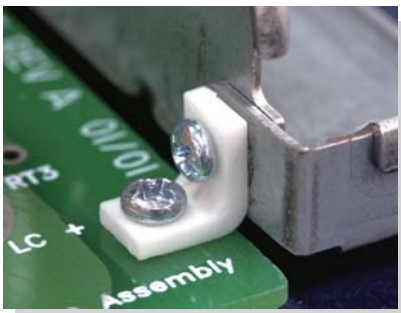

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

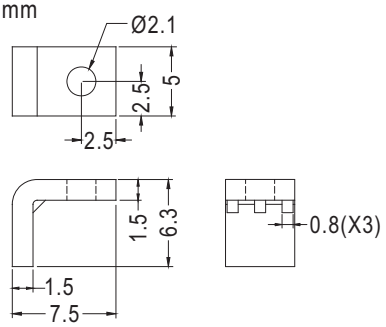

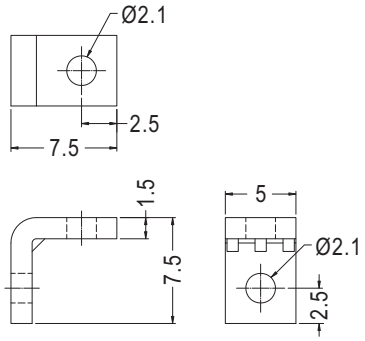


Part No.	Package
DELT-19	1000


Part No.	Package
DELT-25	1000


PC 板固定座 SPACER SUPPORT

用途：用於 PC板固定，使 PC板與機板成90度固定。

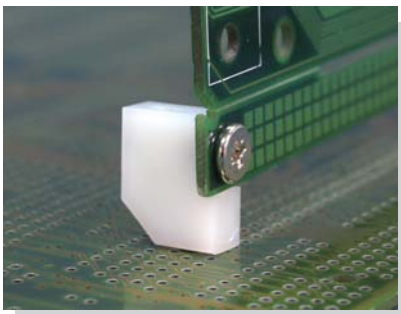


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




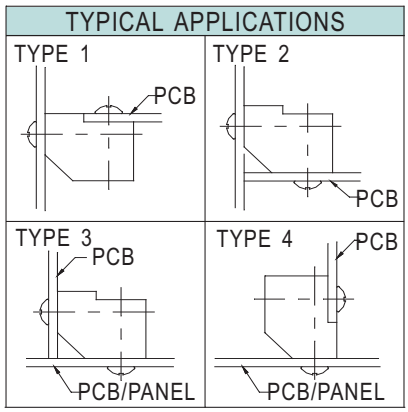


Part No.	Package
PMB-1	500

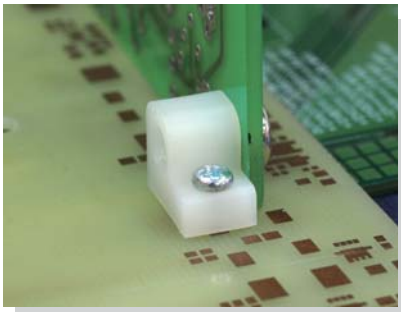


- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
PMB-2	500

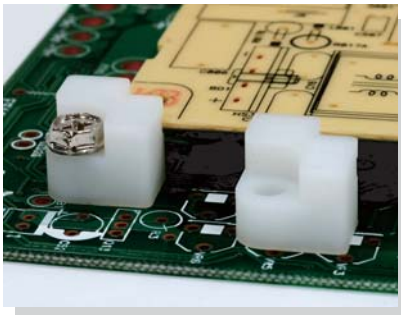


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TCEA-1	1000

PC 板間隔柱 SPACER SUPPORT


用途：兩片 PC板間隔之固定。

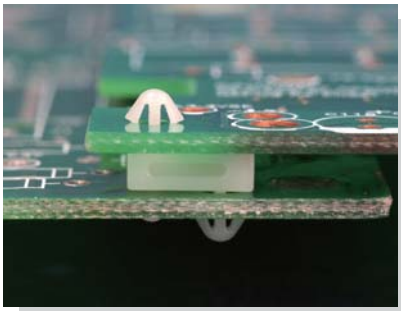


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

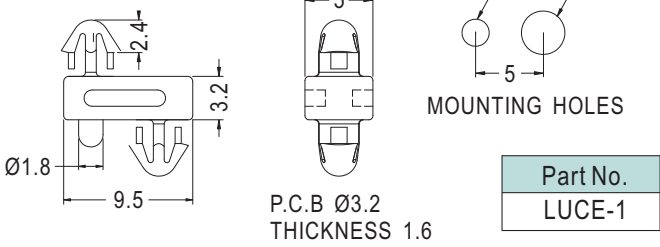

Part No.	Package
LUCE-1	1000

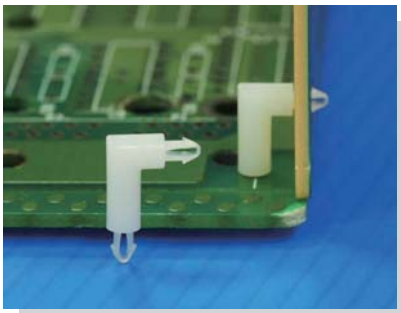

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

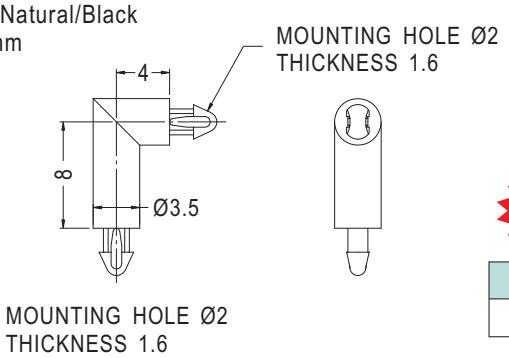


NEW


Part No.	Package
EM-682	1000

PC 板固定扣 PCB HINGE


用途：一端固定於機板或 PC板上，另一端固定於 PC板上成90度。

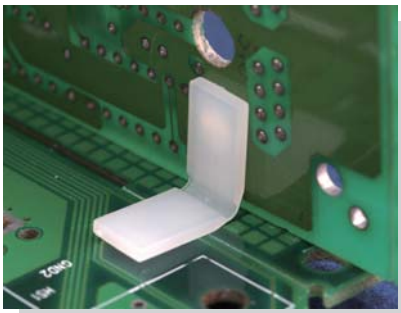


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LPZ-1	1000



Part No.	Package
LPZ-6	1000

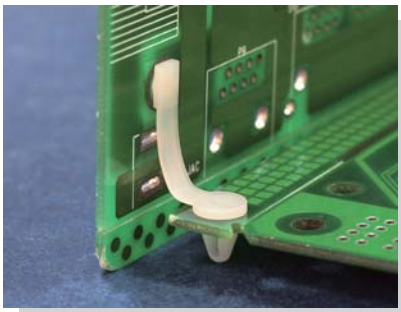

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

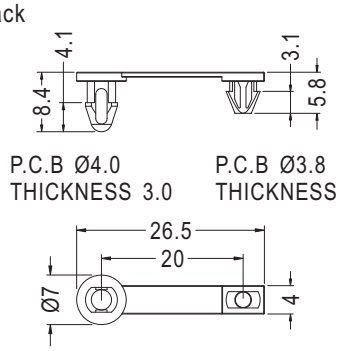


Part No.	Package
LPZ-2	1000

PC 板間隔柱 SPACER SUPPORT


用途：用於散熱片之絕緣。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

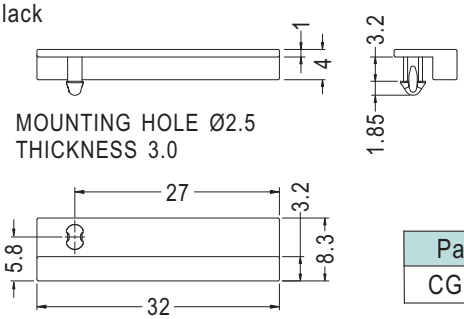

Part No.	Package
CGLF-32	1000

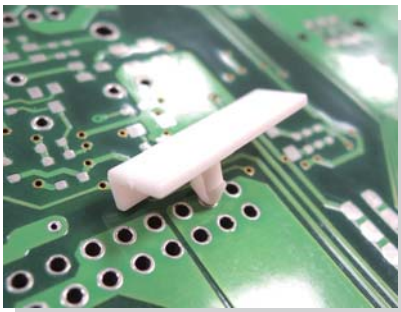


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

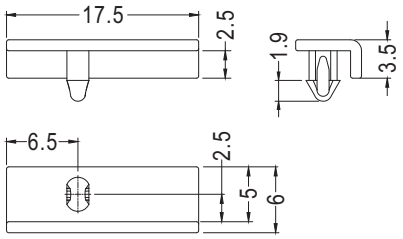


Part No.	Package
CGLE-18	1000

PC 板間隔柱 SPACER SUPPORT

用途：做為 PC板與機板之絕緣用。

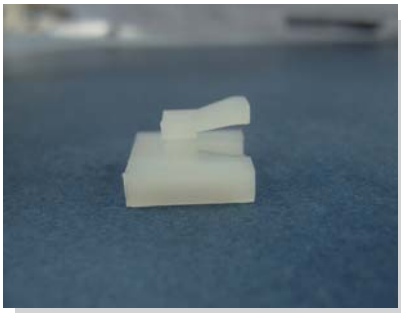


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

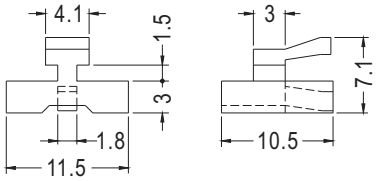


Part No.	Package
JYCE-1	1000

導電間隔柱 SPACER SUPPORT

用途：支撐 PC板與機板間之導電。

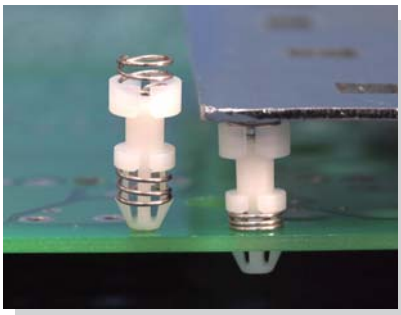


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品(PAT.)
- 美國專利品(USA PAT.)

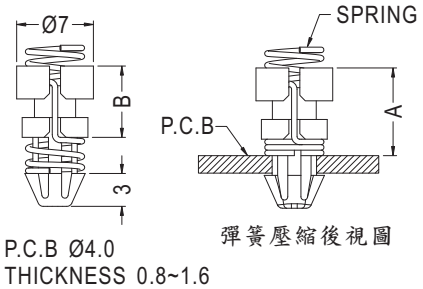


Part No.	A	B	Package
ALUCA-8	8.0	6.5	1000
ALUCA-9	9.0	7.5	
ALUCA-10	10.0	8.5	
ALUCA-12	12.0	10.5	
ALUCA-14	14.0	12.5	
ALUCA-16	16.0	14.5	

間隔柱 SPACER SUPPORT

用途：用於 PC板與機板間之固定。

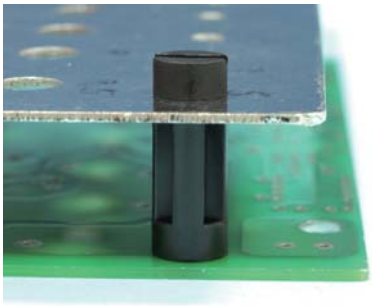

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

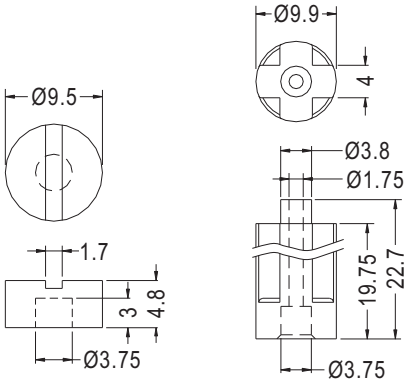


◆ JYCE-2B　◆ JYCE-2A


Part No.	Package
JYCE-2	500

圓體間隔柱 ROUND SPACER

用途：做為 PC板與機板間之墊高與絕緣用。

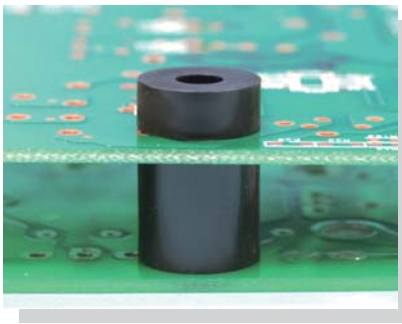

- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm

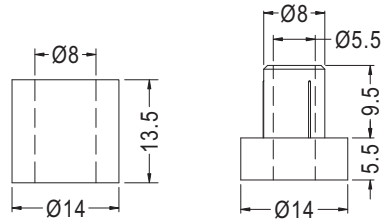


◆ RXS-13.5　◆ RXS-1


Part No.	Package
RXS-1	500
RXS-13.5	

圓體間隔柱 ROUND SPACER


用途：做為 PC板與機板間之墊高與固定用。

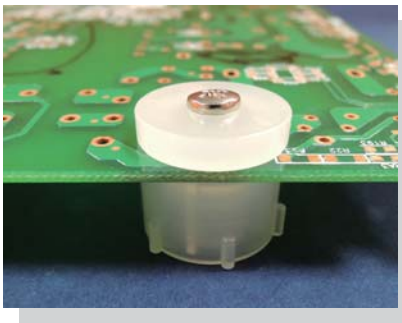

- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
RLA-1	500




Part No.	Package
RLA-12.7	500


圓體間隔柱 ROUND SPACER

用途：做為 PC板與機板間之墊高與絕緣固定用。

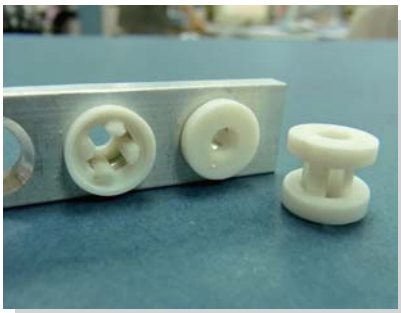


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

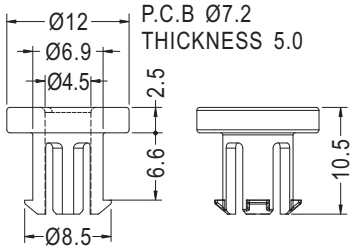




Part No.	Package
RML-1	1000


Part No.	Package
RML-25	1000

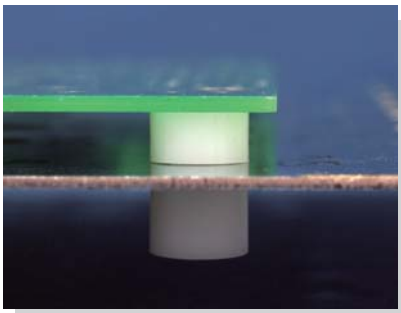

- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: NATURAL
- Unit: mm




◆ RMM-




◆ RMM-1

Part No.		L	HOLE IN P.C.B	HOLE IN CHASSIS	Package
RMM-1	RMM-75	7.5	6.5	4.0	1000
	RMM-100	10.0			
	RMM-150	15.0			

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ RSS-




◆ RSS-1

Part No.		L	HOLE IN P.C.B	HOLE IN CHASSIS	Package
RSS-1	RSS-60	6.0	5.0	3.5	1000
	RSS-78	7.8			
	RSS-105	10.5			
	RSS-150	15.0			500
	RSS-180	18.0			
	RSS-200	20.0			
	RSS-250	25.0			

- Material: ABS
- Flame Class: 94HB
- Color: Natural
- Unit: mm




◆RXL-




◆RXL-1

Part No.		L	HOLE IN P.C.B	HOLE IN CHASSIS	Package
RXL-1	RXL-5	5.0	9.0	6.0	500
	RXL-7	7.5			
	RXL-10	10.0			

- Material: ABS
- Flame Class: 94HB
- Color: Natural
- Unit: mm



◆RLL-



◆RLL-1


Part No.		L	HOLE IN P.C.B	HOLE IN CHASSIS	Package
RLL-1	RLL-57	5.7	7.5	4.5	1000
	RLL-75	7.5			
	RLL-100	10.3			
	RLL-150	15.0			500

PC 板間隔柱 SPACER SUPPORT

用途：做為 PC板與機板之絕緣用。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm




Part No.	Package
LASK-4	1000

- Material: POM
- Color: Black
- UNIT:mm




Part No.	Package
LASK-5	1000


- Material: N6T (UL)
- Flame Class: 94V-0
- Color: Black
- UNIT:mm




Part No.	Package
LASK-6	1000

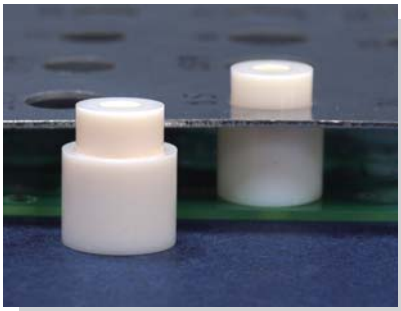

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
RCXL-1	1000




Part No.	Package
RCXL-14	1000


圓體間隔柱 ROUND SPACER

用途：做為板件與機板間之墊高與固定用。

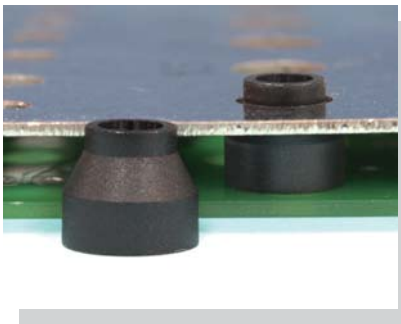

- Material: Nylon66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






◆RCSL5-10


Part No.	A	B	C	D	E	F	Package
RCSL5-10	11.6	7.65	5.4	4.53	8.0	10.0	500
RCSL6-8.5	11.6	7.65	6.1	4.53	6.5	8.5	

背膠式圓體間隔柱 ROUND SPACER WITH ADHESIVE TAPE

用途：背膠式，做為 PC板之墊高用。

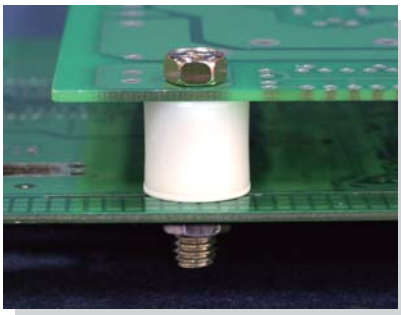


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
6-13A	13.0	6.1	14.7	1000

圓體間隔柱 ROUND SPACER


用途：做為 PC板與機板之絕緣用。

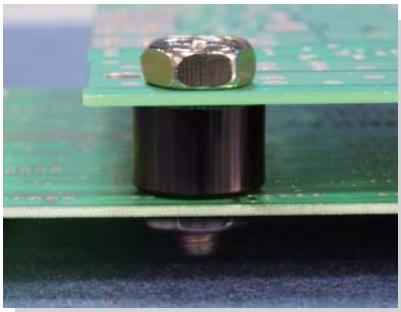


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
9-15	15.0	9.0	21.0	1000

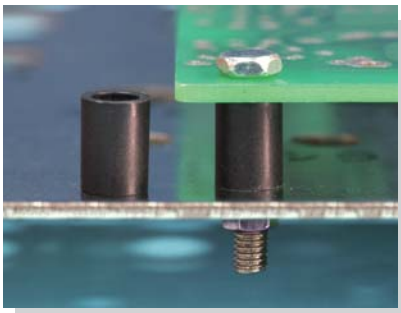


- Material: Nalon66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
★KE3.5-2	2.0	3.5	6.3	1000
KE4.1-8	8.0	4.1	6.0	

圓體間隔柱 ROUND SPACER

用途：做為 PC板與機板之絕緣用。

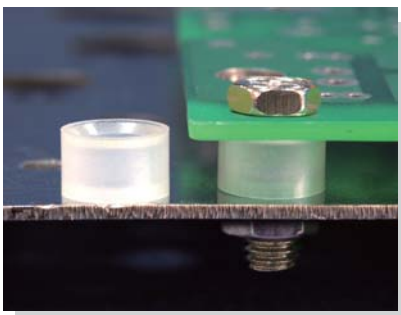


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	Package
DELTA-3	5.6	6.2	9.2	1000

圓體間隔柱 ROUND SPACER


用途：做為 PC板與機板之絕緣用。

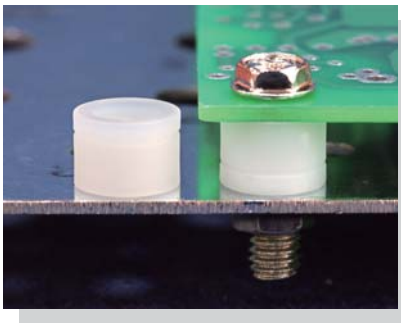


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
RR-1	7.0	6.8	10.0	1000

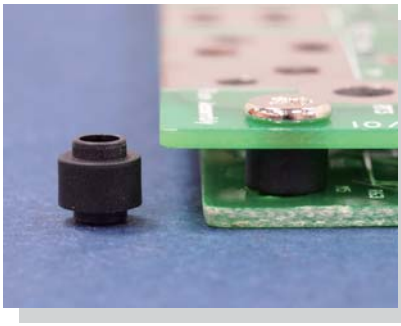


- Material: N6T (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
LUS-3.85	1000

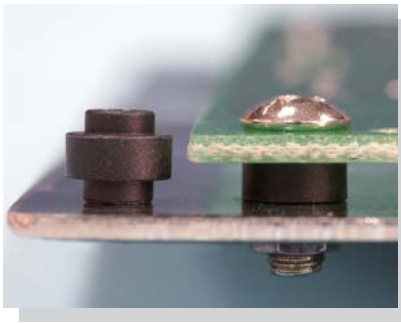


- Material: N6T (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



Part No.	A	B	C	Package
LUS-2.7	1.5	2.7	1.5	1000
LUS-2.9	0.7	2.9	0.7	

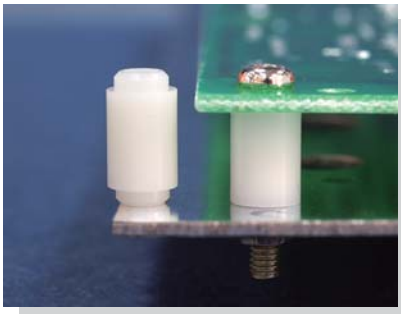


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm



Part No.	Package
LUS-9.1	1000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LUS-10	1000

圓體間隔柱 ROUND SPACER

用途：做為 PC板與機板之絕緣用。

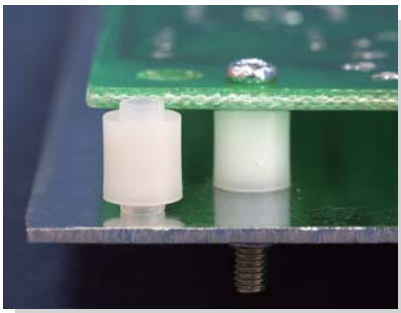


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.5

Part No.	Package
LUS2-8.2	1000

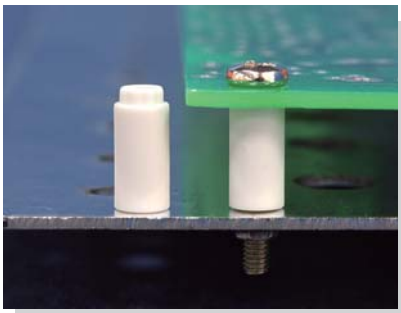

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm




◆ **LUSS-9**


Part No.	A	Package
LUSS-6.4	6.4	1000
LUSS-7.1	7.07	
LUSS-9	9.0	
LUSS-9.4	9.43	
LUSS-10.1	10.06	

PC 板間隔柱 SPACER SUPPORT

用途：PC板與 PC板間之固定，不佔空間。

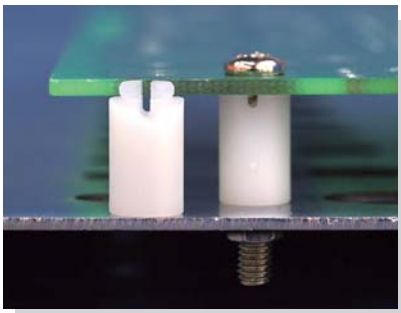


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø5.0
THICKNESS 1.6~1.8

Part No.	Package
LUSA-11	1000

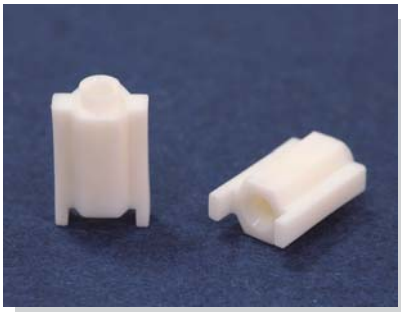


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

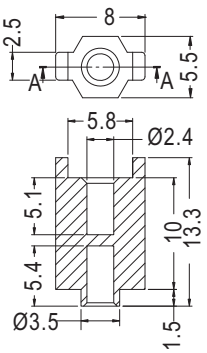


Part No.	Package
LUSB-10	1000


圓體間隔柱 ROUND SPACER

用途：做為PC板之墊高用，尺寸齊全。

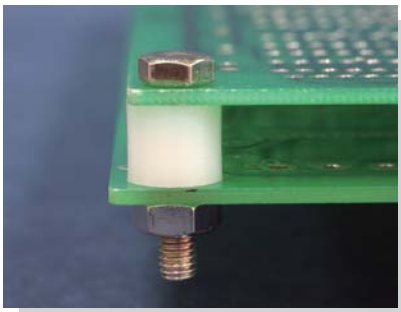

- Material: Nylon 66 (UL)/POM/PPS/ TPE/PE/PC(UL)/ABS(UL)
- Flame Class: 94V-2/94V-0/94HB
- Color: Natural/Black
- Unit: mm






◆ 2.3-5,2.3-5.5

Part No.	A (L)	B (ID)	C (OD)	Package
0.7-1.6	1.6	0.7	2.0	1000
0.7-3	3.0	0.71	2.2	
1.2-2.5	2.5	1.2	4.0	
1.2-3	3.0		3.2	
1.2-5	5.0		4.0	
1.2-7.6	7.6			
1.4-3	3.0	1.4	3.5	
1.6-2	2.0	1.6	4.0	
1.6-4	4.0			
★1.6-5.9	5.89	1.63	3.18	
1.7-11.3	11.3	1.7	3.0	
2-3-1.9	1.9	2.02		2000
2.05-3.5	3.5	2.05		1000
2.1-2.1	2.1	2.1	2.4	
2.2-2.5	1.5	2.2	2.5	2000
2.2-5	5.0		4.0	1000
2.3-5		2.3	5.0	
2.3-5.5	5.5			
2.4-9.4	9.4	2.4	4.8	
2.5-2.15	2.15	2.5	4.0	
2.5-1655	16.0		5.5	
2.7-2.8	2.84	2.7	6.35	
2.7-6.7	6.71			
2.73-2.3	2.3	2.73	4.3	
2.8-3.8	3.8	2.8		
2.95-8	8.0	2.95	3.55	
3.1-2.2	2.2	3.1	8.0	
3.1-3.5	3.5		5.7	
3.1-4-6	4.0		6.0	
3.1-5	6.0		5.0	
3.1-6			6.0	
3.1-7.5	7.5		8.0	
★3.1-8	8.0		6.0	
3.1-3.8	3.85	3.15	5.0	
3.1-4	4.0			
3.2-2.5	2.5	3.2	4.2	
3.2-3	3.0		5.8	
3.2-4.45	4.45		6.4	
3-5.8	5.85		5.0	
3.2-6.4	6.4		5.8	
6432-6.4	6.4		6.4	
3.2-6.8	6.8		4.5	
3.2-10	10.0		8.0	
3.35-5	5.0	3.35		
3.5-5.5	5.5	3.5	6.3	
3.55-10	10.0	3.55	6.0	
★3.55-31.8	31.8		6.35	
3.6-2	2.0	3.6	7.0	
3.6-19	19.0		8.0	
3.7-10	10.0	3.73	6.35	
3.9-5.3	5.3	3.9	8.0	
3.95-3.8	3.8	3.95	6.1	


Part No.	A (L)	B (ID)	C (OD)	Package
★4.1-2.5	2.5	4.1	8.0	1000
★4.2-2.4	2.4	4.2	7.5	
4.2-8.5	8.5	4.2	10.0	
4.4-6	6.0	4.4	7.43	
4.4-6.4	6.4		9.5	
4.5-3.2	3.18	4.45	6.35	
4.5-2.75	2.75	4.5	6.0	
★4.5-11	11.0		7.0	
★4.5-11.5	11.5			
4.5-19.9	19.9		6.1	250
4.7-3.5	3.5	4.7	6.0	1000
4.9-3	3.0	4.9	7.94	
4.9-4.5	4.5			
4.9-11.5	11.5			
4.9-13	13.0			
5-3.5	3.5	5.0	9.0	
5-4	4.0		12.0	
★5-4.2	4.2		7.0	
5-6.5L	6.5		9.5	
5-7.9L	7.9			
5-40	40.0		9.0	500
5.1-12.7	12.7	5.1	9.5	1000
5.2-2	2.0	5.2	6.8	
5.2-2.3	2.3			
5.2-3	3.0			
5.2-4.1	4.1			
5.2-7.5	7.5		7.6	
5.2-11	11.0			
5.2-13	13.0		6.8	
5.4-122	122.0	5.4	9.53	250
5.5-4	4.0	5.5	15.0	1000
5.55-11.8	11.8	5.55	7.0	
5-5	5.0	5.6	8.6	
5-6	6.0			
5-7.9	7.9			
5-8	8.0			
5-8.8	8.8			
5-11.8	11.8			
5-14	14.0			
5-16.5	16.5			
5-16.7	16.7			
5-17	17.0			
5-20	20.0			250
5.7-12.9	12.9	5.7	7.7	1000
5.7-14.1	14.1			
6-6	6.0	6.0	10.0	
6-22	22.0		15.0	250
6.2-6S	6.0	6.2	10.0	1000
6.2-12	12.0		10.4	
6.3-5	5.0	6.3	15.0	
6.3-20	20.0		12.7	250
6.4-3	3.0	6.4	12.0	1000

圓體間隔柱 ROUND SPACER

用途：做為 PC板之墊高用，尺寸齊全。

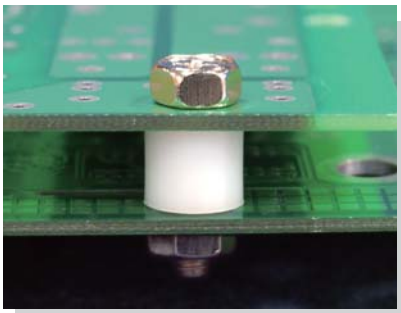


- Material: Nylon 66 (UL)/POM/TPE/ PE/PC(UL)/ABS(UL)/PPS
- Flame Class: 94V-2/94V-0/94HB
- Color: Natural/Black
- Unit: mm





Part No.	A(L)	B(ID)	C(OD)	Package
6.4-10	10.0	6.4	20.0	500
6.5-3	3.0	6.5	9.2	1000
6-4.2	4.2	6.6	10.6	
6-4.8	4.8	6.6	9.1	
6-16	15.7	6.6	9.1	
6.8-5	5.0	6.8	10.0	
6.9-12.7	12.7	6.9	12.7	
7-5.5	5.5	7.0	13.0	
7-8.7	8.7	7.0	10.0	
7.5-8.9	8.9	7.5	10.0	
7.5-29	29.0	7.5	11.0	250

Part No.	A(L)	B(ID)	C(OD)	Package
8-16	15.7	8.1	10.7	1000
8.2-5.5	5.5	8.2	12.0	
8.4-5	5.0	8.4	16.0	
8.5-4.6	4.6	8.5	10.3	
8.5-612	6.0	8.5	12.0	
8.5-8	7.9	8.5	11.0	
9.1-7.5	7.5	9.1	17.9	
9.25-4	4.0	9.25	12.25	
9.5-34	34.0	9.5	19.0	250
10-6	6.0	10.0	12.0	
1012-26	26.0	10.0	12.0	
12.4-5	5.0	12.4	22.0	
12.8-35	35.0	12.8	22.0	
13-5	5.0	13.0	24.0	
20.5-9.5	9.5	20.5	25.5	1000
29-16	16.0	29.5	33.5	

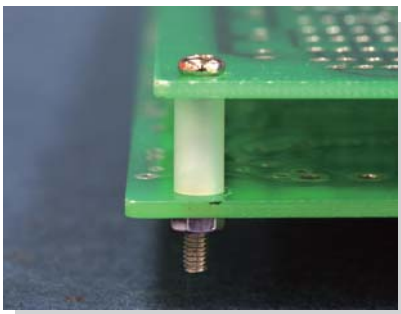

- Material: Nylon 66 (UL)/PBT(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A(L)	B(ID)	C(OD)	Package
2.6-2	2.0	2.6	4.5	2000
2.6-3	3.0			
2.6-4	4.0			
2.6-5	5.0			
2.6-6	6.0			
2.6-7	7.0			
2.6-8	8.0			
2.6-9	9.0			
2.6-10	10.0			
2.6-11	11.0			
2.6-12	12.0			
2.6-13	13.0			
2.6-14	14.0			
2.6-15	15.0			
2.6-16	16.0			


Part No.	A(L)	B(ID)	C(OD)	Package
2-1.8	1.8	2.2	3.7	2000
2-2	2.0			
2-2.5	2.5			
2-3	3.0			
2-3.2	3.2			
2-4	4.0			
2-4.3	4.3			
2-5	5.0			
2-5.3	5.3			
2-6	6.0			
2-7	7.0			
2-8	8.0			
2-9	9.0			
2-9.5	9.5			
2-10	10.0			
2-11	11.0			
2-12	12.0			
2-13	13.0			
2-14	14.0			
2-15	15.0			
2-16	16.0			

圓體間隔柱 ROUND SPACER

用途：做為 PC板之墊高用，尺寸齊全。

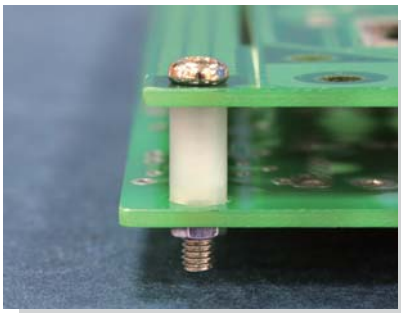


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





Part No.	A (L)	B (ID)	C (OD)	Package
3-1.5	1.5	3.2	5.0	2000
3-2	2.0			
3-2.5	2.5			
3-3	3.0			
3-3.3	3.3			
3-3.5	3.5			
3-4	4.0			
3-4.2	4.2			
3-4.5	4.5			
3-5	5.0			
3-5.1	5.05			
3-5.5	5.5			
3-6	6.0			
3-6.35	6.35			
3-7	7.0			
3-7.5	7.5			
3-8	8.0			
3-9	9.0			
3-9.5	9.5			
3-10	10.0			
3-10.5	10.5			
3-11	11.0			
3-12	12.0			

Part No.	A (L)	B (ID)	C (OD)	Package
3-13	13.0	3.2	5.0	1000
3-13.6	13.6			
3-14	14.0			
3-15	15.0			
3-15.5	15.5			
3-16	16.0			
3-16.5	16.5			
3-16.8	16.8			
3-17	17.0			
3-17.5	17.5			
3-18	18.0			
3-19	19.0			
3-20	20.0			
3-21	21.0			
3-22	22.0			
3-23	23.0			
3-24	24.0			
3-25	25.0			
3-25-6	25.0	3.0	6.0	
3-26	26.0	3.2	5.0	
3-27	27.0			
3-28	28.0			
3-29	29.0			
3-30	30.0			
3-35	35.0			

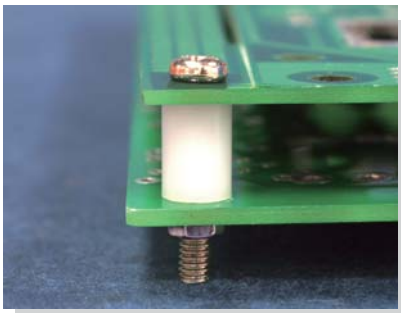

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A (L)	B (ID)	C (OD)	Package
3.5-1.6	1.6	3.5	6.3	2000
3.5-2	2.0			
3.5-3	3.0			
3.5-3.5	3.5			
3.5-4	4.0			
3.5-4.5	4.5			
3.5-5	5.0			
3.5-6	6.0			
3.5-6.4	6.4			
3.5-7	7.0			
3.5-7.5	7.5			
3.5-8	8.0			
3.5-9	9.0			
3.5-9.5	9.5			
3.5-10	10.0			
3.5-11	11.0			
3.5-12	12.0			1000
3.5-13	13.0			
3.5-14	14.0			
3.5-15	15.0			
3.5-15.5	15.5			
3.5-16	16.0			
3.5-17	17.0			
3.5-17.7	17.7			
3.5-18	18.0			
3.5-19	19.0			
3.5-20	20.0			
3.5-21	21.0	3.7		
3.5-22	22.0			
3.5-23	23.0			
3.5-24	24.0			
3.5-25	25.0			
3.5-26	26.0			
3.5-27	27.0			
3.5-28	28.0			
3.5-28.5	28.57	3.55	6.35	
3.5-29	29.0	3.7	6.3	
3.5-30	30.0			
3.5-35	35.0			


Part No.	A (L)	B (ID)	C (OD)	Package
4-2	2.0	4.2	6.3	2000
4-3	3.0			
4-3.4	3.4			
4-3.5	3.5			
4-4	4.0			
4-4.83	4.83			
4-5	5.0			
4-6	6.0			
4-7	7.0			
4-7.5	7.5			
4-8	8.0			
4-8.5	8.5			
4-9	9.0			
4-9.5	9.5			
4-10	10.0			
4-11	11.0			
4-12	12.0			
4-12.7	12.7			1000
4-13	13.0			
4-14	14.0			
4-15	15.0			
4-16	16.0			
4-17	17.0			
4-18	18.0			
4-19	19.0			
4-20	20.0			
4-21	21.0			
4-22	22.0			
4-23	23.0			
4-24	24.0			
4-25	25.0			
4-26	26.0			
4-27	27.0			
4-28	28.0			
4-28.7	28.7			
4-29	29.0			
4-30	30.0			
4-40	40.0			
4-45	45.0			

間隔柱 SPACER SUPPORT


用途：做為 PC板與PC板或機板間之固定不掉落。

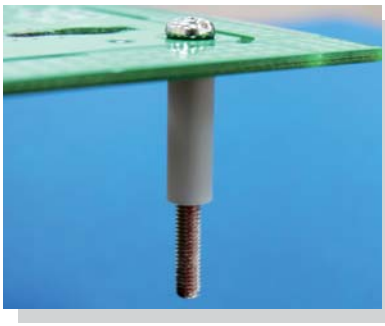

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ **KWH2-1.6**



Part No.	A	Package
★ KWH2-1.6	1.57	1000
KWH2-2	2.0	2000
KWH2-3	3.0	
KWH2-3.5	3.5	
KWH2-4	4.0	
KWH2-5	5.0	
KWH2-6	6.0	
KWH2-6.3	6.3	
KWH2-7	7.0	
KWH2-8	8.0	
KWH2-9	9.0	
KWH2-9.5	9.5	
KWH2-10	10.0	
KWH2-11	11.0	
KWH2-11.5	11.5	
KWH2-12	12.0	
KWH2-12.7	12.7	
KWH2-13	13.0	

Part No.	A	Package
KWH2-14	14.0	2000
KWH2-15	15.0	
KWH2-15.9	15.9	
KWH2-16	16.0	
KWH2-17	17.0	
KWH2-18	18.0	
KWH2-19	19.0	
KWH2-20	20.0	1000
KWH2-21	21.0	
KWH2-22	22.0	
KWH2-23	23.0	
KWH2-24	24.0	
KWH2-25	25.0	
KWH2-25.4	25.4	
KWH2-26	26.0	
KWH2-27	27.0	
KWH2-28	28.0	
KWH2-29	29.0	
KWH2-30	30.0	

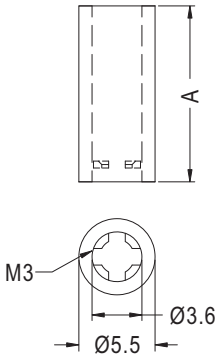


Part No.	A	Package
KWH3-2	2.0	2000
KWH3-3	3.0	
KWH3-3.5	3.5	
KWH3-4	4.0	
KWH3-5	5.0	
KWH3-6	6.0	
KWH3-6.3	6.3	
KWH3-7	7.0	
KWH3-8	8.0	
KWH3-9	9.0	
KWH3-9.5	9.5	
KWH3-10	10.0	
KWH3-11	11.0	
KWH3-11.5	11.5	
KWH3-12	12.0	
KWH3-12.7	12.7	
KWH3-13	13.0	
KWH3-14	14.0	


Part No.	A	Package
KWH3-15	15.0	2000
KWH3-15.9	15.9	
KWH3-16	16.0	
KWH3-17	17.0	
KWH3-18	18.0	
KWH3-19	19.0	
KWH3-20	20.0	1000
KWH3-21	21.0	
KWH3-22	22.0	
KWH3-23	23.0	
KWH3-24	24.0	
KWH3-25	25.0	
KWH3-25.4	25.4	
KWH3-26	26.0	
KWH3-27	27.0	
KWH3-28	28.0	
KWH3-29	29.0	
KWH3-30	30.0	

間隔柱 SPACER SUPPORT

用途：做為 PC板與 Pc板或機板間之固定不掉落。

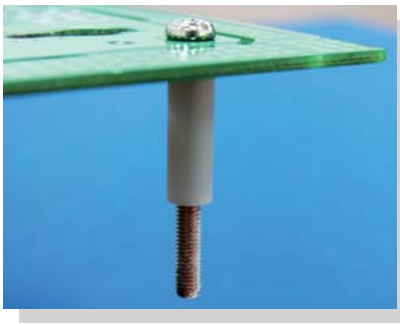


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
KWH3.5-2	2.0	2000
KWH3.5-3	3.0	
KWH3.5-4	4.0	
KWH3.5-5	5.0	
KWH3.5-6	6.0	
KWH3.5-6.3	6.3	
KWH3.5-7	7.0	
KWH3.5-8	8.0	
KWH3.5-9	9.0	
KWH3.5-10	10.0	
KWH3.5-11	11.0	
KWH3.5-12	12.0	
KWH3.5-12.7	12.7	
KWH3.5-13	13.0	
KWH3.5-14	14.0	
KWH3.5-15	15.0	

Part No.	A	Package
KWH3.5-15.9	15.9	2000
KWH3.5-16	16.0	
KWH3.5-17	17.0	
KWH3.5-18	18.0	
KWH3.5-19	19.0	
KWH3.5-20	20.0	1000
KWH3.5-21	21.0	
KWH3.5-22	22.0	
KWH3.5-23	23.0	
KWH3.5-24	24.0	
KWH3.5-25	25.0	
KWH3.5-25.4	25.4	
KWH3.5-26	26.0	
KWH3.5-27	27.0	
KWH3.5-28	28.0	
KWH3.5-29	29.0	
KWH3.5-30	30.0	



Part No.	A	Package
KWH4-2	2.0	2000
KWH4-3	3.0	
KWH4-4	4.0	
KWH4-5	5.0	
KWH4-6	6.0	
KWH4-6.3	6.3	
KWH4-7	7.0	
KWH4-8	8.0	
KWH4-9	9.0	
KWH4-10	10.0	
KWH4-11	11.0	
KWH4-12	12.0	
KWH4-12.7	12.7	
KWH4-13	13.0	
KWH4-14	14.0	
KWH4-15	15.0	


Part No.	A	Package
KWH4-15.9	15.9	2000
KWH4-16	16.0	
KWH4-17	17.0	
KWH4-18	18.0	
KWH4-19	19.0	
KWH4-20	20.0	1000
KWH4-21	21.0	
KWH4-22	22.0	
KWH4-23	23.0	
KWH4-24	24.0	
KWH4-25	25.0	
KWH4-25.4	25.4	
KWH4-26	26.0	
KWH4-27	27.0	
KWH4-28	28.0	
KWH4-29	29.0	
KWH4-30	30.0	




Part No.	A	Package
KWH4-9.5L	9.5	2000

間隔柱 SPACER SUPPORT

用途：做為 PC板與 PC板或機板間之固定不掉落。

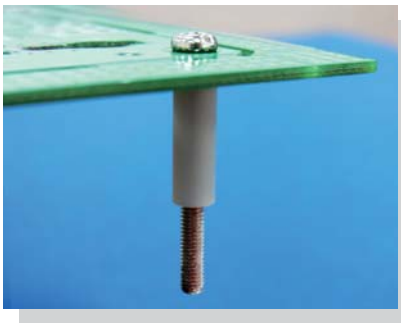

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
KWH440-2	2.0	2000
KWH440-3	3.0	
KWH440-4	4.0	
KWH440-5	5.0	
KWH440-6	6.0	
KWH440-6.3	6.3	
KWH440-7	7.0	
KWH440-8	8.0	
KWH440-9	9.0	
KWH440-9.5	9.5	
KWH440-10	10.0	
KWH440-11	11.0	
KWH440-12	12.0	
KWH440-12.7	12.7	
KWH440-13	13.0	
KWH440-14	14.0	
KWH440-15	15.0	


Part No.	A	Package
KWH440-15.9	15.9	2000
KWH440-16	16.0	
KWH440-17	17.0	
KWH440-18	18.0	
KWH440-19	19.0	
KWH440-20	20.0	1000
KWH440-21	21.0	
KWH440-22	22.0	
KWH440-23	23.0	
KWH440-24	24.0	
KWH440-25	25.0	
KWH440-25.4	25.4	
KWH440-26	26.0	
KWH440-27	27.0	
KWH440-28	28.0	
KWH440-29	29.0	
KWH440-30	30.0	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，六角型不滑動。

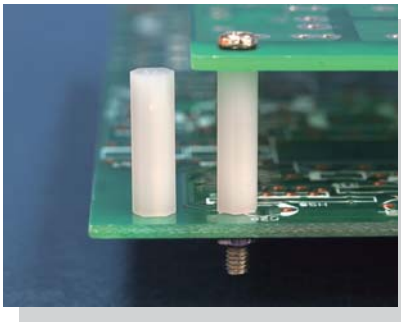

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPS2-4	4.0	1000
HPS2-4.5	4.5	
HPS2-5	5.0	
HPS2-6	6.0	
HPS2-7	7.0	
HPS2-8	8.0	
HPS2-9	9.0	
HPS2-10	10.0	
HPS2-11	11.0	
HPS2-12	12.0	
HPS2-12.7	12.7	




Part No.	A	Package
HPS2-13	13.0	1000
HPS2-14	14.0	
HPS2-15	15.0	
HPS2-16	16.0	
HPS2-17	17.0	
HPS2-18	18.0	
HPS2-19	19.0	
HPS2-20	20.0	
HPS2-21	21.0	
HPS2-22	22.0	
HPS2-23	23.0	
HPS2-24	24.0	
HPS2-25	25.0	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間隔之固定，六角型不滑動。

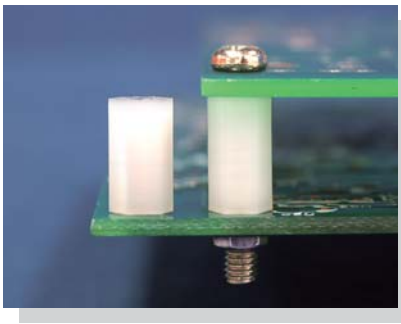


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HP2-4	4.0	1000
HP2-5	5.0	
HP2-6	6.0	
HP2-7	7.0	
HP2-8	8.0	
HP2-9	9.0	
HP2-10	10.0	
HP2-11	11.0	
HP2-12	12.0	




Part No.	A	Package
HP2-13	13.0	1000
HP2-14	14.0	
HP2-15	15.0	
HP2-16	16.0	
HP2-17	17.0	
HP2-18	18.0	
HP2-18.8	18.8	
HP2-19	19.0	
HP2-20	20.0	
HP2-21	21.0	
HP2-22	22.0	
HP2-23	23.0	
HP2-24	24.0	
HP2-25	25.0	
HP2-26	26.0	
HP2-27	27.0	
HP2-28	28.0	

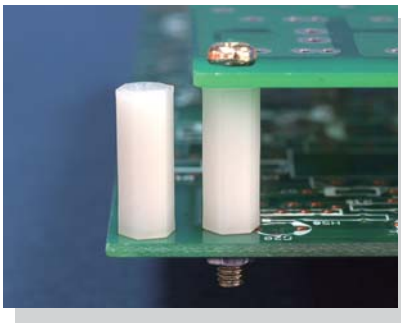


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPS2.5-11	1000

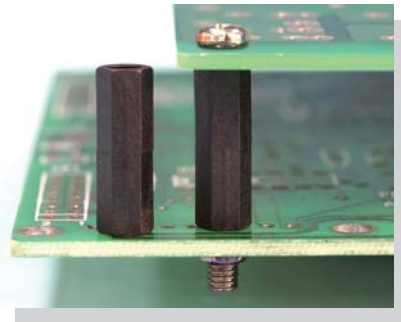


- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
HPS2.5-16.5	1000

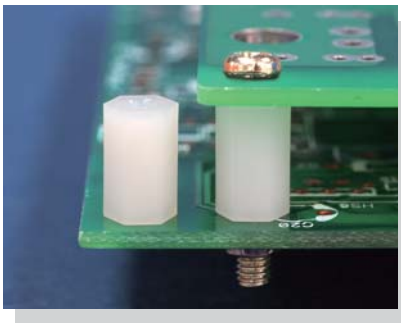

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HP2.5-10	1000




Part No.	Package
HP2.5-31	1000

塑膠銅柱 STANDOFF

用途：做為 PC板與機板間之固定。

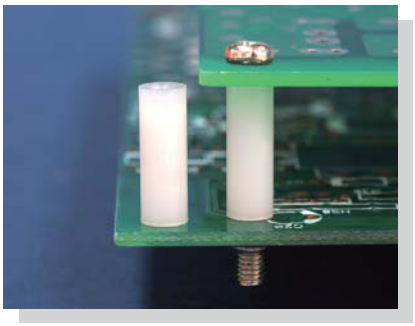


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
HPP25-14.5	14.5	6.0	1000
HPP25-20	20.0	9.0	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，六角型不滑動。

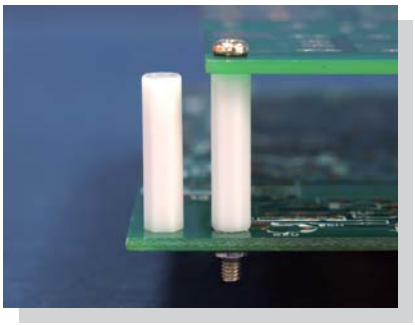


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPS2.6-18	18.0	1000
HPS2.6-19	19.0	
HPS2.6-31.75	31.75	

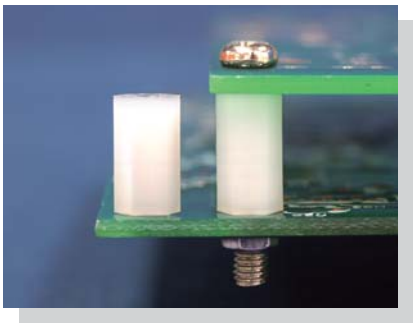

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	Package
HPS-6	6.0	1000
HPS-8	8.0	
HPS-10	10.0	
HPS-12	12.0	


Part No.	A	Package
HPS-15	15.0	1000
HPS-17.4	17.4	
HPS-18	18.0	
HPS-20	20.0	
HPS-25	25.0	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，六角型不滑動。

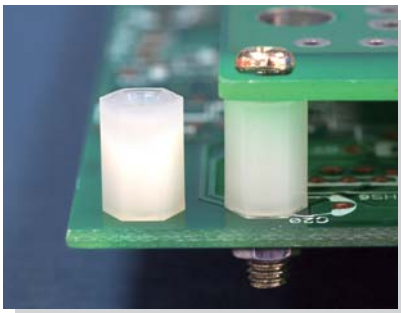

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HP-4	4.0	1000
HP-5	5.0	
HP-6	6.0	
HP-6.3	6.35	
HP-7	7.0	
HP-8	8.0	
HP-8.5	8.5	
HP-9	9.0	
HP-9.5	9.5	
HP-10	10.0	
HP-10.5	10.5	
HP-11	11.0	
HP-12A	12.0	
HP-12	12.7	



◆ 產品兩端皆有螺牙可供鎖付


Part No.	A	B	Package
HP-13.5	13.5	6.0	1000
HP-14	14.0		
HP-14.5	14.5		
HP-15	15.0		
HP-15.5	15.5		
HP-16	16.0		
HP-16.5	16.5		
HP-17	17.0		
HP-18	18.0		
HP-19	19.0		
HP-20	20.0		
HP-21.5	21.5		
HP-22	22.0		
HP-24	24.0		
HP-25	25.0		
HP-26	26.0		
HP-27	27.0		




FOR HP-34

◆ 產品兩端皆有螺牙可供鎖付

Part No.	A	B	Package
HP-28.6	28.6	6.0	1000
HP-30	30.0		
HP-30.8	30.8		
HP-32	32.0		
HP-34	34.0	8.0	
HP-35	35.0	6.0	500
HP-37	37.0	8.0	
HP-38	38.0	6.0	
HP-40	40.0		
HP-42	42.0		
HP-45	45.0		
HP-47	47.0		
HP-49	49.0		
HP-52	52.0		
HP-54	54.0		
HP-55.5	55.5	8.0	
HP-60.2	60.2	8.0	
HP-76.7	76.7	8.5	

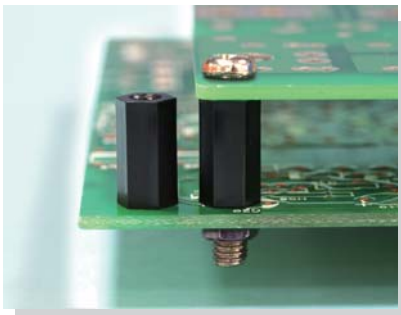


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	L	Package
HPH-10	10.0	2000
HPH-12	12.0	
HPH-15	15.0	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，六角型不滑動。

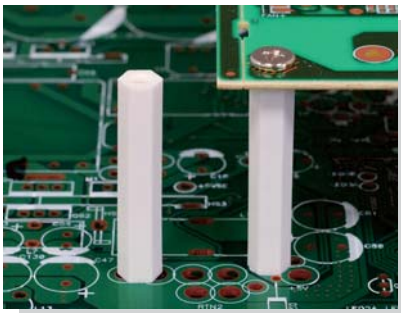


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPH-34	1000

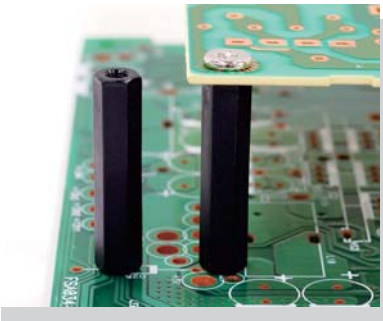

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	Package
HPL-30	30.0	500
HPL-40	40.0	


Part No.	Package
HPL-100	500


塑膠銅柱 STANDOFF

用途：做為 PC板與機板間之固定。

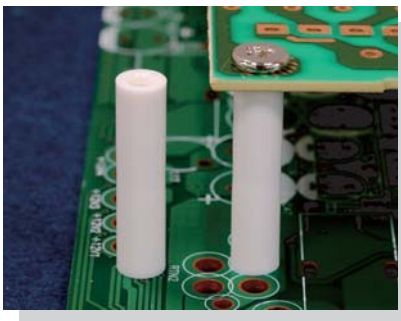

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm







Part No.	A	Package
HPP3-9	9.0	1000
HPP3-9.5	9.5	

Part No.	A	Package
HPP3-25	25.0	1000


用途：做為 PC板與機板間之固定，六角型不滑動。

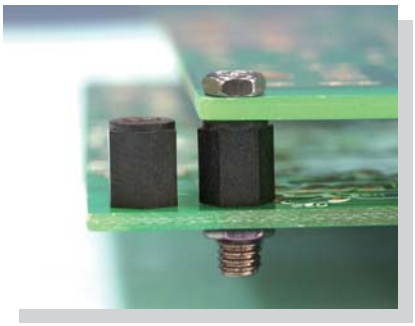


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPR3-7	1000

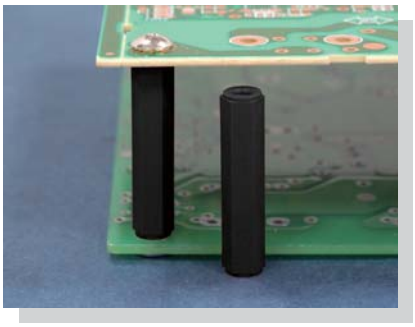


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPR-20	20.0	1000
HPR3-30	30.0	

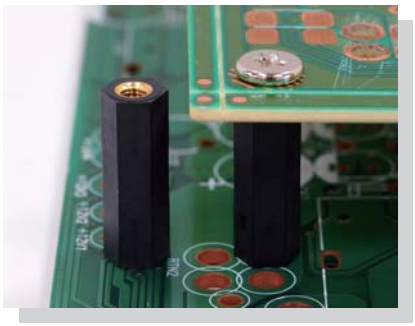


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPC-11.9	11.9	1000
HPC-15	15.0	



Part No.	A	Package
HPC-19	19.0	1000
HPC-30	30.0	
HPC-45	45.0	

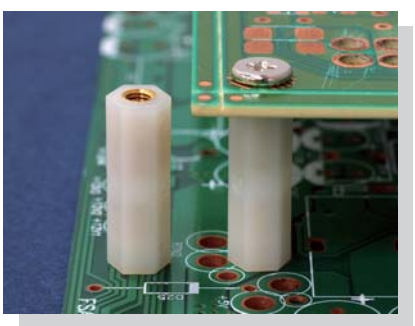


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPCA-21	1000

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，六角型不滑動。

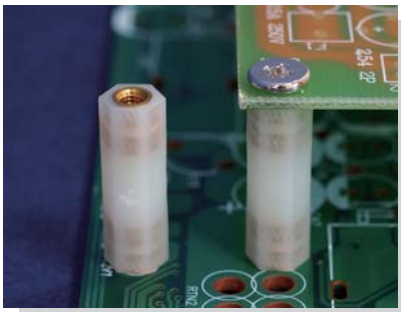


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPC-21	1000




Part No.	Package
HPC-73	1000

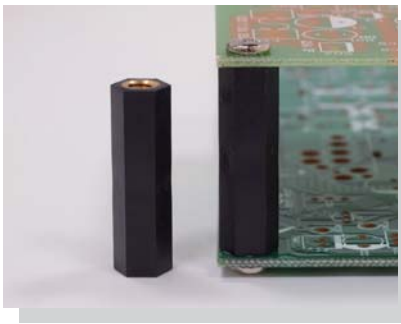


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPC4-30	30.0	1000
HPC4-35	35.0	
HPC4-40	40.0	

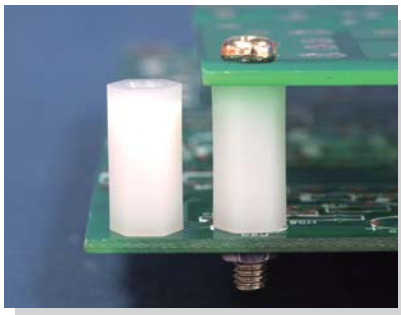


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HP4-6	6.0	1000
HP4-7	7.0	
HP4-8	8.0	
HP4-9	9.0	
HP4-10	10.0	
HP4-11	11.0	
HP4-12	12.0	
HP4-12.7	12.7	




Part No.	A	Package
HP4-14	14.0	1000
HP4-16	16.0	
HP4-20	20.0	
HP4-25	25.0	
HP4-26	26.0	
HP4-30	30.0	
HP4-35	35.0	
HP4-40	40.0	
HP4-45S	45.0	
HP4-45	45.5	

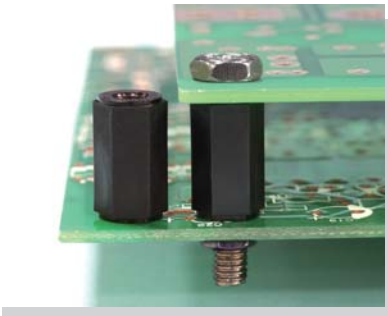

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPR4-10	1000




Part No.	Package
HPR4-15	1000


用途：做為 PC板與機板間之固定，六角型不滑動。

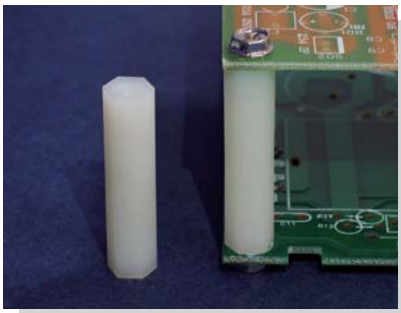


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPL4-37	1000

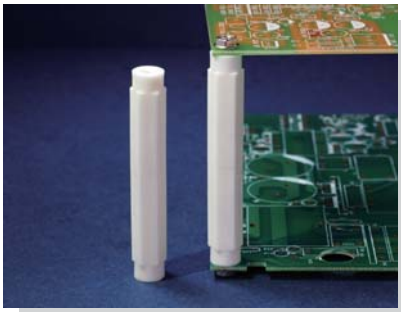


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPR4-70L	500

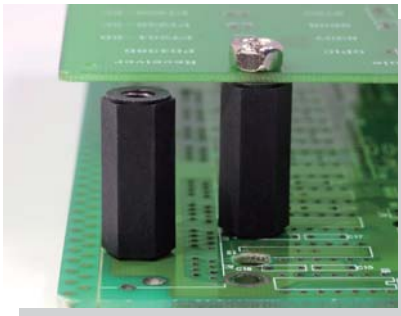


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
HPR5-25	25.0	1000
HPR5-45	45.0	500

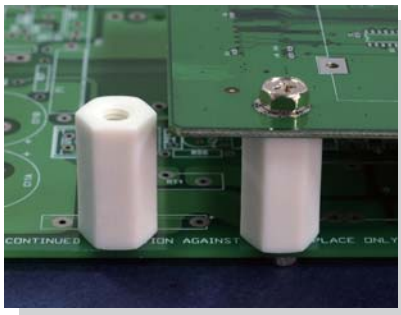


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HP6-25	500

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，六角型不滑動。

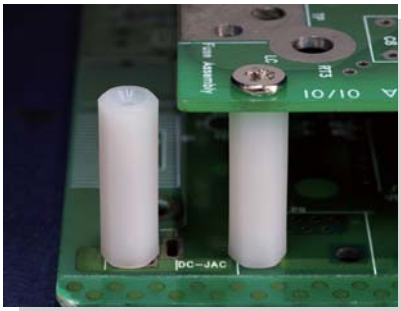


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HP44L-8	1000




Part No.	A	B	Package
HP44L-22	22.2	9.0	1000
HP44L-23.8	23.8	6.4	
HP44L-25.4	25.4	9.0	
HP44L-28.6	28.6	6.4	

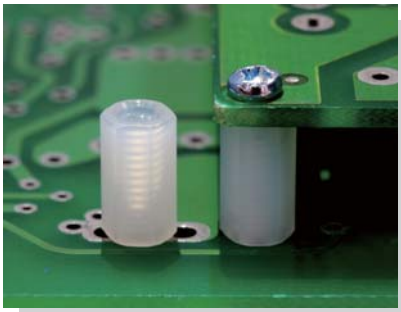


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
HP440-9.5	9.5	4.8	1000
HP440-7.9S	7.9	4.75	
HP440-15.9S	15.88	4.75	

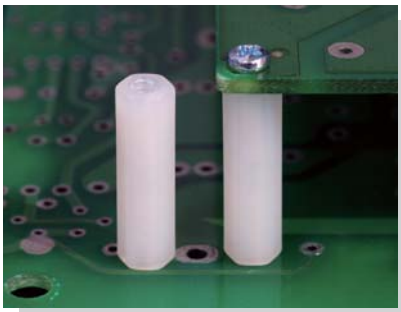


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HP440-18	1000




Part No.	Package
HPC44-21	1000

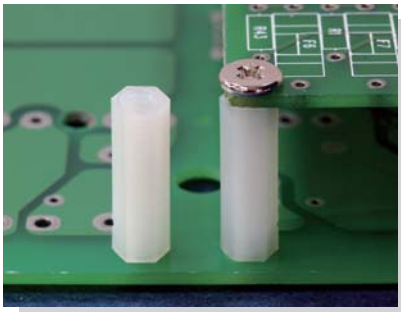

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPS632-12	1000




Part No.	Package
HPS632-19.1	1000

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，六角型不滑動。

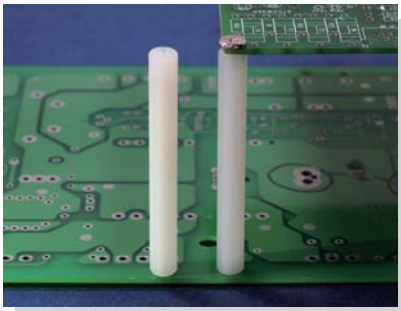


- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- UNIT:mm




Part No.	Package
HP632-64	250

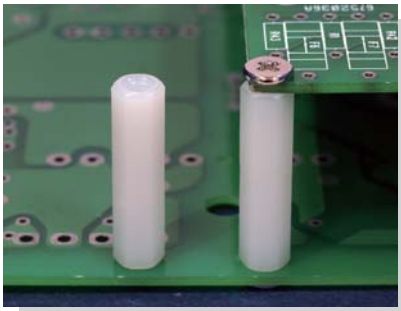


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	B	Package
HP632-6.4	6.4	6.35	1000
HP632-9.5	9.5	6.35	
HP632-12.7	12.7	6.35	

Part No.	A	B	Package
HP632-28.5	28.5	6.35	1000
HP632-31.8	31.8	6.35	
HP632-38.1	38.1	6.35	
HP632-25.4	25.4	6.4	

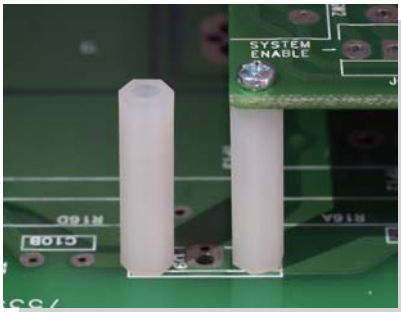

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ 無攻牙

(CLEAR WITHOUT TAPPING)


Part No.	A	Package
HP48-20	20.0	1000
HP48-32	32.0	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定。

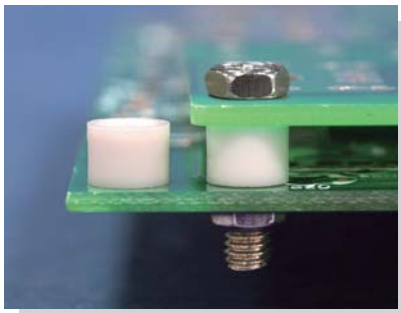


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm



Part No.	Package
HPP4-4.5	1000

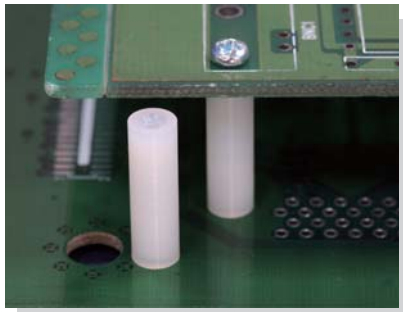

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HP256-16	1000

塑膠銅柱 STANDOFF

用途：做為牙管的延伸與對接。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




Part No.	Package
HP2050	1000

塑膠銅柱 STANDOFF


用途：做為斷路器保護，避免誤觸。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
M-3/8-27	1000

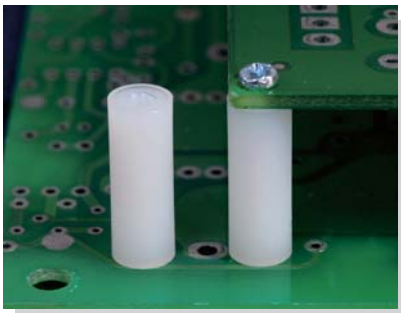


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPP440-6.35	6.35	1000
HPP440-11.2	11.2	




Part No.	Package
HPP440-17.4	1000

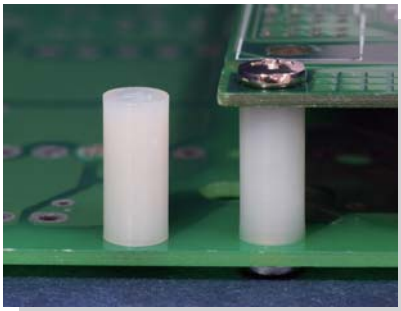


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPP632-14	1000



Part No.	Package
HPP632-51	200

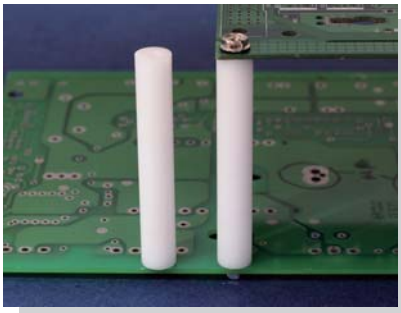


- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
HPP10-64	250

塑膠螺柱 THREADED SPACER

用途：做為於零件之墊高。

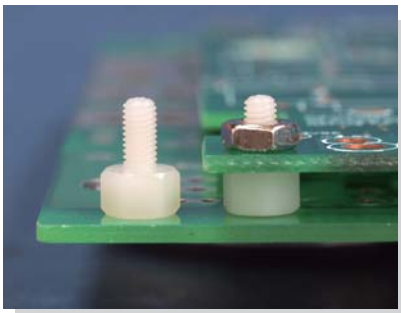


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TPA-4	1000

塑膠螺柱 THREADED SPACER


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

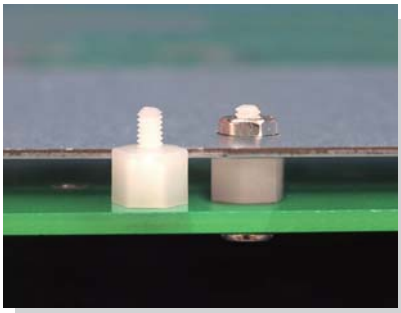


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TP2L-4	1000

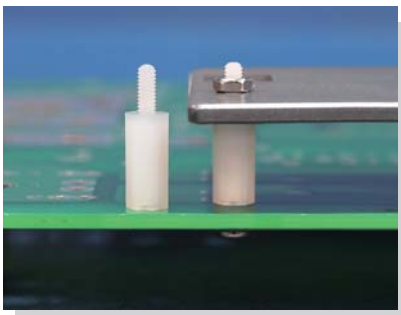

- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- UNIT:mm




Part No.	A	B	C	Package
TP2-5S	5.0	3.0	4.0	1000
TP2-6.5S	6.5	4.0		
TP2-8S	8.0	4.0		
TP2-10S	10.0	4.0		
TP2-15S	15.0	4.0		
TP2-4	4.0	2.5		
TP2-5	5.0	3.0		
TP2-5.5	5.5			


Part No.	A	B	C	Package
TP2-6	6.0	4.0	5.0	1000
TP2-6.5	6.5			
TP2-7	7.0			
TP2-8	8.0	5.0		
TP2-9	9.0			
TP2-10	10.0			
TP2-11	11.0			
TP2-12	12.0			
TP2-13	13.0			
TP2-14	14.0			
TP2-15	15.0			
TP2-16	16.0			
TP2-17	17.0			
TP2-18	18.0			
TP2-19	19.0			
TP2-20	20.0			
TP2-21	21.0			
TP2-22	22.0			
TP2-23	23.0			
TP2-24	24.0			
TP2-25	25.0			
TP2-26	26.0			
TP2-27	27.0			
TP2-28	28.0			

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

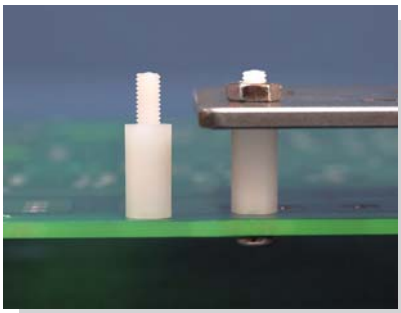

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TP2.5-2-6	1000




Part No.	A	B	Package
TP2.5-5	5.0	3.0	1000
TP2.5-6	6.0	4.0	
TP2.5-7	7.0	5.0	
TP2.5-8	8.0	5.0	

Part No.	A	B	Package
TP2.5-9	9.0	5.0	1000
TP2.5-10	10.0	5.0	
TP2.5-11	11.0	5.0	
TP2.5-12	12.0	5.0	
TP2.5-13	13.0	5.0	
TP2.5-14	14.0	5.0	
TP2.5-15	15.0	5.0	
TP2.5-16	16.0	5.0	
TP2.5-17	17.0	5.0	
TP2.5-18	18.0	5.0	
TP2.5-19	19.0	5.0	
TP2.5-20	20.0	5.0	
TP2.5-21	21.0	5.0	
TP2.5-22	22.0	5.0	
TP2.5-23	23.0	5.0	
TP2.5-24	24.0	5.0	
TP2.5-25	25.0	5.0	
TP2.5-26	26.0	5.0	
TP2.5-27	27.0	5.0	
TP2.5-28	28.0	5.0	

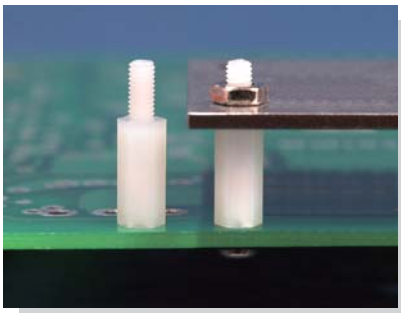

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
TP2.6-4	4.0	2.0	1000
TP2.6-5	5.0	3.0	
TP2.6-6	6.0	4.0	
TP2.6-7	7.0	5.0	
TP2.6-8	8.0	5.5	
TP2.6-9	9.0		
TP2.6-10	10.0		
TP2.6-11	11.0		
TP2.6-12	12.0		
TP2.6-12.7	12.7		
TP2.6-13	13.0		
TP2.6-14	14.0		
TP2.6-15	15.0		


Part No.	A	B	Package
TP2.6-16	16.0	5.5	1000
TP2.6-17	17.0		
TP2.6-18	18.0		
TP2.6-19	19.0		
TP2.6-20	20.0		
TP2.6-21	21.0		
TP2.6-22	22.0		
TP2.6-23	23.0		
TP2.6-24	24.0		
TP2.6-25	25.0		
TP2.6-26	26.0		
TP2.6-27	27.0		
TP2.6-28	28.0		

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

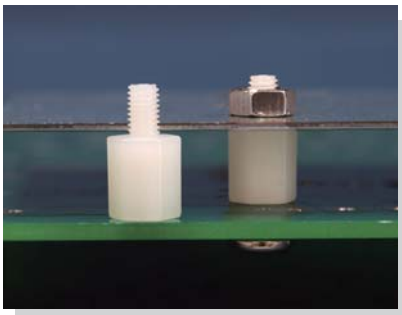


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	E	Package
TP3-2.5-6	6.0	3.5	3.0	M2.5X0.45P	1000
TP3-7.5	7.5	6.25	4.76	M3X0.5P	

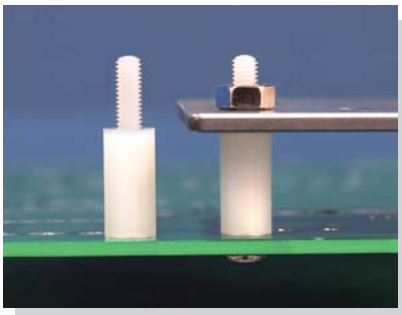


- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- UNIT:mm



Part No.	A	C	Package
TPS-10	10.0	8.0	1000
TPS-10S	10.0	5.0	
TPS-12	12.0	8.0	
TPS-15	15.0		
TPS-18	18.0		
TPS-20	20.0		
TPS-25	25.0		

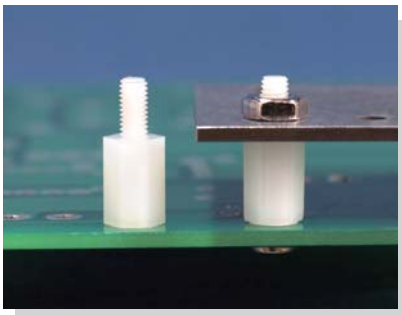


- Material: Nylon 66 (UL)
- Flame Class: 94V-294V-0
- Color: Natural/Black
- UNIT:mm




Part No.	A	B	D	Package
TP-4	4.0	3.0	5.5	1000
TP-5	5.0	3.0		
TP-6	6.0	4.0		
TP-7	7.0	5.0		
TP-7.5	7.5	5.0		
TP-8	8.0	6.0		
TP-8.5	8.5	6.0		
TP-9	9.0	6.0		
TP-9.5	9.5	6.0		
TP-10	10.0	6.0		
TP-10.5	10.5	6.0		
★TP-10.8L	10.8	6.0		
TP-11	11.0	6.0		
TP-12A	12.0	6.0		
TP-12	12.7	6.0		

Part No.	A	B	C	Package
TP-13	13.0	6.0	5.5	1000
TP-14	14.0	6.0		
TP-15	15.0	6.0		
TP-15.5	15.5	6.0		
TP-16	16.0	6.0		
TP-16.5	16.5	6.0		
TP-17	17.0	6.0		
TP-18	18.0	6.0		
TP-18.5	18.5	6.0		
TP-19	19.0	6.0		
TP-20	20.0	8.0		
TP-21	21.0	6.0		
TP-22	22.0	6.0		
TP-24.5	24.5	6.0		
TP-25	25.0	6.0		
TP-27	27.0	6.0		
TP-28	28.0	6.0		
TP-28.5	28.5	6.0		
TP-30	30.0	8.0	6.0	
TP-32.7L	32.7	10.0	5.5	
TP-33	33.0	6.0		
TP-34.5	34.5	6.0		
TP-35	35.0	6.0		
TP-36	36.0	6.0		
TP-40	40.0	6.0		
TP-45	45.0	6.0		
TP-53.5	53.5	6.0		
TP-55.5	55.5	8.0		


用途：做為 PC 板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

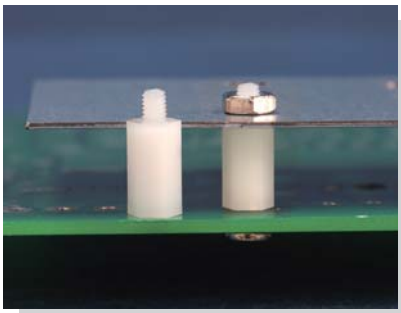


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
TP-5S	5.0	4.0	3.5	1000
TP-5SM	5.0	4.0	5.0	
TP-6S	6.0	4.0	5.0	
TP-7-4	7.0	5.0	4.0	
TP-9-4	9.0	6.0	4.0	
TP-10.8	10.8	6.0	3.5	
TP-11.2	11.2	6.0	3.5	
TP-16S	16.0	6.0	4.0	
TP-18S	18.0	6.0	5.0	
TP-20S	20.0	8.0	5.0	

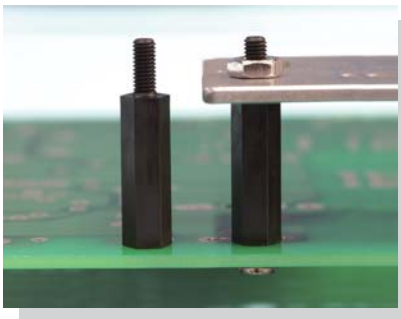


- Material: POM
- Color: Black
- Unit: mm

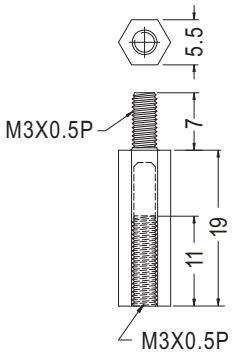


Part No.	Package
TPD-19	1000

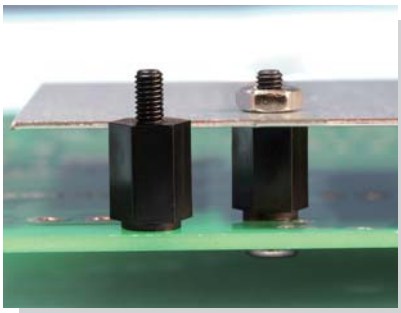


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	Package
TP3-6L	6.0	4.0	8.0	6.0	1000
★ TP3-10L	10.0	8.0			
TP3-10.4	10.4	7.0	5.0	7.0	
★ TP3-12L	12.0	10.0	8.0	6.0	

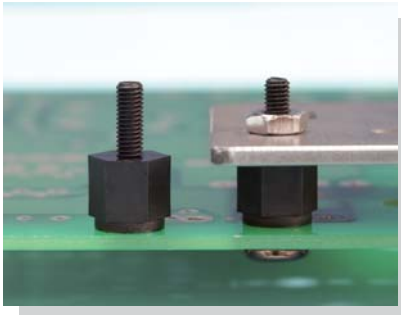


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TP-8L	1000

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

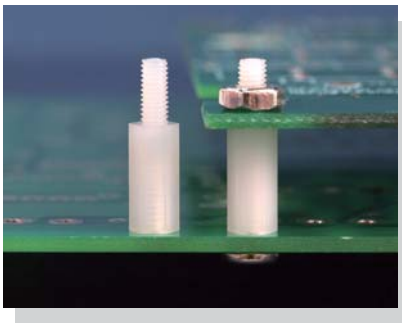


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TPS44-11	1000

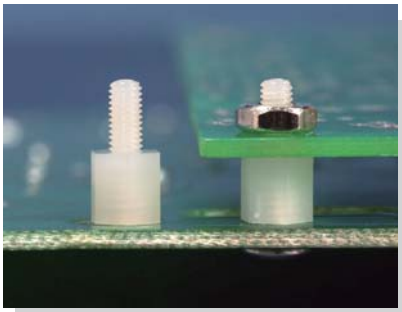


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TPS632-6	1000

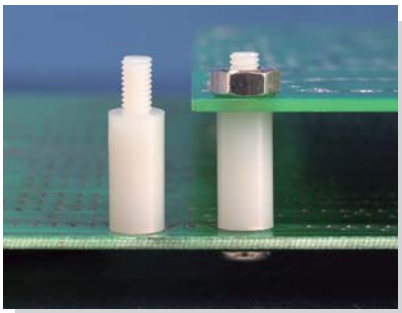


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TPR4-15	1000

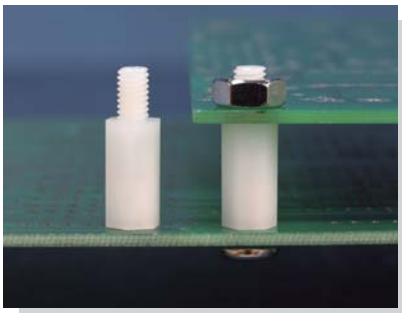


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

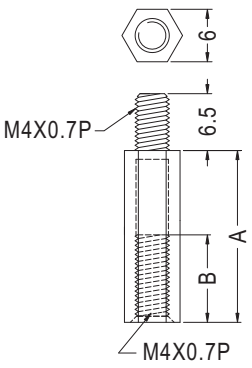



Part No.	A	B	Package
TPS4-13	13.0	6.0	1000
TPS4-30	30.0	10.0	
TPS4-55	55.0	10.0	

用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

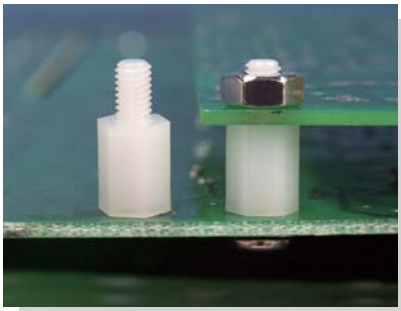


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






◆ **TP4-10LS**


Part No.	A	B	C	D	Package
TP4-6	6.0	4.0	6.5	7.0	1000
TP4-8	8.0	6.0			
TP4-10	10.0	6.0			
★TP4-10LS	10.0	7.0	8.0		
TP4-10L				8.0	
TP4-12	12.0	6.0	6.5	7.0	
TP4-13	13.0	6.0			
TP4-14	14.0	6.0			
TP4-15	15.0	6.0			
TP4-16	16.0	7.0			
TP4-17	17.0	7.0			
TP4-19	19.0	7.0			
TP4-20	20.0	8.0			
TP4-25	25.0	8.0			
TP4-27	27.0	8.0			
TP4-30	30.0	8.0			
TP4-34	34.0	8.0			
TP4-35	35.0	8.0			
TP4-37	37.0	8.0			
TP4-40	40.0	8.0			
TP4-45	45.5	8.0			
TP4-57	57.0	8.0			

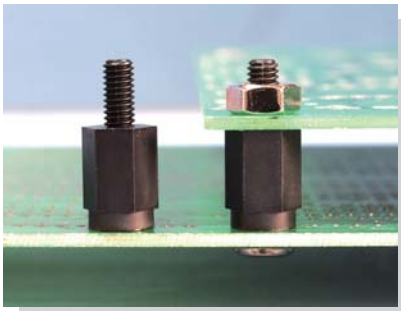


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	Package
★TP4-10R	10.0	8.0	1000
TP4-11R	11.0	9.0	
TP4-12L	12.0	10.0	
TP4-14L	14.0	10.0	
TP4-20L	20.0	10.0	
TP4-32L	32.0	10.0	500
TP4-35L	35.0	10.0	

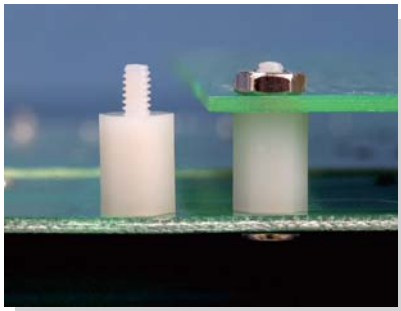


- Material: Nylon 46 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	D	Package
★ TP440-25.4	25.4	4.75	4.75	6.35	1000

塑膠銅柱 STANDOFF


用途：做為 PC 板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

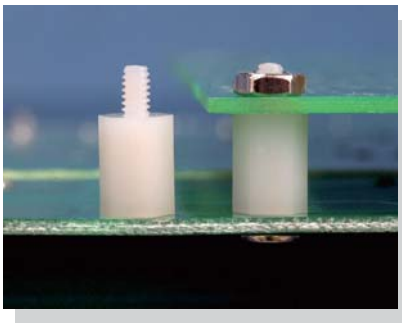


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	Package
TP440-6.4	6.4	4.0	4.8	6.4	1000
TP440-6.4-4.8	6.4	4.8			
TP440-7	7.0	4.0			
TP440-8S	8.0	6.35	4.8	4.8	
TP440-9.5	9.5	6.0	4.8	6.4	
TP440-12.7	12.7	6.0			
TP440-15.9	15.9	6.0			
TP440-19.1	19.1	6.0			
TP440-28.7	28.7	6.0	4.8	6.4	

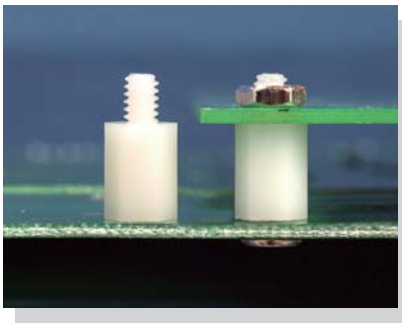


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TP632-M310	1000

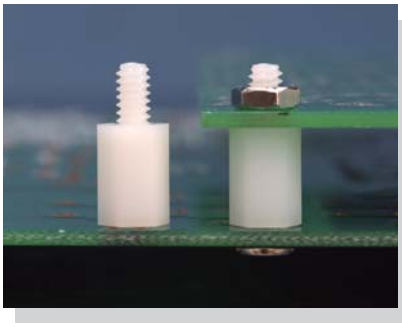

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	Package
TP632-5S	5.0	3.0	5.0	6.3	1000
TP632-5.5S	5.5	3.5			
TP632-6S	6.0	4.0			
TP632-6.3S	6.3	4.0			
TP632-8S	8.0	6.0			
TP632-9S	9.0	6.0			
TP632-10S	10.0	6.0			
TP632-11S	11.0	6.0			
TP632-12S	12.0	6.0			
TP632-12.7S	12.7	6.0			
TP632-15.9S	15.9	6.0			
TP632-19.1S	19.1	6.0			
TP632-25.4S	25.4	6.0			
TP632-31.8S	31.8	6.0			


Part No.	A	B	C	D	Package
TP632-5	5.0	3.0	6.0	6.3	1000
TP632-5.5	5.5	3.5			
TP632-6	6.0	4.0			
TP632-6.3	6.3	4.0			
TP632-8	8.0	6.0			
TP632-9	9.0	6.0			
TP632-10	10.0	6.0			
TP632-11	11.0	6.0			
TP632-12	12.0	6.0			
TP632-12.7	12.7	6.0			
TP632-15.9	15.9	6.0			
TP632-17.5L	17.5	6.4	6.4	6.4	
TP632-19.1	19.1	6.0	6.0	6.3	
TP632-25.4	25.4	6.0			
TP632-28.6	28.6	9.5			
TP632-31.8	31.8	6.0			
TP632-51	51.0	6.0			

塑膠銅柱 STANDOFF


用途：PC板與PC板間之固定，不佔空間。

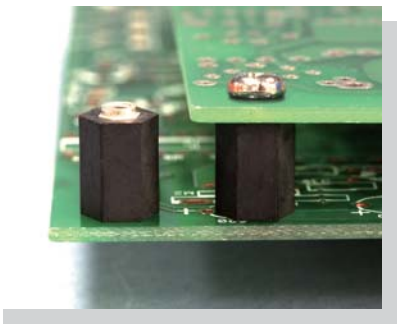


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
HPB2.5-10	1000

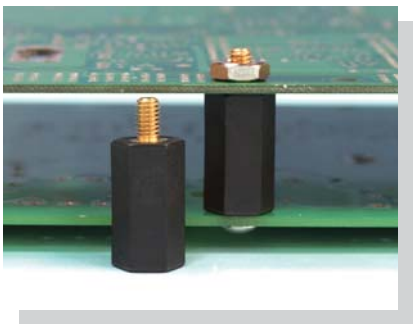


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

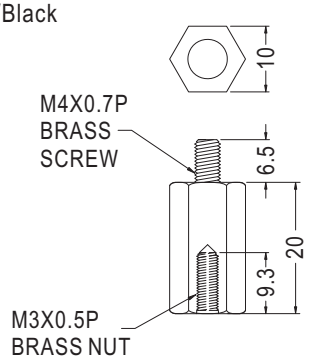


Part No.	Package
MTPA4-3-20	1000

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

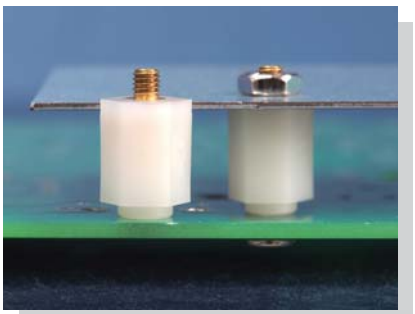


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MTPE3-12	1000

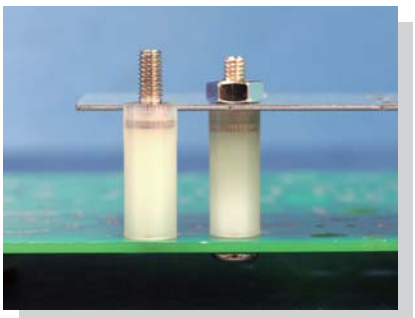


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
MTPC4-20	20.0	1000
MTPC4-57	57.0	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

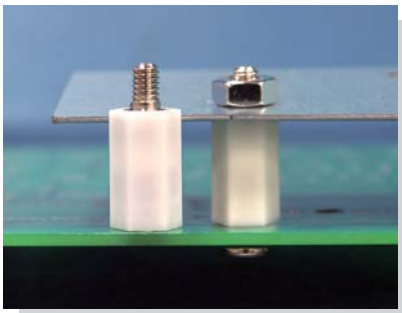


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MTPA4-15-1	1000




Part No.	B	Package
MTPA4-15	6.0	1000
MTPA4-15L	8.0	

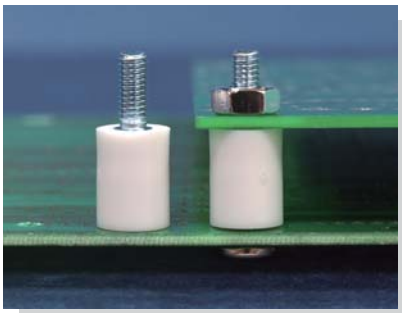

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MTP4-12.7	1000

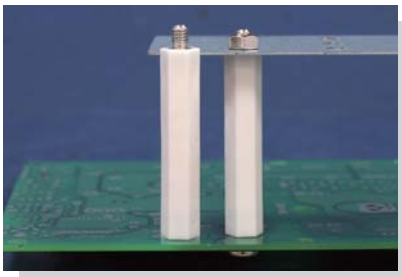





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MTPA5-4-50	250



Part No.	Package
MTPA6-5-30	1000

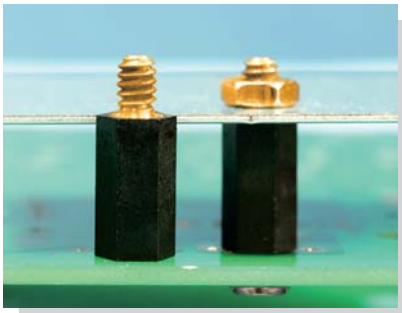


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MTPD632-11.9	1000


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

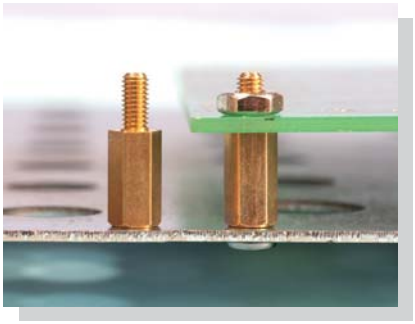


- Material: Brass
- Unit: mm




Part No.	Package
TP-10BA	1000

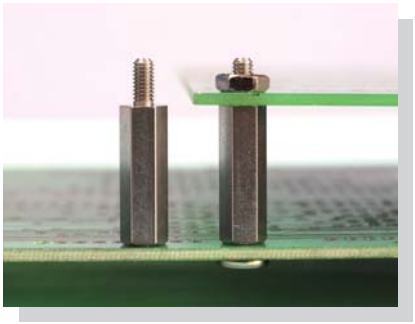


- Material: Steel/SUS
- Unit: mm

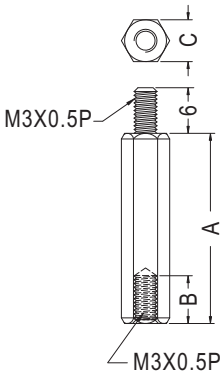


Part No.	A	B	C	E	Package
TP-25ST	25.0	6.0	5.0	STEEL	500
TP-30SUS	30.0			SUS	
TP-18SUS	18.0	8.0	5.5		
TP-55SUS	54.9				

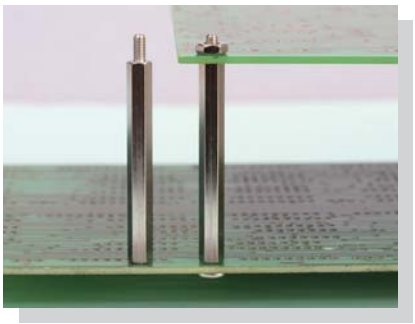


- Material: Steel
- Unit: mm

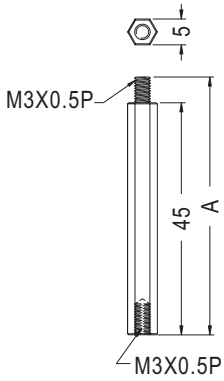


Part No.	A	Package
TP3-45ST	51.0	500
TP3-45LST	52.0	

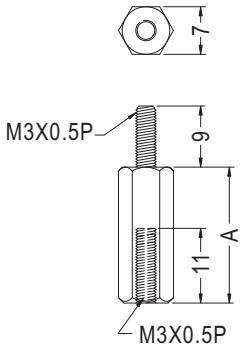


Part No.	A	Package
TPB3-20NI	20.0	500
TPB3-40NI	40.0	

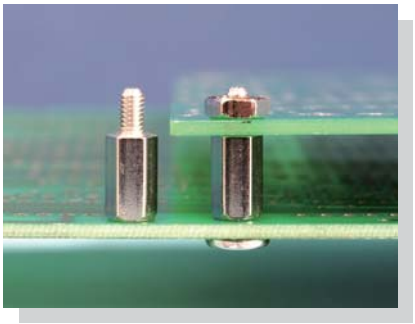

- Material: Steel
- Unit: mm




Part No.	Package
TP3-9ST	1000




Part No.	Package
TPS3-7ST	1000

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，一端配合螺絲，另一端配合螺帽使用。

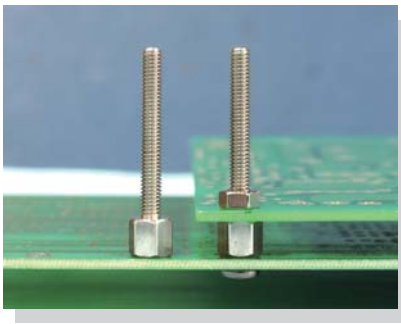


- Material: SUS
- Unit: mm




Part No.	Package
TP-6ST	500



Part No.	Package
TP-6ST-1	500

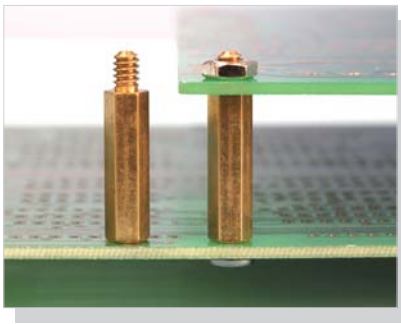


- Material: Brass
- Unit: mm

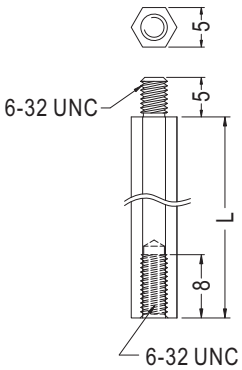


Part No.	L	Package
TP632-19.05BA	19.05	500
TP632-25.4BA	25.4	

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，兩端配合攻牙或螺母使用。

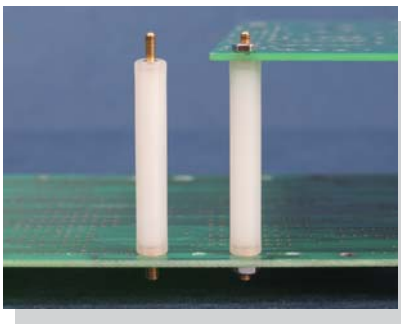


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

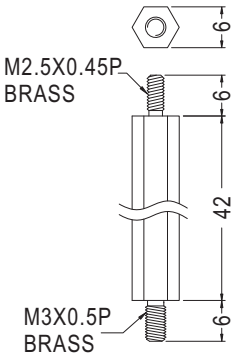

Part No.	Package
TPIM2.5-3-42	500

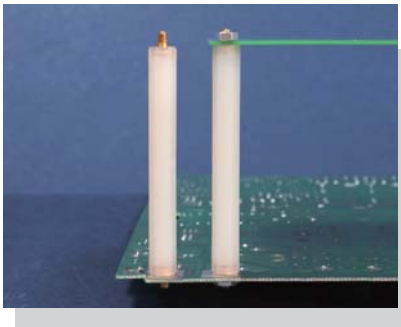


- Material: Nylon 6
- Color : Natural
- Unit: mm




Part No.	Package
TPIM4-90	500

塑膠銅柱 STANDOFF


用途：做為 PC板與機板間之固定，兩端配合攻牙或螺母使用。

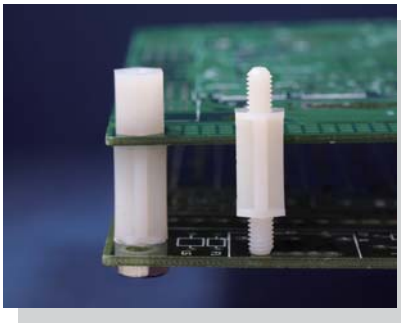


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
HPI4-5	5.0	1000
HPI4-10	10.0	
HPI4-15	15.0	
HPI4-19	19.0	






◆ **HPI3-3,HPI3-4.75**


Part No.	A	Package
HPI3-3	3.0	1000
HPI3-4.75	4.75	
HPI3-5	5.0	
★HPI3-5.5	5.5	
HPI3-10	10.0	
HPI3-15	15.0	

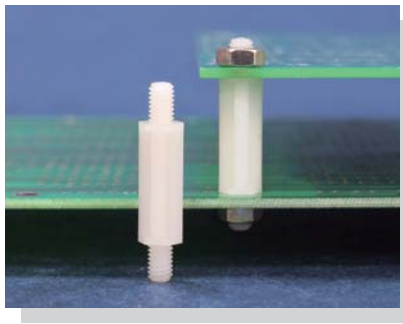


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
HPIB4-18.5	1000

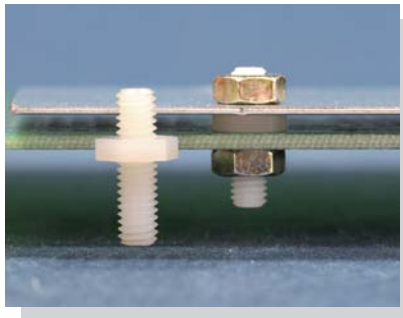


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
HPIA4-2	1000

PC 板間隔柱 SPACER SUPPORT


用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

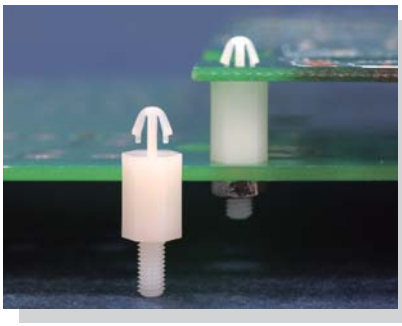


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

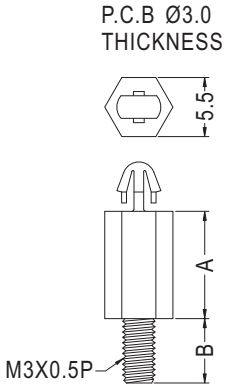


Part No.	A	B	Package
SCBA-3	3.0	6.3	1000
SCBA-3S	3.0	3.0	
SCBA-4	4.0	6.3	
SCBA-5	5.0		
SCBA-6	6.0		
SCBA-6S	6.0	4.5	
SCBA-7	7.0	6.3	
SCBA-8	8.0		
SCBA-9	9.0		
SCBA-10	10.0		
SCBA-11	11.0		
SCBA-12	12.0		
SCBA-13	13.0		
SCBA-14	14.0		
SCBA-15	15.0		
SCBA-16	16.0		

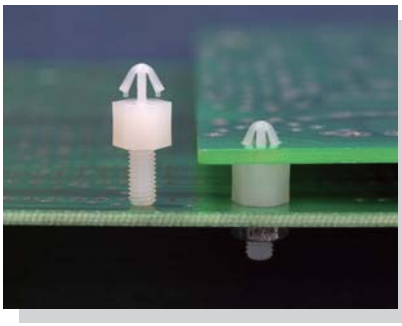


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
SCBC-3	3.0	1000
SCBC-4.75	4.75	
★SCBC-5.5	5.5	2000

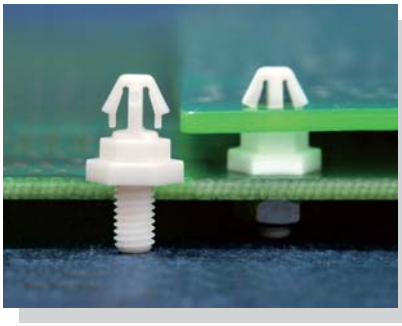


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
SCBB-3	1000

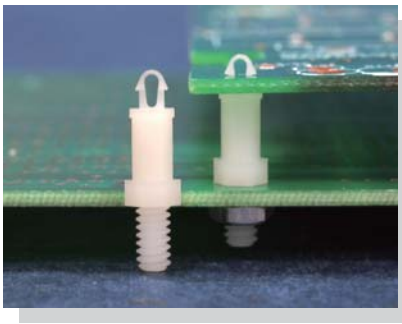


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

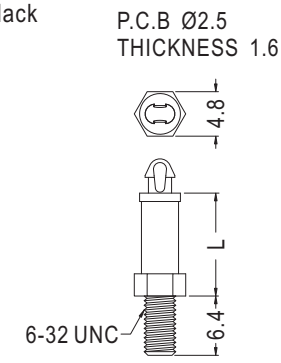


Part No.	L	Package
SCBS632-3.2	3.2	1000
SCBS632-4.8	4.8	
SCBS632-6.4	6.4	
SCBS632-7.9	7.9	
SCBS632-9.5	9.5	
SCBS632-11.1	11.1	
SCBS632-12.7	12.7	
SCBS632-14.3	14.3	
SCBS632-15.9	15.9	

PC 板間隔柱 SPACER SUPPORT


用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

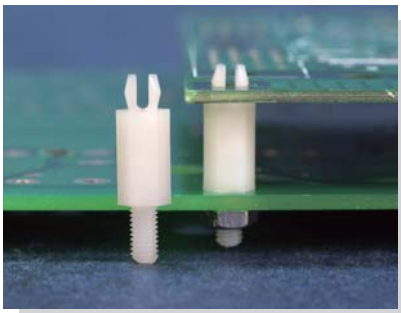


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

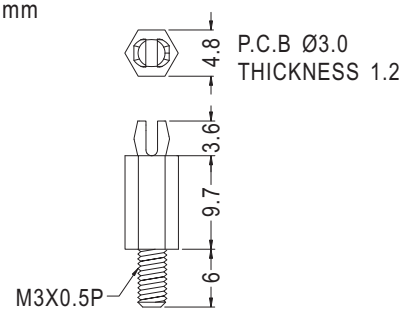


Part No.	Package
MSPA3-9.7	1000

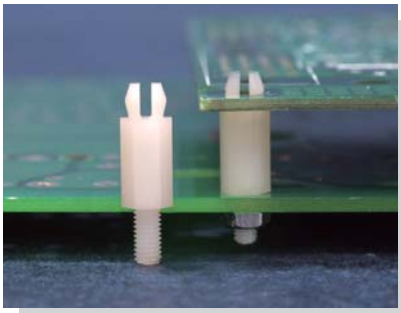


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

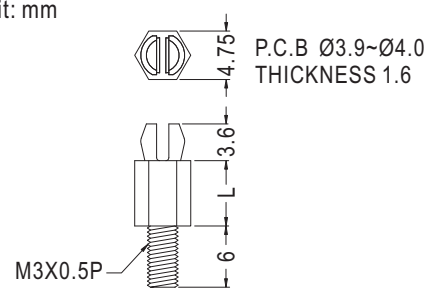



Part No.	L	Package
MSPG3-3.2	3.2	1000
MSPG3-4.8	4.8	
MSPG3-6.4	6.4	
MSPG3-9.5	9.5	
MSPG3-12.7	12.7	
MSPG3-15.9	15.9	
MSPG3-19.1	19.1	
MSPG3-22.2	22.2	

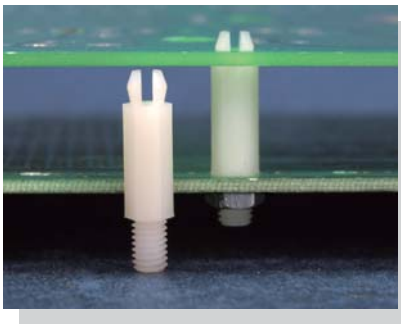

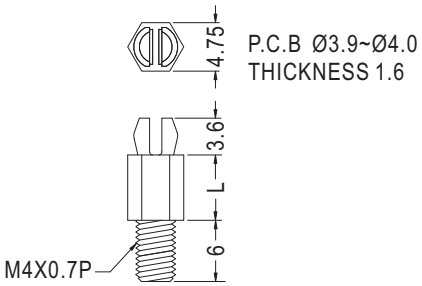


Part No.	L	Package
MSPG4-3.2	3.2	1000
MSPG4-4.8	4.8	
MSPG4-6.4	6.4	
MSPG4-9.5	9.5	
MSPG4-12.7	12.7	
MSPG4-15.9	15.9	
MSPG4-19.1	19.1	
MSPG4-22.2	22.2	

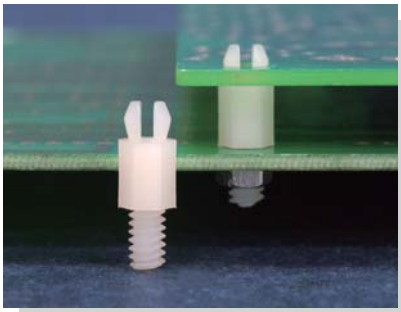

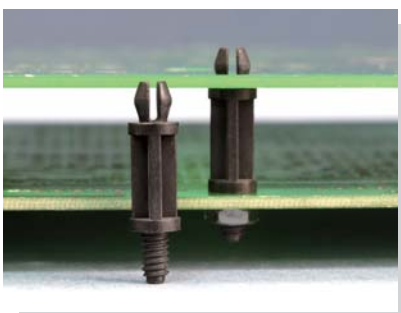

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

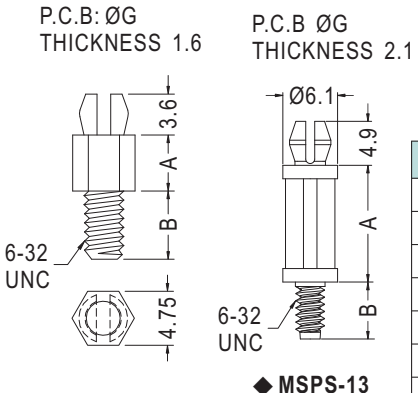

◆ **MSPS-13**


Part No.	A	B	G	Package
MSPS-2S	2.0	3.0	4.0	2000
MSPS-3	3.2	6.0		
MSPS-5	4.8	6.0	3.9~4.0	1000
MSPS-6	6.4	6.0		
MSPS-12.7	12.7	6.0		
MSPS-13	13.0	6.35	4.0	
MSPS-15.9	15.9	6.0	3.9~4.0	
MSPS-19.1	19.1	6.0		
MSPS-22.2	22.2	6.0		

PC 板間隔柱 SPACER SUPPORT


用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

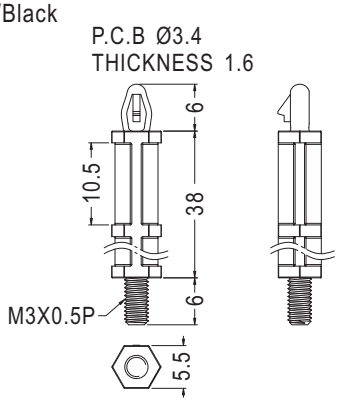


Part No.	Package
SCB3-38	1000

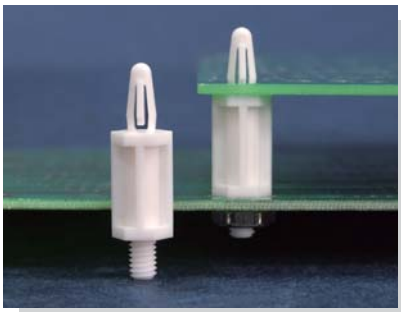


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




Part No.	Package
SCB832-15.9	1000

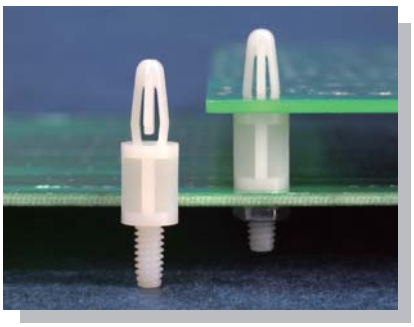


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

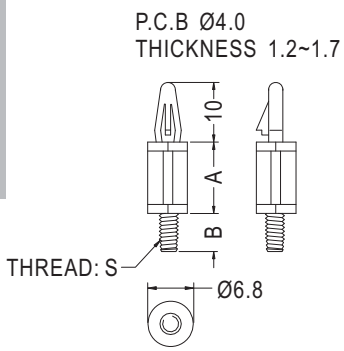

Part No.	A	B	S	Package
SCB-6	6.3	7.8	6-32 UNC	1000
SCB-10	9.5	7.8		
SCB-12	12.7	7.8		
SCB-15	15.9	7.8		
SCB-15A	15.9	4.8		

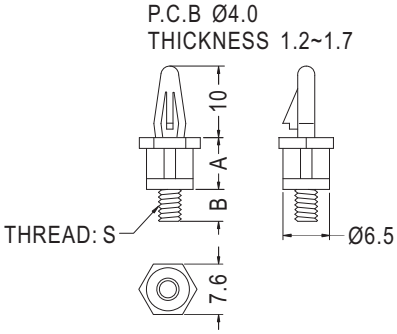


Part No.	A	B	S	Package
SCB-8.5S	8.5	4.5	6-32 UNC	1000
SCB-10SA	10.0	4.5		




Part No.	A	B	S	Package
SCB-6SM3	6.3	4.8	M3X0.5P	1000
SCB-6S	6.3	4.8	6-32 UNC	
SCB-8S	8.0	4.5		
SCB-10S	10.0	4.5		

PC 板間隔柱 SPACER SUPPORT


用途：PC板端直接壓入固定，另一端可配合螺母或攻牙。

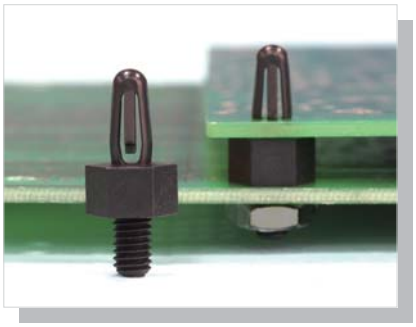


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

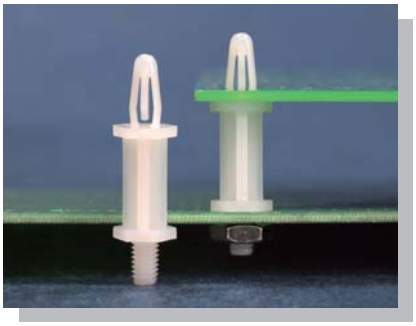


P.C.B Ø4.0
THICKNESS: E





◆ SCB4-4,SCB4-5


P.C.B Ø4.0
THICKNESS: E





◆ SCB4-6,SCB4-6A
SCB4-16


P.C.B Ø4.0
THICKNESS: E







◆ SCB4-23.8,SCB4-30

Part No.	A	B	C	D	E	S	Package
SCB4-4	4.0	6.4	9.4	8.0	2.0	M4X0.7P	1000
SCB4-5	5.0	6.0	9.4	8.0	1.6		
SCB4-6	6.3	4.8	10.7	7.6	1.2~1.7		
SCB4-6A	6.3	6.4	10.7	7.6	1.2~1.7		
SCB4-16	15.9	6.4	10.0	8.0	1.6~1.8		
SCB4-23.8	23.8	6.35	9.0	6.8	1.6		
SCB4-30	30.0	6.35	9.0	6.8	1.6		

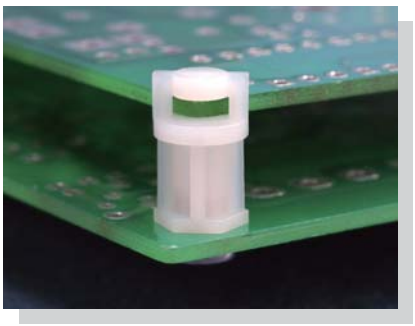


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







FOR M3.5 SCREW

Part No.	A	L	Package
TCEH-6.4	5.2	6.4	1000
TCEH-9.5	7.9	9.5	
TCEH-12.7	7.9	12.7	
TCEH-15.9	7.9	15.9	

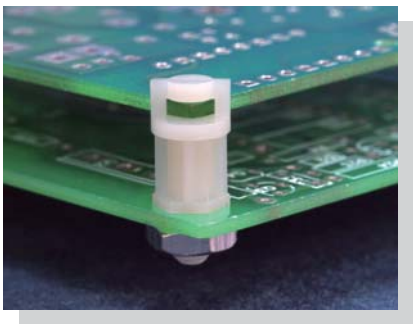

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	L	Package
TCEP4-6.4	6.4	1000
TCEP4-9.5	9.5	
TCEP4-12.7	12.7	
TCEP4-15.9	15.9	


導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

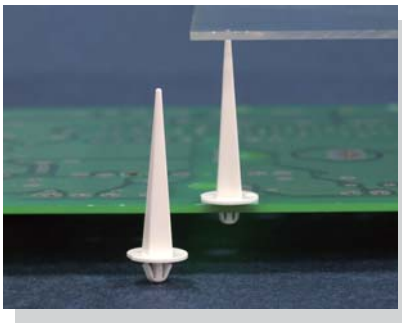


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: White
- Unit: mm






MOUNTING HOLE
THICKNESS: D

Part No.	A	B	C	D	Package
MCFG-3010	30.5	4.65	0.8	1.0	1000
MCFG-35810	35.8	4.65	1.05	1.05	



P.C.B Ø4.5
THICKNESS: D


Part No.	A	B	C	D	Package
MCFA-2508	25.4	3.5	1.5	0.6~0.8	500
MCFA-2511	25.4	3.5	1.5	0.8~1.1	



P.C.B Ø4.5
THICKNESS: D


Part No.	A	B	C	D	Package
MCFC-2508	25.4	4.6	2.0	0.6~0.8	1000

- Material: PC
- Color: Natural/White
- Unit: mm




P.C.B Ø4.5
THICKNESS: D

Part No.	A	B	C	D	Package
MCFD-2810	28.0	4.0	1.0	0.8~1.0	1000
MCFD-3210	32.0	4.0	1.0	0.8~1.0	




P.C.B Ø4.5
THICKNESS: D

Part No.	A	B	C	D	Package
MCFL-3310	33.3	4.0	1.5	1.0	1000



P.C.B Ø4.6
THICKNESS: D

Part No.	A	B	C	D	Package
MCF-3305	33.1	4.0	1.5	0.6	500
MCF-3308	33.1	4.0	1.5	0.5~0.8	




P.C.B Ø5.2
THICKNESS: D

Part No.	A	B	C	D	Package
MCF-2310	23.5	4.5	1.6	0.8~1.0	500
MCF-4213	40.0	3.95	1.3	1.0~1.3	

用途：用於支撐晶面板，高導光，高反射，高透光。




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural/White
- Unit: mm




P.C.B Ø3.8
THICKNESS 0.5~0.65

Part No.	A	D	Package
MCFO-2806	28.5	0.5~0.65	1000
MCFO-2906	29.5		
MCFO-2908		0.6~0.8	

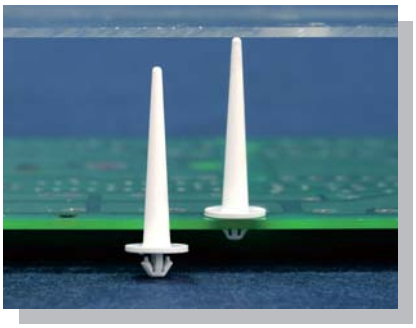

- Material: PC (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm




P.C.B ØF
THICKNESS: D

Part No.	A	B	C	D	F	J	Package
MCFJ-4	28.8	3.9	1.06	1.0	3.8	2.65	1000
MCFJ-6		4.3	1.5	1.25			
MCFJ-7		3.9	1.06	0.8	3.5	2.5	




- Material: PC(UL)
- Flame Class: 94V-0
- Color: Natural/White
- Unit: mm




P.C.B Ø4.7
THICKNESS 1.0

Part No.	Package
MCFF-11	1000

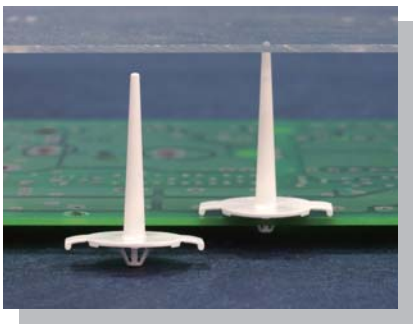

- Material: Nylon 66 (UL)/PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm

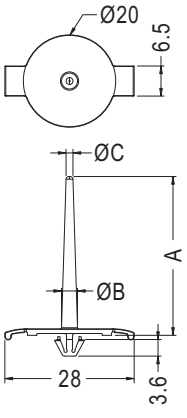


P.C.B Ø5.0
THICKNESS: B


Part No.	A	B	C	D	Package
MCFD-1	34.4	3.5	1.5	0.75~1.05	500

導光板間隔柱 PILLAR SUPPORT

用途：用於支撐晶面板，高導光，高反射，高透光。

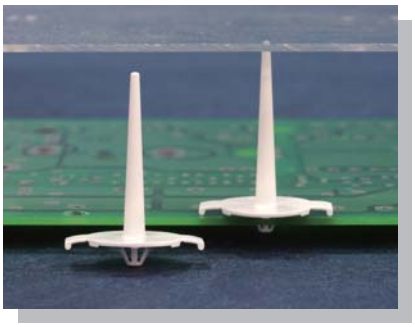


- Material: Nylon 66 (UL)/PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm




P.C.B Ø4.6
THICKNESS: D

Part No.	A	B	C	D	Package
MCFF-9	17.16	4.0	1.5	0.6~0.8	1000
MCFF-10	31.42	4.0	1.5	0.8	500
MCFF-14	18.0	4.0	1.5	0.8	1000




P.C.B Ø3.0
THICKNESS: D

Part No.	A	B	C	D	Package
MCFM-2807	27.8	2.9	1.6	0.65	1000

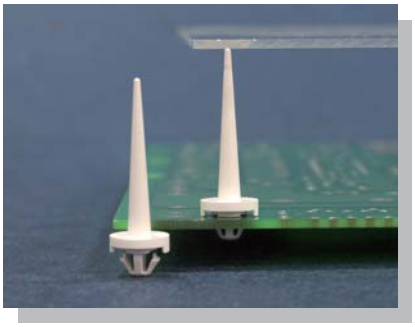


- Material: PC (UL)
- Flame Class: 94V-294V-0
- Color: White
- UNIT:mm





P.C.B Ø5.2
THICKNESS: D

Part No.	A	B	C	D	Package
MCF-428	42.6	4.0	1.05	0.6~0.8	500
MCF-2908	29.0				

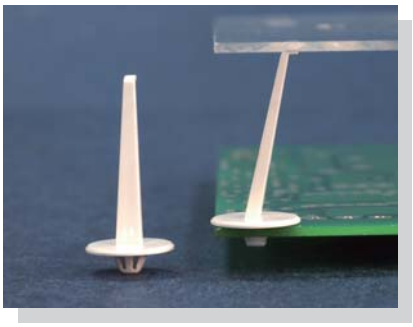

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural/Transparent
- Unit: mm






P.C.B Ø4.5
THICKNESS 0.8~1.0


Part No.	Package
MCF-1	1000

導光板間隔柱 PILLAR SUPPORT

用途：用於支撐晶面板，高導光，高反射，高透光。

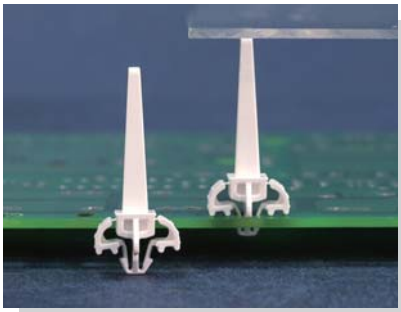


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural/White/Transparent
- Unit: mm
- 專利品 (PAT.)




P.C.B Ø4.5
THICKNESS 1.0

Part No.	Package
MCFF-5	1000

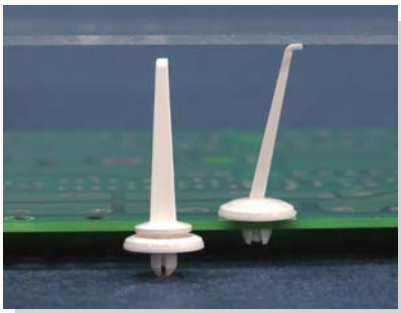


- Material: PC (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm
- 專利品 (PAT.)




P.C.B Ø4.5
THICKNESS 1.0~1.2


Part No.	Package
MCFF-6	500

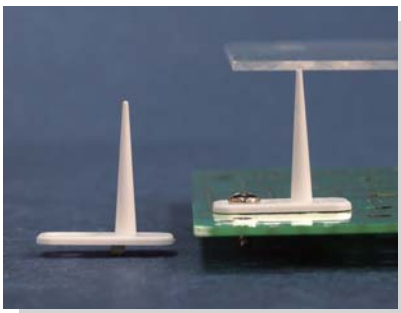

- Material: PC (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm

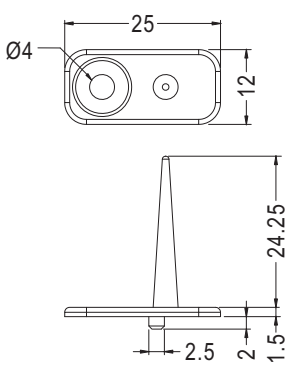

Part No.	Package
MCFJ-1	1000




MOUNTING HOLE Ø5.0
THICKNESS 0.6~0.8


Part No.	Package
MCFJ-2	1000


導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

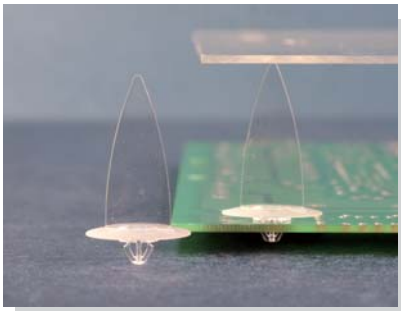


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Transparent
- Unit: mm

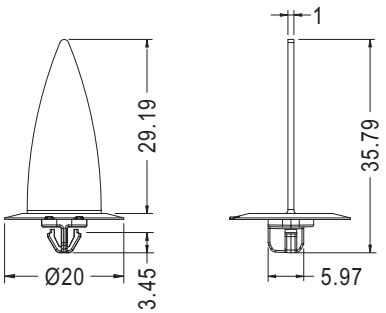





MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MCFF-15	1000

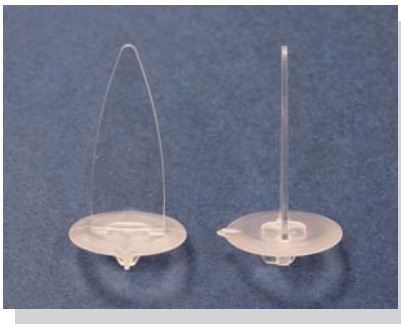


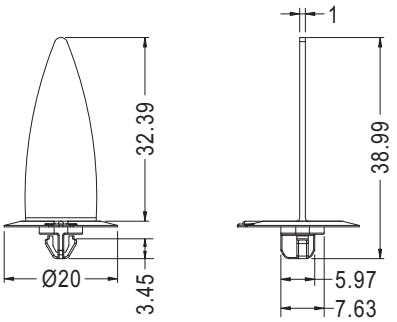





MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MCFF-16	1000

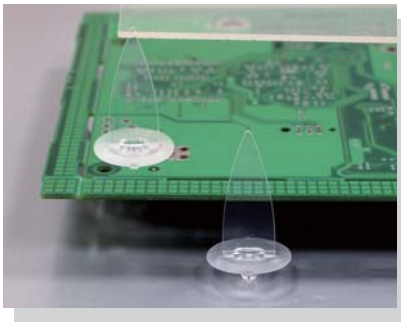


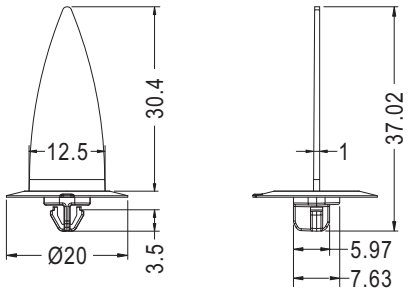





MOUNTING HOLE
THICKNESS 0.8

Part No.	Package
MCFF-13	1000

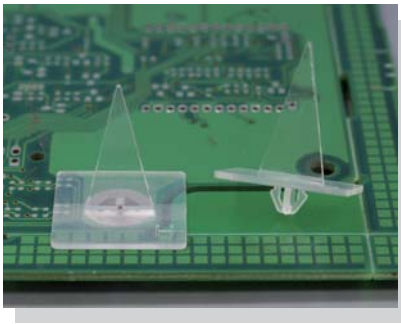

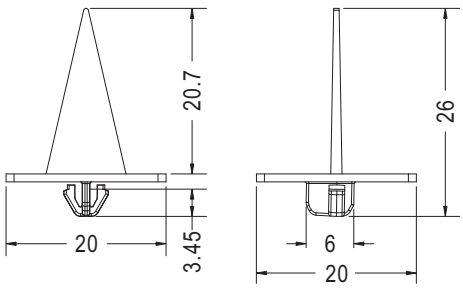



MOUNTING HOLE
THICKNESS 0.8


Part No.	Package
MCFF-17	1000


導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。




- Material: PC (UL)/ 94V-0
- Color: Transparent
- Base Material: Nylon 66(UL)/94V-0
- Base Color: Natural
- Unit: mm
- 專利品 (PAT.)






MOUNTING HOLE
THICKNESS 0.5~1.0




Part No.	Package
MCFF-7	1000




- Material 1: PC (UL)
- Material 2: Nylon 66(UL)
- Flame Class: 94V-2/94V-0
- Color 1: Transparent
- Color 2: Natural/White
- Unit: mm
- 專利品 (PAT.)







MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
MCFF-12	1000

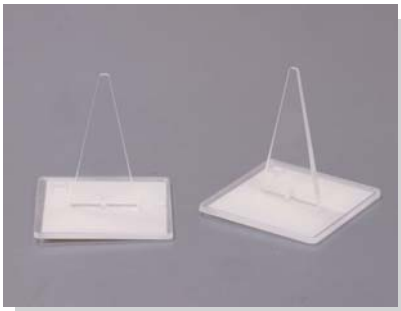

- Material: PC (UL)
- Flame Class: 94V-0
- Color: Transparent
- Unit: mm







Part No.	Package
MCFP-5	1000

導光板間隔柱 PILLAR SUPPORT

用途：用於支撐液晶面板，高導光，高反射，高透光。

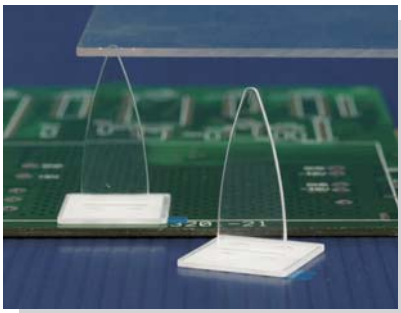


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Transparent
- Unit: mm

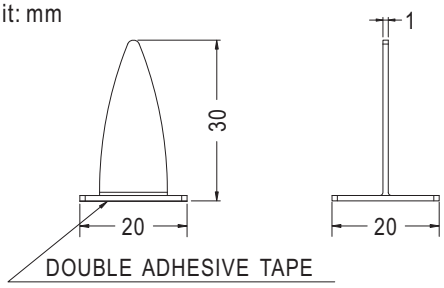


NEW

Part No.	Package
MCFP-7	1000

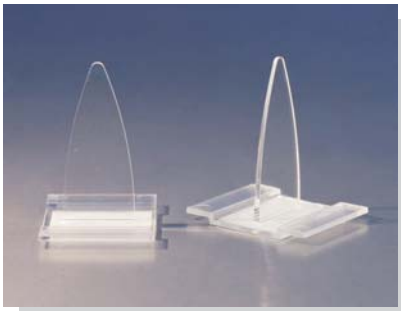


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm

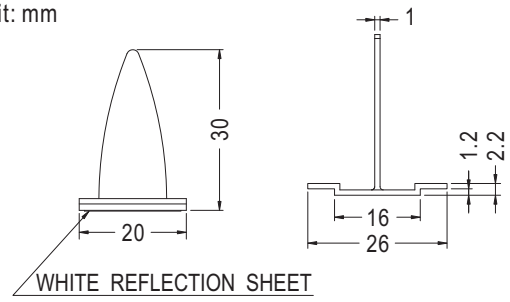


NEW

Part No.	Package
MCFP-9	1000

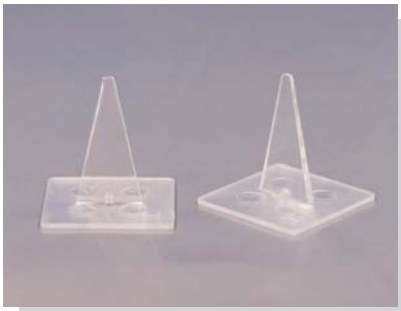

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm

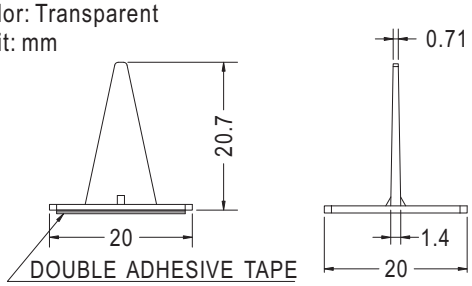


NEW

Part No.	Package
MCFP-12	1000

PC 板間隔柱 SPACER SUPPORT


用途: 適用 NGFF卡於機板上，免工具，易拆卸。

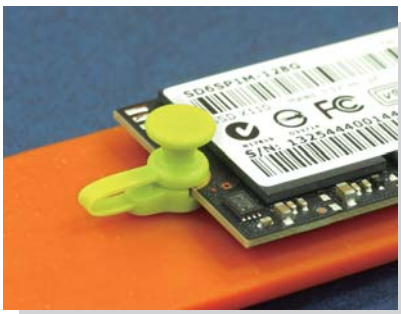

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- 專利品 (PAT.)




MOUNTING HOLE
THICKNESS: E




Part No.	A	B	E	Package
★ULCO2.1-2	2.08	0.81	2.0	1000
ULCO2.4-2.1	2.4	0.8	2.1	
ULCO2.4-3.1	2.4	0.8	2.95	
ULCO2.5-1.6	2.5	0.8	1.6	
ULCO2.5-2.2	2.5	0.8	2.2	
ULCO2.5-2.4	2.5	0.8	2.4	
ULCO2.5-4.2	2.5	0.8	4.2	
ULCO6.6-2.6	6.6	0.8	2.46	

用途：適用 NGFF 卡於機板上，免工具，易拆卸。

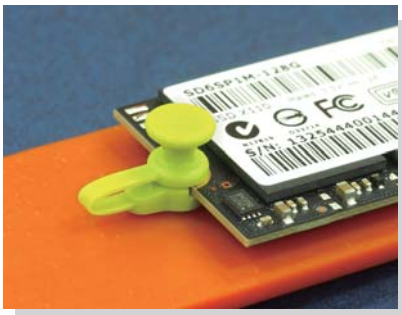


- Material: Nylon66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- 專利品(PAT.)


◆ ULCN-1

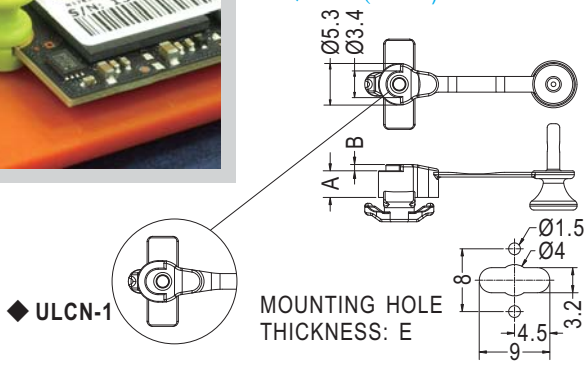


Part No.	A	B	E	Package
★ULCN-1	1.7	0.8	2.1~2.4	1000
ULCN1.7-2.4	1.7	0.8	2.1~2.4	
ULCN2.2-1.2	2.2	0.8	1.2	
ULCN2.5-1.6	2.5	0.8	0.8~1.6	
ULCN2.5-2.6	2.5	0.8	1.8~2.6	
ULCN2.5-2.9	2.5	0.8	2.1~2.9	
ULCN3.4-0.8	3.4	0.8	0.8	
ULCN3.4-2.1	3.4	0.8	2.13	
ULCN6.3-1.6	6.3	0.8	1.6	

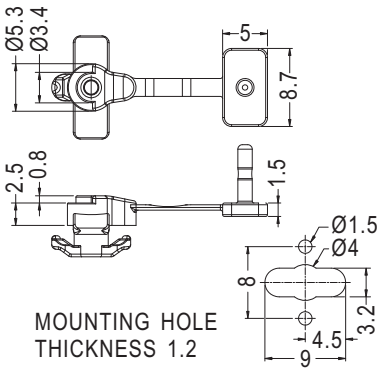


Part No.	Package
ULCN2.5-1.2	1000

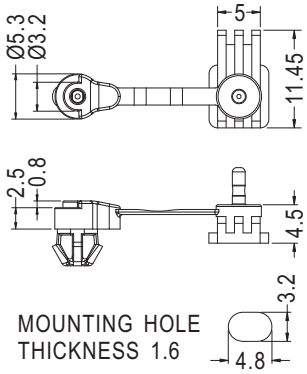


Part No.	Package
ULCW2.5-1.6	1000




Part No.	A	Package
ULCOG2.5-1.6	2.5	1000
ULCOG6.3-1.6	6.3	

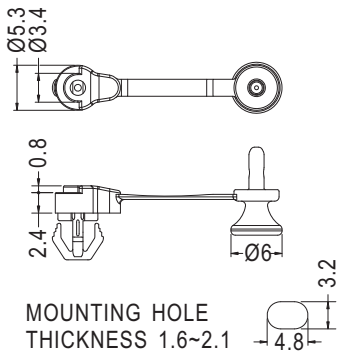


Part No.	Package
ULCOJ-1	1000

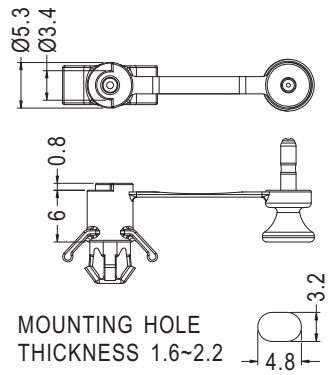


Part No.	Package
ULCOB-1	1000

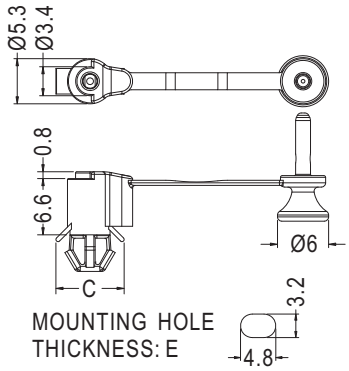


Part No.	A	B	Package
ULCO6.6-1.6	8.0	1.6	1000
ULCO6.6-3.1	8.3	2.7~3.3	

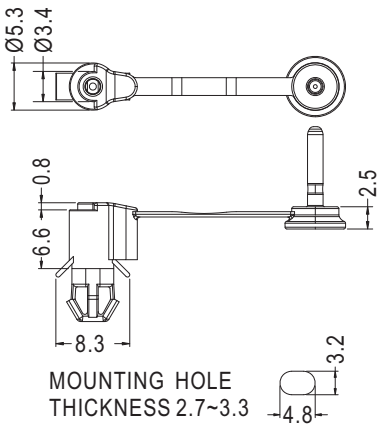

Part No.	Package
★ULCO6.6-3.1S	1000

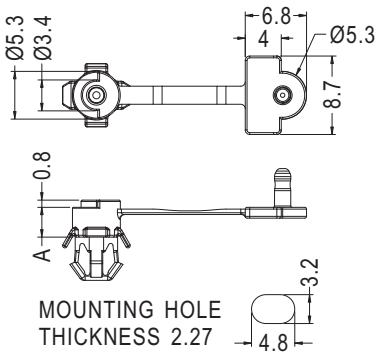

Part No.	A	Package
ULCOB3.3-2.3	3.3	1000
ULCOB6-2.3	6.0	

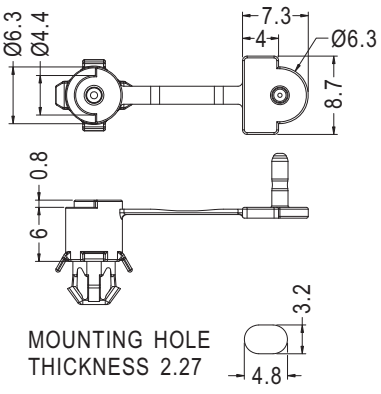


Part No.	Package
★ULCOB-2	1000


PC 板間隔柱 SPACER SUPPORT

用途：適用 NGFF卡於機板上，免工具，易拆卸。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Green/Blue
- Unit: mm
- 專利品 (PAT.)







MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
ULCOA5-1.6	1000










MOUNTING HOLE
THICKNESS 1.6~1.8

Part No.	B	Package
ULCNA2.5-1.8	2.15	1000
ULCNA2.5-1.8S	2.45	
ULCNA4-1.8	4.0	

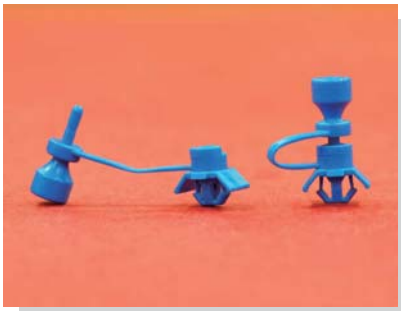







MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
ULCOB3.4-1.6	1000



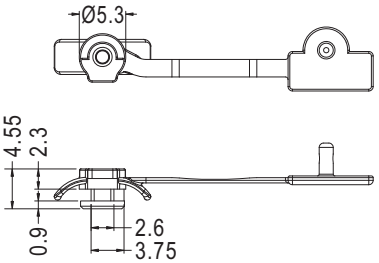




MOUNTING HOLE
THICKNESS 1.1

Part No.	Package
★ULCND1.5-1.1	1000








MOUNTING HOLE
THICKNESS 1.6


Part No.	C	D	Package
ULCY-1	18.27	4.05	1000
ULCY3.9-1.6	24.1	4.0	

PC板間隔柱 SPACER SUPPORT

用途：適用 NGFF 卡於機板上，免工具，易拆卸。

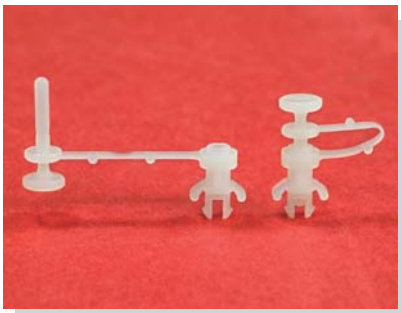

- Material: Nylon66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品(PAT.)

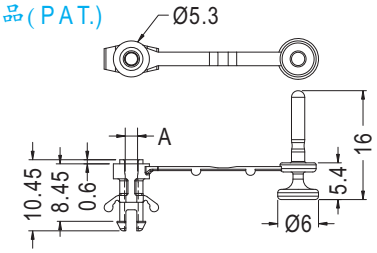


MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.2

Part No.	A	Package
ULCOC-1	1.8	1000
★ ULCOC-9	1.77	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品(PAT.)



MOUNTING HOLE Ø4.0
THICKNESS 1.6


Part No.	Package
ULCOC-2	1000


導電 PC 板間隔柱 CONDUCTIVE SPACER SUPPORT

用途：適用 NGFF 卡於機板上，免工具，易拆卸，銅柱導電性佳，防 E.M.I. 干擾。




- Material: Nylon66 (UL)
- Nut Material: Brass
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品(PAT.)






MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
ULCOE-1	1000






MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
★ ULCOE-3	1000

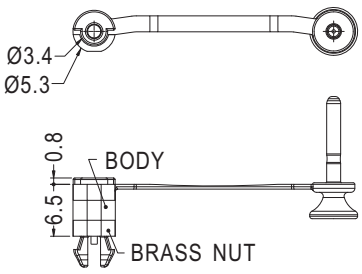




MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
ULCOE-4	1000


PC 板間隔柱 SPACER SUPPORT

用途：適用 NGFF 卡於機板上，免工具，易拆卸。

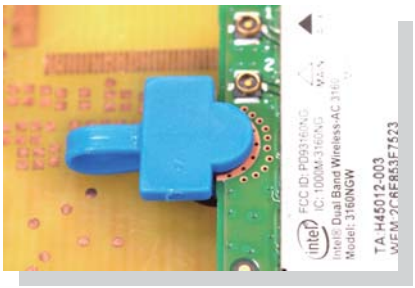




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm
- 專利品 (PAT.)

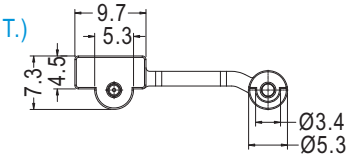








MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
ULCOD1.5-1.6	1000









MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
ULCOD-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm
- 專利品 (PAT.)








MOUNTING HOLE
THICKNESS 1.6


NEW

Part No.	Package
ULCND2.5-1.6	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm
- 專利品 (PAT.)




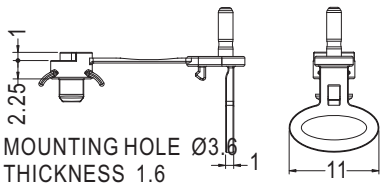



MOUNTING HOLE Ø3.6
THICKNESS 1.6

Part No.	C	Package
ULCOC-4	3.4	1000
★ULCOC-8	2.8	
ULCOC2.2-1.6	2.8	





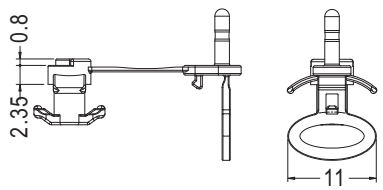




MOUNTING HOLE
THICKNESS 2.6


Part No.	Package
ULCOC2.4-2.6	1000

PC 板間隔柱 SPACER SUPPORT

用途：用於上下雙層 NGFF 卡之固定。

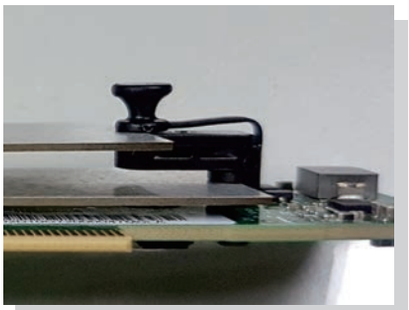


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)

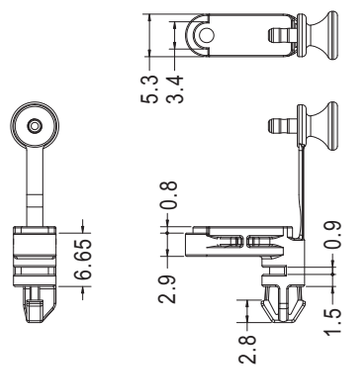


Part No.	Package
ULD-1	1000

PC 板間隔柱 SPACER SUPPORT


用途：適用 NGFF 卡於機板上，免工具，易拆卸。

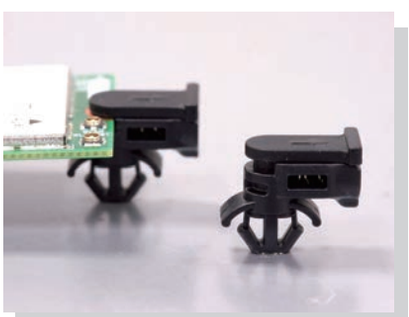


- Material: Nylon66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)

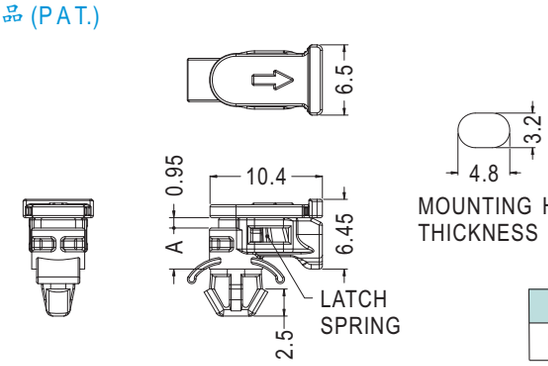

Part No.	Package
ULCOF-2F	1000

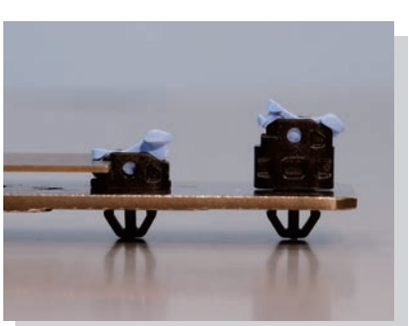

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Blue
- Unit: mm
- 專利品 (PAT.)

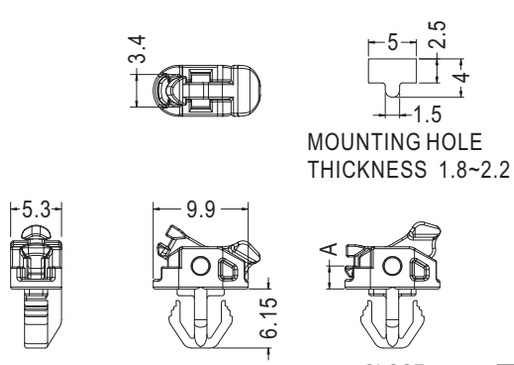

◆使用說明


Part No.	A	Package
ULCOI-2.4	2.4	1000
ULCOI-6.6	6.6	

PC 板間隔柱 SPACER SUPPORT

用途：用於 NGFF 卡之絕緣與保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

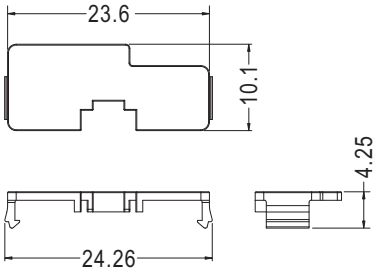


Part No.	Package
UNCV-1	1000

間隔柱 SPACER SUPPORT

用途：做為 PC板與機板間固定用，需配合 M3 螺絲用。




- Body Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

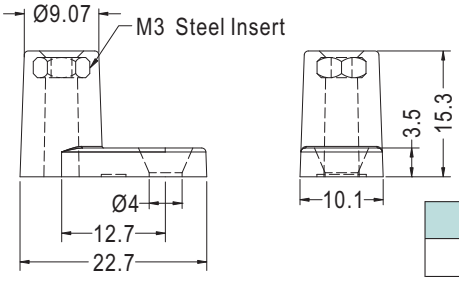


Part No.	Package
LLCB3-15	1000

PC 板間隔柱 SPACER SUPPORT

用途：用於 PC板與機板間之固定。

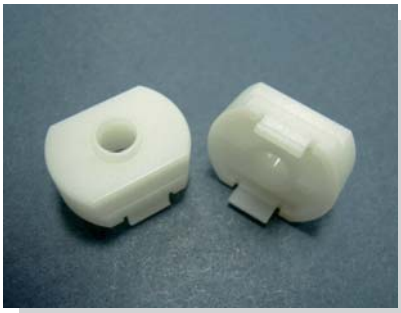

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



THICKNESS 1.2


Part No.	Package
DDMC-5.5	1000


圓體間隔柱 ROUND SPACER

用途：用於零件之間隔與固定。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm





Part No.	Package
BPLT-9	1000






Part No.	Package
BPLT-13	1000




2

- LED間隔柱
  LED Spacer Support
- LED座
  LED Holder
- LED擋板
  LED Mask
- LED導光柱
  Light Pipe

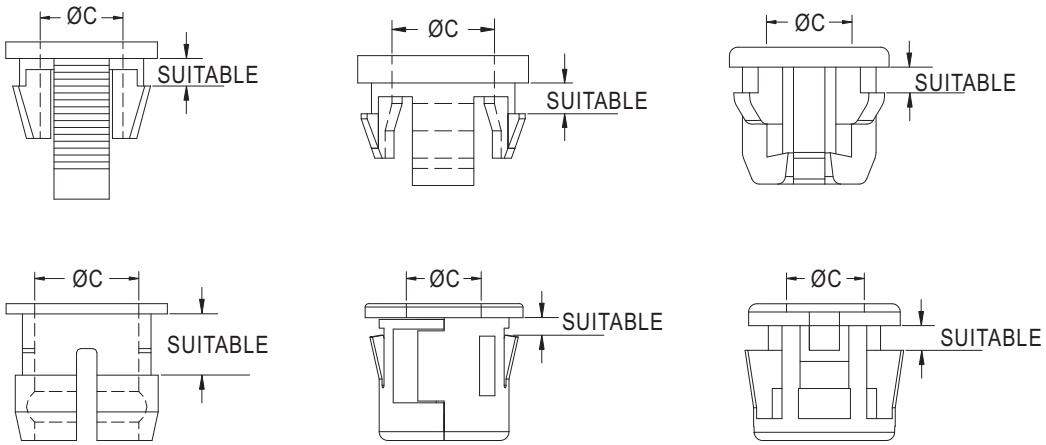


Part No.	Chassis	Suitable	ØC	Page
LED3-29	Ø4.3	0.8	3.0	2-26
LED3-4	Ø4.5	0.8	3.0	2-25
LED3-6	Ø4.5	0.8	3.0	2-25
LED3-45	Ø4.5	0.8	3.0	2-27
LED3-1	Ø4.5	0.8~1.2	3.1	2-25
LED3-8	Ø4.5	0.8~1.2	3.1	2-25
LED3-20	Ø4.5	1.0	3.0	2-25
LED3-7	Ø4.5	1.6	3.0	2-25
LED3-2	Ø4.5	1.7	3.0	2-24
LED3-23	Ø4.8	0.8	3.0	2-26
LED3-38	Ø5.0	0.8	2.8	2-27
LED3-49	Ø5.0	0.8	2.87	2-34
LED3-50	Ø5.0	0.8	2.87	2-34
LED3-22	Ø5.0	0.8	3.0	2-26
LED3-37	Ø5.0	0.8	3.0	2-27
LED3-31	Ø5.0	0.8	3.0	2-33
LED3-44	Ø5.0	0.8	3.0	2-27
LED3-46	Ø5.0	0.8	3.0	2-27
LED3-5	Ø5.0	1.0~1.1	3.0	2-25
LED3-17-0.6	Ø5.2	0.6	2.9	2-33
LED3-18	Ø5.2	0.8	2.9	2-33
LED3-43	Ø5.2	0.8	2.9	2-33
LED3-55	Ø5.2	0.8	2.9	2-33
LED3-28	Ø5.2	0.8	3.0	2-27
LED3-25	Ø5.2	0.8	3.0	2-33
LED3-40	Ø5.2	0.8~1.0	2.8	2-34
LED3-40S	Ø5.2	0.8	2.9	2-34
LED3-17	Ø5.2	0.8~1.0	2.9	2-33
LED3-35	Ø5.2	0.8~1.0	2.9	2-33
LED3-42	Ø5.2	0.8~1.0	2.95	2-34
LED3-30	Ø5.2	1.1	3.0	2-33
LED3-41	Ø5.2	1.2	2.8	2-34
LED3-24	Ø5.2	1.2	2.9	2-33
LED3-34	Ø5.3	0.8	3.1	2-26

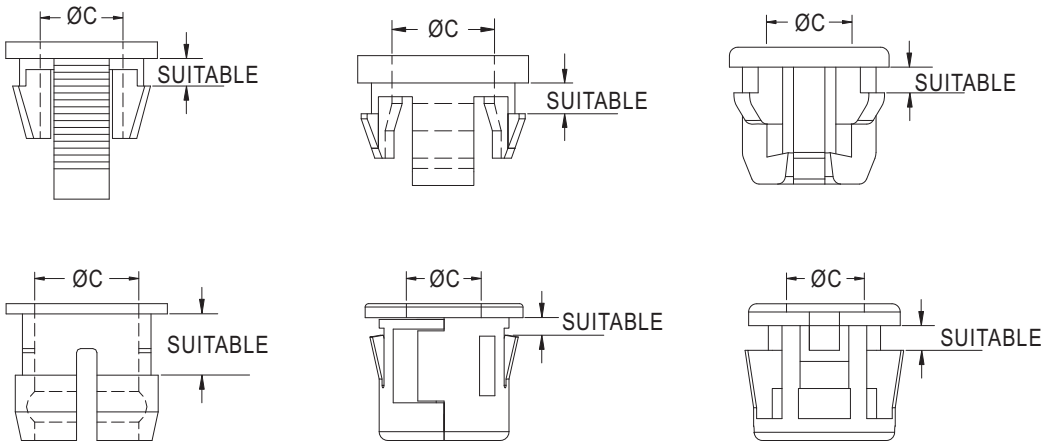


Part No.	Chassis	Suitable	ØC	Page
LED3-53	Ø4.2~4.3	0.8	3.0	2-28
LEQU3-1	Ø5.9	0.6~0.8	4.1	2-28
LEQU3-2	Ø5.9	0.6~0.8	4.1	2-28
LED5-11	Ø6.0	0.8~1.0	5.1	2-30
LED5-5	Ø6.0	1.8	5.1	2-28
LED5-13	Ø6.2	1.2~1.6	5.1	2-30
LED3-16	Ø6.35	0.6~1.0	3.0	2-32
LED5-8	Ø6.35	0.9	5.0	2-29
LED3-16M	Ø6.35	1.0~1.2	3.0	2-32
LED3-19	Ø6.35	2.0	3.1	2-27
LED3-33	Ø6.35~Ø6.4	0.8	3.0	2-32
LED3-15	Ø6.4	0.6~1.0	3.0	2-32
LED3-15M	Ø6.4	1.0~1.2	3.0	2-32
LED5-1S	Ø6.4	1.2	5.0	2-28
LED5-1	Ø6.4	1.5	5.0	2-28
LED5-2	Ø6.4	3.0	5.1	2-29
LED5-16S	Ø6.5	0.6~1.2	5.0	2-30
LED5-14	Ø6.5	0.8~1.0	5.0	2-31
LED5-28	Ø7.0	0.6~0.8	4.9	2-29
LED5-29	Ø7.0	0.8	5.0	2-29
LED5-9S	Ø7.0	0.8	5.1	2-30
LED5-24	Ø7.0	0.8~1.0	5.0	2-34
LED5-9	Ø7.0	0.8~1.4	5.1	2-30
LED5-24M	Ø7.0	1.2	5.0	2-34
LED5-24L	Ø7.0	1.6	5.0	2-34
LED5-6	7.0x6.0	1.0	5.8	2-29
LED5-25	Ø7.2	1.2	5.0	2-30
LED3-14	Ø7.5	0.6~1.0	3.0	2-32
LED5-18	Ø7.5	0.6~1.0	5.0	2-32
LED3-14M	Ø7.5	1.0~1.2	3.0	2-32
LED5-18M	Ø7.5	1.0~1.2	5.0	2-32
LED5-18L	Ø7.5	1.5	5.0	2-32
LED5-17	Ø9.0	0.6~1.0	5.0	2-32
LED5-17M	Ø9.0	1.0~1.2	5.0	2-32

LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø5mm LED立於PC板上，使高度一致，接腳不會彎曲、折斷、短路。

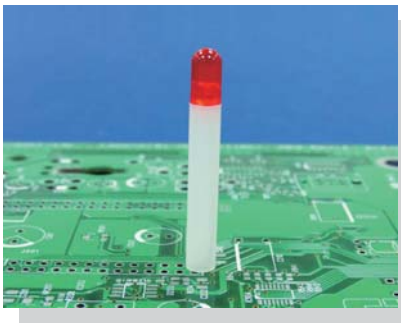

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

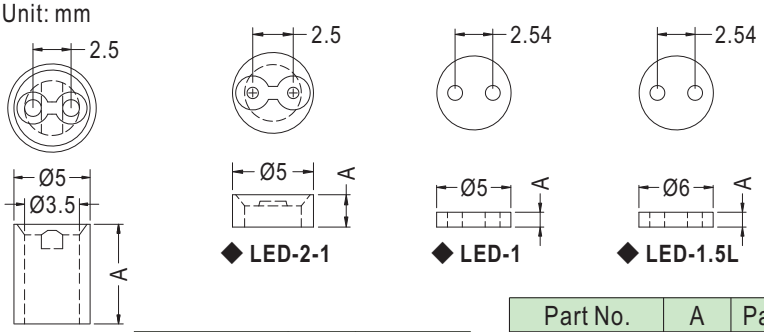

◆ LED-2-1　◆ LED-1　◆ LED-1.5L


Part No.	A	Package
LED-1	1.0	2000
LED-1.5	1.5	
LED-1.5L	1.5	
LED-2	2.0	
LED-2-1	2.0	
LED-2.5	2.5	
LED-3	3.0	
LED-3.5	3.5	
LED-4	4.0	
LED-4.5	4.5	
LED-5	5.0	
LED-5.5	5.5	
LED-6	6.0	
LED-6.5	6.5	
LED-6.8	6.8	
LED-7	7.0	
LED-7.5	7.5	

Part No.	A	Package
LED-8	8.0	2000
LED-8.5	8.5	
LED-8.8	8.8	
LED-9	9.0	
LED-9.5	9.5	
LED-10	10.0	
LED-10S	10.0	
LED-10.5	10.5	
LED-11	11.0	
LED-11.5	11.5	
LED-12	12.0	
LED-12.5	12.5	
LED-13	13.0	
LED-13.5	13.5	
LED-14	14.0	1000
LED-14.5	14.5	
LED-15	15.0	
LED-15.5	15.5	

Part No.	A	Package
LED-16	16.0	1000
LED-16.5	16.5	
LED-17	17.0	
LED-17.5	17.5	
LED-17.7	17.7	
LED-18	18.0	
LED-18.5	18.5	
LED-19	19.0	
LED-19.5	19.5	
LED-20	20.0	
LED-20.5	20.5	
LED-21	21.0	
LED-21.5	21.5	
LED-22	22.0	
LED-22.5	22.5	
LED-23	23.0	
LED-23.5	23.5	
LED-24	24.0	
LED-28	28.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
LEDW-2	2.0	5.6	3.5	2000
LEDW-5	5.0	5.0	3.6	
LEDW-7.5	7.5			
LEDW-9	9.0			
LEDW-12	12.0			
LEDW-15	15.0	5.6	4.2	1000
LEDW-16	16.0			
LEDW-17	17.0			
LEDW-18.5	18.5			
LEDW-19	19.0			
LEDW-21	21.0			
LEDW-21.5	21.5			
LEDW-22	22.0			
LEDW-23.5	23.5			


Part No.	Package
LEDW-20	1000

LED間隔柱 LED SPACER SUPPORT


用途：用於保護Ø3 mm LED 立於 PC 板上，使高度一致，中間隔板設計，接腳不會彎曲、折斷、短路。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
LEDEW-5	5.0	1000
LEDEW-8.5	8.5	
LEDEW-15	15.0	
LEDEW-17	17.0	
LEDEW-17.5	17.5	




Part No.	Package
LEDSW-18.5	1000

LED間隔柱 LED SPACER SUPPORT

用途：使 LED 立於PC板上，高度一致，不斷腳。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDLA-9.8	2000


LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø3mm LED 立於 PC 板上，接腳不會彎曲、折斷、短路，且使LED高度一致，免用治具，尺寸齊全。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





◆ LEDS-0.8~LEDS-3.5

Part No.	A	Package
LEDS-0.8	0.8	2000
LEDS-1	1.0	
LEDS-1.5	1.5	
LEDS-2	2.0	
LEDS-2.5	2.5	
LEDS-3	3.0	
LEDS-3.5	3.5	
LEDS-4	4.0	
LEDS-4.5	4.5	
LEDS-5	5.0	
LEDS-5.5	5.5	
LEDS-6	6.0	
LEDS-6.5	6.5	

Part No.	A	Package
LEDS-7	7.0	2000
LEDS-7.5	7.5	
LEDS-8	8.0	
LEDS-8.5	8.5	
LEDS-9	9.0	
LEDS-9.5	9.5	
LEDS-9.8	9.8	
LEDS-10	10.0	
LEDS-10.5	10.5	
LEDS-11	11.0	
LEDS-11.5	11.5	
LEDS-12	12.0	
LEDS-12.5	12.5	


Part No.	A	Package
LEDS-13	13.0	2000
LEDS-13.5	13.5	
LEDS-14	14.0	
LEDS-14.5	14.5	
LEDS-15	15.0	
LEDS-15.5	15.5	
LEDS-16	16.0	
LEDS-16.5	16.5	1000
LEDS-17	17.0	
LEDS-17.5	17.5	
LEDS-18	18.0	
LEDS-18.5	18.5	
LEDS-19	19.0	
LEDS-19.5	19.5	
LEDS-20	20.0	
LEDS-20.5	20.5	
LEDS-21	21.0	
LEDS-21.5	21.5	
LEDS-22	22.0	
LEDS-22.5	22.5	
LEDS-23	23.0	
LEDS-23.5	23.5	
LEDS-24	24.0	

LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø3mm LED立於PC板上，接腳不會彎曲、折斷、短路，且使LED高度一致，免用治具，尺寸齊全。



- Material:Nylon 66 (UL)
- Flame Class:94V-2/94V-0
- Color:Natural/Black
- Unit: mm




Part No.	A	Package
LEDS-3S	3.0	2000
LEDS-4S	4.0	
LEDS-4.5S	4.5	
LEDS-5S	5.0	
LEDS-5.5S	5.5	
LEDS-6S	6.0	
LEDS-6.5S	6.5	
LEDS-7S	7.0	
LEDS-7.5S	7.5	
LEDS-8S	8.0	
LEDS-8.5S	8.5	
LEDS-9S	9.0	
LEDS-9.5S	9.5	
LEDS-10S	10.0	
LEDS-11S	11.0	
LEDS-11.5S	11.5	
LEDS-12S	12.0	
LEDS-12.5S	12.5	
LEDS-13S	13.0	


Part No.	A	Package
LEDS-13.5S	13.5	2000
LEDS-14.5S	14.5	
LEDS-15S	15.0	
LEDS-15.5S	15.5	
LEDS-16S	16.0	
LEDS-16.5S	16.5	
LEDS-17S	17.0	1000
LEDS-17.5S	17.5	
LEDS-18S	18.0	
LEDS-18.5S	18.5	
LEDS-19S	19.0	
LEDS-20S	20.0	
LEDS-20.5S	20.5	
LEDS-21S	21.0	
LEDS-21.5S	21.5	
LEDS-22S	22.0	
LEDS-22.5S	22.5	
LEDS-23S	23.0	

LED間隔柱 LED SPACER SUPPORT


用途：使LED立於PC板上，高度一致，不斷腳。

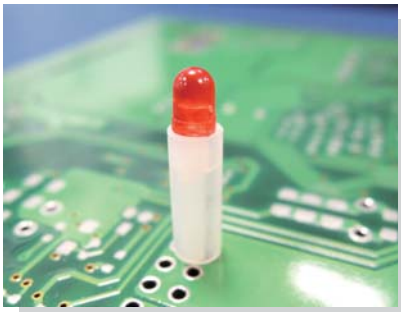


- Material:Nylon 66 (UL)
- Flame Class:94V-2/94V-0
- Color:Natural/Black
- Unit: mm



Part No.	Package
LEDSB-11	2000

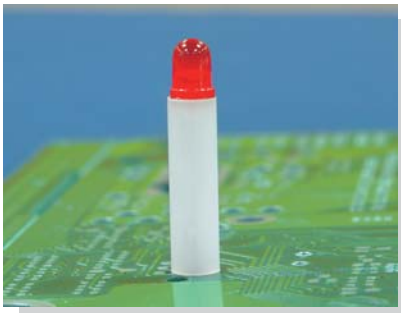

- Material:Nylon 66 (UL)
- Flame Class:94V-2/94V-0
- Color:Natural/Black
- Unit: mm




Part No.	Package
LEDE-17.5	1000

LED間隔柱 LED SPACER SUPPORT


用途：使Ø3 LED立於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEDL-3	2000

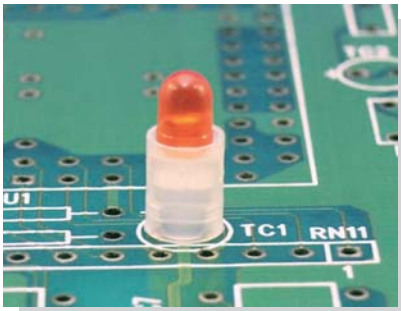


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDL-5.5	2000

LED間隔柱 LED SPACER SUPPORT

用途：使3 PIN Ø3 LED立於PC板上，高度一致，不斷腳。

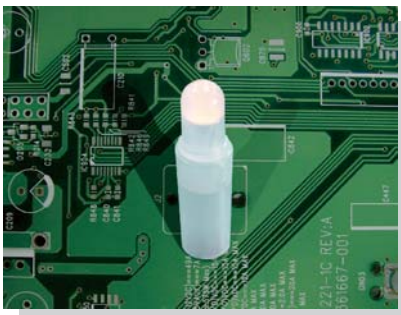

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEH3-16	2000

LED座 LED HOLDER

用途：使Ø5 LED固定於PC板上，高度一致，不斷腳。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LED2M-3.6	2000

LED間隔柱 LED SPACER SUPPORT

用途：使Ø5 LED固定於PC板上，高度一致，不斷腳。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)



◆適用於Ø5 LED帽緣款
◆適用於2PIN、3PIN


Part No.	C	Package
LEDF-2	6.0	2000

LED間隔柱 LED SPACER SUPPORT

用途：使LED立於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)




Part No.	C	Package
LEDF-3	4.2	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	C	Package
COC8-5	6.0	2000

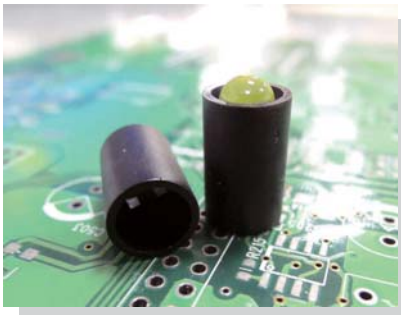


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	C	Package
LEDD-12	6.0	1000

LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø3 mm LED立於PC板上，高度一致，不斷腳，有遮光效果，不漏光。

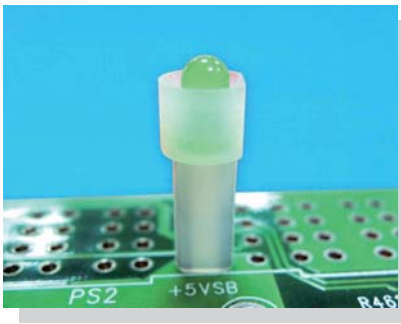


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDZ3-9	2000

LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø5 mm LED立於PC板上，高度一致，不斷腳，有遮光效果，不漏光。

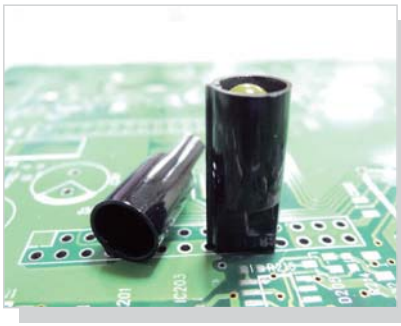


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	Package
LEDZ5-2	2.0	5.9	2000
LEDZ5-3	3.0		
LEDZ5-4	4.0		
LEDZ5-5	5.0		
LEDZ5-6	6.0		
LEDZ5-7	7.0		
LEDZ5-8	8.0		
LEDZ5-9	9.0		
LEDZ5-10	10.0		




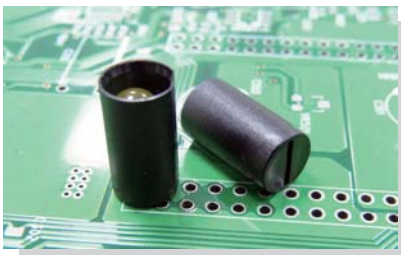


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	C	Package
LEDX5-1	9.0	6.0	2000
LEDX5-2	12.5		1000

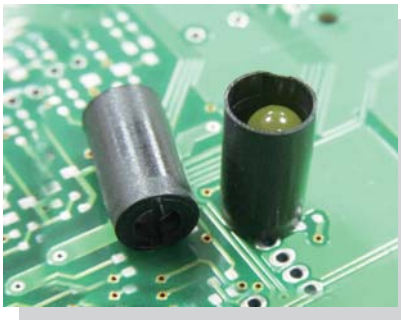


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	C	Package
LEDXA5-2	6.4	1000

LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø3 mm LED立於PC板上，高度一致，不斷腳，不漏光。

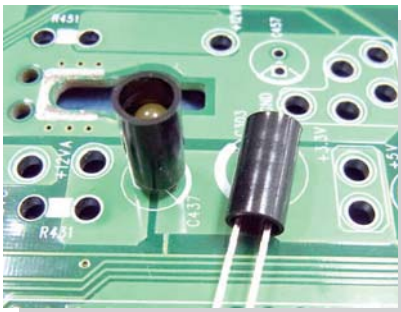


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	Package
LEDX3-1	9.5	4.1	1000
LEDX3-3	8.0		

LED間隔柱 LED SPACER SUPPORT


用途：使LED立於PC板上，高度一致，不斷腳。

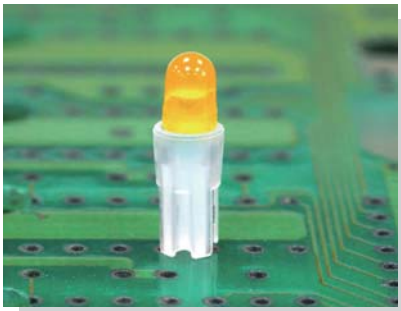


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEDXB-7.5	1000

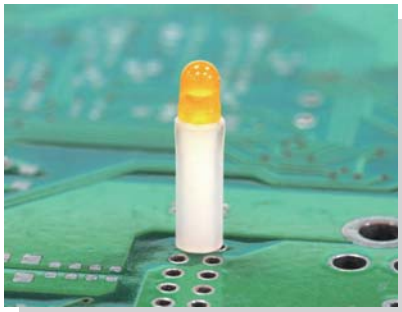


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEDBF-10	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LEDO-6	6.0	2000
LEDO-9.5	9.5	
LEDO-15.5	15.5	1000

LED間隔柱 LED SPACER SUPPORT

用途：使 LED 立於 PC 板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
LEDXV-4.8	4.8	2000
LEDXV-6.5	6.5	
LEDXV-9.5	9.5	
LEDXV-12.7	12.7	
LEDXV-19.1	19.1	
LEDXV-22.2	22.2	
LEDXV-25.4	25.4	




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

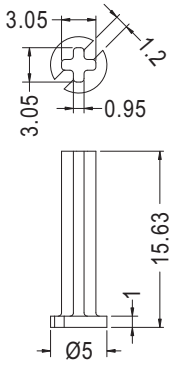


Part No.	Package
LEDXA-15.6	2000


LED間隔柱 LED SPACER SUPPORT

用途：用於保護 Ø5 mm LED 立於 PC 板上，使高度一致，接腳不會彎曲、折斷、短路。

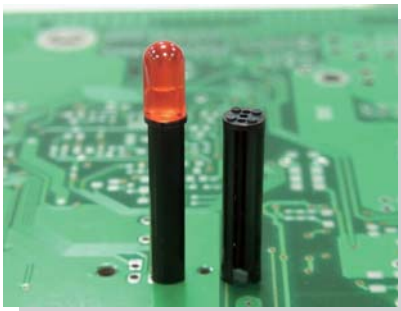

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm






Part No.	Package
LEDAA-22	1000


LED間隔柱 LED SPACER SUPPORT

用途：使 3 PIN Ø3 LED 固定於 PC 板上，高度一致，不斷腳。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	B	Package
LEDM-3	3.0	1.0	2000
LEDM-4	4.0	1.0	
LEDM-5	5.0	1.5	
LEDM-8	8.0	5.0	
LEDM-16	16.0	13.0	1000

LED間隔柱 LED SPACER SUPPORT

用途：使3 PIN Ø3 LED固定於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDQ-5	2000

LED間隔柱 LED SPACER SUPPORT


用途：使LED固定於PC板上，高度一致，不斷腳。

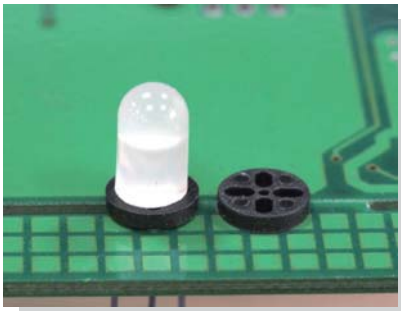


- Material: TPE
- Color: Black
- Unit: mm




Part No.	A	Package
LEDAJ-1.3	1.3	2000
LEDAJ-7.9	7.9	

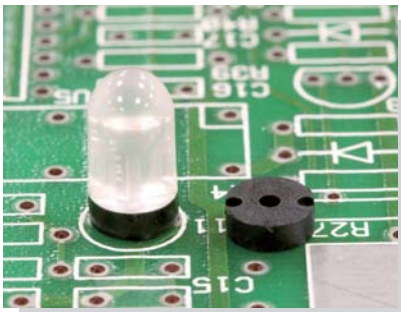


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEDHB-2.3	2000

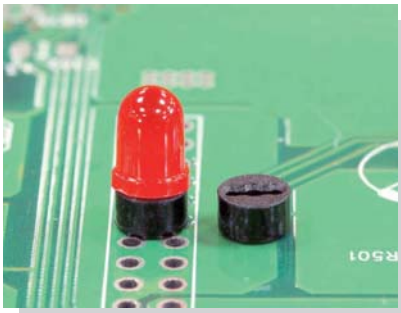

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDBA-2.5	1000

LED間隔柱 LED SPACER SUPPORT

用途：使 LED 立於 PC 板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDBB-3	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDBC-1.6	2000

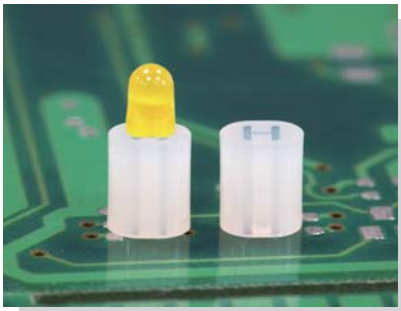


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEDBD-4.8	1000

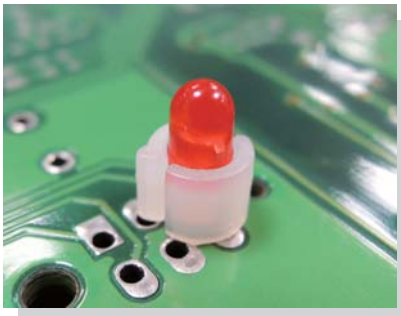


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDHC-4	2000

LED間隔柱 LED SPACER SUPPORT


用途：使 LED 立於 PC 板上，高度一致，不斷腳。

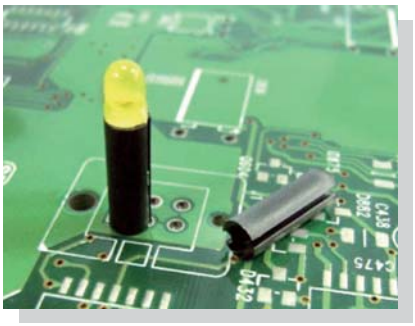

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LEDG-3	3.0	2000
LEDG-10	10.1	




Part No.	A	Package
LEDG-4	4.0	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDV-5.5	2000



Part No.	Package
LEDV-42	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
LEDH-1	1.0	2000
LEDH-1.5	1.5	
LEDH-2	2.0	
LEDH-2.5	2.5	
LEDH-3	3.0	
LEDH-3.5	3.5	
LEDH-4	4.0	
LEDH-4.5	4.5	
LEDH-5	5.0	
LEDH-5.5	5.5	
LEDH-6	6.0	
LEDH-6.5	6.5	
LEDH-7	7.0	
LEDH-7.5	7.5	

Part No.	A	Package
LEDH-8	8.0	2000
LEDH-8.5	8.5	
LEDH-9	9.0	
LEDH-9.5	9.5	
LEDH-10	10.0	
LEDH-10.5	10.5	
LEDH-11	11.0	
LEDH-11.5	11.5	
LEDH-12	12.0	
LEDH-12.5	12.5	
LEDH-13	13.0	
LEDH-13.5	13.5	
LEDH-14	14.0	
LEDH-14.5	14.5	
LEDH-15	15.0	
LEDH-15.5	15.5	
LEDH-16	16.0	
LEDH-17	17.0	
LEDH-18	18.0	



Part No.	A	Package
LEDHA-4	4.0	2000


LED間隔柱 LED SPACER SUPPORT

用途：使 LED 立於 PC 板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


- Material: EVA
- Color: Black




◆ **LEDT-6.4S**




Part No.	A	Package
LEDT-2.4	2.4	2000
LEDT-5S	5.0	1000
LEDT-6.4S	6.4	




Part No.	A	Package
LEDT-5	5.0	1000
★LEDT-5.5	5.5	
LEDT-8	8.0	
LEDT-9	9.0	
LEDT-11	11.0	
LEDT-14.5	14.5	



Part No.	A	Package
LEDT-16.1	16.1	1000
LEDT-16.4	16.4	
LEDT-17.5	17.5	
LEDT-20	20.2	
LEDT-22	22.0	
LEDT-22.7	22.7	
LEDT-23.5	23.5	
LEDT-26	26.0	

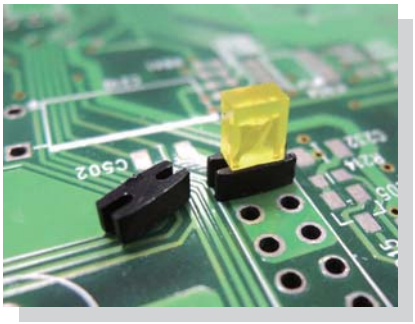


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LEDSH-2	2.0	2000
LEDSH-3.5	3.5	
★LEDSH-6	6.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEDSA-6	2000

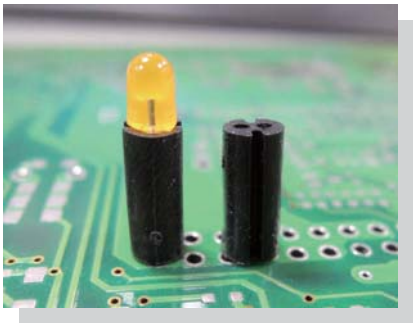


- Material: TPE
- Color: Black
- Unit: mm




Part No.	Package
LEDAK-9.5	2000

LED間隔柱 LED SPACER SUPPORT

用途：使 LED 立於 PC 板上，高度一致，不斷腳。

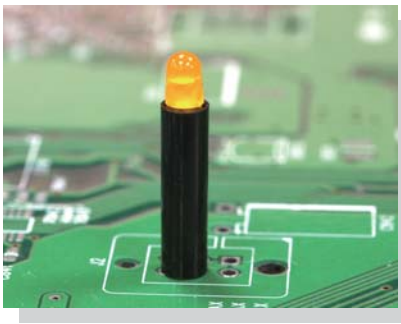


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
LEDAC-14.5	14.5	0.75	1000
LEDAC-18	18.0	0.76	


LED間隔柱 LED SPACER SUPPORT

用途：用於保護 Ø5 mm LED 立於 PC 板上，使高度一致，中間隔板設計，接腳不會彎曲、折斷、短路，有定位腳，不歪斜。

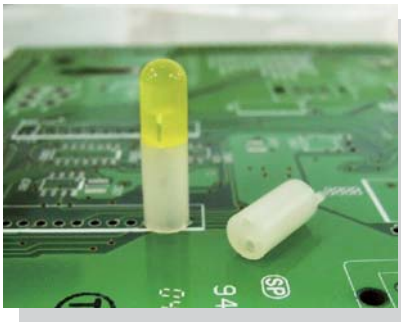



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	A	Package
LEDK-2	2.0	2000
LEDK-3	3.0	







Part No.	A	Package
LEDK-4	4.0	2000
LEDK-6	6.0	
LEDK-7	7.0	
LEDK-8	8.0	
LEDK-9	9.0	
LEDK-10	10.0	
LEDK-11	11.0	1000
LEDK-11.5	11.5	
LEDK-12	12.0	
LEDK-12.5	12.5	
LEDK-13	13.0	
LEDK-14	14.0	
LEDK-18	18.0	
LEDK-20	20.0	







Part No.	Package
LEDK-4S	1000





Part No.	Package
LEDK-5	1000






Part No.	Package
LEDKU-2	1000

LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø3 mm LED 立於 PC 板上，使高度一致，中間隔板設計，接腳不會彎曲、折斷、短路，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

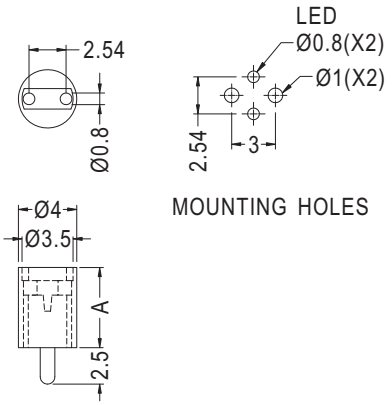


Part No.	A	Package
LEDWK-5.5	5.5	1000
LEDWK-6	6.0	
LEDWK-7	7.0	
LEDWK-8.5	8.5	
LEDWK-9	9.0	
LEDWK-10	10.0	
LEDWK-11	11.0	
LEDWK-12	12.0	
LEDWK-13	13.0	
LEDWK-14	14.0	
LEDWK-15	15.0	
LEDWK-17	17.0	
LEDWK-23	23.0	

LED間隔柱 LED SPACER SUPPORT

用途：用於保護LED焊於PC板上，高度一致，有定位腳，不歪斜。

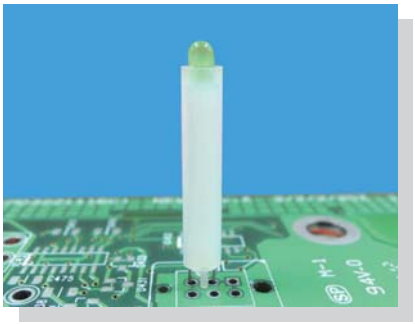


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

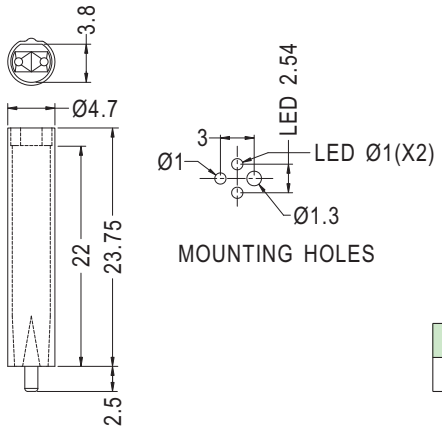


Part No.	Package
LEDWA-23.7	1000

LED間隔柱 LED SPACER SUPPORT

用途：用於保護 3 PIN Ø5 mm LED 焊於 PC 板上，高度一致，不斷腳，有定位腳，不歪斜。

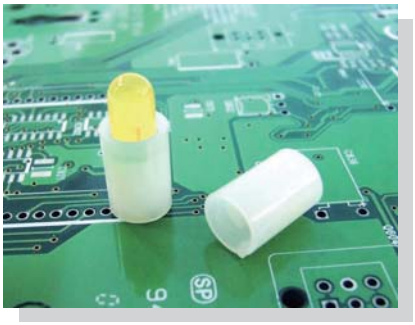

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

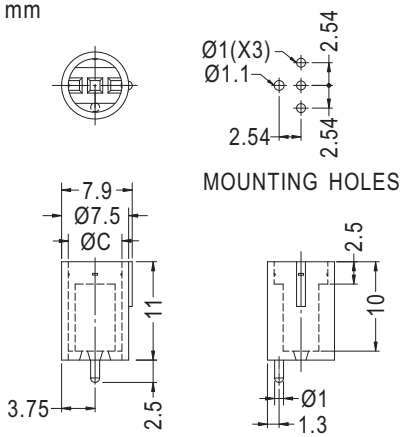


Part No.	C	Package
LECC-8.5	6.0	1000

LED間隔柱 LED SPACER SUPPORT

用途：固定4 PIN Ø5mm LED焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

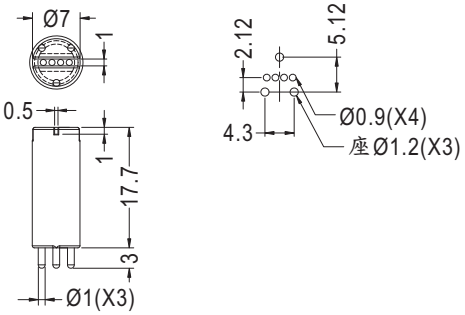


Part No.	Package
LEDKB-17.7	1000

LED間隔柱 LED SPACER SUPPORT

用途：用於保護2 PIN Ø3 mm LED焊於PC板上，高度一致，有定位腳，不歪斜。

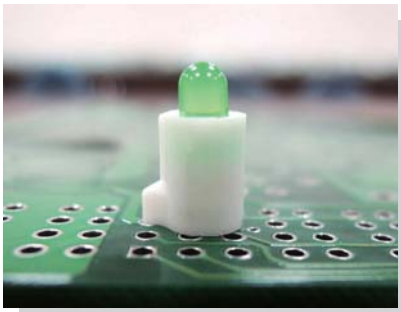


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

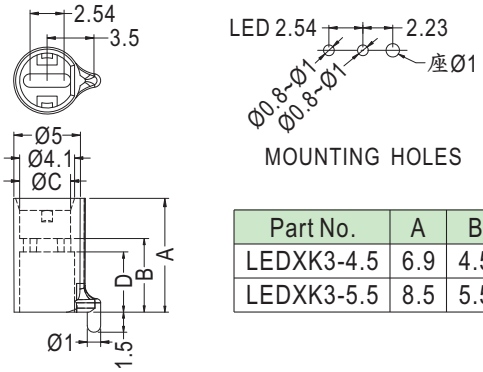


Part No.	A	B	C	D	Package
LEDXK3-4.5	6.9	4.5	3.8	3.5	1000
LEDXK3-5.5	8.5	5.5	3.8	4.5	

LED間隔柱 LED SPACER SUPPORT

用途：固定LED焊於PC板上，高度一致，有定位腳，不傾斜。

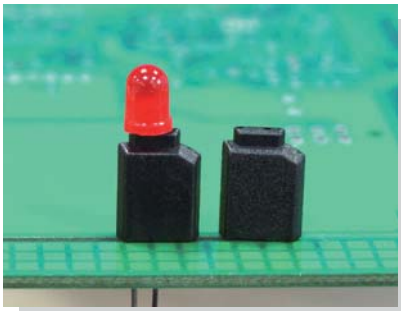

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

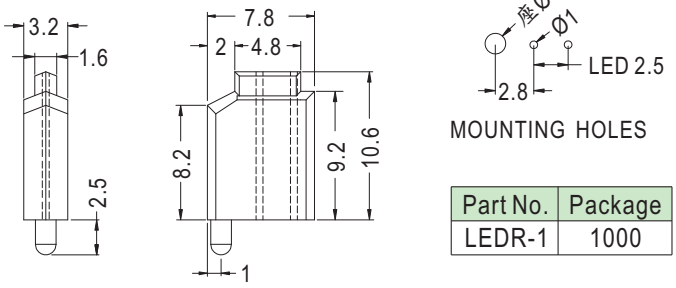


Part No.	Package
LEDR-1	1000

LED間隔柱 LED SPACER SUPPORT

用途：可快速將Ø5 LED固定於機板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

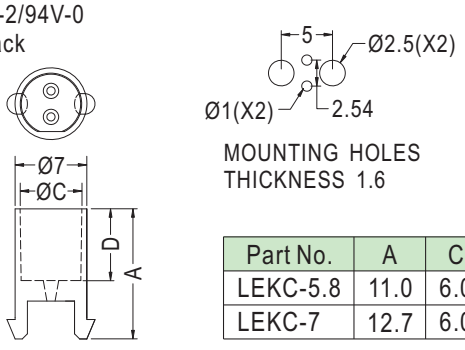


Part No.	A	C	D	Package
LEKC-5.8	11.0	6.0	5.8	2000
LEKC-7	12.7	6.0	7.0	

LED間隔柱 LED SPACER SUPPORT


用途：使3 PIN Ø5 LED固定於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
LEDU-4	4.0	3.0	2000
LEDU-6	6.0	5.0	
LEDU-9.5	9.5	8.5	
LEDU-11.5	11.5	10.5	

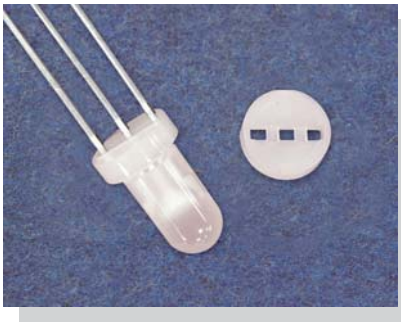


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEDU-2	2000

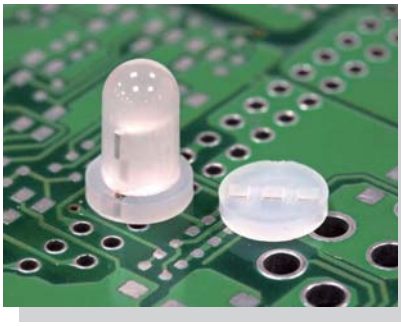

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDU-1.5	2000

LED間隔柱 LED SPACER SUPPORT

用途：用於保護Ø3 mm LED立於PC板上，高度一致，接腳不彎曲、折斷、短路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	C	Package
LEDMU-8.5	8.5	3.6	1000
LEDMU-10	10.0		
LEDMU-15	15.0		
LEDMU-20	20.0		


LED間隔柱 LED SPACER SUPPORT

用途：使4 PIN變色LED固定於PC板上，高度一致，不斷腳。

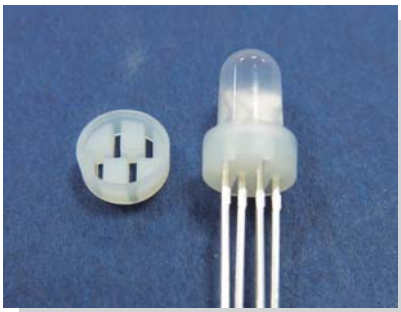


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES



◆ LED54-2.5~LED54-5




MOUNTING HOLES


Part No.	A	C	Package
LED54-2	2.0	6.0	2000
LED54-2.5	2.5		1000
LED54-3	3.0		
LED54-3.5	3.5		
LED54-4	4.0		
LED54-4.5	4.5		
LED54-5	5.0		
LED54-5.5	5.5		
LED54-6	6.0		
LED54-6.5	6.5		
LED54-7	7.0		
LED54-7.5	7.5		
LED54-8	8.0		
LED54-8.5	8.5		
LED54-9	9.0		
LED54-9.5	9.5		
LED54-10	10.0		

LED間隔柱 LED SPACER SUPPORT

用途：使LED立於PC板上，高度一致，不斷腳。

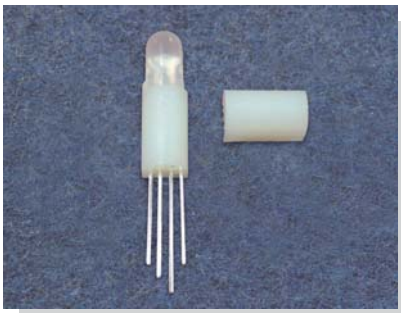


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LD54-10.5	2000

LED間隔柱 LED SPACER SUPPORT

用途：可配合LED使用。

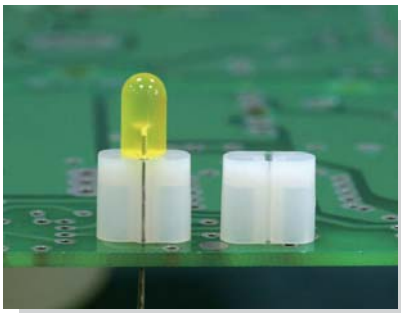


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDMU-9	1000

LED間隔柱 LED SPACER SUPPORT

用途：保護雙色LED(3PIN)固定PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。

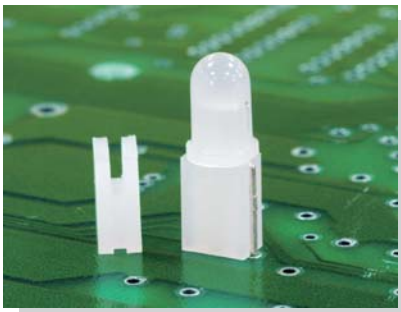


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
LED3X9	9.0	5.7	1000
LED3X9.5	9.5		
LED3X10	10.0		
LED3X10.5	10.5		
LED3X11	11.0	6.0	
LED3X11.5	11.5	5.7	
LED3X12	12.0		
LED3X12.5	12.5		
LED3X13	13.0		
LED3X13.6	13.6		
LED3X14	14.0		
LED3X14.5	14.5		
LED3X15	15.0	7.0	
LED3X15.5	15.5	5.7	
LED3X16	16.0		
LED3X16.5	16.5		
LED3X17	17.0		
LED3X17.5	17.5		
LED3X18	18.0		
LED3X18.5	18.5		
LED3X19	19.0		
LED3X19.5	19.5		
LED3X22	22.0		

Part No.	A	B	Package
LED3X3	3.0	5.7	2000
LED3X3.5	3.5		
LED3X4	4.0		
LED3X4.5	4.5		
LED3X5	5.0		
LED3X5.5	5.5		
LED3X6	6.0		
LED3X6.5	6.5		
LED3X7	7.0		
LED3X7.5	7.5		
LED3X8	8.0		
LED3X8.5	8.5		


- Material: Nylon 6T (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	Package
LED3X6-1	6.5	5.7	2000



Part No.	A	B	C	D	E	F	Package
LED3X13-1	13.0	7.0	0.8	8.0	3.5	4.2	1000
LED3X16-1	16.0	6.0	0.9	11.5	3.9	4.3	



Part No.	Package
LED3X8R	2000




Part No.	Package
LED3X1.5R	2000


LED間隔柱 LED SPACER SUPPORT

用途：用於3 PIN LED之墊高及固定，有定位腳，不歪斜。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLES


Part No.	Package
LEK3X5.3	1000


LED間隔柱 LED SPACER SUPPORT

用途：保護LED固定PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。




- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm







MOUNTING HOLES




Part No.	Package
LED3A-9	1000

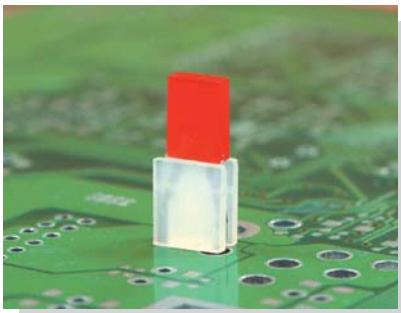

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
LED2X7.5	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
LEDSC-2	1000


LED座 LED HOLDER

用途：保護4 PIN LED固定PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。

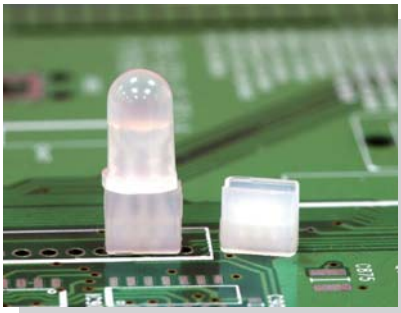

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
LED4AX5	2000


LED間隔柱 LED SPACER SUPPORT

用途：保護4 PIN LED 固定PC板上，使接腳不會彎曲、折斷、短路，並使 LED 高度一致。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
LED4X7	2000


LED間隔柱 LED SPACER SUPPORT

用途：使LED固定於PC板上，高度一致，不斷腳。可用於2個方形LED燈並排。

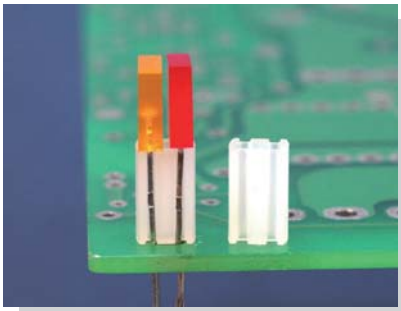

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
LED-208	2000

LED間隔柱 LED SPACER SUPPORT


用途：保護LED 固定 PC 板上，使接腳不會彎曲、折斷、短路，可連接多個LED座，並使LED高度一致。

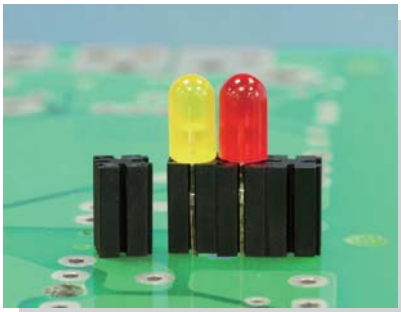


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



◆ 產品使用時可組合使用
◆ Products Are Combinable






Part No.	A	Package
LEDP-3	3.0	2000
LEDP-4	4.0	
LEDP-5	5.0	
LEDP-6	6.0	
LEDP-7	7.0	
LEDP-8	8.0	
LEDP-9	9.0	
LEDP-9.5	9.5	
LEDP-10	10.0	


Part No.	A	Package
LEDP-11	11.0	2000
LEDP-12	12.0	
LEDP-13	13.0	
LEDP-14	14.0	
LEDP-15	15.0	
LEDP-16	16.0	
LEDP-17	17.0	
LEDP-18	18.0	
LEDP-19	19.0	
LEDP-20	20.0	


LED間隔柱 LED SPACER SUPPORT

用途：使 LED 固定 PC 板上，高度一致，不斷腳。

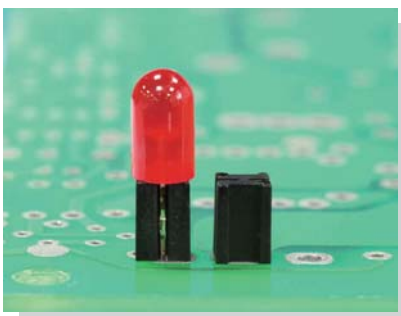

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
LEDP3-6.4	500

LED間隔柱 LED SPACER SUPPORT


用途：使 LED 固定 PC 板上，高度一致，不斷腳。

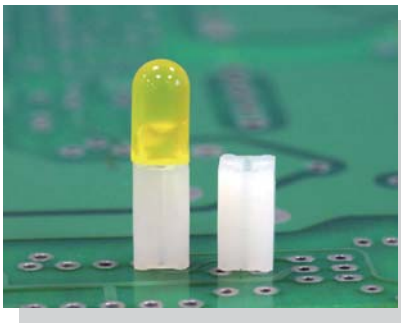


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

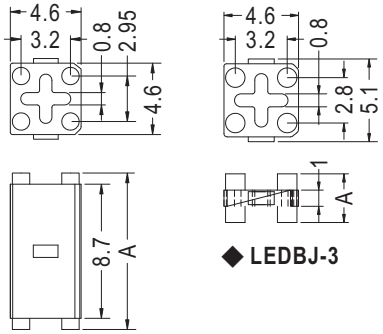


Part No.	A	Package
LEDBJ-3	3.0	2000
LEDBJ-9	9.15	1000
LEDBJ-10	10.15	

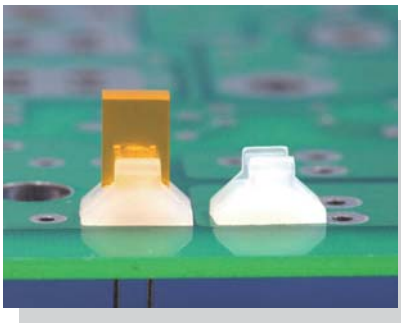


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
LEC-1	2000

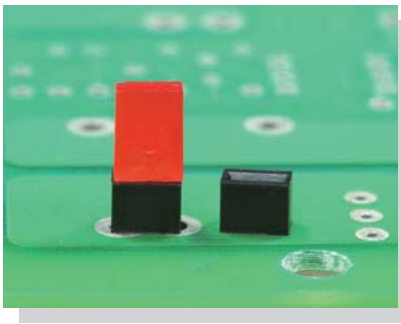


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

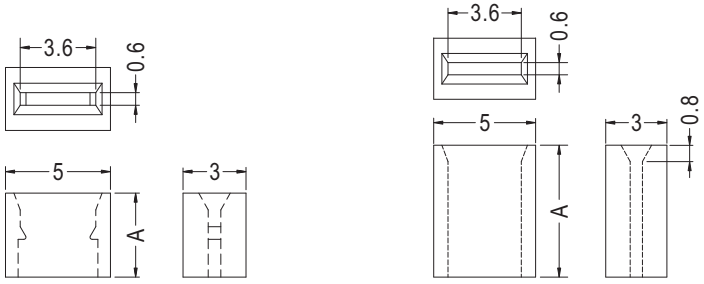


Part No.	A	Package
LEDJ-4	4.0	2000
LEDJ-4.5	4.5	

Part No.	A	Package
LEDJ-7.5	7.5	2000
LEDJ-8	8.0	
LEDJ-8.5	8.5	

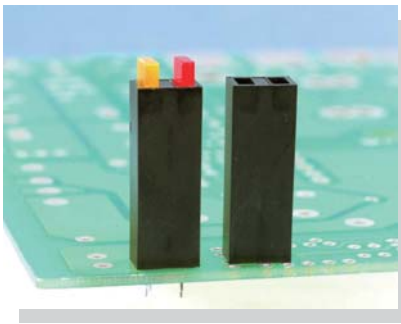


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
ELH2-27	500

LED間隔柱 LED SPACER SUPPORT

用途：使LED固定於PC板上，使高度一致，不斷腳。

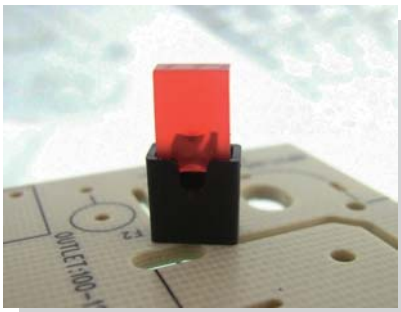

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

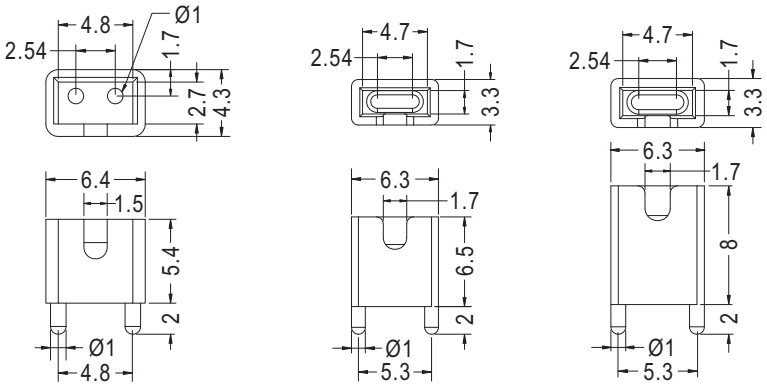


Part No.	Package
LEDUA-5.4	2000

Part No.	Package
LEDUA-6.5	2000


Part No.	Package
LEDUA-8	2000

LED座 LED HOLDER

用途：保護LED固定PC板上，使接腳不會彎曲、折斷、短路，並使LED高度一致。

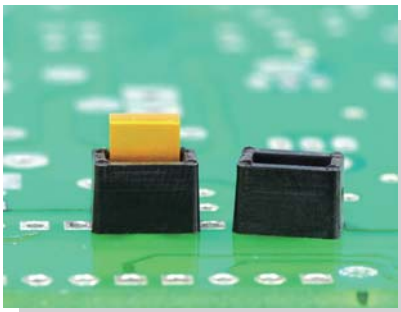


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LEF-1	2000

LED蓋 LED CAP

用途：做為LED外殼。

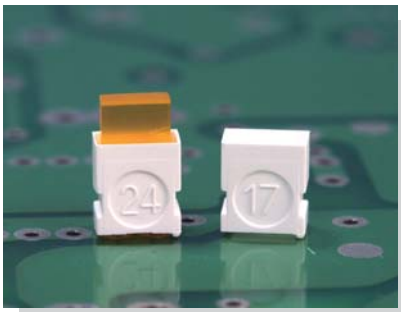


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm




Part No.	Package
ELED-1	2000

LED座 LED HOLDER

用途：可快速將5×2方形LED固定於機器面板上。

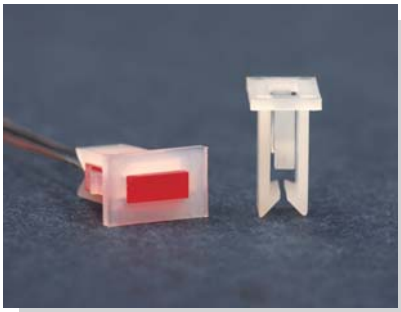


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Computer
- Unit: mm

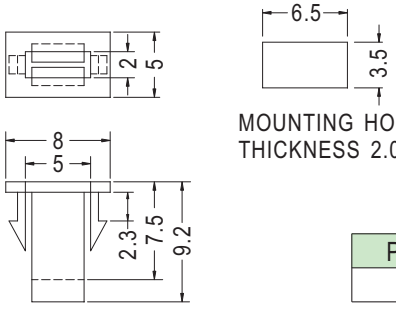


Part No.	Package
LEQ-1	2000

LED座 LED HOLDER

用途：可快速將5×2方形LED固定於機器面板上。

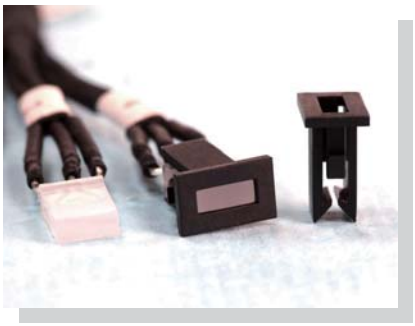

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

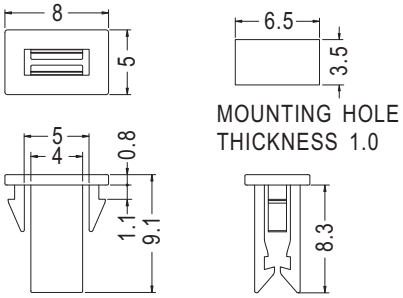


Part No.	Package
LEQ-3	2000

LED座套 LED HOLDER COVER

用途：可將方型LED固定於機器面板上，與LEQ-2T配合使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

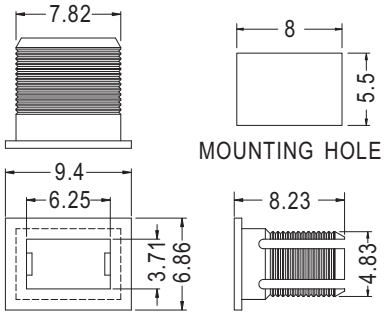


Part No.	Package
LEQ-2	1000

LED座套 LED HOLDER COVER

用途：可配合加強LEQ-2固定於機器面板上不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

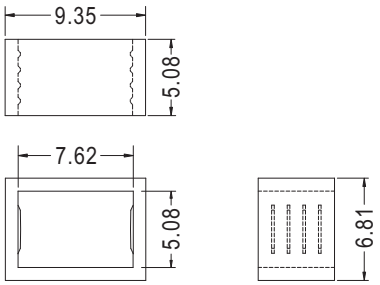


Part No.	Package
LEQ-2T	1000

LED間隔柱 LED SPACER SUPPORT

用途：可配合LED定位。

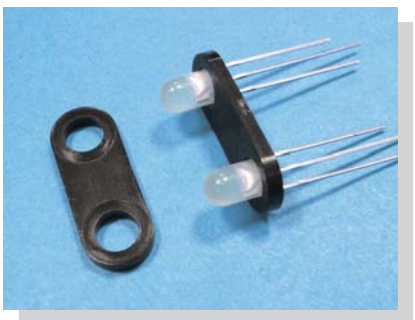


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PUCP-1	1000

LED間隔柱 LED SPACER SUPPORT

用途：可配合LED定位。

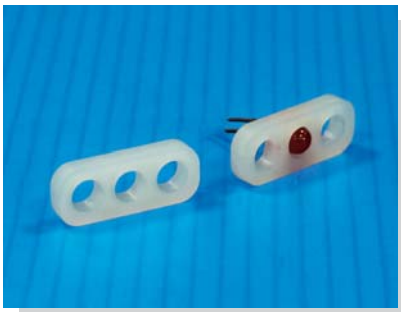

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEDI3-3	1000

LED間隔柱 LED SPACER SUPPORT

用途：LED墊高，可固定間隔，長度可自行裁切。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

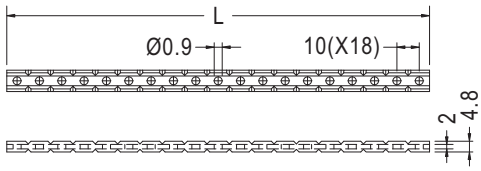


Part No.	L	Package
EM-45	47.3	500
EM-45-2	4.9	
EM-45-3	7.4	
EM-45-4	9.9	


Part No.	L	Package
EM-45-5	12.4	500
EM-45-6	14.9	
EM-45-7	17.4	
EM-45-8	19.9	
EM-45-9	22.4	
EM-45-10	24.9	
EM-45-11	27.4	
EM-45-12	29.9	
EM-45-13	32.4	
EM-45-14	34.9	
EM-45-15	37.4	
EM-45-16	39.9	
EM-45-17	42.4	

LED間隔柱 LED SPACER SUPPORT

用途：可快速將8字型LED固定墊高於PC板上。

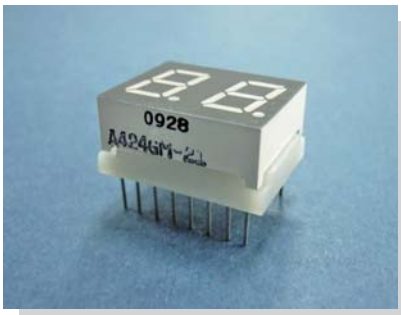

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LEDSS-4	4.0	1000
LEDSS-5	5.0	
LEDSS-6	6.0	
LEDSS-7	7.0	
LEDSS-8	8.0	

LED座 LED HOLDER


用途：可快速將 Ø3 LED 固定於機器面板上，LED3-1B可加強LED3-2之固定或作為墊片使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø4.5
THICKNESS 1.7



Part No.	C	Package
LED3-2	3.0	2000


Part No.	Package
LED3-1B	2000

LED座 LED HOLDER


用途：可快速將 Ø3 LED 固定於機器面板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



CHASSIS Ø4.5
THICKNESS 0.8~1.2




CHASSIS Ø5.0
THICKNESS 1.0~1.1

Part No.	A	B	C	D	Package
LED3-1	5.6	5.0	3.1	3.8	2000
LED3-8	4.6	4.0	3.1	2.8	

Part No.	C	Package
LED3-5	3.0	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø4.5
THICKNESS 0.8

Part No.	C	Package
LED3-4	3.0	2000






CHASSIS Ø4.5
THICKNESS 0.8




CHASSIS Ø4.5
THICKNESS 1.6

Part No.	C	Package
LED3-6	3.0	2000

Part No.	C	Package
LED3-7	3.0	2000

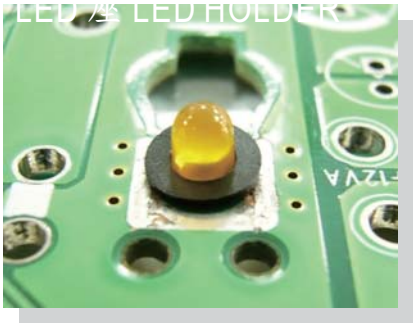

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

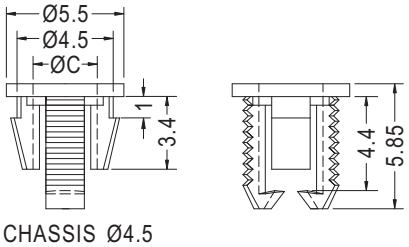


CHASSIS Ø4.5
THICKNESS 1.0

Part No.	C	Package
LED3-20	3.0	2000

用途：可快速將 Ø3 LED 固定於機器面板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

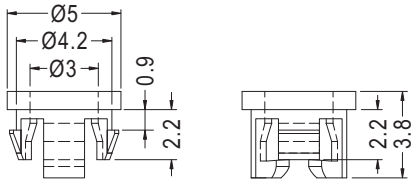


CHASSIS Ø4.3
THICKNESS 0.8

Part No.	Package
LED3-29	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

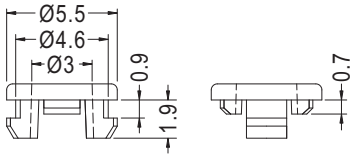

CHASSIS Ø4.8
THICKNESS 0.8

Part No.	Package
LED3-23	2000

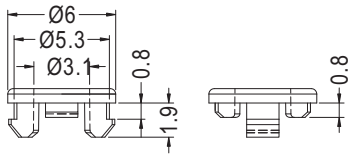


CHASSIS Ø5.3
THICKNESS 0.8

Part No.	Package
LED3-34	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

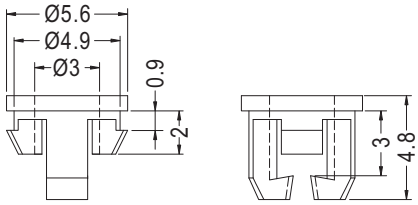



CHASSIS Ø5.0
THICKNESS 0.8

Part No.	Package
LED3-22	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

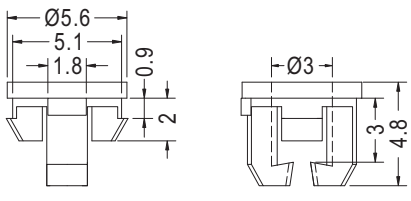



HOLE IN CHASSIS
THICKNESS 0.8


Part No.	Package
LED3-28	2000

LED座 LED HOLDER

用途：可快速將Ø3 LED固定於機器面板上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)




Part No.	A	C	Package
LED3-37	4.8	3.0	2000
LED3-38	4.8	2.8	
LED3-44	5.3	3.0	

MOUNTING HOLE Ø5.0
CHASSIS THICKNSS 0.8

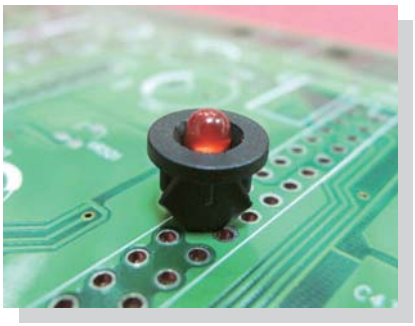

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LED3-19	1000


MOUNTING HOLE Ø6.35
THICKNESS 2.0

LED座 LED HOLDER

用途：可快速將Ø3 LED燈固定於機器面板上，有遮光，不干涉。

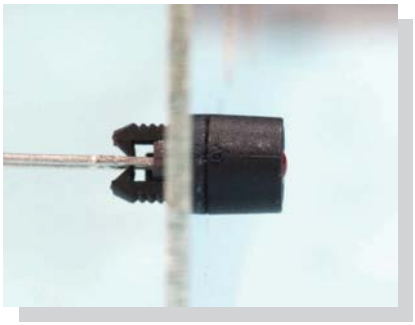


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LED3-45	1000

MOUNTING HOLE Ø4.5
THICKNESS 0.8

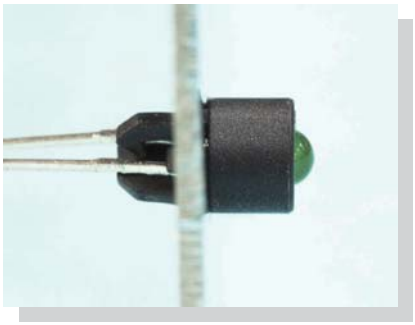

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (P.A.T)




Part No.	Package
LED3-46	1000


MOUNTING HOLE Ø5.0
THICKNESS 0.8

LED座 LED HOLDER

用途：可快速將LED固定於機器面板上。

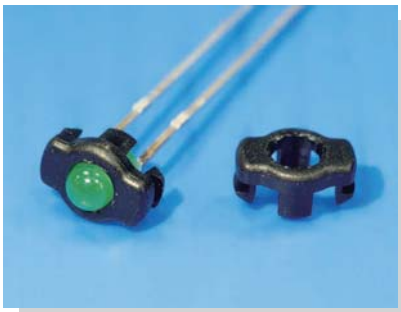


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

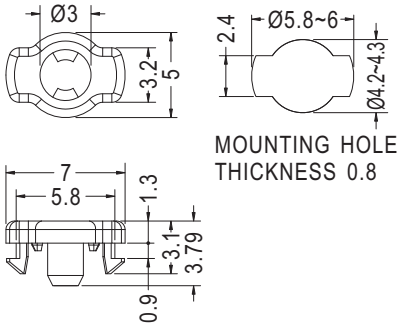


NEW

Part No.	Package
LED3-53	1000

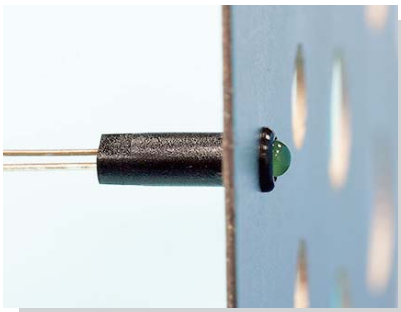


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

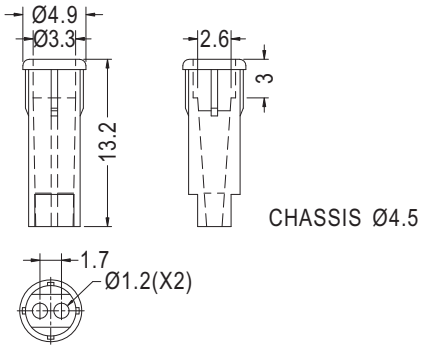

Part No.	Package
LED3-3	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

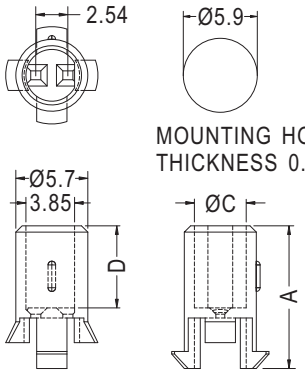


Part No.	A	C	D	Package
LEQU3-1	12.8	4.1	8.0	2000
LEQU3-2	11.3	4.1	6.5	

LED座 LED HOLDER


用途：可快速將Ø5 LED固定於機器面板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
LED5-1	2000




Part No.	Package
LED5-1S	2000


LED座 LED HOLDER

用途：可快速將Ø5 LED固定於機器面板上，LED5-5T可加強LED5-5之固定或作為墊片使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

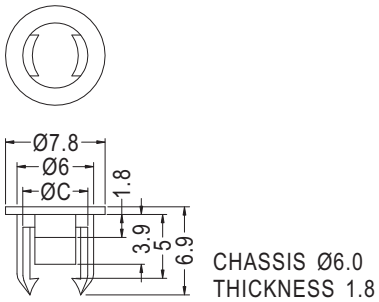




Part No.	C	Package
LED5-5	5.1	2000


Part No.	Package
LED5-5T	2000

LED座 LED HOLDER

用途：可快速將 LED 固定於機器面板上。

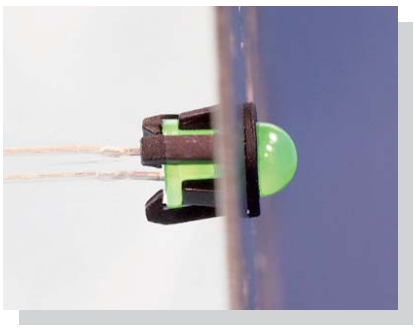

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)




MOUNTING HOLE Ø7.0
THICKNESS: F


Part No.	A	B	C	D	F	Package
LED5-28	7.5	5.5	4.9	7.6	0.6~0.8	1000
LED5-29	6.9	4.65	5.0	8.0	0.8	


LED座 LED HOLDER

用途：可快速將橢圓LED固定於機器面板上。

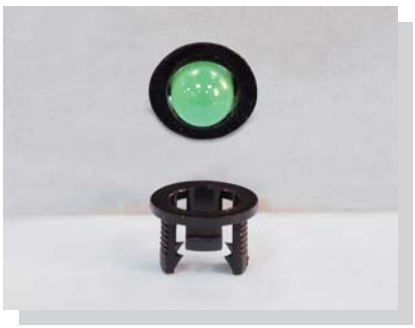

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 1.0


Part No.	C	Package
LED5-6	5.8	2000

LED座 LED HOLDER


用途：可快速將 Ø5 LED 固定於機器面板上。
LED5-2B可加強LED5-2之固定或作為墊片使用。

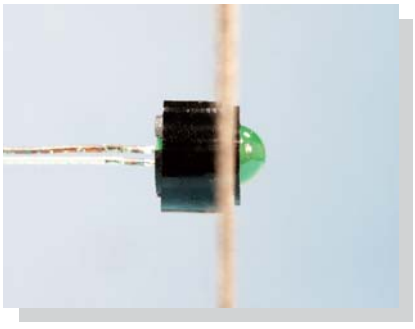

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



◆ LED5-2A




◆ LED5-2B

CHASSIS Ø6.4
THICKNESS 3.0 MAX


Part No.	C	Package
LED5-2	5.1	1000

LED座套 LED HOLDER COVER

用途：可快速將Ø5 LED固定於機器面板上。
LED5-8T可加強LED5-8之固定，或作為墊片使用。

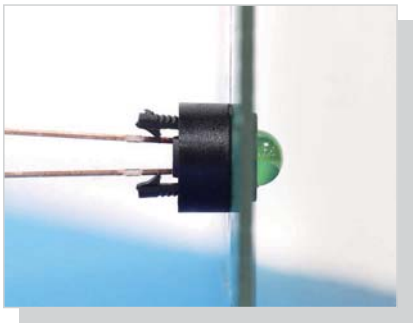


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø6.35
THICKNESS 0.9


Part No.	C	Package
LED5-8	5.0	2000




Part No.	Package
LED5-8T	2000



Part No.	Package
LED5-27T	2000

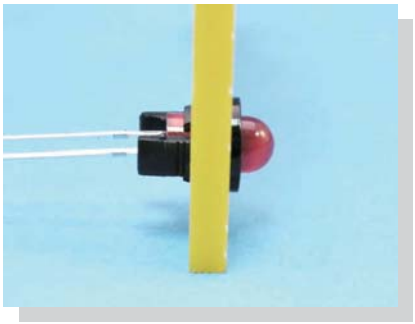


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø7.0
THICKNESS: E

Part No.	A	C	E	Package
LED5-9	1.5	5.1	0.8~1.4	1000
LED5-9S	1.0	5.1	0.8	2000

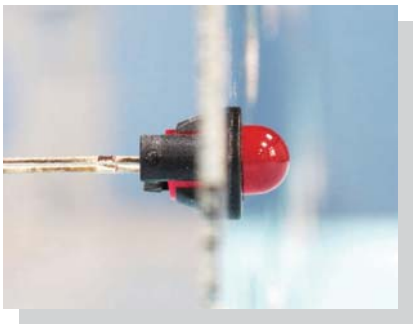

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS: ØE
THICKNESS: F

Part No.	A	B	C	D	E	F	Package
LED5-11	6.3	1.1	5.1	3.3	6.0	0.8~1.0	2000
LED5-13	6.9	1.8	5.1	3.9	6.2	1.2~1.6	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø6.5
THICKNESS 0.6~1.2


Part No.	C	Package
LED5-16S	5.0	2000

LED座 LED HOLDER

用途：可快速將Ø5 LED固定於機器面板上。

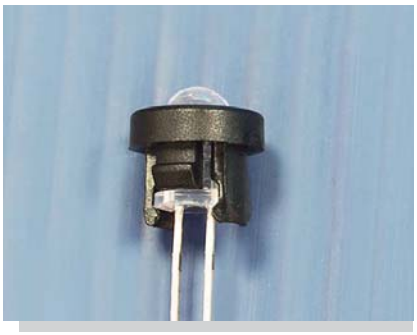

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø7.2
THICKNESS 1.2


Part No.	Package
LED5-25	500

LED座 LED HOLDER

用途：可快速將Ø5 LED燈固定於機器面板上，有遮光，不干涉。

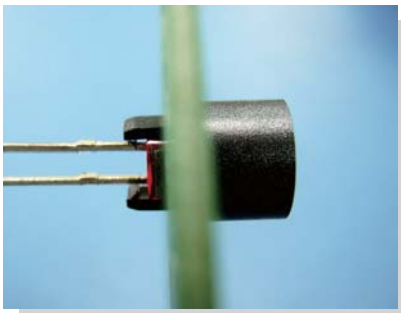

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø6.5
THICKNESS 0.8~1.0


Part No.	Package
LED5-14	2000

LED座 LED HOLDER

用途：可快速將Ø5 LED固定於機器面板上。

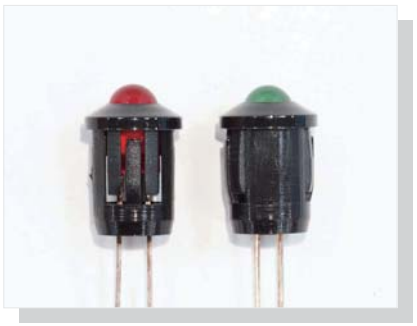

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø8.0
THICKNESS 1.2~3.0

Part No.	Package
LED5-3	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

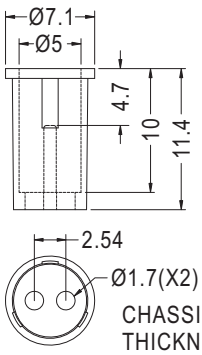

CHASSIS Ø6.35
THICKNESS 0.8~1.4

Part No.	Package
LED5-4	1000

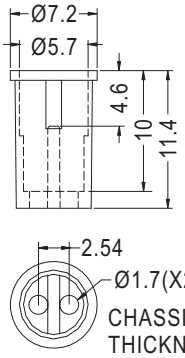


CHASSIS Ø6.4
THICKNESS 0.8~1.4

Part No.	Package
LED5-10	1000

用途：可快速將LED固定於機器面板上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS: ØE
THICKNESS: F

◆ 適用 Ø3 LED帽緣款

Part No.	A	B	C	D	E	F	SUITABLE LED	Package
LED3-14	7.8	9.0	3.0	7.4	7.5	0.6~1.0	3 PIN	1000
LED3-14M						1.0~1.2		
LED3-15	6.8	7.2	3.0	6.3	6.4	0.6~1.0	2 PIN	
LED3-15M						1.0~1.2		

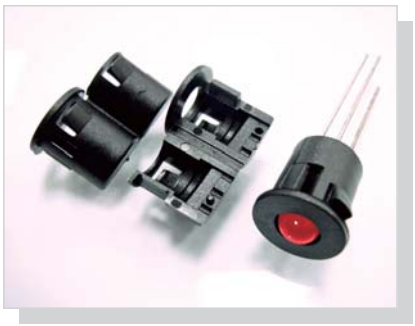





CHASSIS: ØE
THICKNESS: F

◆ 適用 Ø5 LED帽緣款

Part No.	A	B	C	D	E	F	SUITABLE LED	Package
LED5-17	10.9	10.5	5.0	8.8	9.0	0.6~1.0	3 PIN	1000
LED5-17M						1.0~1.2		
LED5-18	9.5	9.0	5.0	7.4	7.5	0.6~1.0	2 PIN	
LED5-18M						1.0~1.2		
LED5-18L						1.5		

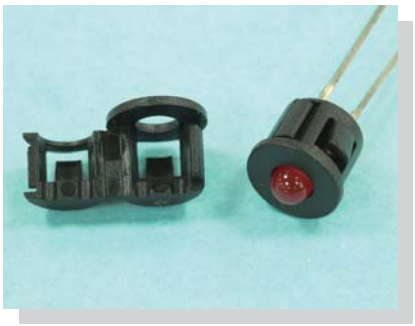

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø6.35~Ø6.4
THICKNESS 0.8

Part No.	C	Package
LED3-33	3.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



CHASSIS Ø6.35
THICKNESS: F


◆ 適用 Ø3 LED帽緣款
◆ 適用於2PIN、3PIN

Part No.	C	F	Package
LED3-16	3.0	0.6~1.0	1000
LED3-16M	3.0	1.0~1.2	

用途：可快速將LED固定於機器面板上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

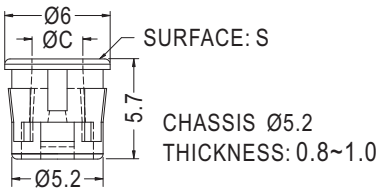

◆ 適用Ø3 LED帽緣款
◆ 適用於2PIN

Part No.	C	S	Package
LED3-17	2.9	Matte	1000
LED3-35	2.9	Glossy	




◆ 適用 Ø3 LED帽緣款
◆ 適用於2PIN、3PIN

Part No.	C	Package
LED3-25	3.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)




Part No.	C	Package
LED3-24	2.9	1000


◆ 適用Ø3 LED帽緣款
◆ 適用於2PIN、3PIN

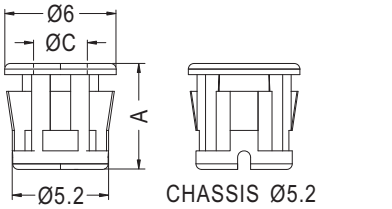

Part No.	A	C	Package
LED3-18	5.7	2.9	1000
LED3-43	5.5	2.9	
★LED3-55	4.4	2.9	

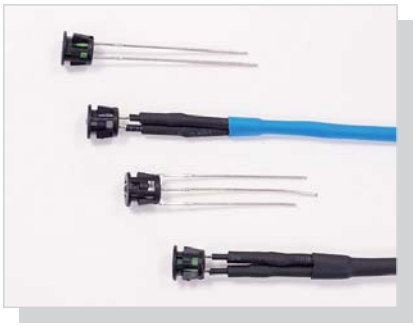


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)



◆ 適用Ø3 LED帽緣款
◆ 適用於2PIN、3PIN

Part No.	A	C	D	E	F	Package
LED3-30	5.0	3.0	5.2	5.2	1.1	1000
LED3-31	5.2	3.0	4.95	5.0	0.8	






◆ 適用Ø3 LED帽緣款
◆ 適用於2PIN、3PIN

Part No.	C	Package
LED3-17-0.6	2.9	1000

用途：可快速將LED固定於機器面板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)



MOUNTING HOLE Ø5.2
THICKNESS: F

◆ 適用Ø2.8 LED帽緣款
◆ 適用於2PIN、3PIN


Part No.	A	C	F	Package
LED3-40	5.3	2.8	0.8~1.0	1000
LED3-40S		2.9	0.8	
LED3-41		2.8	1.2	

◆ 適用Ø3 LED帽緣款
◆ 適用於2PIN、3PIN

Part No.	A	C	F	Package
LED3-42	5.7	2.95	0.8~1.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

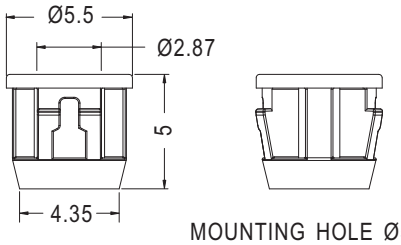


MOUNTING HOLE Ø5.0
THICKNESS 0.8

◆ 適用Ø2.8 LED帽緣款
◆ 適用於2PIN

Part No.	Package
LED3-49	1000



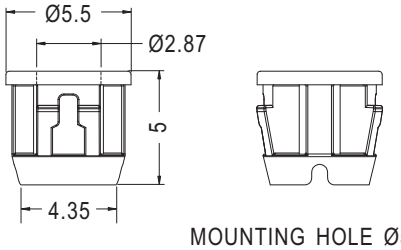


MOUNTING HOLE Ø5.0
THICKNESS 0.8

◆ 適用Ø2.8 LED帽緣款
◆ 適用於2PIN、3PIN

Part No.	Package
LED3-50	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)

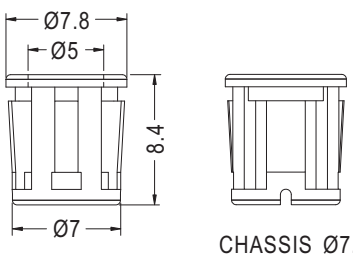

CHASSIS Ø7.0
THICKNESS: F

◆ 適用 Ø5 LED帽緣款
◆ 適用於2PIN、3PIN


Part No.	F	Package
LED5-24	0.8~1.0	1000
LED5-24M	1.2	
LED5-24L	1.6	

LED座 LED HOLDER

用途：快速固定Ø3 LED於面板上，須搭配M-6螺帽使用，可當電源指示燈。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

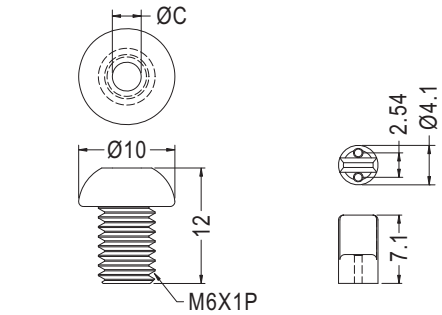

◆ LELG-1A ◆ LELG-1B


Part No.	C	Package
LELG-1F	3.0	2000

LED套 LED COVER

用途：用於LED的遮光避免光干擾。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




◆ 適用於2PIN、3PIN之Ø3 LED、Ø5 LED遮光


Part No.	A	B	C	D	E	Package
LEDMK-3	5.1	3.7	2.2	4.1	5.4	2000
LEDMK-5	7.1	5.7	4.0	6.1	8.55	

LED套 LED COVER


用途：用於 LED 的遮光。

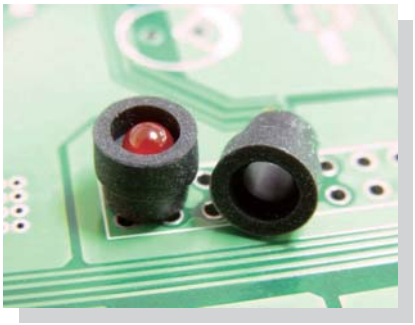


- Material: Silicon Rubber
- Color: Black
- Unit: mm



Part No.	A	B	C	D	E	F	Package
TF-263	5.8	4.0	2.6	4.8	5.3	1.9	2000
TF-444	6.0	4.0	2.8	4.8	5.45	1.3	

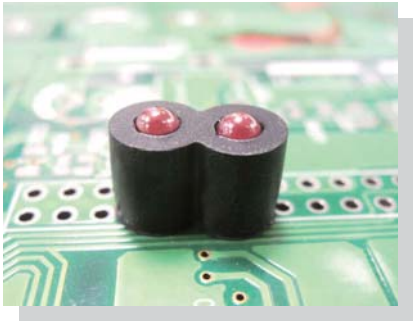


- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	C	Package
LEDMK-1	2.9	2000

LED座 LED HOLDER

用途：可快速將LED固定於機器面板上。

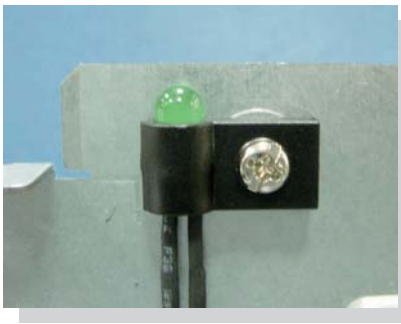

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)

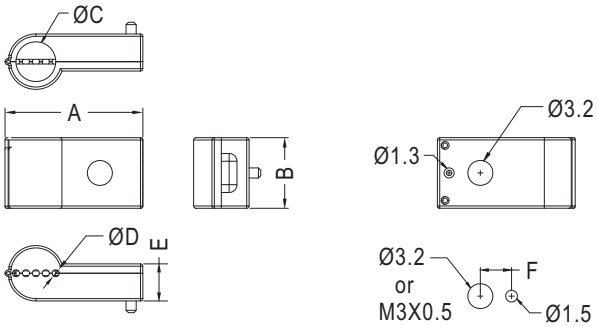

◆適用於2PIN、3PIN


Part No.	A	B	C	D	E	F	適用於有帽緣的	Package
LEKHD-1	17.65	9.05	5.1	0.9	4.75	4.0	Ø5 LED	1000
LEKHD-2	14.05	6.0	3.1	0.88	4.25	3.0	Ø3 LED	

LED座 LED HOLDER

用途：可快速將Ø3 LED燈固定於機器面板上，有遮光，不干涉。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)

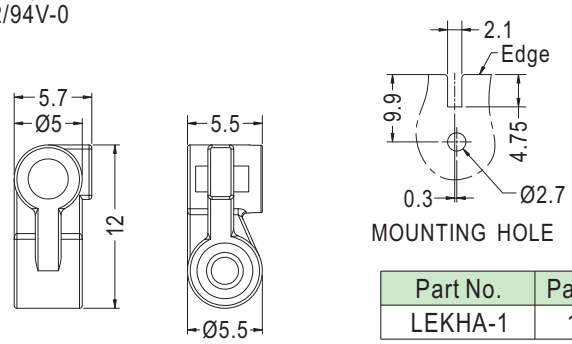


Part No.	Package
LEKHA-1	1000

LED座 LED HOLDER

用途：配合螺絲，可將LED固定於機板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

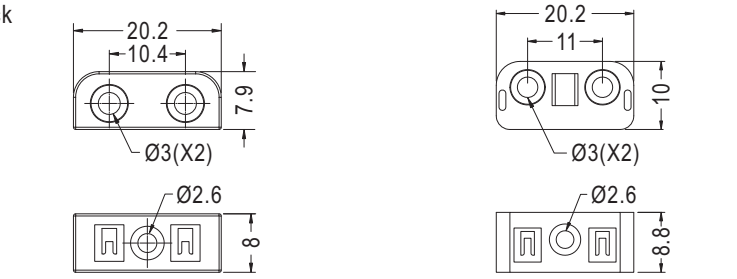

Part No.	Package
LED3-47	1000


Part No.	Package
LED3-48	1000

LED間隔柱 LED SPACER SUPPORT

用途：配合螺絲，可將 2PIN、3PIN Ø3 LED固定於機板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
EMD-141	1000


LED座 LED HOLDER

用途：可快速將LED固定於機器面板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)





SUGGESTED MOUNTING HOLE THICKNESS 0.8

Part No.	Package
LED3-14-3S	1000

LED導光柱 LIGHT PIPE


用途：配合M4螺帽，使LED導光於面板上，使光線均勻、柔和、防水，方便使用。




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm


◆ 經過IP68防水測試
◆ 此為子母包:內容物包含下方各零件

Part No.	Part No.	Package
LEMA-2F	LEMA-2	1000
	TF-807	
	M-4	
	上述零件亦可單獨選購	







MOUNTING HOLE




(NUT)
▯ **M-4**



(SILICON WASHER)
◆ **TF-807**



(LIGHT PIPE)




MOUNTING HOLE

Part No.	Package
LEMA-2	2000

LED導光柱 LIGHT PIPE


用途：可快速將LED固定於機器面板上，防水性佳。

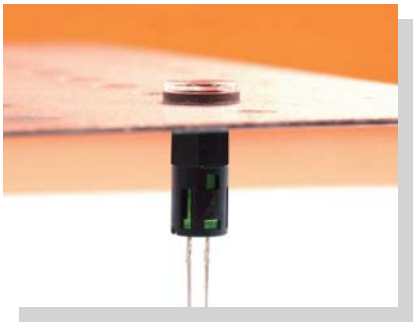

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)


◆ 經過IP68防水測試
◆ 此為子母包:內容物包含下方各零件

Part No.	Part No.	Package
LEMA-3F	LEMA-2	1000
	LEMA-3A	
	TF-807	
	上述零件亦可單獨選購	






MOUNTING HOLE




Part No.	Package
LEMA-3A	1000


LED導光座 LIGHT GUIDE HOLDER

用途：可快速將LED固定於機器面板上，使LED導光於機殼面板上，使光度均勻、柔和。

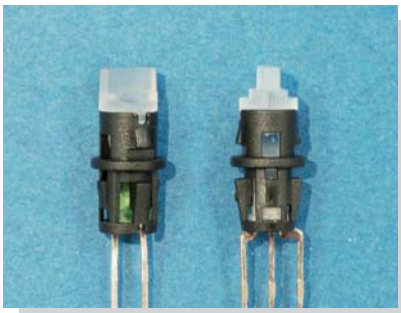


- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent/Black
- Unit: mm
- 專利品 (PAT.)

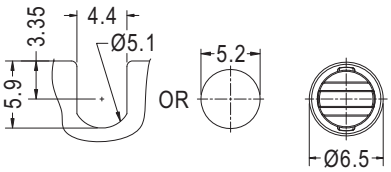

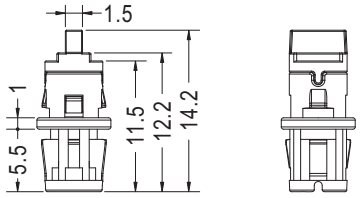

MOUNTING HOLE
THICKNESS 0.8




◆ 適用於Ø3 LED有帽緣款
◆ 適用於2PIN及3PIN
◆ 此為子母包:內容物包含右方各零件

Part No.	Part No.	Package
LEMA-6F	LED3-52	1000
	LEM-234	
	上述零件亦可單獨選購	


◆使用說明


LED光纖座 LED OPTICAL FIBER AOLDER

用途：配合光纖將LED光導到機器面板上。

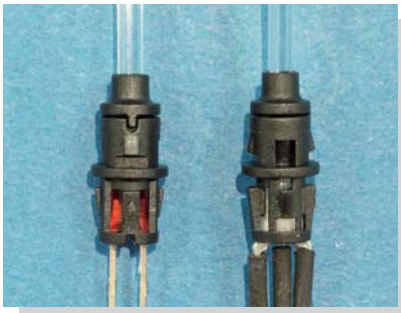


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

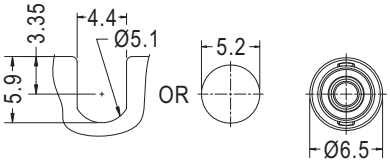

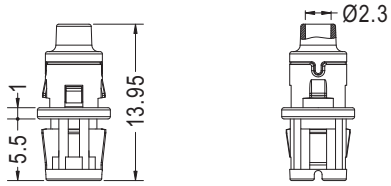

MOUNTING HOLE
THICKNESS 0.8




◆ 適用於Ø3 LED有帽緣款
◆ 適用於2PIN及3PIN
◆ 此為子母包:內容物包含右方各零件

Part No.	Part No.	Package
PMR-12F	LED3-52	1000
	PMR-12	
	上述零件亦可單獨選購	

◆使用說明

◆ LED3-52


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm
- 專利品 (PAT.)

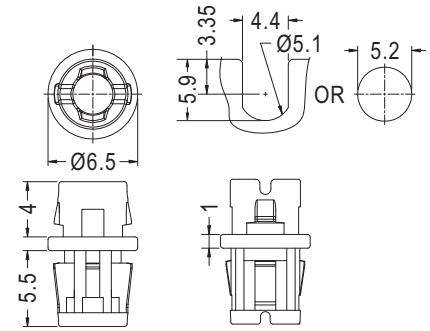

MOUNTING HOLE
THICKNESS 0.8

◆ LEM-234


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm
- 專利品 (PAT.)

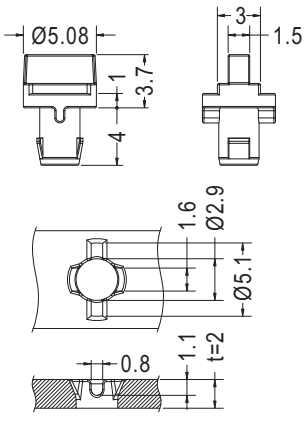

MOUNTING HOLE

◆ PMR-12


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm
- 專利品 (PAT.)

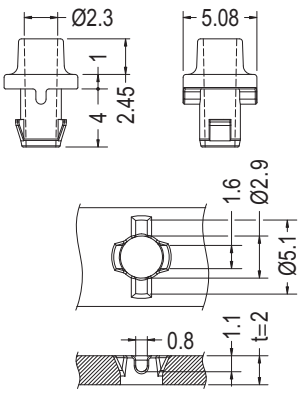


MOUNTING HOLE

LED座套 LED HOLDER COVER

用途：LC3-1T可加強LC3-1之固定，或作為墊片使用。

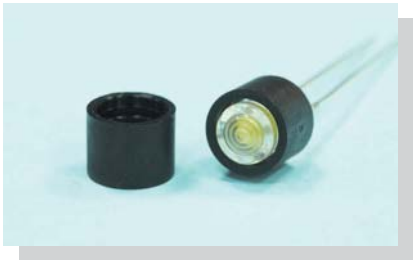

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
LC3-1T	6.8	5.2	2000
LC3-2T	6.4	4.95	
LC3-3T	6.4	5.0	

LED座套 LED HOLDER COVER

用途：LC5-1T可加強LC5-1之固定，或作為墊片使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LC5-1T	1000

LED座套 LED HOLDER COVER

用途：LC5-2T可加強LC5-1之固定，或作為絕緣墊片使用。

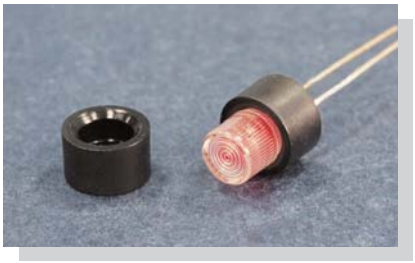

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LC5-2T	1000

LED導光蓋 LENS CAP

用途：將LED導光於機殼面板上，使光度均勻、柔和。搭配LC3-1T, LC3-2T, LC3-3T更緊密穩固。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




CHASSIS Ø4.4
THICKNESS 1.57~3.2

Part No.	C	Package
LC3-1	3.3	2000



CHASSIS Ø4.4
THICKNESS 1.6

Part No.	C	Package
LC3-6	3.0	2000



CHASSIS Ø4.4
THICKNESS 0.7


Part No.	C	Package
LC3-13	3.2	2000

LED導光蓋 LENS CAP

用途：將LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



CHASSIS Ø6.4
THICKNESS 0.8~6.35


Part No.	C	Package
LC5-1	5.1	1000

LED導光蓋 LENS CAP

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




CHASSIS Ø6.35
THICKNESS 3.0

Part No.	Package
LC5-2	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




CHASSIS Ø6.4
THICKNESS 3.0

Part No.	Package
LC5-9	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




CHASSIS Ø6.4
THICKNESS 0.8

Part No.	Package
LC5-4	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




CHASSIS Ø6.4~Ø6.45
THICKNESS 0.8~6.35

Part No.	Package
LC5-5	2000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



CHASSIS Ø6.4~Ø6.45
THICKNESS 0.8~6.35


Part No.	Package
LC5-6	1000

LED導光蓋 LENS CAP

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø6.3

Part No.	Package
LEM-149	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø6.35

Part No.	Package
LC5-3	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




CHASSIS Ø3.7~Ø3.8
THICKNESS 0.8~1.6

Part No.	C	Package
LC3-8	3.0	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø4.6
THICKNESS 2.0

Part No.	Package
LEM-123	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø5.0
THICKNESS 1.3


Part No.	Package
LC5-8	1000

LED導光蓋 LENS CAP

用途：置LED導光於機殼面板上，使光度均勻、柔和。

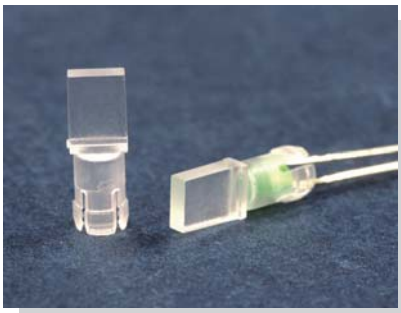


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



CHASSIS Ø4.4
THICKNESS 1.57~3.2

Part No.	A	C	Package
LC3-2	6.3	3.4	1000
LC3-7	2.5	3.4	




CHASSIS Ø4.4
THICKNESS 1.57~3.2

Part No.	C	Package
LC3-12	3.3	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø6.3
THICKNESS 0.8


Part No.	Package
LC5-7	1000

LED燈罩 LED COVER

用途：使用於LED之導光。

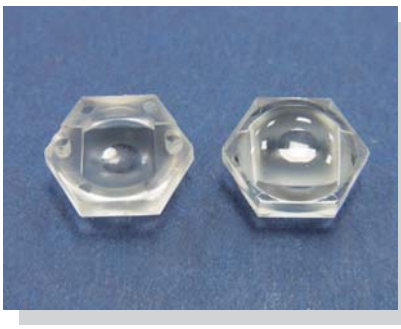

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEMA-1	1000


紅外線燈罩 INFRARED RAYS LAMPSHADE

用途：固定於LCD TV機殼上，做為紅外線遙控接收器導光面板，過濾無效光源，動作穩定。






- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Purple
- Unit: mm



Part No.	Package
IRCV-1	1000




Part No.	Package
IRCV-2	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

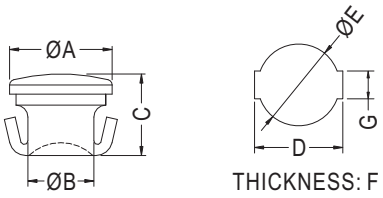


Part No.	A	B	C	D	E	F	G	Package
LEM-7	5.6	3.5	4.5	5.4	5.0	1.2	1.7	1000
LEM-7S	5.6	3.0	4.5	5.4	5.0	1.2	1.7	
LEM-29	4.8	3.4	4.5	5.0	4.3	1.2	1.8	
LEM-161	6.9	4.5	3.8	6.75	6.3	0.7	2.1	

LED導光柱 LIGHT PIPE

用途：可將LED導光到機器面板。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

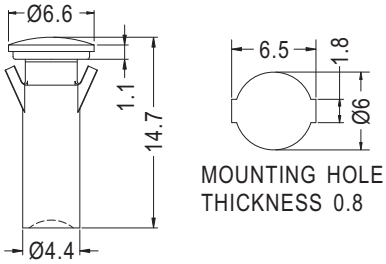


Part No.	Package
LEM-54	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class:94V-2/94V-0
- Color: Transparent
- Unit: mm

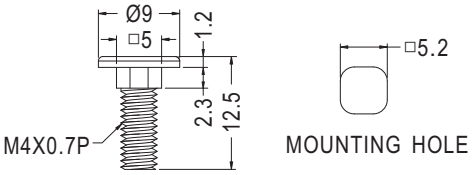


Part No.	Package
LEMA-5	1000

LED導光柱 LIGHT PIPE

用途：用於LED導光柱。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

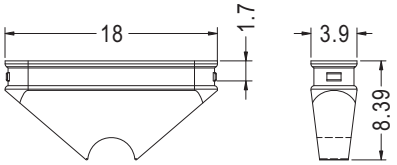


Part No.	Package
LEM-30	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均匀、柔和。

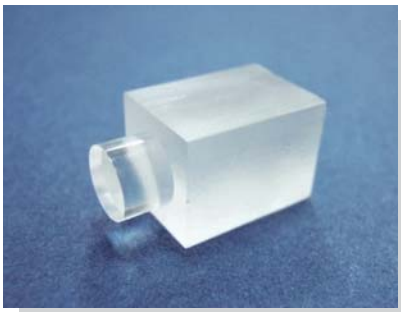


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-55	2000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

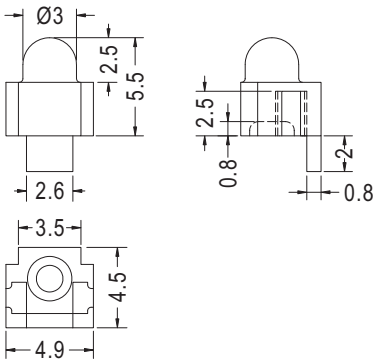


NEW

Part No.	Package
LEM-244	2000

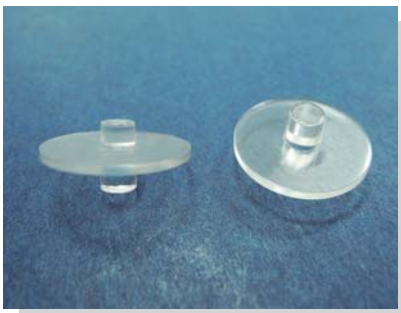


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-79	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

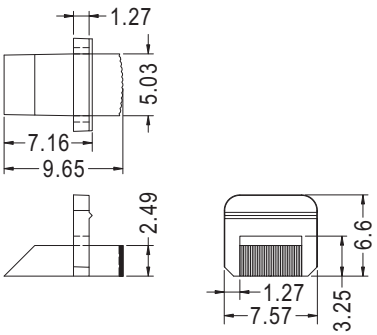


Part No.	Package
LEM-96	1000

LED導光柱 LIGHT PIPE

用途：使用於LED之導光。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-151	500

LED導光柱 LIGHT PIPE


用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PMMA
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-1	1000

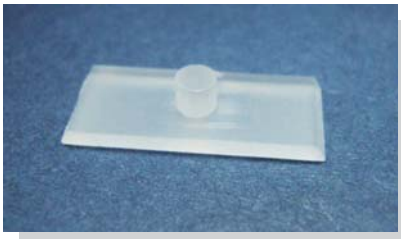




Part No.	Package
LEM-2	1000




- Material: PMMA
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-16	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	Package
LEM-9	3.0	1000
LEM-62	3.7	

用途：置LED導光於機殼面板上，使光度均匀、柔和。

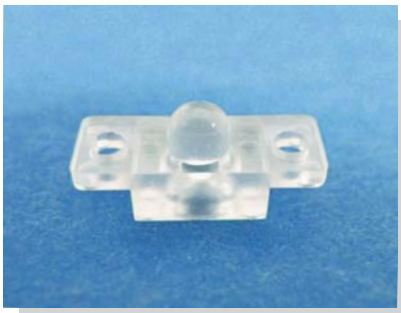

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-36	1000






- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	Package
LEM-3	1.8	1000
LEM-3L	2.2	




Part No.	Package
LEM-12	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-131	500

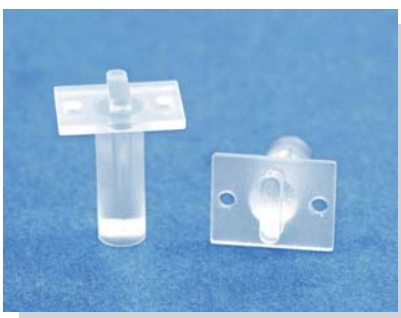

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-210	1000

LED導光柱 LIGHT PIPE


用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-63	1000



Part No.	Package
LEM-73	1000

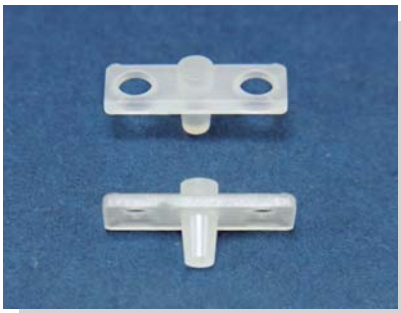


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-108	1000




- Material: PMMA
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-6	1000

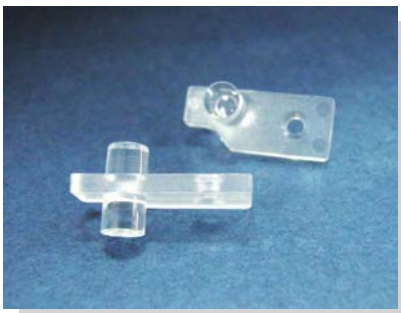

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-40	500


用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PMMA
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-122	500

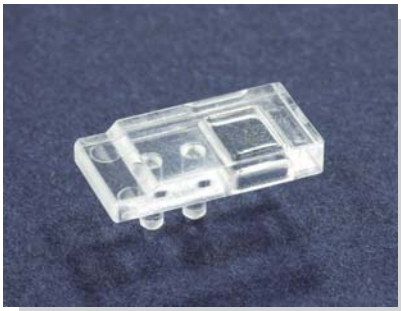


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-205	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-137	2000




- Material: PMMA
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-4	500




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-11	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

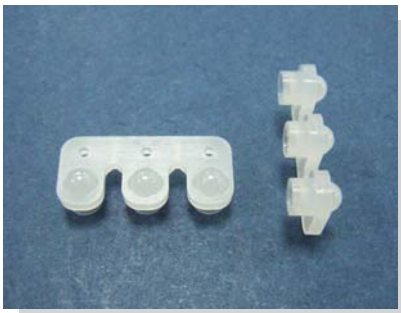


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-18	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-92	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-212	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-213	1000

LED導光柱 LIGHT PIPE

用途：LED墊高，可固定間隔，長度可自行裁切。

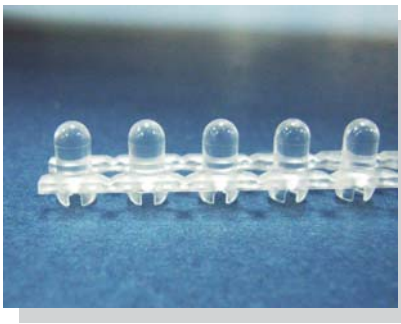

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

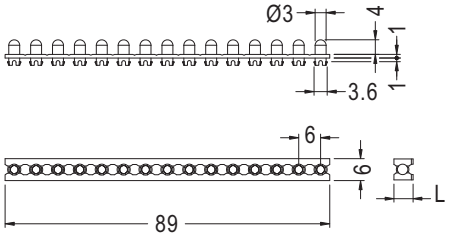


Part No.	Package
LEM-24	500

LED導光柱 LIGHT PIPE


用途：用於LED導光柱。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-52	1000

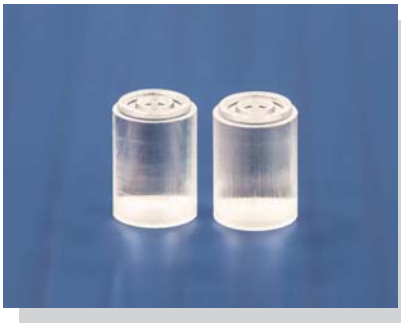


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-20	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-33	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-103	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均匀、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-114	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	A	Package
LEM-5	13.5	1000
LEM-5-57	57.0	500
LEM-93	8.7	1000



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø4.95

Part No.	Package
EMP5-29.3	1000



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	Package
EMP1-6	2000



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm



MOUNTING HOLES Ø3.05


Part No.	L	Package
EMP1-4.8-F	4.8	1000
EMP1-5-F	5.0	
EMP1-7-F	7.0	
EMP1-8-F	8.0	
EMP1-10-F	10.0	

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	B	Package
LEM-13	14.1	3.53	1000
LEM-23	15.75	3.4	

LED導光柱 LIGHT PIPE

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.0


Part No.	Package
LEM2-5.5	2000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

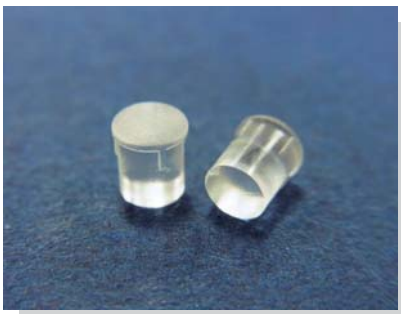

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	Package
LEM-144	2000



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø3.0


Part No.	A	Package
LEM-67	6.0	2000
LEM-67-13	13.0	
★LEM-67-17.5	17.5	
LEM-67-27.5	27.5	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均匀、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE: ØG

Part No.	A	G	Package
EMP2-4	4.0	3.05	2000
★EMP2-5	5.0	3.0	
EMP2-6	6.0	3.0	
★EMP2-7	7.0	3.0	
EMP2-8	8.0	3.05	
EMP2-10	10.0	3.0	
EMP2-25.4	25.4	3.05	1000
EMP2-30.5	30.5	3.0	

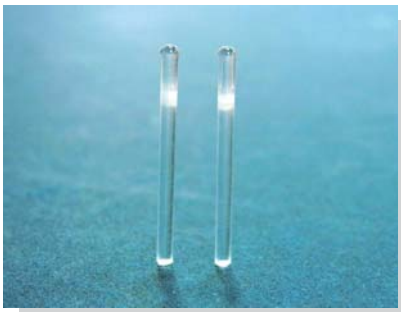

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø1.55

Part No.	A	Package
LEM-132	20.0	2000
LEM-141	21.8	
LEM-193	29.2	
LEM-199	10.16	



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	A	Package
LEM-87	18.0	2000
LEM-235-7.2	7.2	1000
LEM-235	12.2	



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø3.8


Part No.	Package
LEM-156	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm





MOUNTING HOLE: ØD

Part No.	A	B	D	Package
LEM-53	21.55	2.5	4.3	2000
LEM-53-8.5	8.5		4.2	
LEM-53-16.5	16.5			
LEM-53-24	24.0			1000
LEM-191	43.5		4.3	
★LEM-191-36	36.0			
LEM-191-37.5	37.5			
LEM-198	30.0			
LEM-202	54.0			
LEM-203	8.5	2.4	4.2	2000




- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm







HOLE IN PANEL

Part No.	A	Package
LEM-90	23.6	2000
LEM-91	8.0	
LEM-192	25.85	

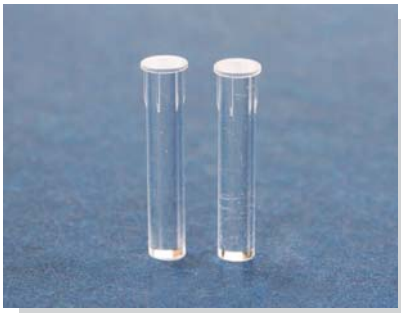


- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm





HOLE IN PANEL




HOLE IN PANEL

Part No.	A	Package
LEM-97	21.0	1000
LEM-97S	8.5	
LEM-98	28.0	



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø3.5


Part No.	A	B	Package
LEM-150	4.0	3.5	2000
LEM-150-3	3.0	3.5	
LEM-150-3.5	3.5	3.5	
LEM-240	4.0	3.45	

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø1.5

Part No.	Package
LEM-133	2000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




PLASTIC MOUNTING HOLE Ø2.8
METAL MOUNTING HOLE Ø3.0

Part No.	Package
LEM-88	2000

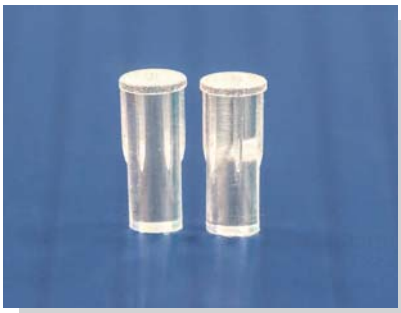


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE: ØD

Part No.	A	B	C	D	Package
LEM-135	7.0	2.6	0.4	3.0	2000
★LEM-135-4.8	4.8				
LEM-167	10.05	2.5	0.45	2.8	
LEM-167-11	11.0				
LEM-189	25.0	2.6	0.4	3.0	

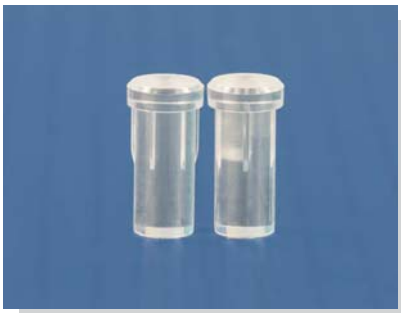

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø4.0

Part No.	A	Package
LEM-196	4.0	1000
LEM-197	8.5	

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-208	2000



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø6.5

Part No.	Package
LEM-233	500



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




NEW

Part No.	Package
LEM-248	1000




- Material: PMMA
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-223	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

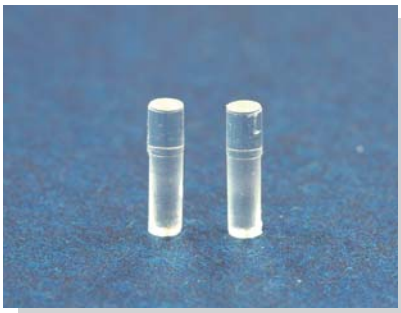

- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø1.6

Part No.	Package
LEM-185	2000




- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm



Part No.	Package
LEM-200	2000



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.5

Part No.	Package
LEM-221	1000



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm



NEW


Part No.	Package
LEM - 253	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm




Part No.	A	B	Package
LEM-70	24.0	29.0	1000
LEM-95	29.0	34.0	
LEM-107	20.5	25.5	



- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm






Part No.	A	B	Package
LEM-99	4.7	31.0	1000
LEM-115	1.7	28.0	


Part No.	Package
LEM-110	1000

LED導光柱 LIGHT PIPE

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。

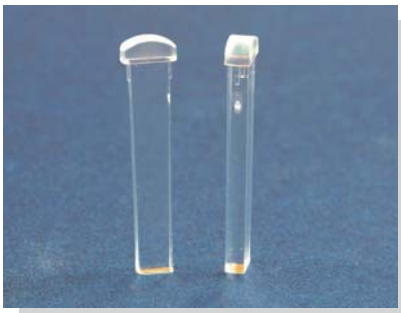

- Material: PC (UL)
- Flame Class: 94V-2/94-0
- Color: Transparent
- Unit: mm





MOUNTING HOLE


Part No.	A	B	C	Package
LEM-188	5.1	25.4	27.9	1000
LEM-188-5715	5.1	17.0	19.5	

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø3.96


Part No.	L	Package
★LEM4W-4	4.0	2000
LEM4W-5	5.0	
LEM4W-6	6.0	
LEM4W-8	8.0	
LEM4W-10	10.0	
★LEM4W-12.7	12.7	

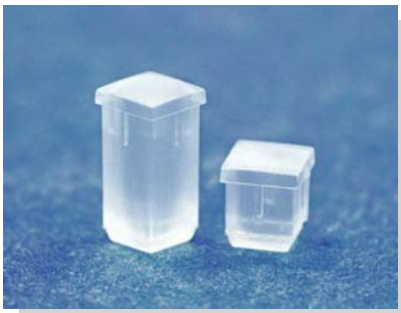

- Material: PC
- Color: Transparent
- Unit: mm

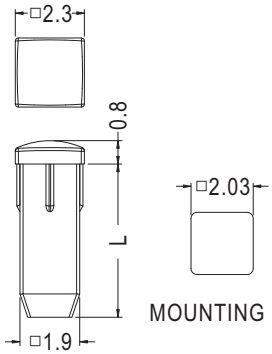

MOUNTING HOLE




MOUNTING HOLE

Part No.	L	Package
LEMC1-3	3.0	2000
★LEMC1-4.8	4.8	
LEMC1-5	5.0	
★LEMC1-9	9.0	
LEMC1-12.7	12.7	


Part No.	L	Package
LEMC2-3	3.0	2000
★LEMC2-5	5.0	
LEMC2-6	6.0	
LEMC2-7	7.0	



- Material: PC
- Color: Transparent
- Unit: mm



MOUNTING HOLE

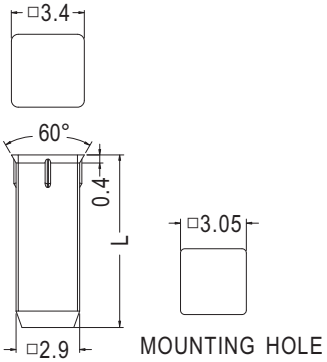


MOUNTING HOLE

Part No.	L	Package
LEMD1-3	3.0	2000
LEMD1-4.8	4.8	


Part No.	L	Package
LEMD2-3	3.0	2000
LEMD2-8	8.0	

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均匀、柔和。

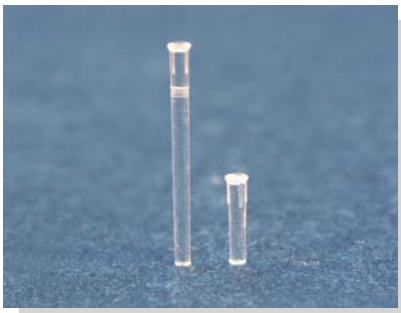



- Material: PC
- Color: Transparent
- Unit: mm




MOUNTING HOLES Ø1.02

Part No.	L	Package
LEMB1-2.5-F	2.5	2000
LEMB1-3-F	3.0	
★LEMB1-4.8-F	4.8	
LEMB1-5-F	5.0	
LEMB1-12.7-F	12.7	

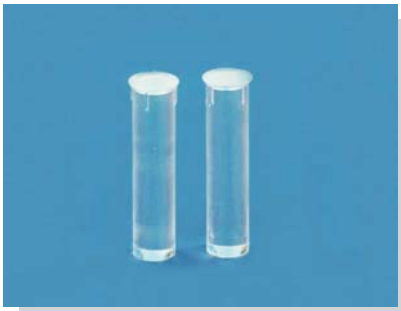



MOUNTING HOLES Ø1.98



MOUNTING HOLES Ø3.07




Part No.	L	Package
LEMB2-2.5-F	2.5	2000
LEMB2-3.2-F	3.2	
★LEMB2-4-F	4.0	
LEMB2-4.8-F	4.8	
LEMB2-7-F	7.0	
LEMB2-8-F	8.0	
LEMB2-9-F	9.0	
LEMB2-10-F	10.0	

Part No.	L	Package
LEMB3-2.5-F	2.5	2000
LEMB3-3-F	3.0	
LEMB3-3.2-F	3.2	
LEMB3-5-F	5.0	
LEMB3-6-F	6.0	
LEMB3-8-F	8.0	
★LEMB3-9.5-F	9.5	
LEMB3-10-F	10.0	
LEMB3-12.7-F	12.7	




- Material: PC
- Color: Transparent
- Unit: mm





MOUNTING HOLE Ø3.5

Part No.	Package
LEMB3.5-2-F	2000

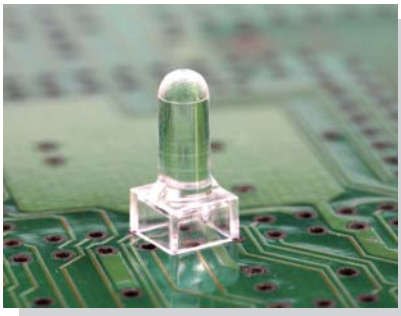

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm





MOUNTING HOLES


Part No.	A	Package
PL1-7.6	7.6	1000
PL1-10.2	10.2	
PL1-11.4	11.4	
PL1-12.7	12.7	
PL1-16.5	16.5	


LED導光柱 LIGHT PIPE

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm






MOUNTING HOLES
THICKNESS 1.6


Part No.	L	Package
★PL2-12.7-F	12.7	1000
PL2-13.9-F	13.9	


LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

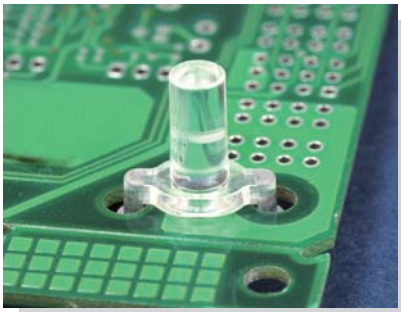

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm





MOUNTING HOLES


Part No.	Package
LEM-184	1000


LED導光柱 LIGHT PIPE

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm







MOUNTING HOLES

Part No.	Package
LEM-69	500



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm






MOUNTING HOLES


Part No.	Package
LEM-180	2000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。

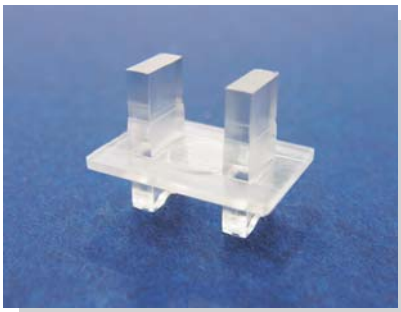


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

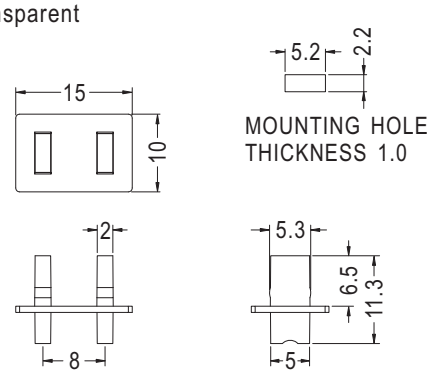


Part No.	Package
LEM-106	500




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

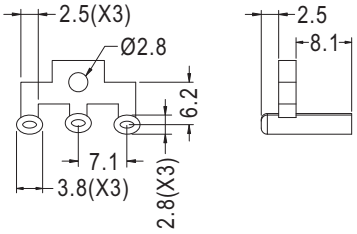

Part No.	Package
LEM-28	500

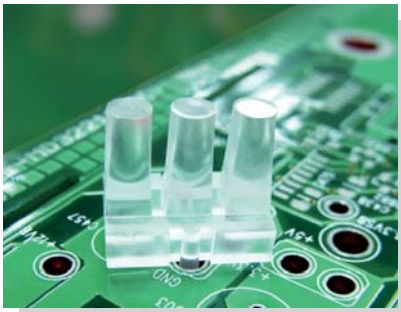

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

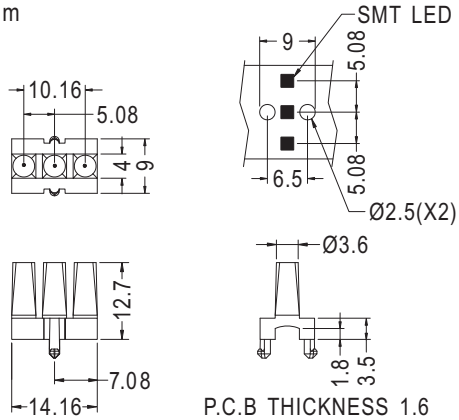


Part No.	Package
LEM-113	500

LED導光柱 LIGHT PIPE

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-61	2000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




MOUNTING HOLE Ø2.6
THICKNESS 0.9

Part No.	Package
LEM-145	2000

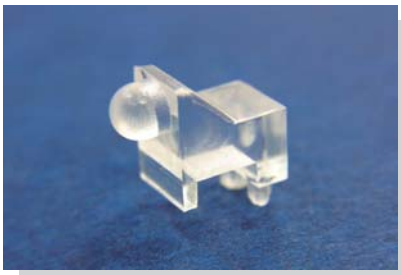




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

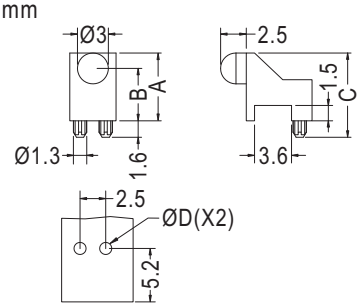


MOUNTING HOLES

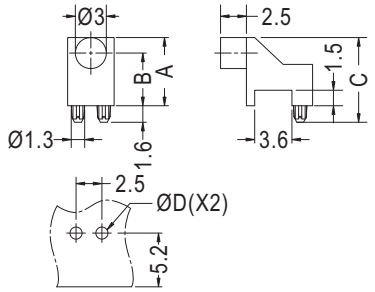


MOUNTING HOLES

◆ **LEM-136V01-F,LEM-225V01-F**

Part No.	A	B	C	D	Package
LEM-136	6.6	5.1	8.2	1.2	2000
★LEM-136-F					
LEM-225	5.3	3.8	6.9	1.17	
★LEM-225-F					

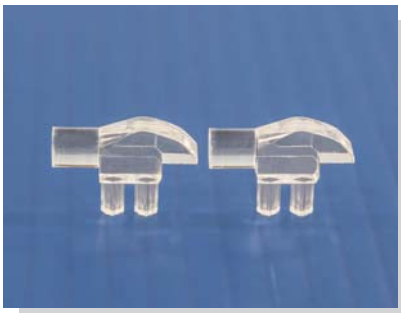

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

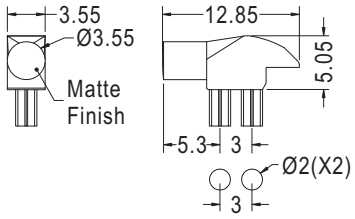

MOUNTING HOLES


Part No.	Package
LEM-195	1000

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。LEM-207B遮敝導光柱，可免鄰近LED光線干擾，配合LEM-207使用。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLES

Part No.	Package
LEM-207	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit:mm




Part No.	Package
LEM-207B	1000

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

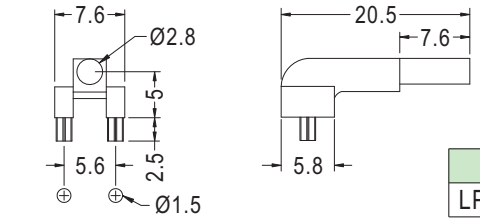


MOUNTING HOLES

Part No.	Package
LPE1-5-20.5	1000




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

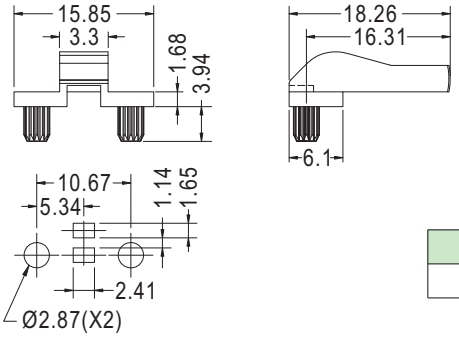


MOUNTING HOLES

Part No.	Package
SLP-3	1000

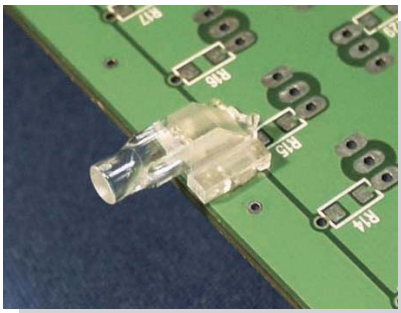


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

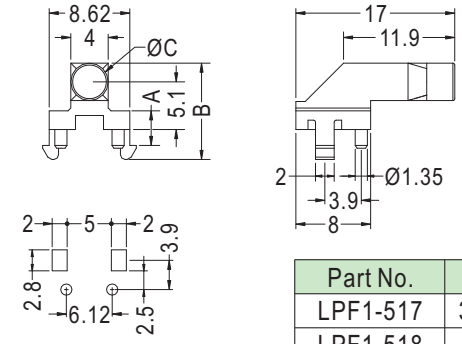


MOUNTING HOLES

Part No.	A	B	C	Package
LPF1-517	3.7	10.3	4.0	2000
LPF1-518	4.1	10.7	2.6	

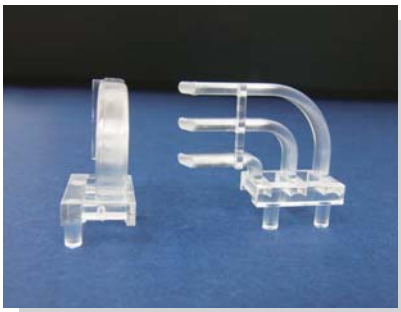

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

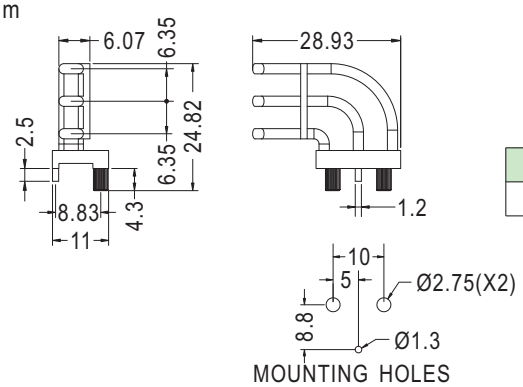


MOUNTING HOLES


Part No.	Package
LPE3-7.8	500


LED導光柱 LIGHT PIPE

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。

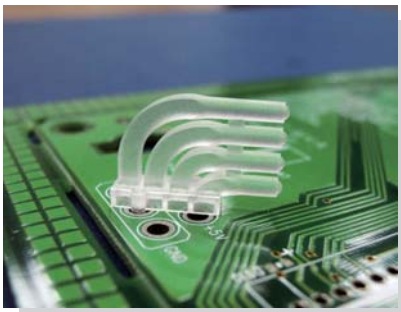

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

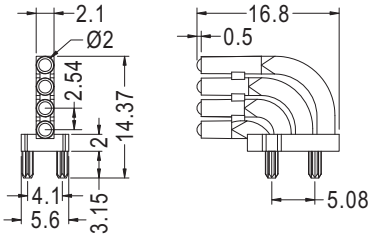





HOLE FOR P.C.B
THICKNESS 1.6

Part No.	Package
LPE4-3.6	500




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

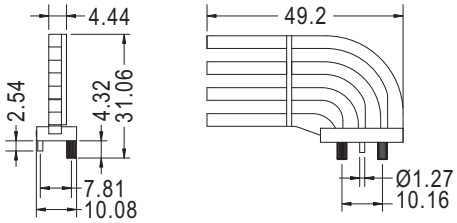





MOUNTING HOLES

Part No.	Package
LPEB4-1	500

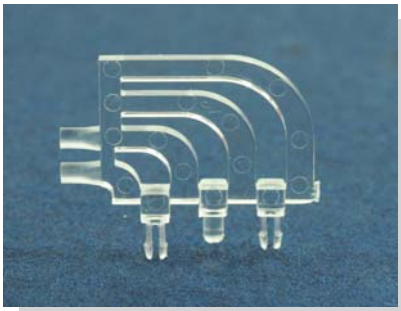

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

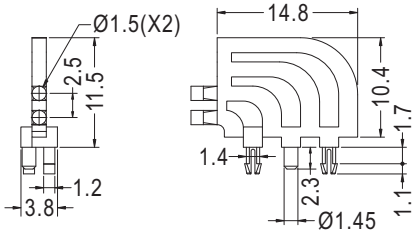





MOUNTING HOLES
THICKNESS 1.6

Part No.	Package
LPED2-1	1000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

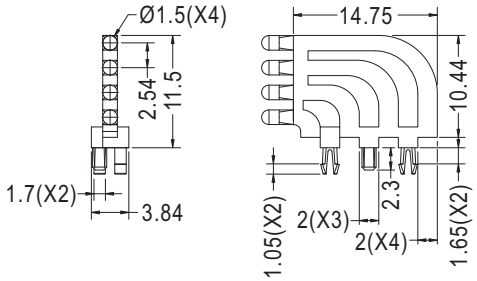



MOUNTING HOLES
THICKNESS 1.6

NEW


Part No.	Package
LPED4-2	1000


LED導光柱 LIGHT PIPE

用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

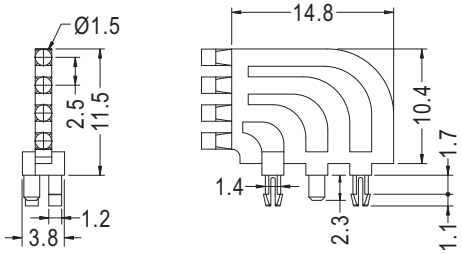




MOUNTING HOLES
THICKNESS 1.6


Part No.	Package
LPED4-1	1000

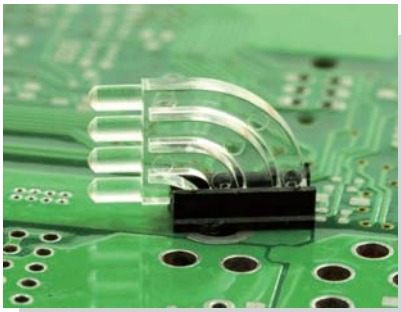

- Material: PC (UL)
- Holder Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Holder Color: Black
- Unit: mm




MOUNTING HOLES

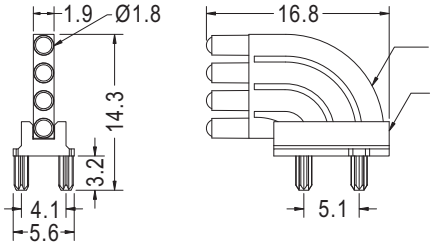


LIGHT PIPE: LP-3

LED HOLDER: LPH-3

Part No.	Package
LP-3V0F	1000

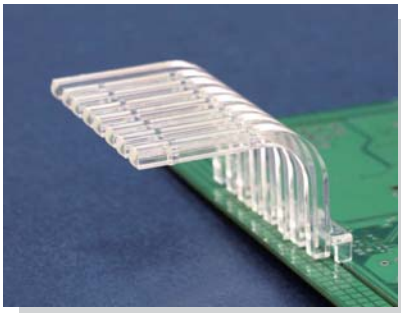


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

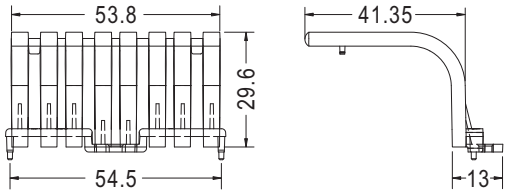


Part No.	Package
LEM-166	50

LED導光柱 LIGHT PIPE

用途：置LED導光於機殼面板上，使光度均勻、柔和。LPH-2B遮敝導光柱，可免鄰近LED光線干擾，配合LP-2使用。

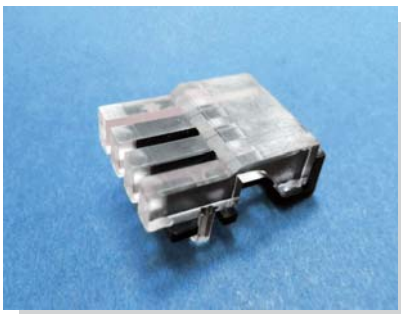


- Material: PMMA (UL)/PC (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø1.5

Part No.	Package
LP-2	2000

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




Part No.	Package
LPH-2B	2000

LED導光柱 LIGHT PIPE

用途：用於LED導光柱。




- Material: PMMA
- Color: Transparent
- Unit: mm



Part No.	A	B	Package
LPG-1	41.5	1.3	250
LPG-2	76.5	1.2	100

- Material: PC (UL)
- Flame Class: 94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
LPG-3	250

LED遮光罩 LIGHT PIPE MASK

用途：遮蔽導光柱，避免鄰近LED光線干擾，配合LPE系列使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)




Part No.	Package
LPH-4	2000

LED遮光罩 LIGHT PIPE MASK

用途：遮蔽導光柱，避免鄰近LED光線干擾，搭配LPE2-5-19使用。

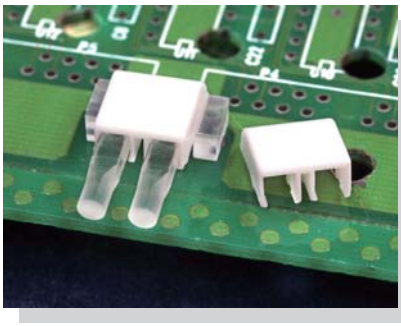


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

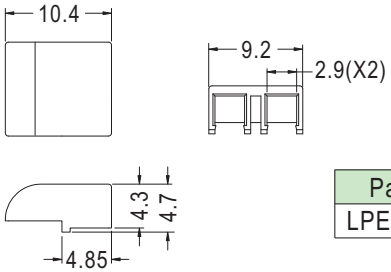


Part No.	Package
LPE2-5-19C	1000

LED遮光罩 LIGHT PIPE MASK

用途：遮蔽導光柱，避免鄰近LED光線干擾，配合LPE-5-22使用。

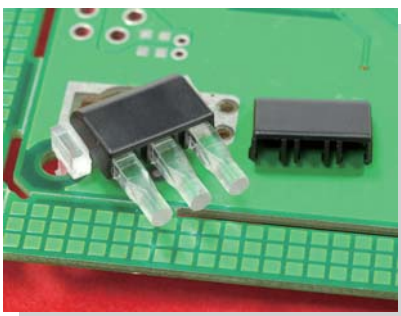


- Material: PC +ABS(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

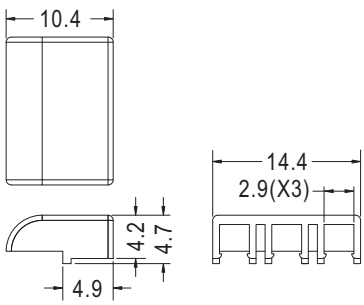


Part No.	Package
LPE3-5-22C	1000


用途：置S.M.T LED導光於機殼面板上，使光度均勻、柔和。

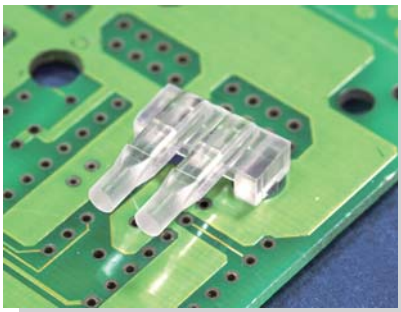


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	B	C	Package
LPE1-5-16	5.0	16.0	14.0	1000
LPE1-5-19	5.0	19.0	17.0	
LPE1-5-22	5.0	22.0	20.0	
LPE1-10-16	10.0	16.0	14.0	
LPE1-10-19	10.0	19.0	17.0	
LPE1-10-22	10.0	22.0	20.0	
LPE1-10-26	10.0	27.0	25.0	
LPE1-15-16	15.0	16.0	14.0	
LPE1-15-19	15.0	19.0	17.0	
LPE1-15-22	15.0	22.0	20.0	

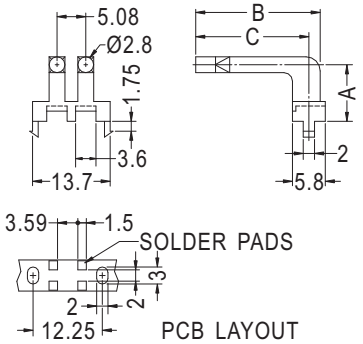


Part No.	A	B	C	Package
LPE2-5-16	5.0	16.0	14.0	1000
LPE2-5-19	5.0	19.0	17.0	
LPE2-5-22	5.0	22.0	20.0	
LPE2-10-16	10.0	16.0	14.0	
LPE2-10-19	10.0	19.0	17.0	
LPE2-10-22	10.0	22.0	20.0	
LPE2-15-16	15.0	16.0	14.0	
LPE2-15-19	15.0	19.0	17.0	
LPE2-15-22	15.0	22.0	20.0	

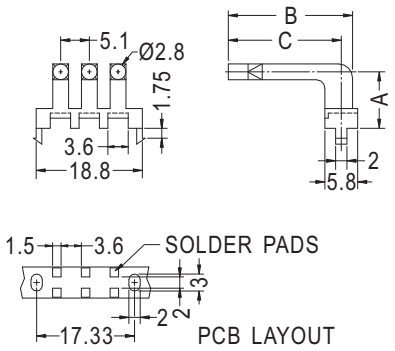

Part No.	A	B	C	Package
LPE3-5-16	5.0	16.0	14.0	500
LPE3-5-19	5.0	19.0	17.0	
LPE3-5-22	5.0	22.0	20.0	
LPE3-10-16	10.0	16.0	14.0	
LPE3-10-19	10.0	19.0	17.0	
LPE3-10-22	10.0	22.0	20.0	
LPE3-15-16	15.0	16.0	14.0	
LPE3-15-19	15.0	19.0	17.0	
LPE3-15-22	15.0	22.0	20.0	

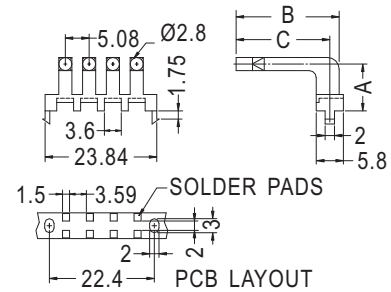

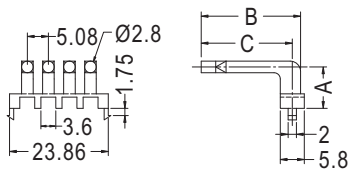

◆ **LPE4-5-18V,LPE4-10-24V**


Part No.	A	B	C	Package
LPE4-5-16	5.0	16.0	14.0	500
LPE4-5-18V	5.0	18.0	16.0	100
LPE4-5-19	5.0	19.0	17.0	500
LPE4-5-22	5.0	22.0	20.0	
LPE4-10-16	10.0	16.0	14.0	
LPE4-10-19	10.0	19.0	17.0	
LPE4-10-22	10.0	22.0	20.0	
LPE4-10-24V	10.0	24.0	22.0	100
LPE4-15-16	15.0	16.0	14.0	500
LPE4-15-19	15.0	19.0	17.0	
LPE4-15-22	15.0	22.0	20.0	

LED導光柱 LIGHT PIPE

用途：可配合光纖將LED光導到機器面板。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




CHASSIS Ø3.5
THICKNESS 0.8~1.0

Part No.	A	B	Surface	Package
LEU-1	1.1	3.4	Bright	2000
LEU-2	1.05	3.35	Matte	



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



MOUNTING HOLE Ø4.5
THICKNESS 1.6


Part No.	Package
LEU-4	1000


光纖座 OPTICAL FIBER MOUNT


用途：配合光纖及LEU-1將LED光導到機器面板。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







◆ PMR-1 ◆ PMR-2


Part No.	A	Package
PMR-1	6.4	2000
PMR-2	7.86	

光纖座 OPTICAL FIBER MOUNT

用途：配合光纖將S.M.T LED光導到機器面板。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

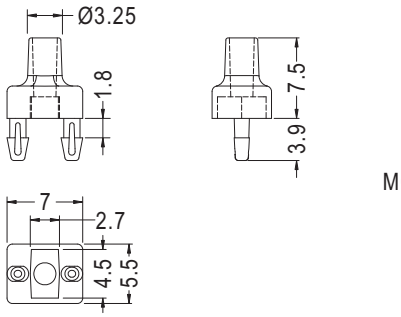


Part No.	Package
PMR-3	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
PMR-10	1000

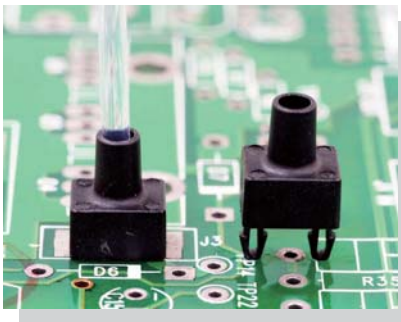

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

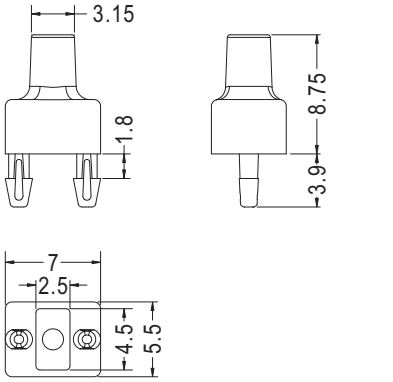


Part No.	Package
PMR-13	2000

光纖座 OPTICAL FIBER MOUNT

用途：配合光纖將LED光導到機器面板。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

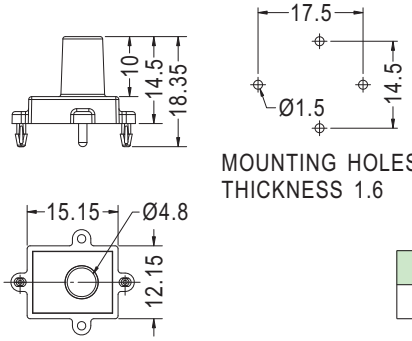


Part No.	Package
PMR-6	2000

光纖座 LENS CAP


用途：配合光纖將LED光導到機器面板。

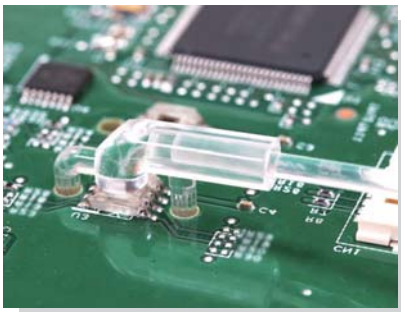


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm

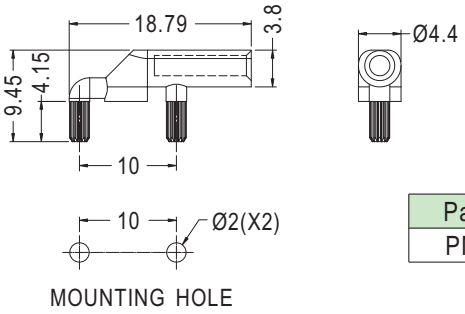

Part No.	Package
PMR-11	1000

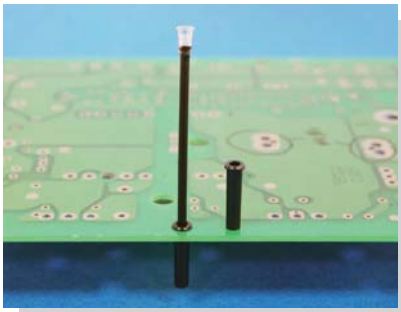


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




NEW

Part No.	A	Package
PMR-14	16.0	2000

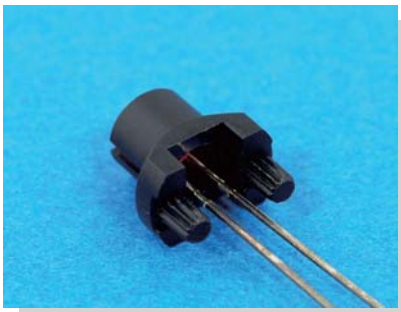


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
PMR-7	1000

LED座 LED HOLDER

用途：可快速將LED固定於PCB板上。

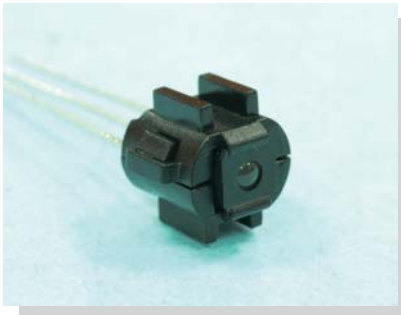

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

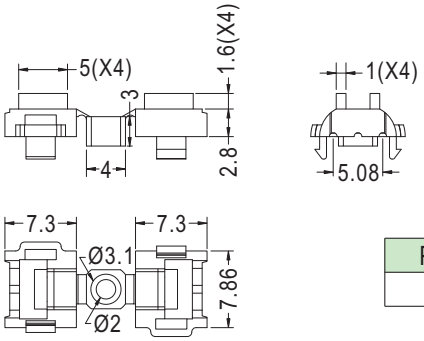

Part No.	Package
PMR-8	1000




3


▶ 90° LED燈座
LED Holder

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED成 90° 焊於 PC 板上，高度一致，不斷腳。

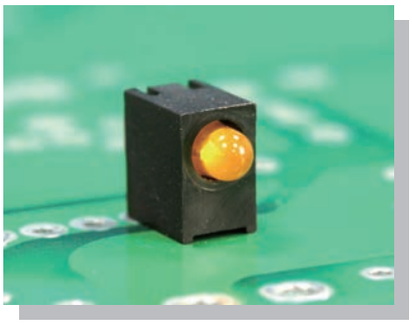


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES

Part No.	C	Package
LED-301	3.4	2000

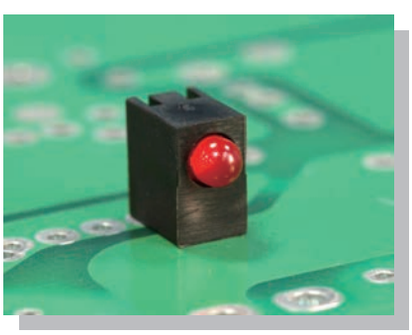

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES

Part No.	C	Package
LED-301A	3.4	2000
LED-301(B)	3.3	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES

Part No.	C	Package
LED-312	3.3	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLES


Part No.	C	Package
LED-313	3.2	2000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED成 90° 焊於 PC 板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES

Part No.	C	Package
LED-314	3.2	2000

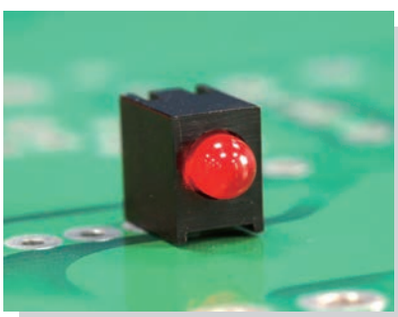


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

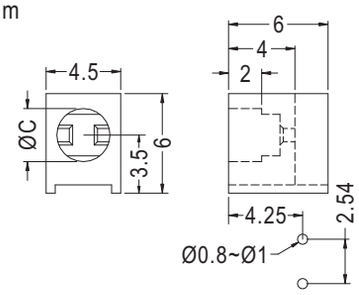


MOUNTING HOLES

Part No.	C	Package
LED-316	3.2	2000

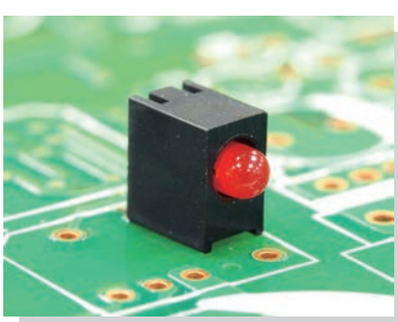


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

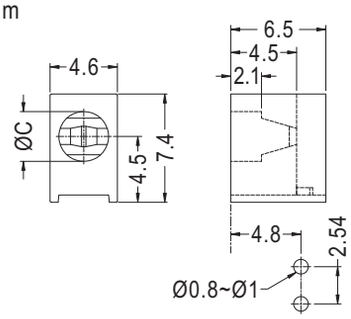


MOUNTING HOLES

Part No.	C	Package
LED-326	3.4	1000

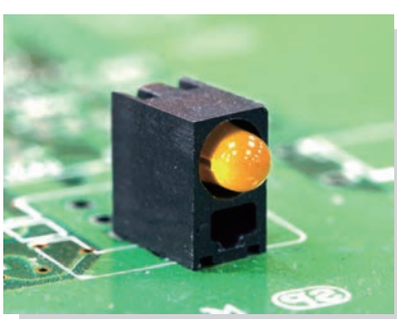

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES


Part No.	C	Package
LED-328	3.8	1000

90° LED燈座 90° LED HOLDER

用途：使Ø3 mm LED成90° 焊於PC板上，高度一致，不斷腳。

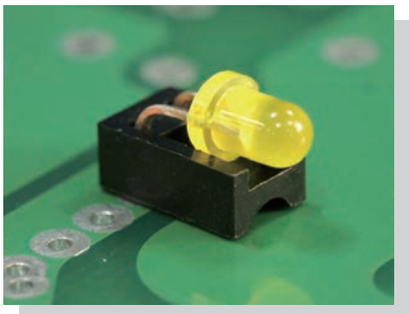


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LED-325	1000

90° LED燈座 90° LED HOLDER

用途：可快速將Ø3 mm LED固定於機器面板上。

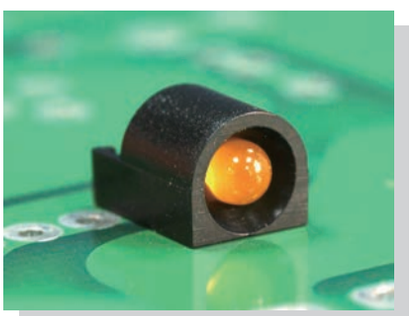

- Material: ABS
- Color: Black
- Unit: mm




Part No.	C	Package
LED3-21	3.2	2000

90° LED燈座 90° LED HOLDER


用途：使Ø3 mm 3 PIN LED成90° 焊於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	C	Package
LED-343	3.2	1000

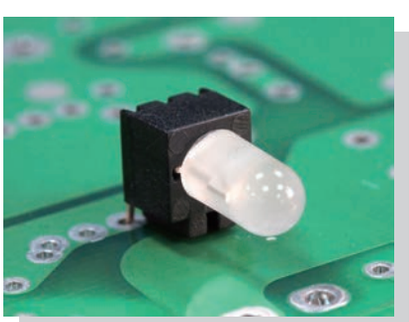


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	C	Package
LED-319	4.2	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED成 90° 焊於 PC 板上，高度一致，不斷腳。

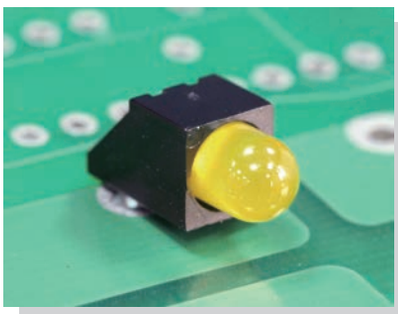


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES

Part No.	A	C	Package
LED-502	4.95	5.2	2000
LED-502S	5.0	4.9	

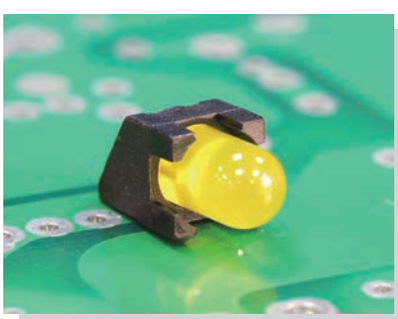

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

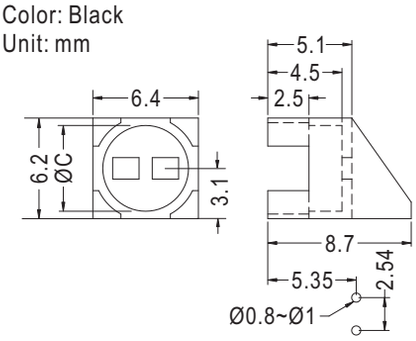


MOUNTING HOLES


Part No.	C	Package
LED1L-2.5	5.1	2000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm 有帽沿 LED 成 90° 焊於 PC 板上，高度一致，不斷腳。

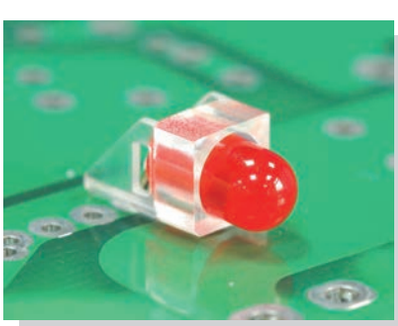


- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm

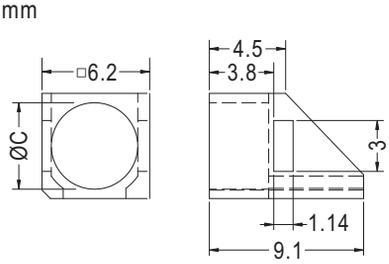


Part No.	C	Package
LED-505	5.1	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED成90° 焊於PC 板上，高度一致，不斷腳。

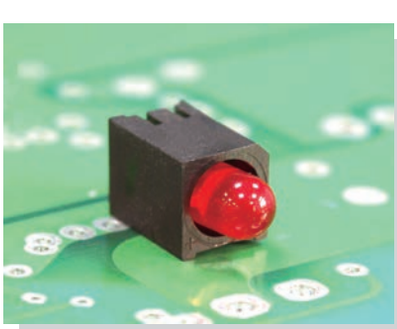

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

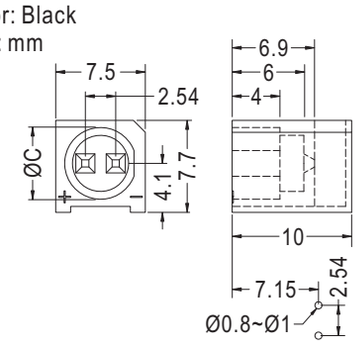


MOUNTING HOLES


Part No.	C	Package
LED-542	6.0	1000

90° LED燈座 90° LED HOLDER

用途：使Ø5 mm LED成90° 焊於PC板上，高度一致，不斷腳。

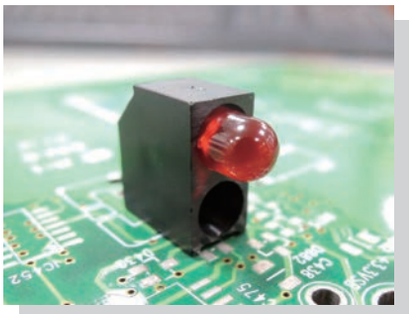


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

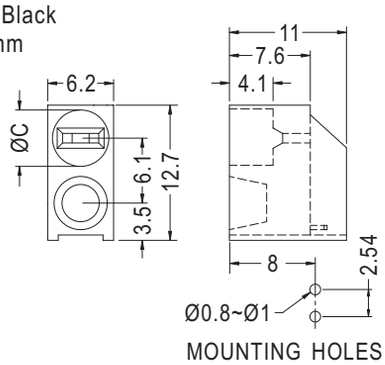


MOUNTING HOLES

Part No.	C	Package
LED-528	5.3	1000

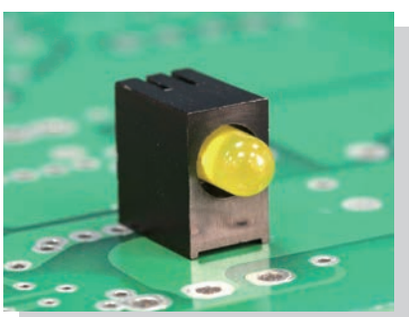

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES


Part No.	C	Package
LED-504	6.0	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm 3 PIN LED成 90° 焊於 PC 板上，高度一致，不斷腳。

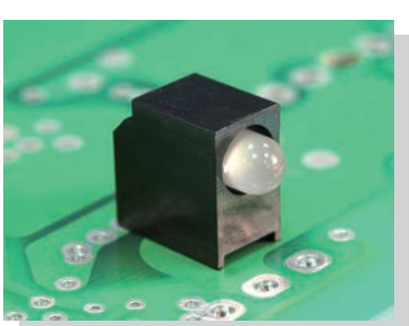

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




MOUNTING HOLES

Part No.	C	Package
LED-535	6.1	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

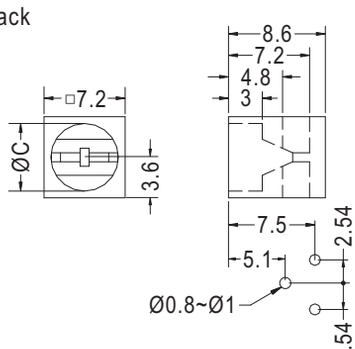


MOUNTING HOLES


Part No.	C	Package
LED-503	6.1	1000

90° LED燈座 90° LED HOLDER

用途：使Ø5 mm 3 PIN LED 成 90° 焊於 PC 板上，高度一致，不斷腳。

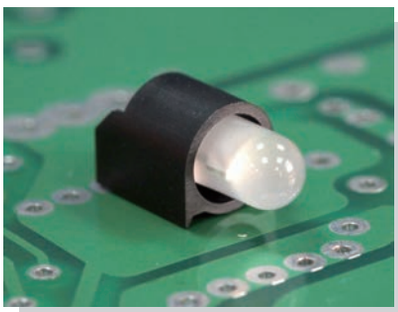


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

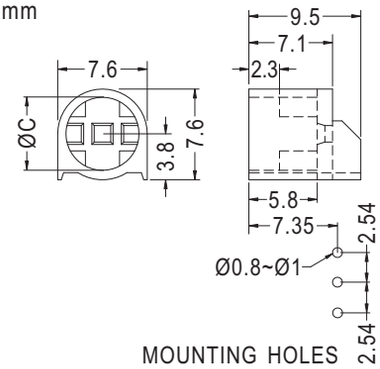


Part No.	C	Package
LED-501	6.1	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED成 90° 焊於 PC 板上，高度一致。

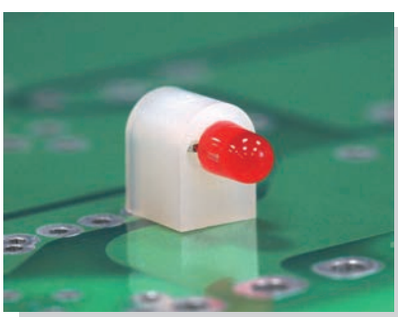


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
LEAH-4.5	2000

90° LED燈座 90° LED HOLDER


用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，不斷腳。

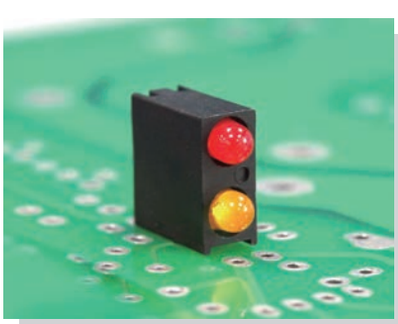


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

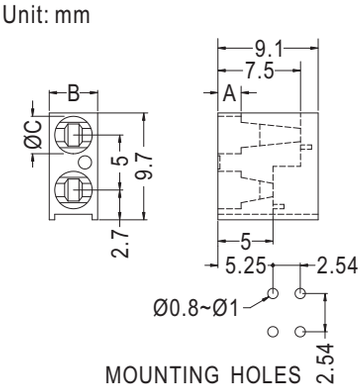

Part No.	A	B	C	Package
LED-306	2.1	4.4	3.4	1000
LED-306(A)	1.5	4.3	3.4	

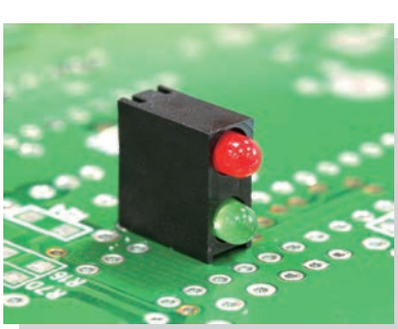


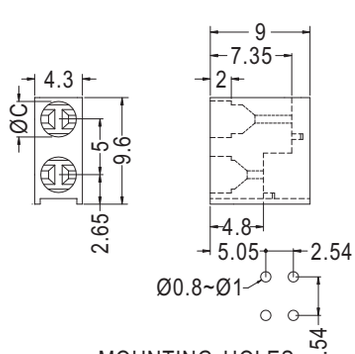


Part No.	C	Package
LED-306(B)	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使Ø3 mm LED成90° 焊於 PC 板上，高度一致，不斷腳。

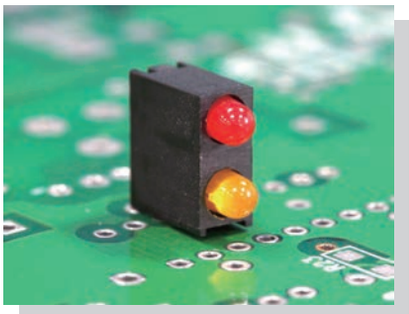



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

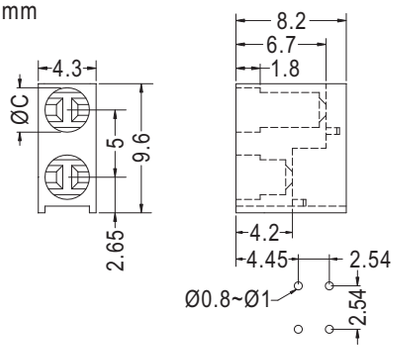

MOUNTING HOLES


Part No.	C	Package
LED-307	3.3	1000
LED-307(A)	3.2	

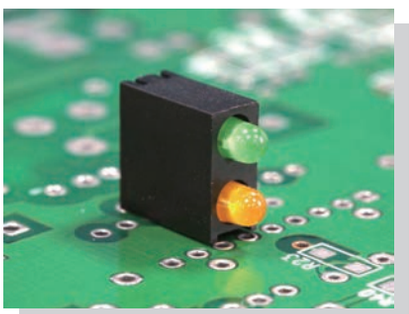

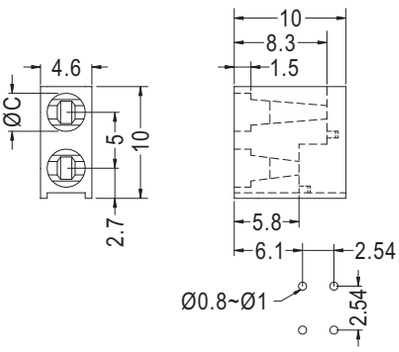


MOUNTING HOLES

Part No.	C	Package
LED-308	3.4	1000

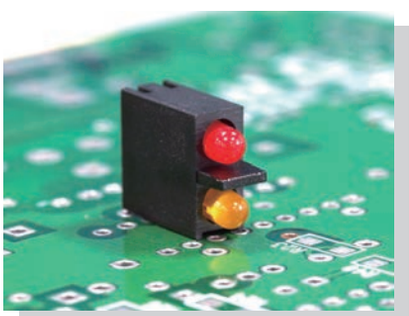


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

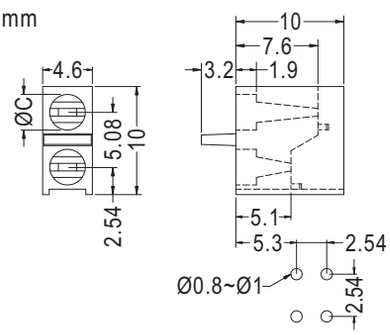


MOUNTING HOLES

Part No.	C	Package
LED-305	3.3	1000

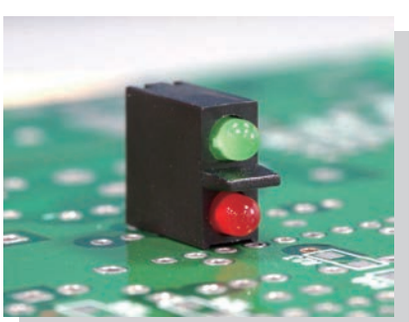

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

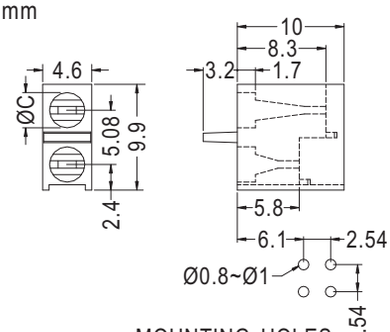


MOUNTING HOLES


Part No.	C	Package
LED-317	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，不斷腳。

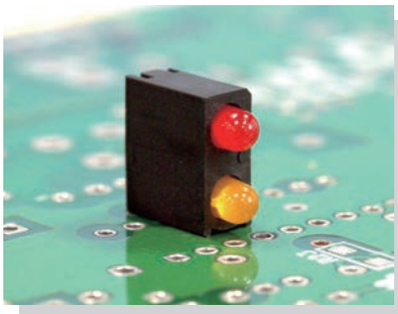


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

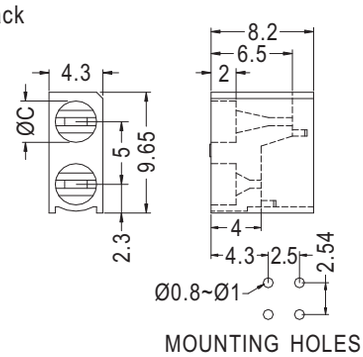


MOUNTING HOLES

Part No.	C	Package
LED-322	3.3	1000

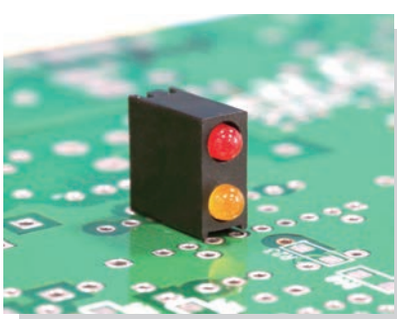

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

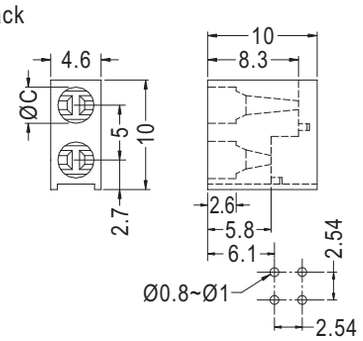


MOUNTING HOLES


Part No.	C	Package
LED-324	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，不斷腳，遮光佳。

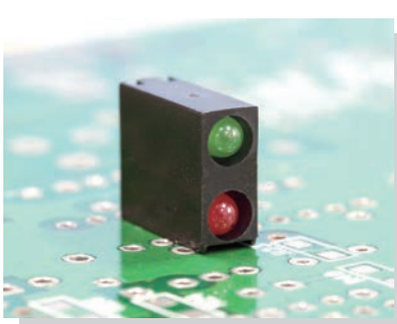

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

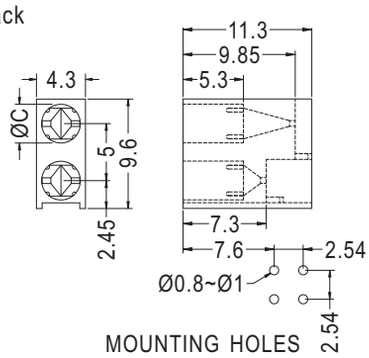


MOUNTING HOLES


Part No.	C	Package
LED-323	3.4	1000

90° LED燈座 90° LED HOLDER

用途：使Ø3 mm 3 PIN LED 成 90° 焊於 PC 板上，高度一致，不斷腳。

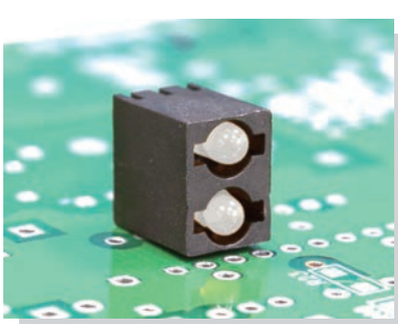

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

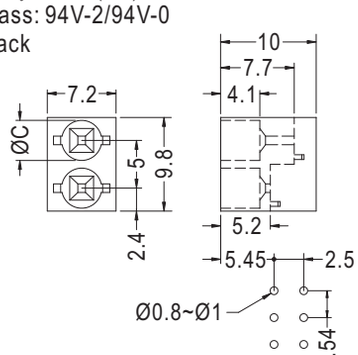


MOUNTING HOLES


Part No.	C	Package
LED-310	4.1	1000

90° LED燈座 90° LED HOLDER

用途：使Ø4 mm 3 PIN LED成90°焊於PC板上，高度一致，不斷腳。

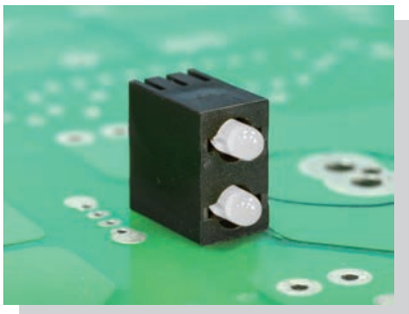

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

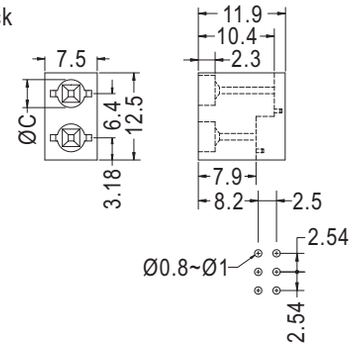

MOUNTING HOLES


Part No.	C	Package
LED-342	4.0	1000

90° LED燈座 90° LED HOLDER

用途：使Ø5 mm LED成90°焊於PC板上，高度一致，不斷腳。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

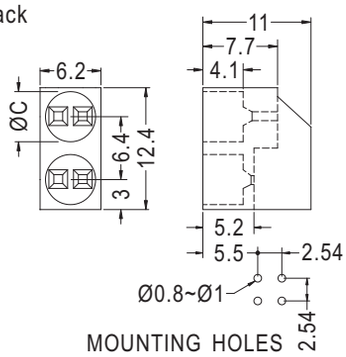

MOUNTING HOLES


Part No.	C	Package
LED-525	5.1	1000

90° LED燈座 90° LED HOLDER

用途：使方型LED 90°焊於PC板上，高度一致，維修方便，不斷腳。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLES


Part No.	Package
LED-521	1000

90° LED燈座 90° LED HOLDER

用途：使Ø3 mm LED成90°焊於PC板上，高度一致，不斷腳。

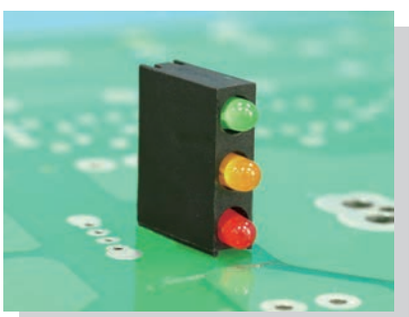

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

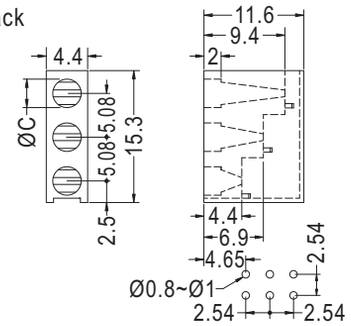


MOUNTING HOLES


Part No.	C	Package
LED-330	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED成 90° 焊於 PC 板上，高度一致，不斷腳。

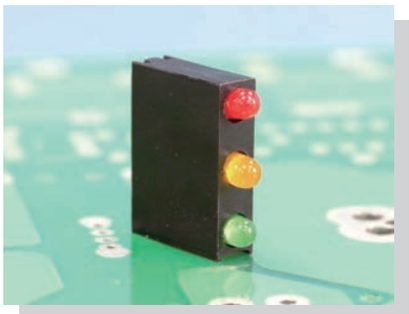

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

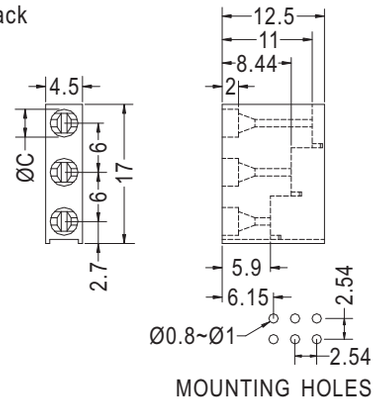


Part No.	C	Package
LED-331	3.4	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成90° 焊於 PC 板上，高度一致，組合式子母套，焊腳不搖動。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

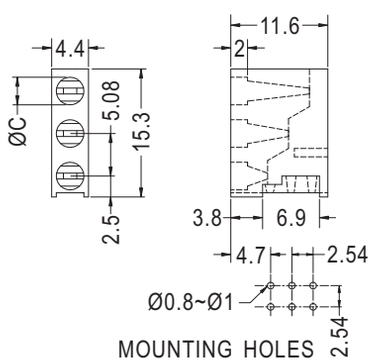

Part No.	C	Package
LH-330	3.3	1000




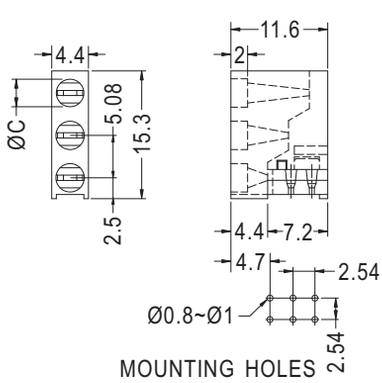

Part No.	C	Package
KLH-330	3.3	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

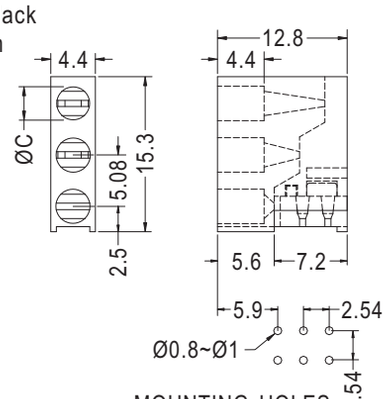


Part No.	C	Package
KLH-331	3.3	1000

90° LED燈座 90° LED HOLDER


用途：使Ø3 mm LED成90° 焊於 PC 板上，高度一致，不斷腳。

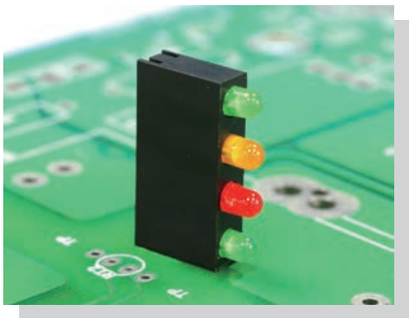


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

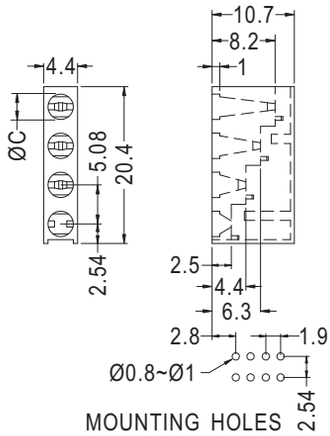

Part No.	C	Package
LED-340	3.3	1000

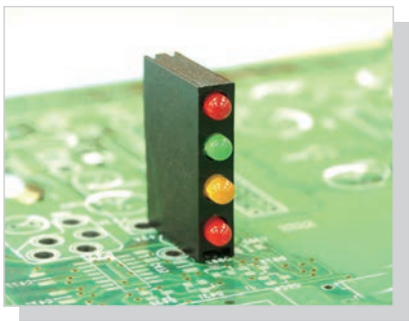


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

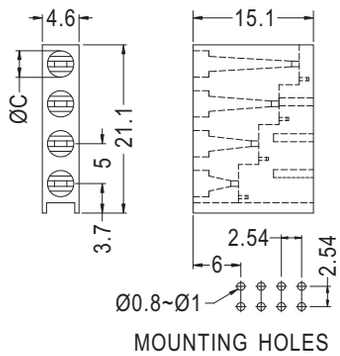


Part No.	C	Package
LED-345	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成90° 焊於PC 板上，高度一致，組合式子母套，焊腳不搖動。

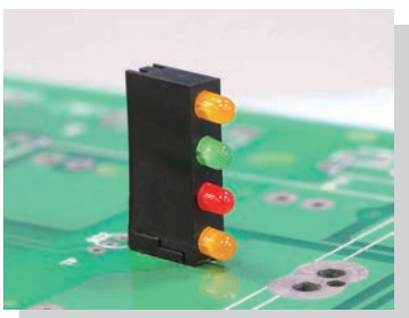


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

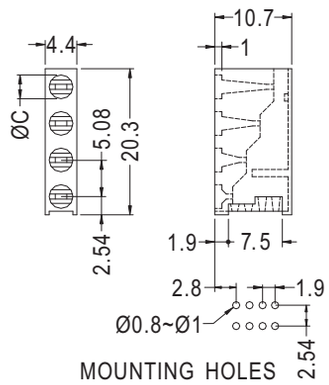


Part No.	C	Package
LH-340	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使Ø3 mm LED 成90° 焊於PC板上，高度一致，組合式子母套，焊腳不搖動。

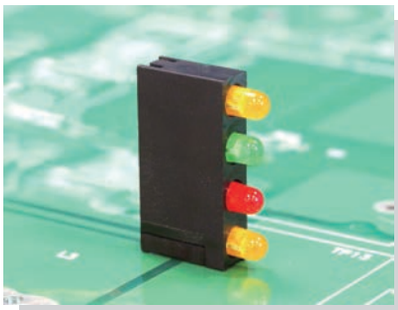


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

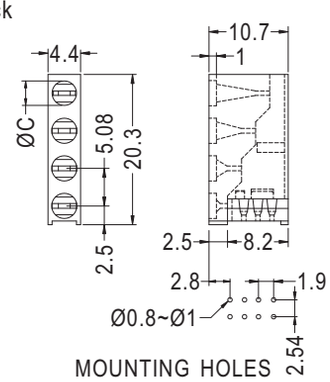

Part No.	C	Package
KLH-340	3.3	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

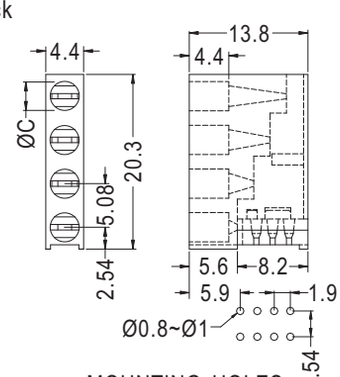

Part No.	C	Package
KLH-341	3.3	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

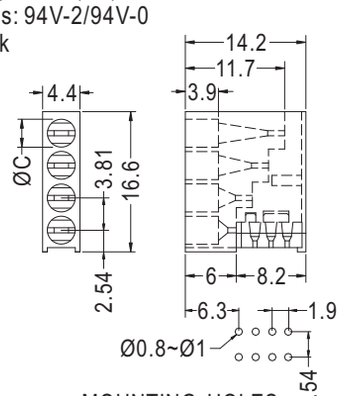


Part No.	C	Package
KLH-342	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使方形 LED 成 90° 焊於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

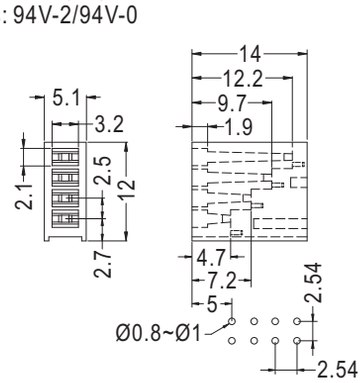


Part No.	Package
LED-341	1000

90° LED燈座 90° LED HOLDER


用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，不斷腳，可組合使用。

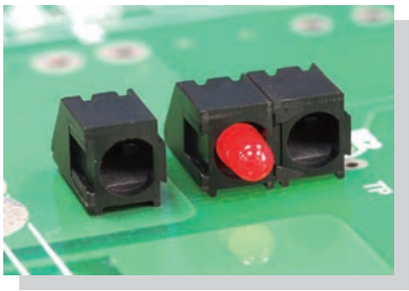


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	C	Package
LED-6301	4.1	2000

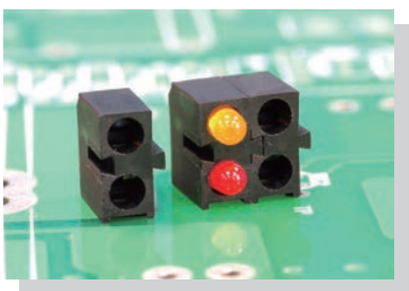


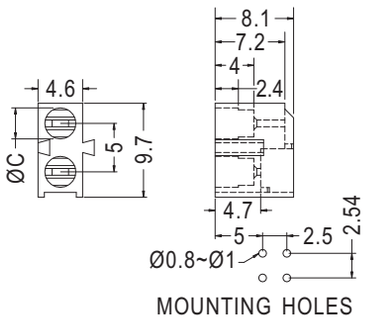


Part No.	C	Package
LED-6302	3.2	2000




Part No.	C	Package
LED-6303	3.8	2000

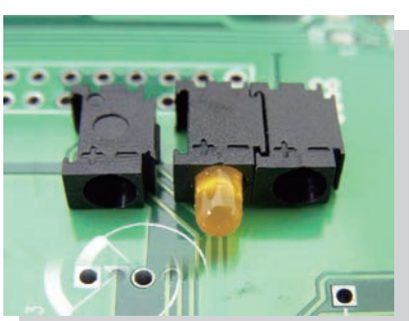

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

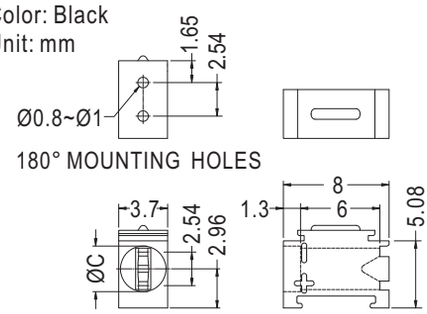





Part No.	C	Package
LED-344	3.45	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，不斷腳，可組合使用。

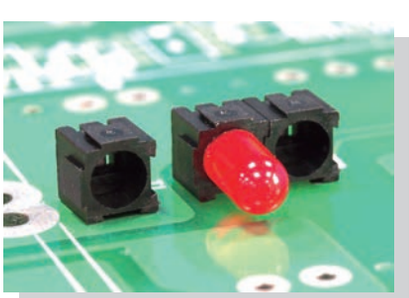


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

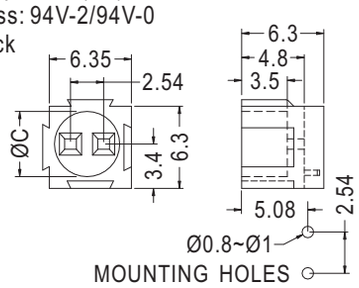


Part No.	C	Package
LED-6501	5.0	2000

90° LED燈座 90° LED HOLDER

用途：可組合使用 LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜，可組合使用。

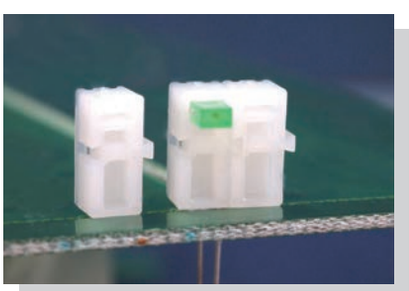


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

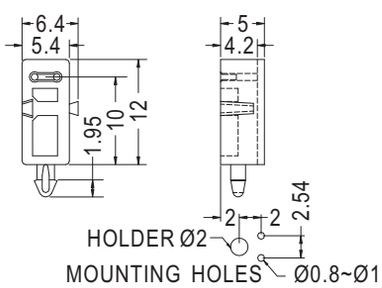


Part No.	Package
LEKH-6301	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

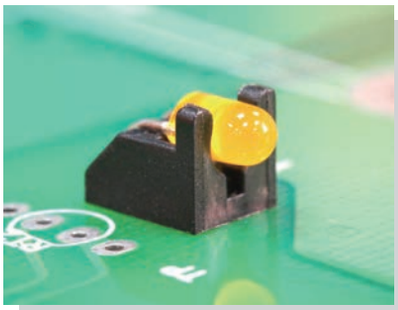


- Material: Nylon 66 (UL)/ABS (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	Package
LEJ-4	4.0	6.0	1000
LEJ-5	5.0	7.0	
LEJ-6	6.0	8.0	
LEJ-7	7.0	9.0	
LEJ-8	8.0	10.0	
LEJ-9	9.0	11.0	
LEJ-13	13.0	15.0	

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0




Part No.	D	Package
LEJ-4S	1.8	1000
★LEJ-4M	3.0	




◆LEJN-4為底部無定位腳

Part No.	Package
LEJN-4	1000

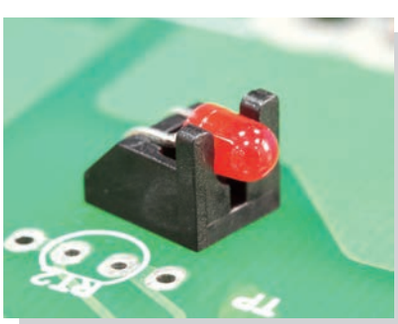

- Material: PC +ABS(UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LEJT-4	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm 3 PIN LED 成90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LEJ3-5	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

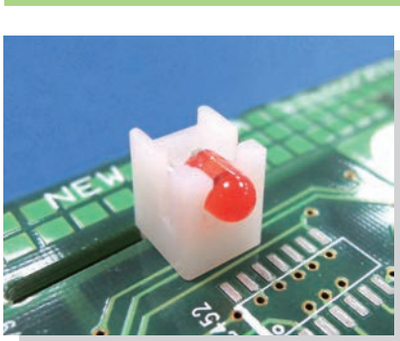


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
LEJA-5	2000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

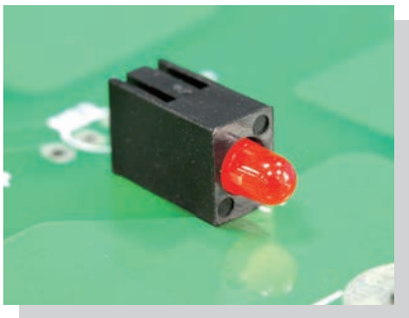


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

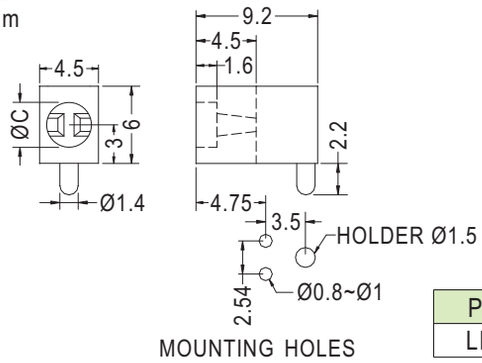


Part No.	C	Package
LEK-301	3.4	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

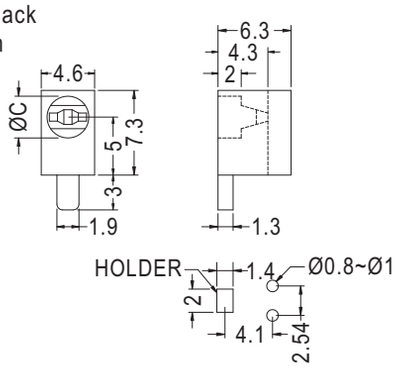


Part No.	C	Package
LEK-302	3.3	1000

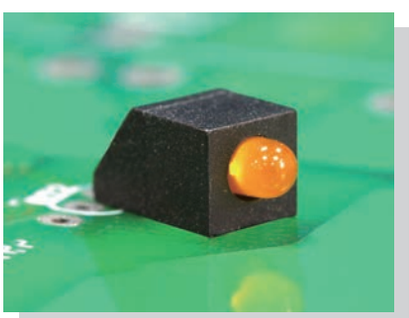


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

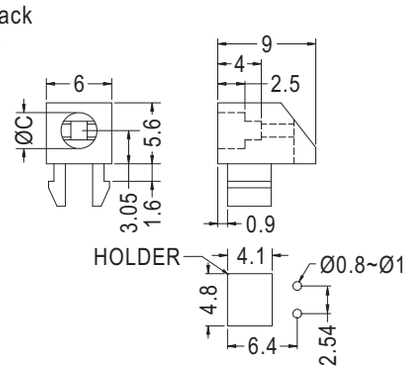

Part No.	C	Package
LEK-314	3.3	1000

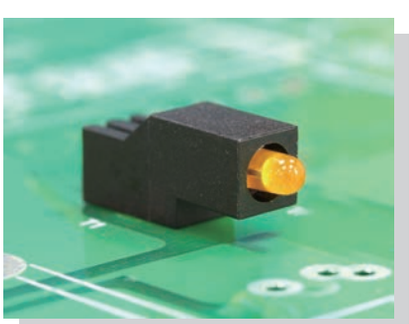


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

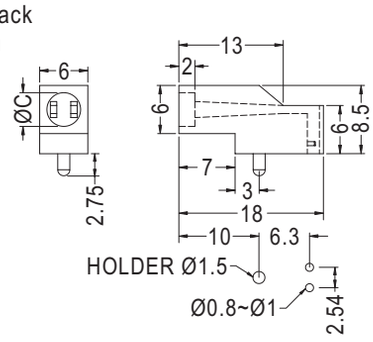


Part No.	C	Package
LEK-311	4.2	1000

90° LED燈座 90° LED HOLDER

用途：使Ø3 mm 3PIN LED 成90° 焊於PC 板上，高度一致，有定位腳，不傾斜。

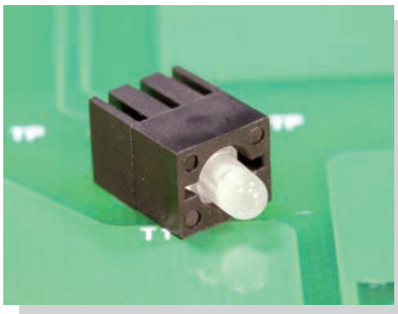


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

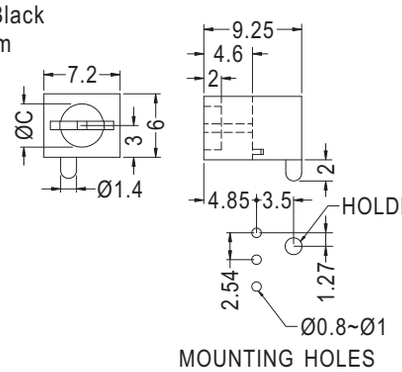


Part No.	C	Package
LEK-303	4.1	1000
LEK-303L	4.25	

90° LED燈座 90° LED HOLDER

用途：使Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

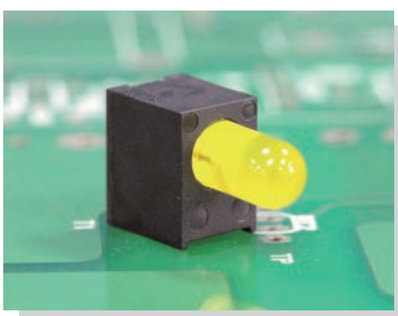


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

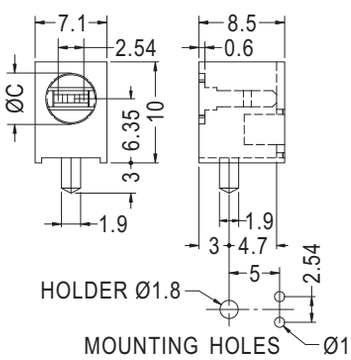

Part No.	C	Package
LEK-541	5.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

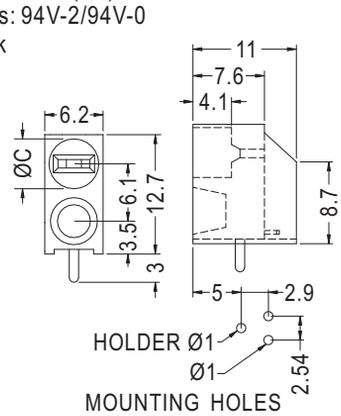

Part No.	C	Package
LEK-525	5.3	1000




- Material: POM
- Color: Natural/Black
- Unit: mm

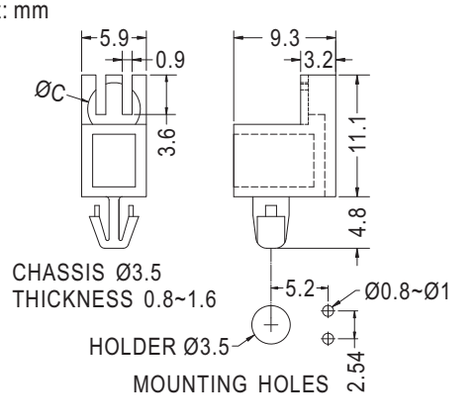


Part No.	C	Package
LEK-526	4.8	1000

90° LED燈座 90° LED HOLDER


用途：使 Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

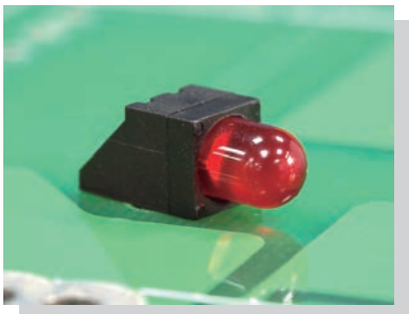


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

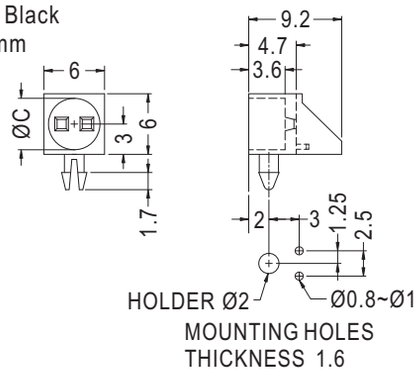

Part No.	C	Package
LEK-548	5.1	1000

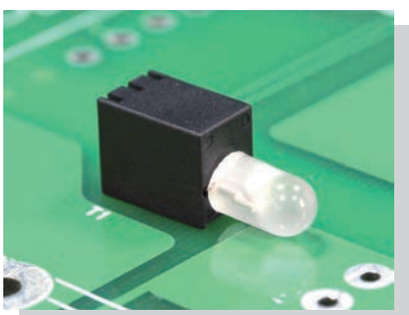


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

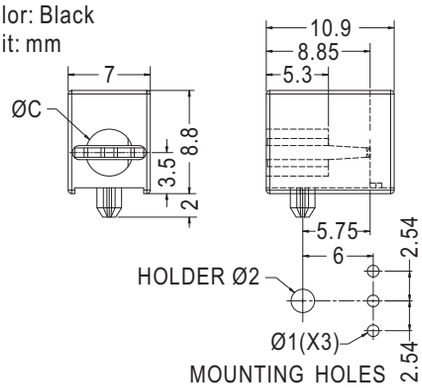

Part No.	C	Package
LEK-551	4.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

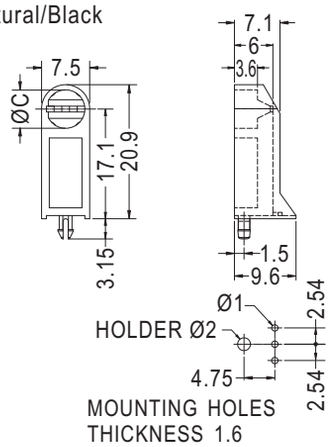


Part No.	C	Package
LEK-546	6.0	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致 ，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

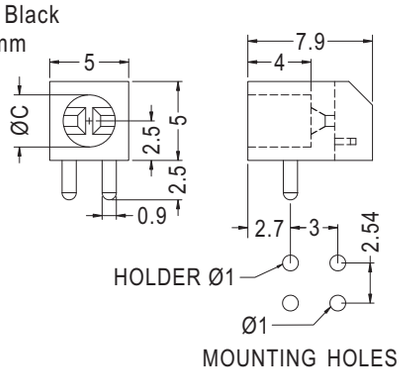


Part No.	C	Package
LEK-3111	3.3	1000

90° LED燈座 90° LED HOLDER


用途：使 Ø3 mm LED成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

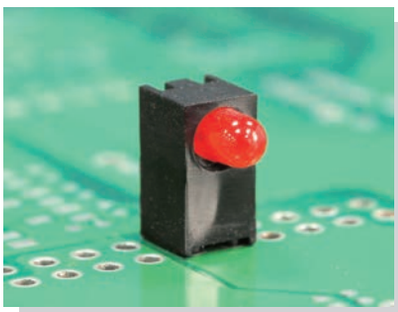


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
LEK-304	1.0	6.4	3.5	1000
LEK-310	2.0	6.35	3.5	

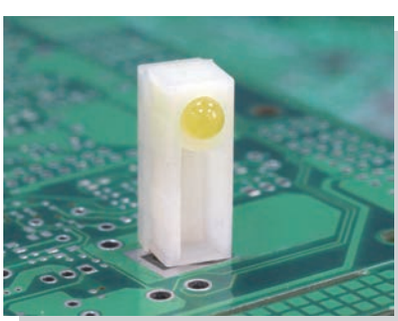

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

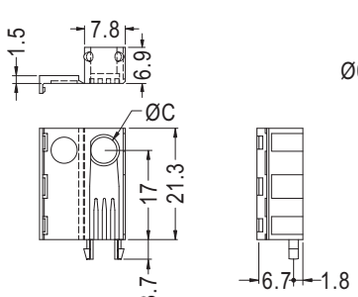

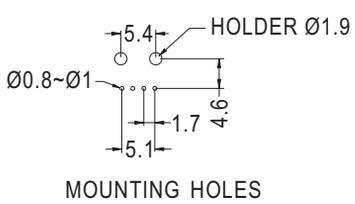


Part No.	C	Package
LEK54-17	5.0	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm 3 PIN LED 成 90° 焊於PC板上，高度一致，有定位腳，不傾斜。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

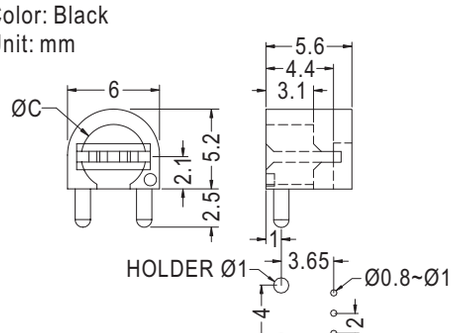


Part No.	C	Package
LEK-312	4.2	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED 成 90° 焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

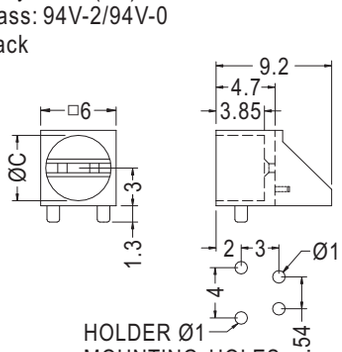


Part No.	C	Package
LEK-516	5.2	2000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

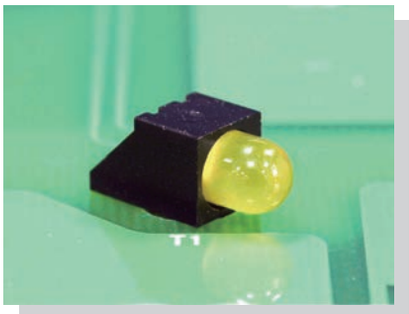


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

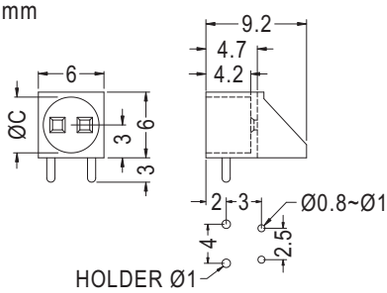


MOUNTING HOLES

Part No.	C	Package
LEK-502	5.2	1000

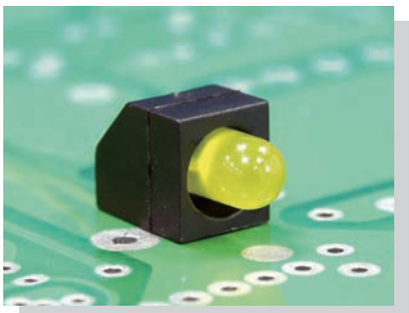

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

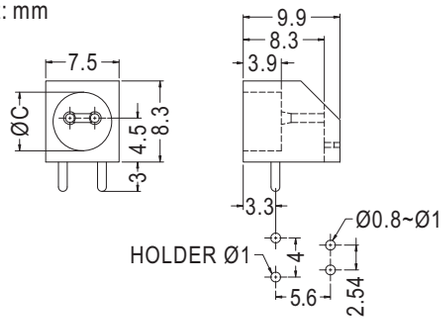


MOUNTING HOLES

Part No.	C	Package
LEK-535	6.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

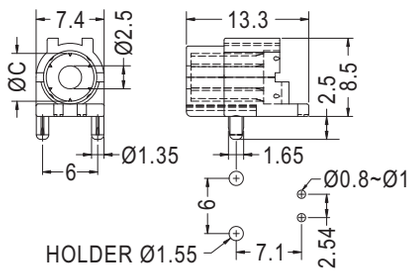


MOUNTING HOLES
THICKNESS 1.0

Part No.	C	Package
LEK-533	5.2	1000

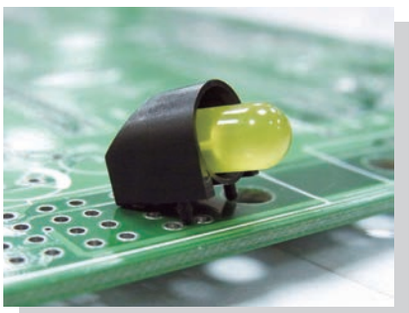

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

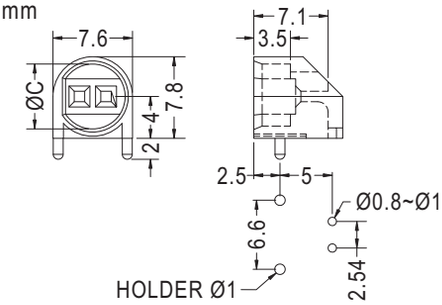


MOUNTING HOLES


Part No.	C	Package
LEK-534	6.2	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

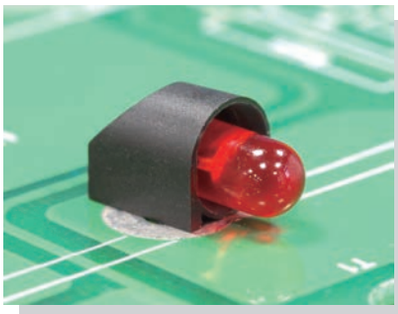


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

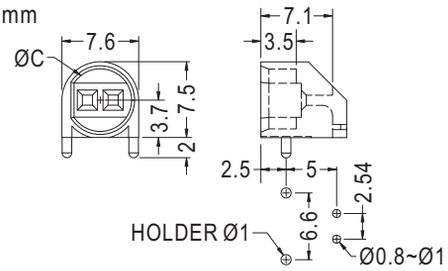


MOUNTING HOLES

Part No.	C	Package
LEK-547	6.2	1000

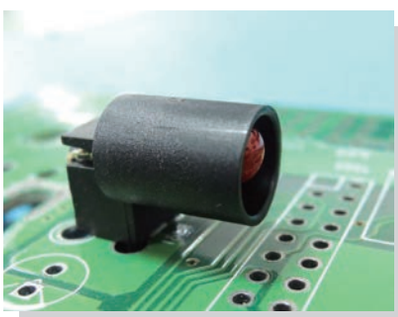

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

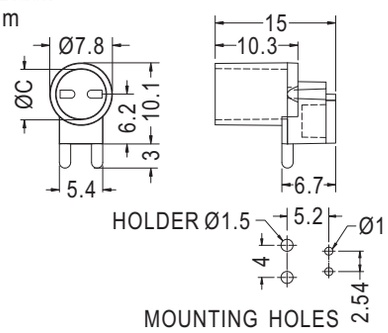


MOUNTING HOLES


Part No.	C	Package
LEK-539	6.2	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

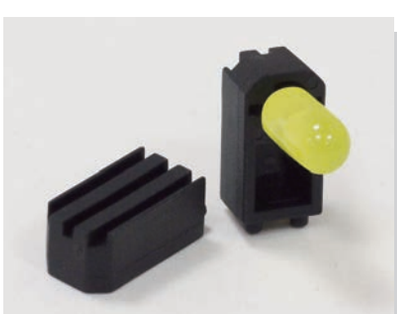

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

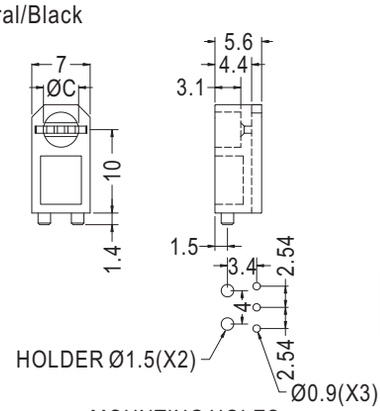

MOUNTING HOLES


Part No.	C	Package
LEK-555	4.2	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

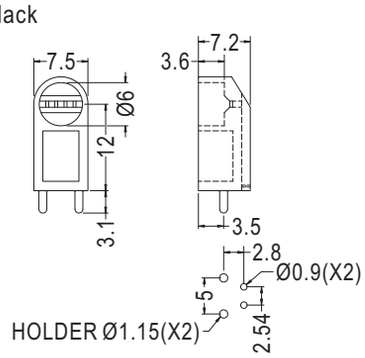


MOUNTING HOLES


Part No.	Package
LEK-556	1000

90° LED燈座 90° LED HOLDER

用途：使Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

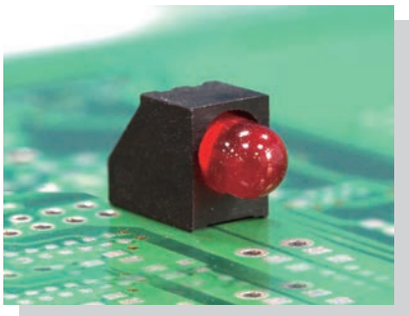


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

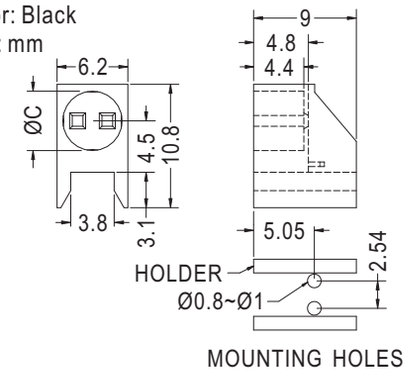


Part No.	C	Package
LEK-507	5.2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

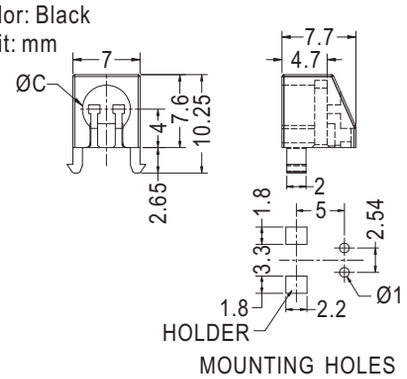

Part No.	C	Package
LEJB-4	5.0	1000

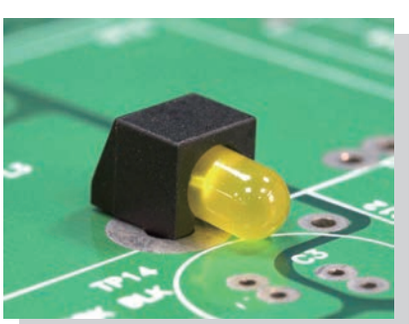


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

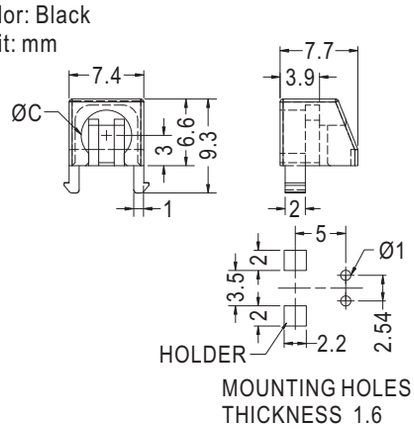


Part No.	C	Package
LEK-549	5.0	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm 3 PIN LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

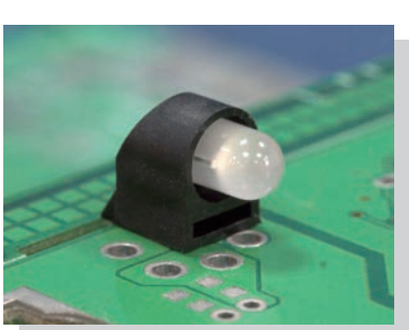


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

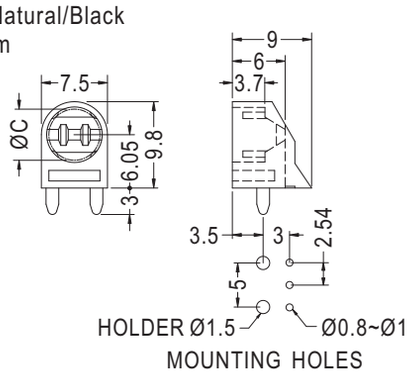


Part No.	C	Package
LEK-505	5.8	1000

90° LED燈座 90° LED HOLDER


用途：使Ø5 mm 3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。

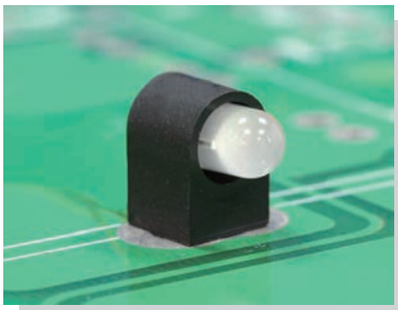


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

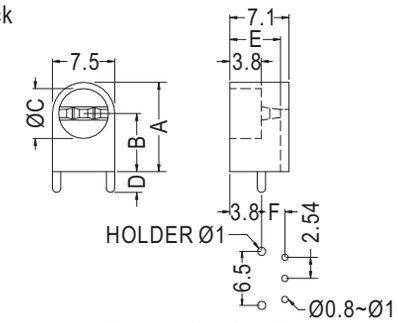


Part No.	A	B	C	D	E	F	Package
LEK503-7	10.75	7.0	6.0	2.5	6.1	2.8	1000
LEK503-18	21.75	18.0	6.0	3.1	5.9	2.6	

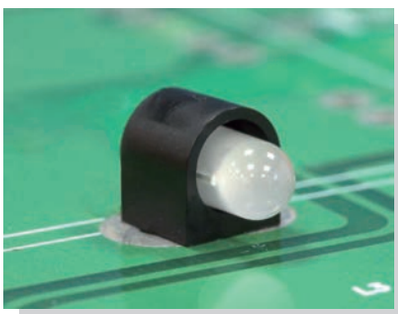


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

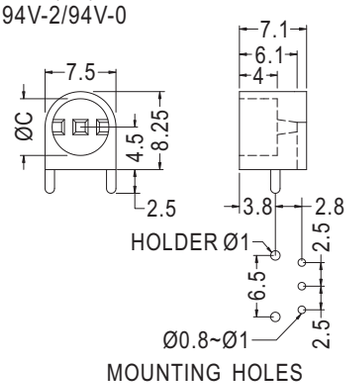

Part No.	C	Package
LEK-503	6.0	1000

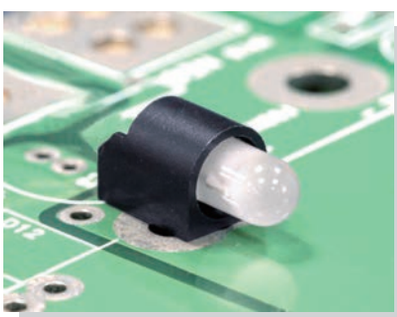

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

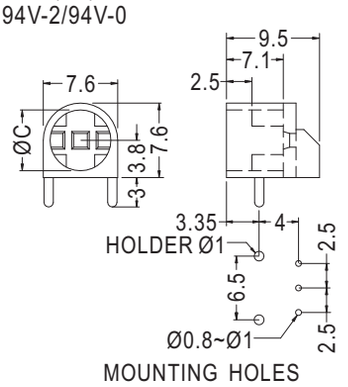


Part No.	C	Package
LEK-501	6.2	1000

90° LED燈座 90° LED HOLDER

用途：用於Ø5 mm 2或3 PIN LED成90°焊於PC板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

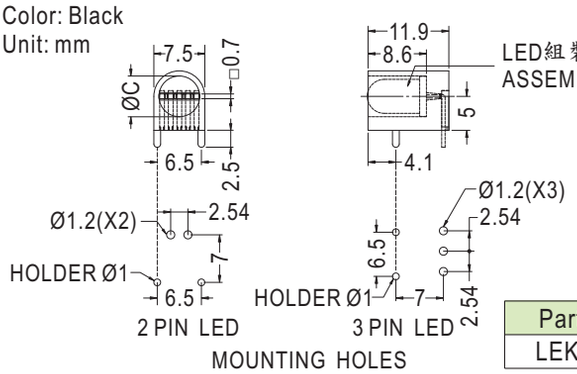


Part No.	C	Package
LEK-528	6.0	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm 3 PIN LED 成90° 焊於PC 板上，高度一致，有定位腳，不傾斜。

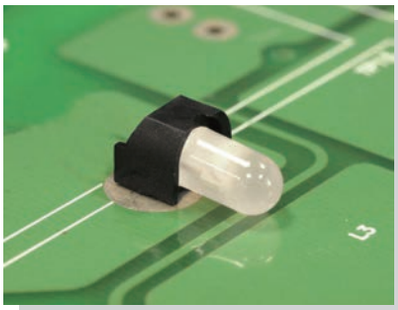


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

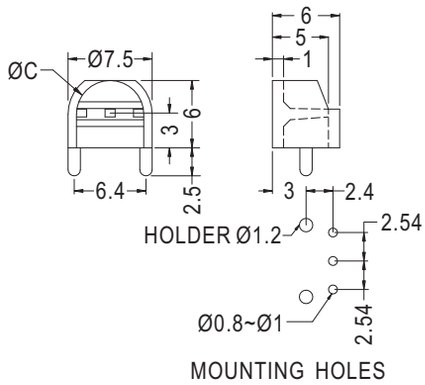


MOUNTING HOLES

Part No.	C	Package
LEK-508	6.0	1000

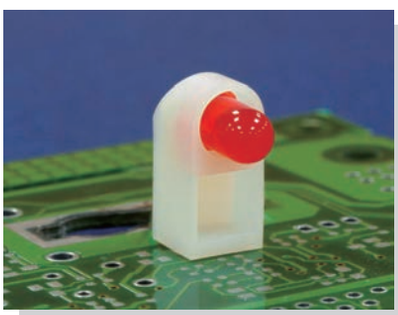


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

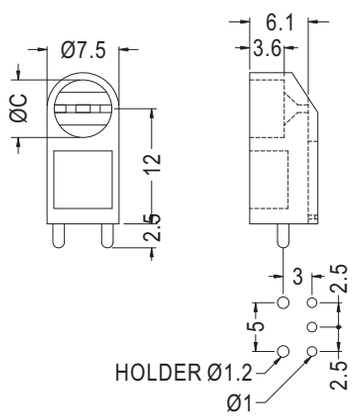


MOUNTING HOLES

Part No.	C	Package
LED5L-12	6.0	1000

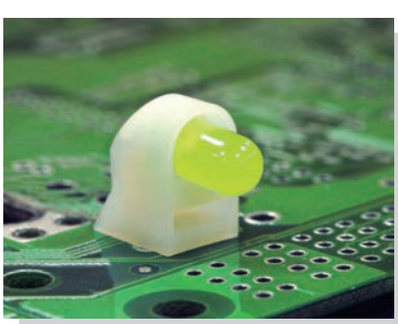

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

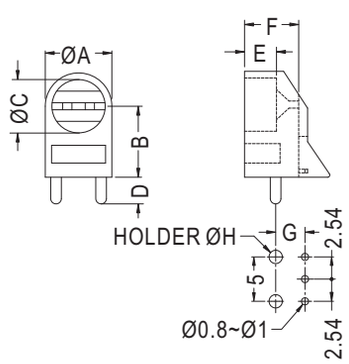


MOUNTING HOLES


Part No.	A	B	C	D	E	F	G	H	Package
LED5L-5	7.5	5.0	6.1	3.0	3.6	6.0	3.3	1.0	1000
LED5L-8	7.5	8.0	6.05	3.0	3.7	6.0	3.3	1.5	
LED5L-11	7.5	11.0	6.1	3.0	3.6	6.1	3.0	1.5	
LED5L-14	7.5	14.0	6.05	3.0	3.7	6.1	3.3	1.5	
LED5L-17	7.5	17.5	6.2	3.0	3.6	6.1	3.0	1.2	

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm 3 PIN LED 成 90° 焊於PC板上，高度一致，有定位腳，不傾斜。

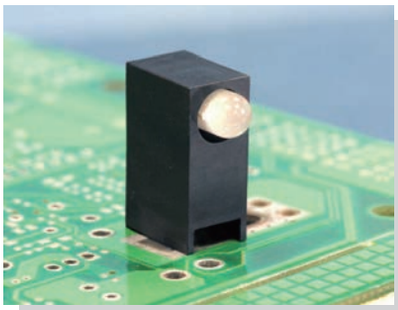

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

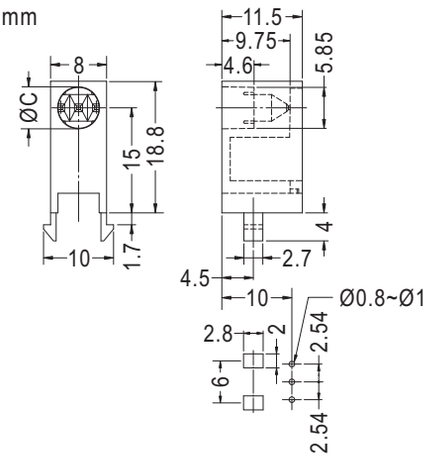

MOUNTING HOLES

Part No.	C	Package
LEK-517	6.0	1000


3

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

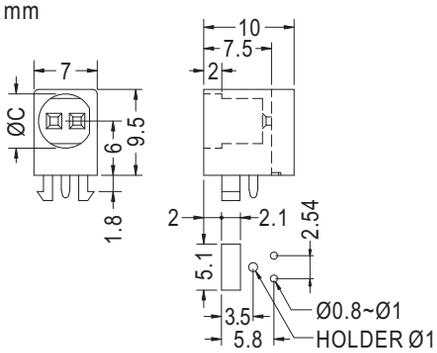


MOUNTING HOLES


Part No.	C	Package
LEK-506	6.1	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm 3 PIN LED成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

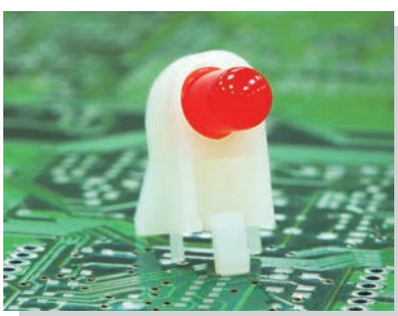

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

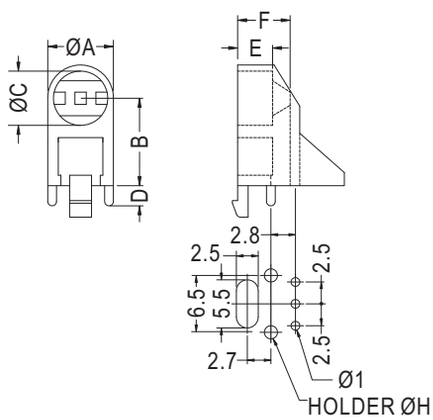


MOUNTING HOLES


Part No.	A	B	C	D	E	F	H	Package
LED5L-7	7.5	7.0	6.2	2.5	4.0	6.0	1.7	1000
LED5L-10	7.5	10.0	6.2	2.3	4.0	6.0	1.5	
LED5L-13	7.5	13.5	6.2	2.3	4.0	6.0	1.5	

90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm 3 PIN LED 成90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

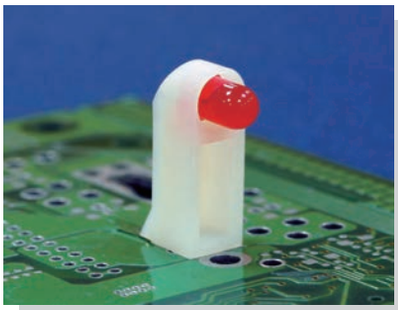

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

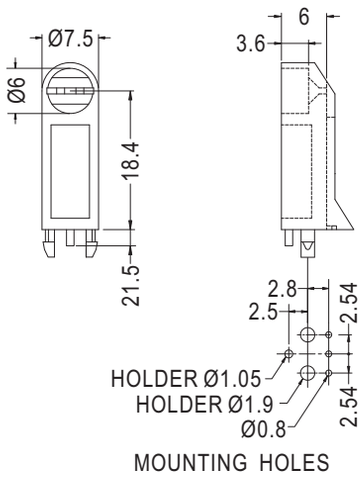


MOUNTING HOLES


Part No.	Package
LED5L-18	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm 3 PIN LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

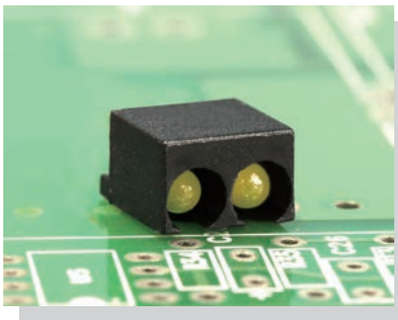

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

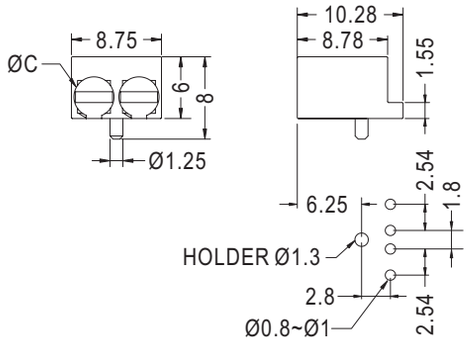


MOUNTING HOLES


Part No.	C	Package
LEK-316	3.9	2000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

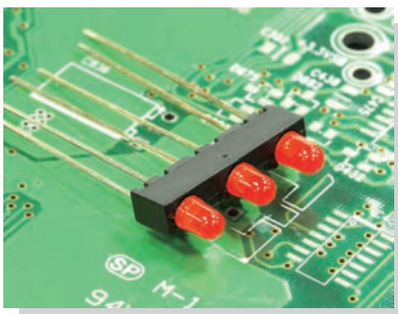

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

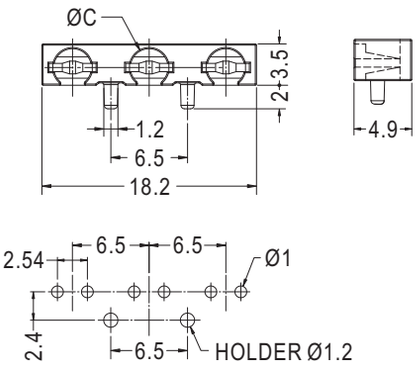


MOUNTING HOLES


Part No.	C	Package
LEK-348	3.2	1000

90° LED燈座 90° LED HOLDER


用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

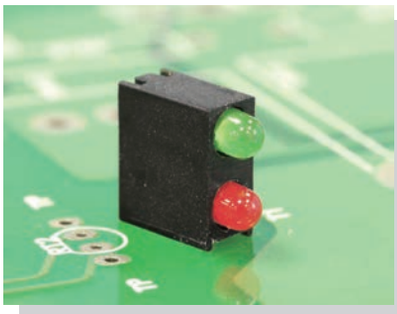


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

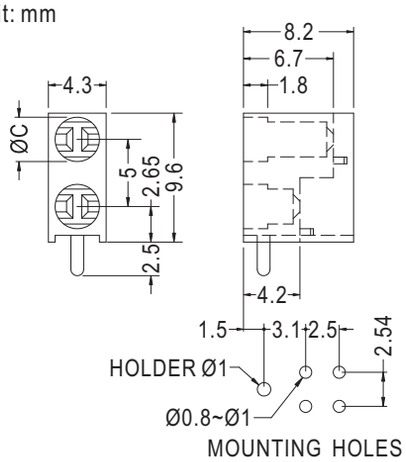

Part No.	C	Package
LEK-307	3.3	1000

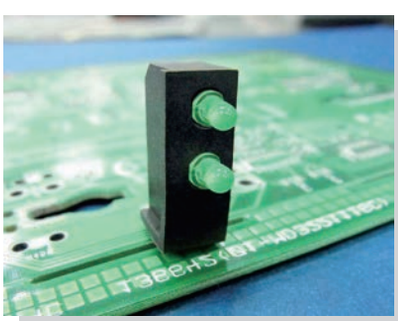


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

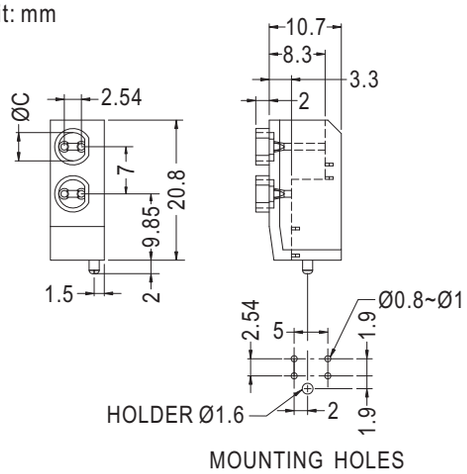


Part No.	C	Package
LEK-323	4.2	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm 3 PIN LED成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

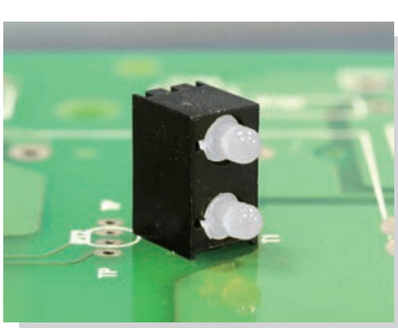

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

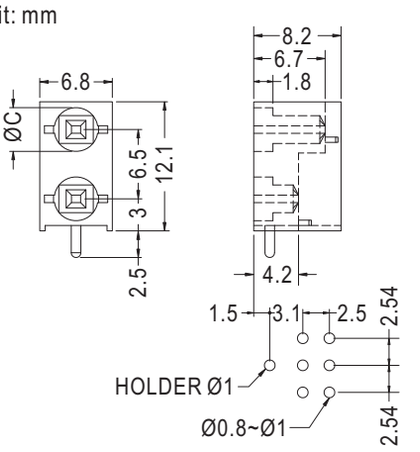


Part No.	C	Package
LEK-327	4.1	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

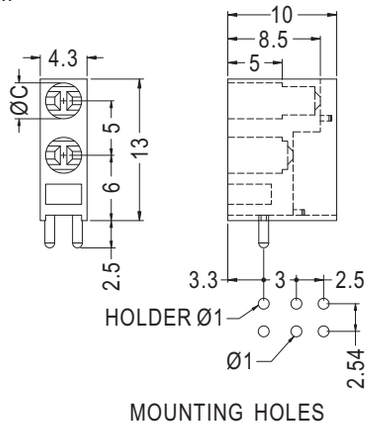


MOUNTING HOLES

Part No.	C	Package
LEK-325	3.3	1000

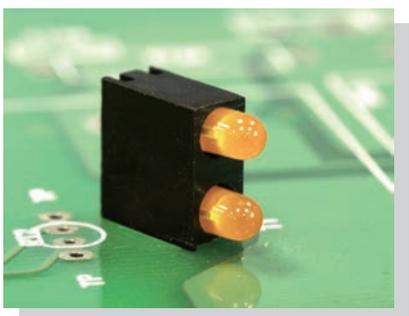

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

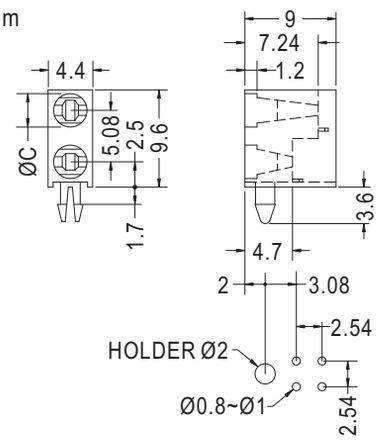

MOUNTING HOLES


Part No.	C	Package
LEK-320	3.3	1000

90° LED燈座 90° LED HOLDER

用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，不斷腳。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

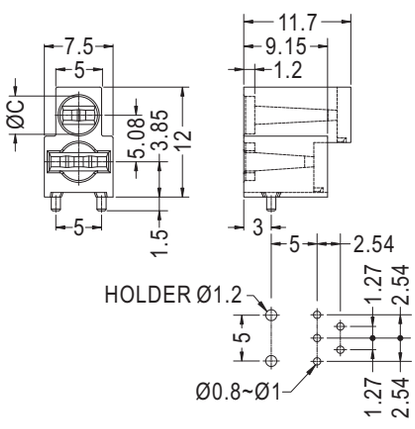


MOUNTING HOLES
THICKNESS 1.6


Part No.	C	Package
LEK-345	4.1	2000


90° LED燈座 90° LED HOLDER

用途：使 Ø5 mm LED 成90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

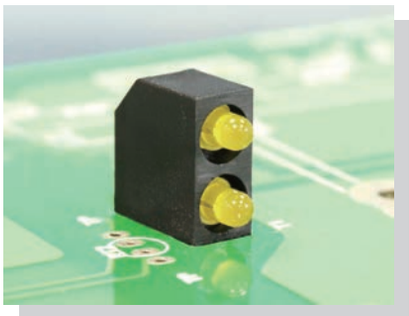

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

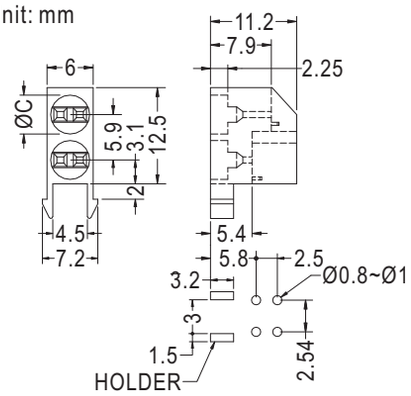

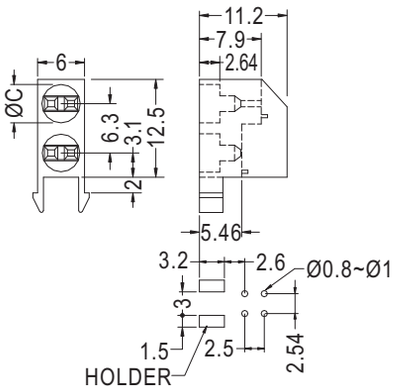


Part No.	C	Package
LEK-512	5.05	1000


Part No.	C	Package
LEK-515	4.8	1000

90° LED燈座 90° LED HOLDER


用途：使 Ø3 mm LED 成 90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

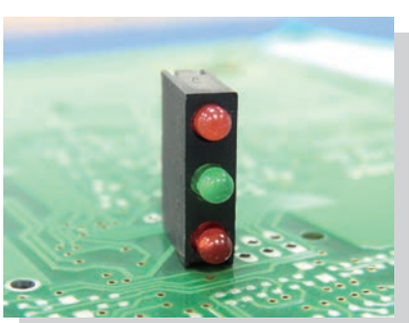


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

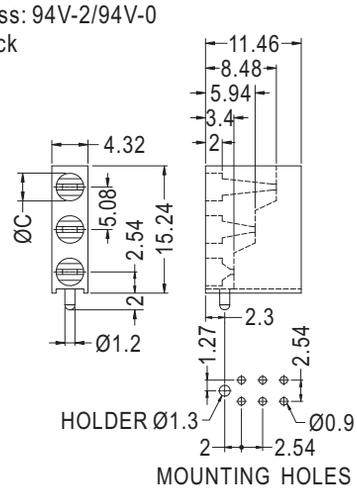



Part No.	C	Package
LEK-331	3.3	1000

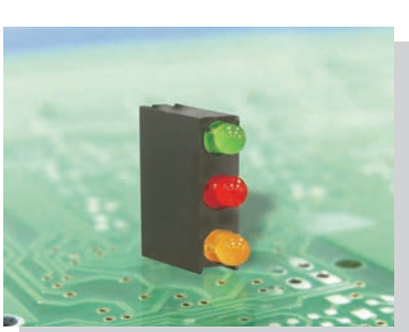

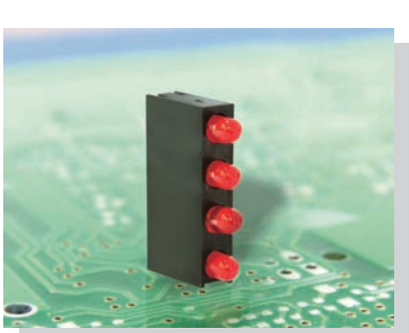

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

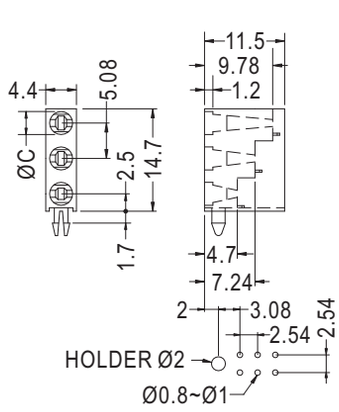

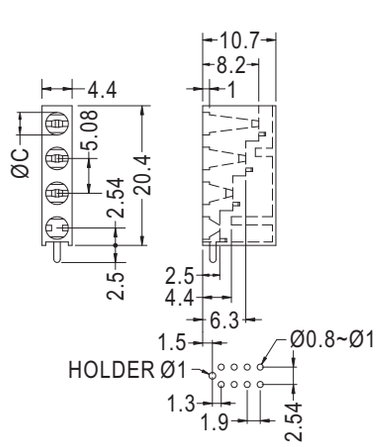


Part No.	C	Package
LEK-330	3.3	1000


Part No.	C	Package
LEK-340	3.3	1000

90° LED燈座 90° LED HOLDER


用途：使方形 LED 成90° 焊於 PC 板上，高度一致，有定位腳，不傾斜。

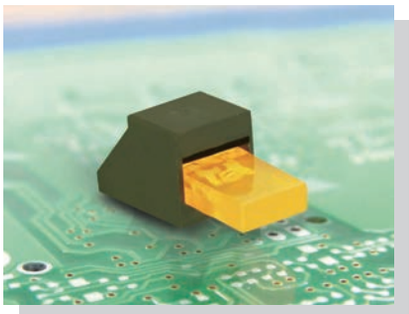


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

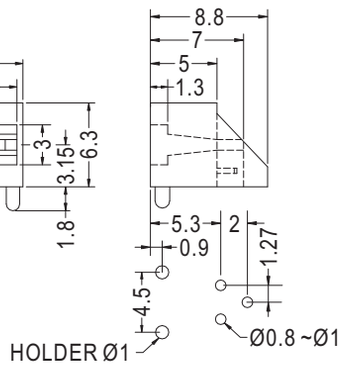

Part No.	Package
LEK-518	1000

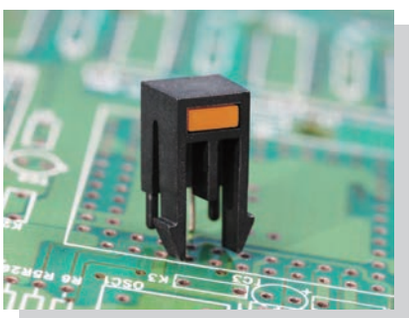


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

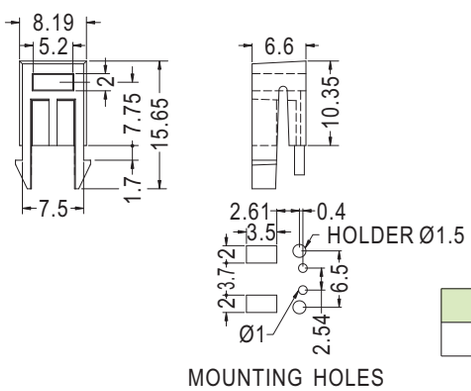

Part No.	Package
LEK-520	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

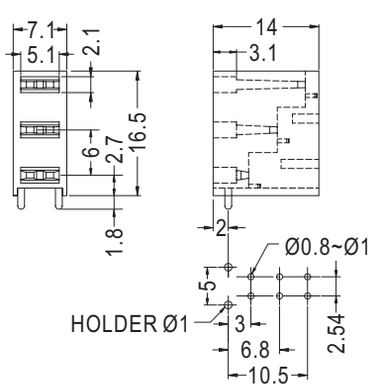


Part No.	Package
LEK-315	1000

LED燈座 LED MOUNT

用途：使方形 5X2 LED 10 顆預先組合，可快速固定於 PC 板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
LED101	500

LED燈座 LED MOUNT

用途：用於LED座。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-1298	1000

LED燈座 LED MOUNT

用途：使 Ø3 mm LED 立於 PC 板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

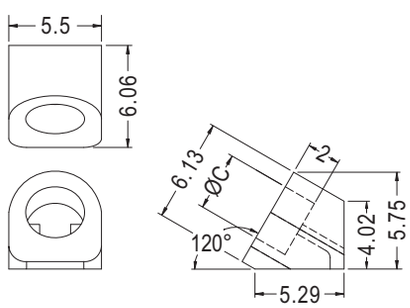

Part No.	C	Package
LEDA-5	3.5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	C	Package
LEDA-6	3.5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

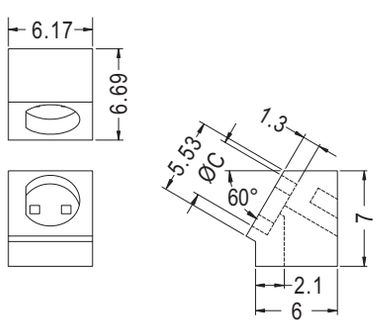


Part No.	C	Package
LEDA-4	4.3	1000

LED燈座 LED MOUNT


用途：使 Ø5 mm LED 成斜角焊於 PC 板上，高度一致，不斷腳。

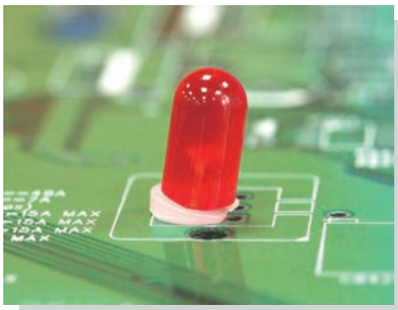


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

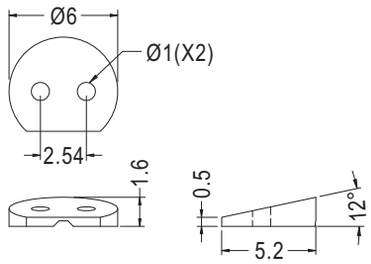


Part No.	Package
LEDA-7	1000

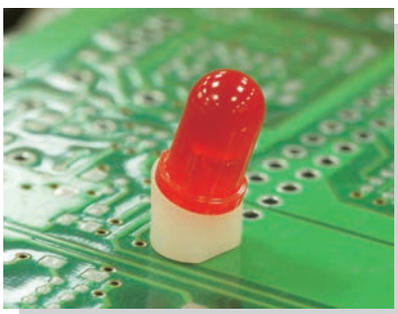


- Material: Nylon 66 (UL)/ABS (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
LEDA-2S	0.9	1000
LEDA-2	1.0	

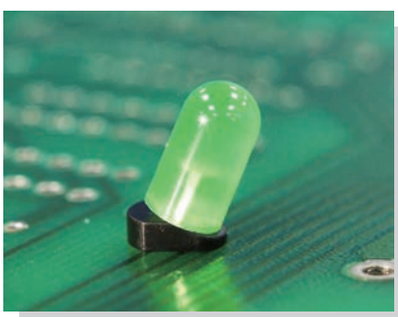


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

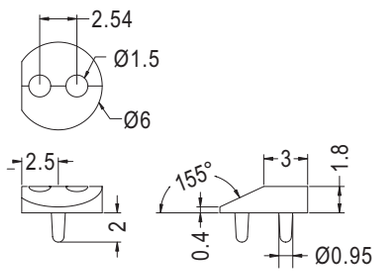

Part No.	Package
LEK-530	1000

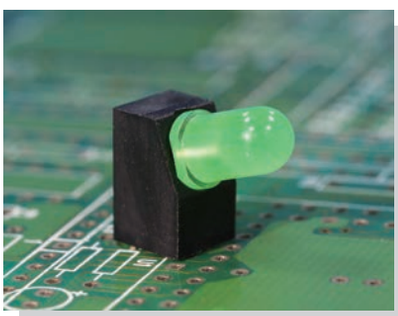

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

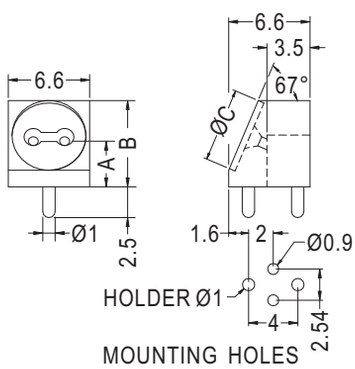


Part No.	A	B	C	Package
LEK-509	3.0	7.0	6.0	1000
LEK-531	7.0	10.3	6.0	

LED燈座 LED MOUNT

用途：使 Ø5 mm LED 成斜角焊於 PC 板上，高度一致，有定位腳，不傾斜。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

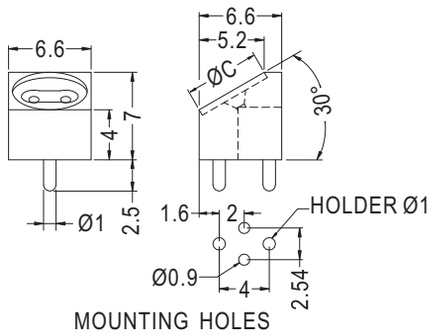


MOUNTING HOLES

Part No.	C	Package
LEK-513	6.0	2000

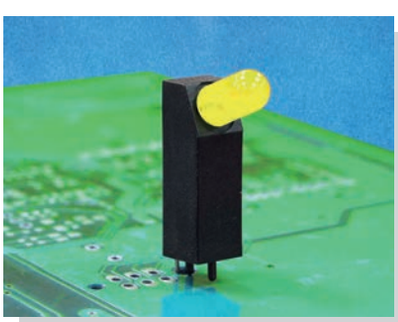

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

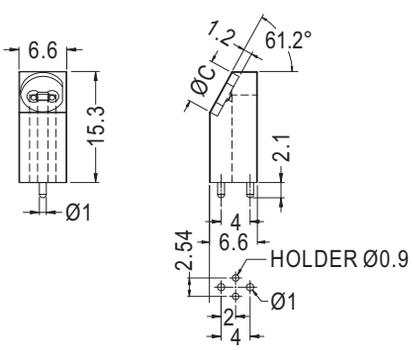


MOUNTION HOLES

Part No.	C	Package
LEK-545	6.2	1000


LED燈座 LED MOUNT

用途：使 Ø3 mm LED 成斜角焊於 PC 板上，高度一致，有定位腳，不傾斜。

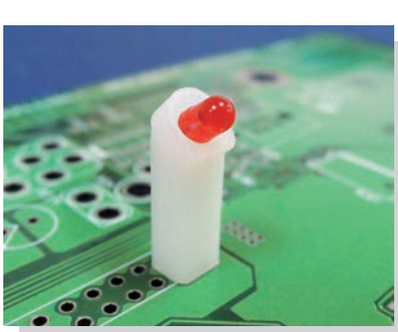




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

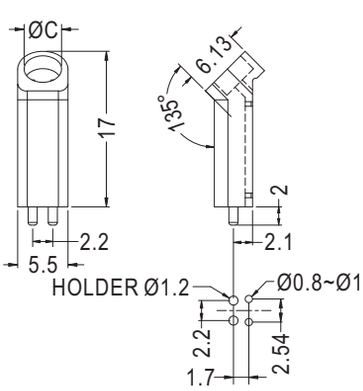

MOUNTING HOLES




◆ **LEDA-17-1**


Part No.	A	B	C	Package
LEDA-17			4.1	1000
LEDA-17-1	5.0	2.0	4.1	

90° LED燈座 90° LED HOLDER


用途：使LED成90° 焊於PC板上，高度一致，有定位腳，不傾斜。

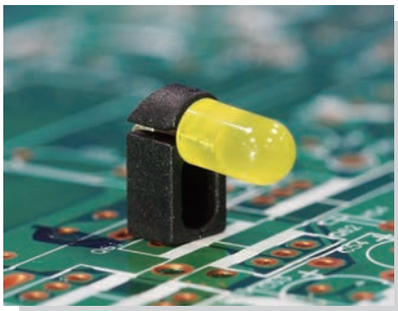


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

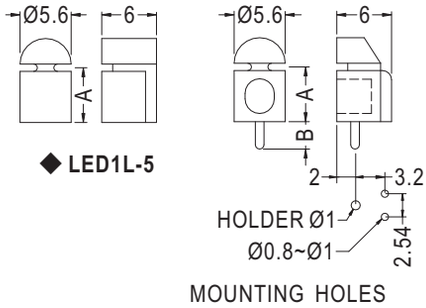

Part No.	A	B	Package
LED1L-5	5.0		2000
LED1L-6	6.0	3.0	
LED1L-7	7.0	3.0	
LED1L-8	8.0	3.0	1000
LED1L-9	9.0	3.0	
LED1L-10	10.0	2.5	

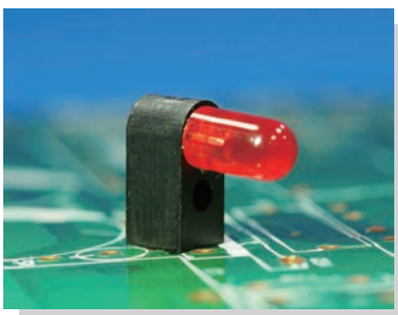


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

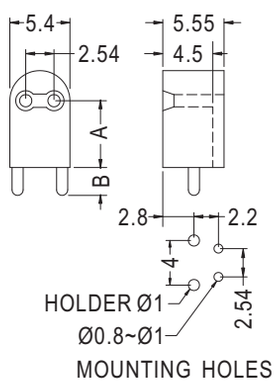

Part No.	A	B	Package
LEKH-3	3.0	2.9	1000
LEKH-6	6.0	2.5	
LEKH-7	7.0	2.5	
LEKH-9	9.0	2.9	
LEKH-10	10.0	2.9	




- Material: Nylon 66 (UL)/N6T (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

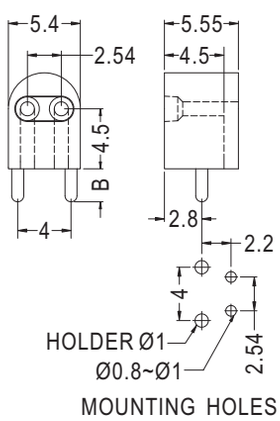


Part No.	B	Package
LEKH-4.5	2.5	1000
LEKH-4.5S	1.2	

90° LED燈座 90° LED HOLDER

用途：使Ø3 mm LED成90° 焊於PC板上，高度一致，有定位腳，不傾斜。

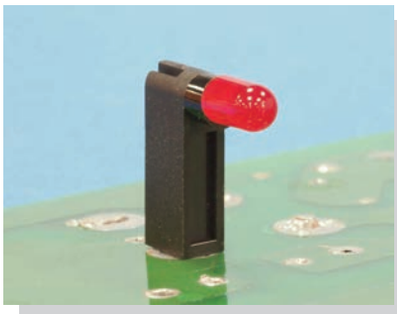


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

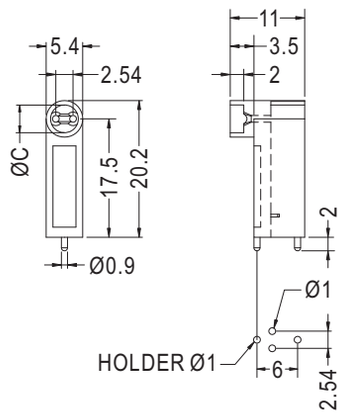


MOUNTING HOLES

Part No.	C	Package
LEAK-17.5	4.1	1000

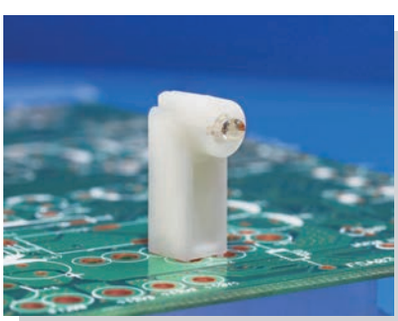


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

◆ FOR 3 PIN LED

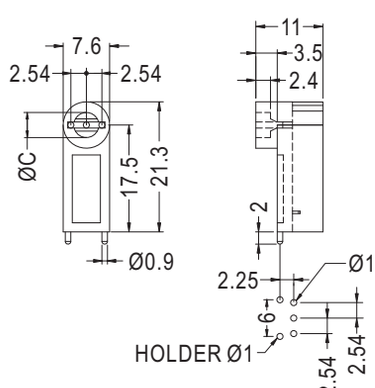


MOUNTING HOLES

Part No.	C	Package
LEAK3-17.5	4.1	1000

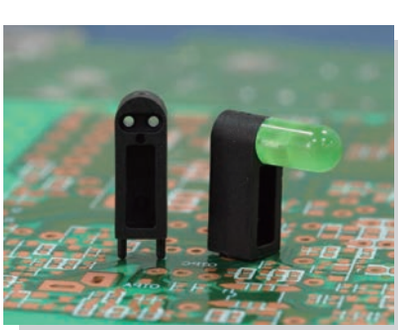

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

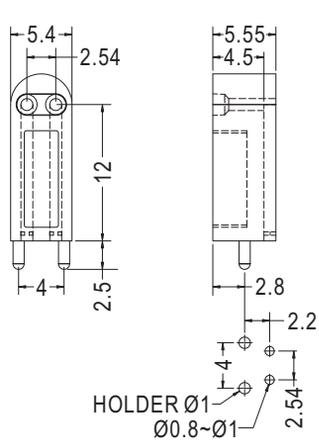


MOUNTING HOLE


Part No.	Package
LEKH-12	1000

LED間隔柱 LED SPACER SUPPORT

用途：使LED成80.5°焊於PC板上，高度一致，不斷腳，中間有隔板不短路。

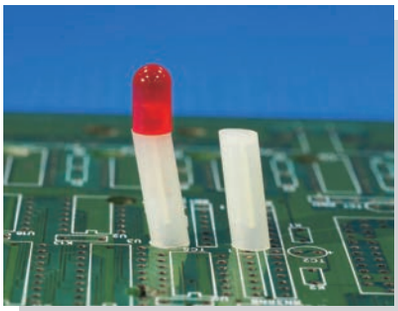

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

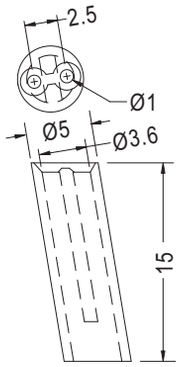


Part No.	Package
LEDA-15	1000


光纖晶體座 OPTICAL LENS HOLDER

用途：光纖晶體焊於PC板上，高度一致，有定位腳，不傾斜，可與OPC-1配合使用。



- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm





Part No.	Package
PLT130T	1000




4


- ▶ 固定座
  Mount
- ▶ 束線座
  Lock
- ▶ 防高壓線環
  F.B.T Clip

排線固定板 FLAT CABLE MOUNT


用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。

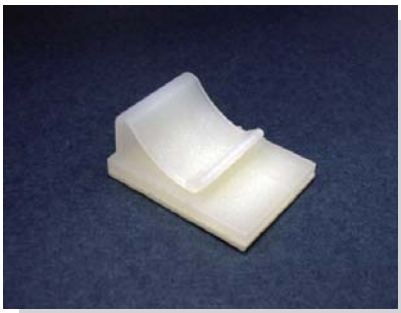


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FC-19	500




Part No.	Package
FC-19L	500

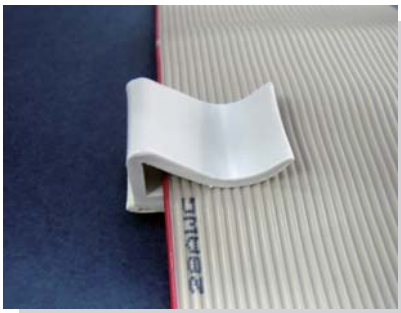


- Material: PVC
- Color: Gray
- Unit: mm

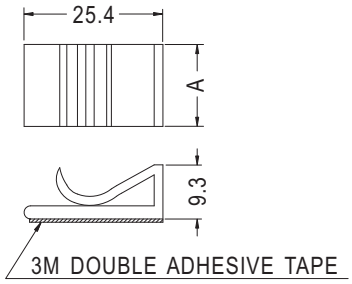


Part No.	A	Package
FCC-15	15.0	500
FCC-20	20.0	
FCC-25	25.0	250

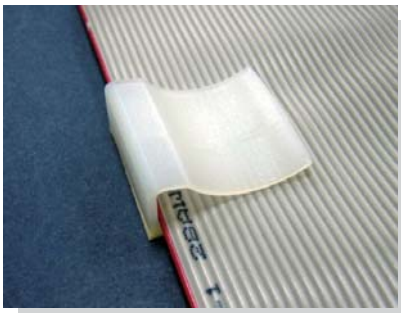

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
FCN-15	15.0	500
FCN-20	20.0	
FCN-25	25.4	



◆ **FCN-16**


Part No.	A	Package
FCN-16	15.0	500

電線固定座 WIRE SADDLE


用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

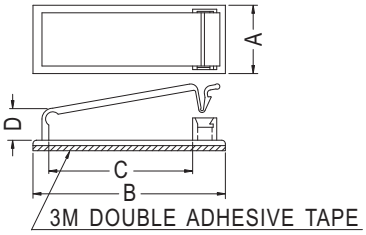


Part No.	A	B	C	D	Package
FCA-1	19.7	77.6	64.0	9.95	50
FCA-2	19.0	53.5	40.0	8.9	100
FCA-3	19.0	45.8	32.0	8.44	200

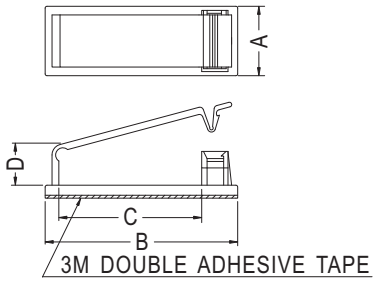


Part No.	A	B	C	D	Package
FCA-5	19.8	45.4	31.8	15.2	200
FCA-6	19.3	53.5	39.7	12.0	
FCA-7	19.3	53.5	39.7	11.7	
FCA-8	19.2	53.5	39.7	9.5	
FCA-19	18.7	55.2	41.3	9.6	

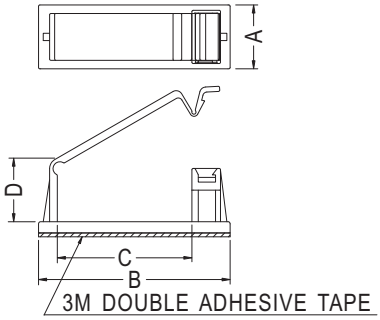


Part No.	A	B	C	D	Package
FCA-9	15.0	45.0	31.6	14.95	200
FCA-10	19.0	78.2	64.6	14.8	100
FCA-11	15.0	38.5	27.0	11.6	200
FCA-14	19.8	66.5	52.6	12.1	
FCA-17	14.8	38.0	26.9	24.1	
FCA-18	14.8	38.0	26.9	30.1	

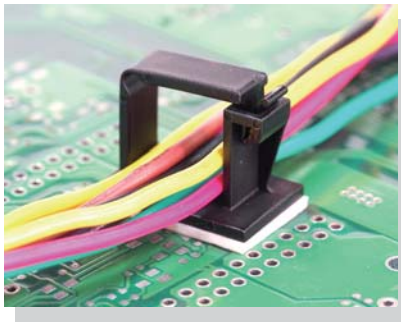


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
FCAB-1	500

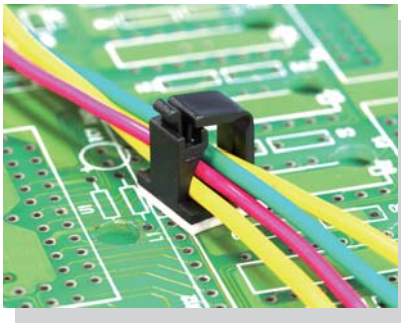

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

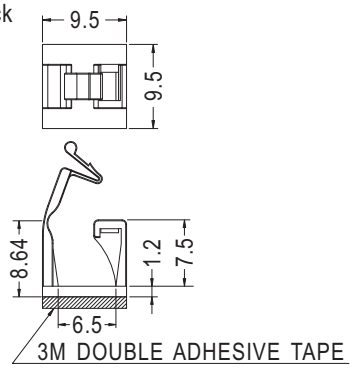


Part No.	Package
FCAB-7	1000

電線固定座 WIRE SADDLE


用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








◆ **FCU-9**

Part No.	A	B	C	D	Package
FCU-1	12.7	40.7	31.5	5.5	200
FCU-2	12.7	36.0	27.0	11.2	
FCU-3	15.0	36.0	27.0	13.9	
FCU-4	12.5	35.8	26.8	8.3	
FCU-5	12.7	26.2	17.0	4.55	
FCU-7	10.0	28.0	19.0	4.9	
FCU-8	12.9	72.3	63.1	6.7	100
FCU-9	18.8	30.7	20.9	16.0	
FCU-12	10.0	26.2	17.0	14.2	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
FCAB-2	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FCAB-3	200

排線固定座 FLAT CABLE CLAMP

用途：背膠式，用於電子，電腦內部電線固定，裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

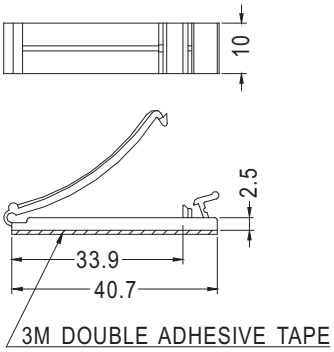


Part No.	Package
FCJ-40	100

排線固定夾 FLAT CABLE CLAMP

用途：用於電子，電腦內部排線固定，裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

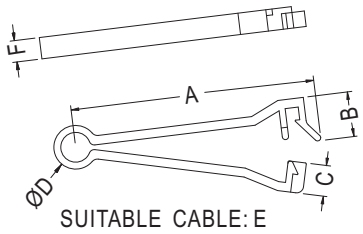


Part No.	A	B	C	D	E	F	Package
FCE-30	62.3	13.0	8.9	12.0	30 PIN	6.4	100
FCE-40	70.2	12.2	8.7	12.8	40 PIN	6.2	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
FCS-31	100


電線固定座 WIRE SADDLE

用途：配合螺絲，固定電線美觀，不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

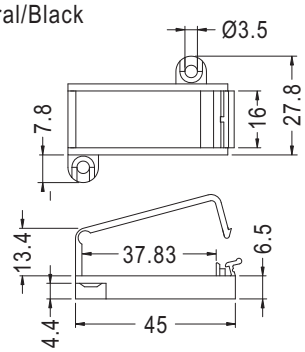





Part No.	Package
FCUA-1	200


電線固定板 WIRE SADDLE

用途：用於電線之固定。

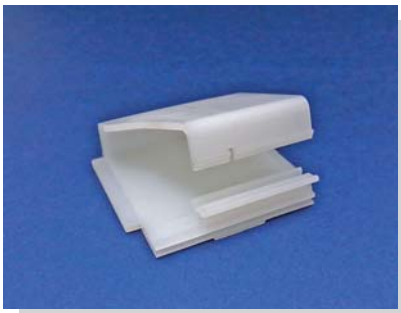

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
FCUA-2	200



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
FCUA-4	200


電線固定座 WIRE SADDLE

用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm









Part No.	Package
CWK-1	200

排線固定座 FLAT CABLE CLAMP

用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。

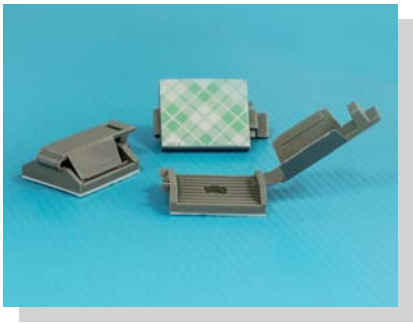


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

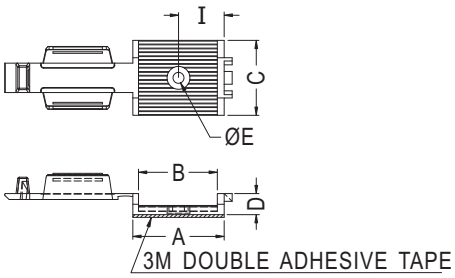

Part No.	A	B	C	D	E	I	Package
FCH-29	30.7	26.5	25.2	7.1	3.7	15.4	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

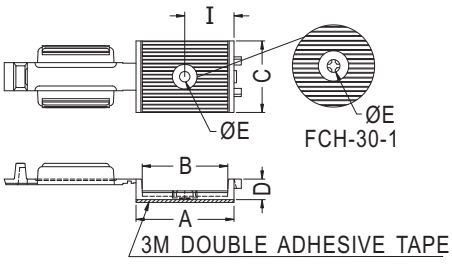


FOR FCH-30,FCH-30-1


Part No.	A	B	C	D	E	I	Package
FCH-30	35.0	30.5	25.4	8.2	3.7	17.5	100
FCH-30-1	35.0	30.5	25.4	7.3	3.7	17.5	

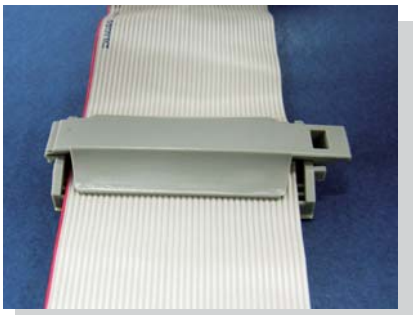


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

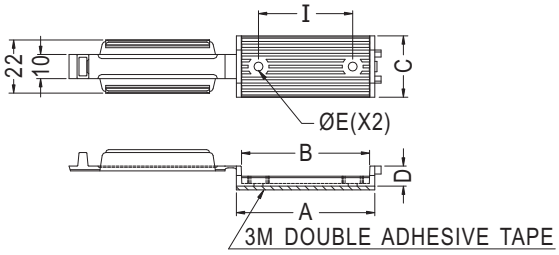

Part No.	A	B	C	D	E	I	Package
FCH-50	57.3	53.0	25.4	8.3	3.7	39.0	50
FCH-80	82.3	78.93	25.4	12.3	3.8	38.7	

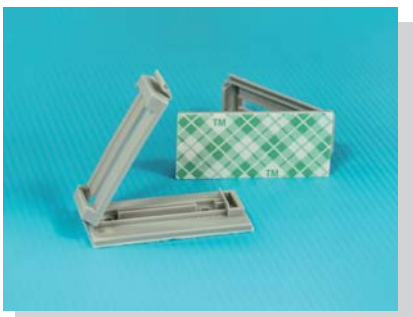


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

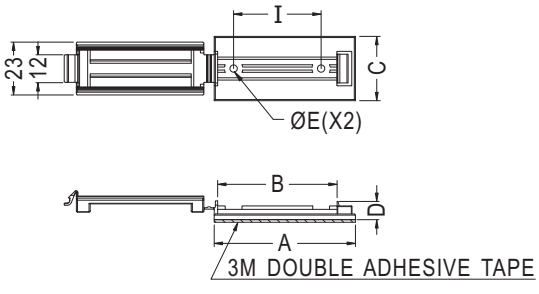


Part No.	A	B	C	D	E	I	Package
FCHA-1	61.5	52.0	28.0	8.0	3.2	38.1	50


電線固定座 WIRE SADDLE


用途：用於電子，電腦內部電線固定，裝配容易，美觀不脫落。

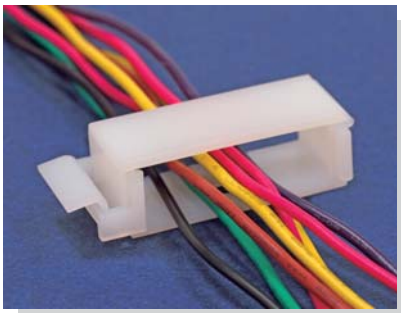


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










Part No.	A	B	C	Package
FCSA-2	33.6	28.4	37.2	100
FCSA-3	47.8	42.6	51.4	

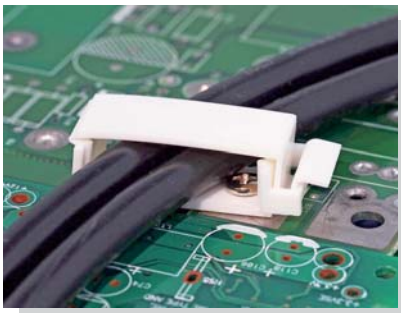

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

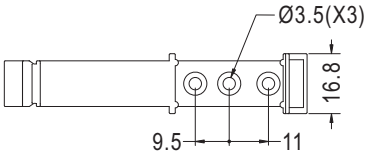







NEW

Part No.	A	B	C	Package
FCSA-6	33.6	28.4	37.2	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLES



NEW


Part No.	Package
FCSA-7	100


電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm






MOUNTING HOLES
THICKNESS 0.6~0.8



Part No.	Package
MIB-32	1000


電線固定座 WIRE SADDLE

用途：用於電子，電腦內部電線固定，
裝配容易，美觀不脫落。

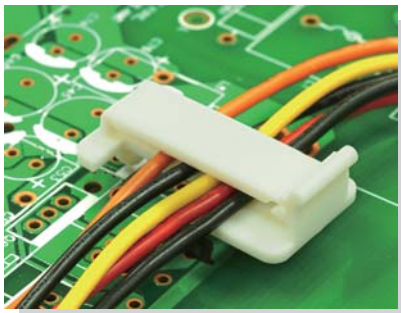



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

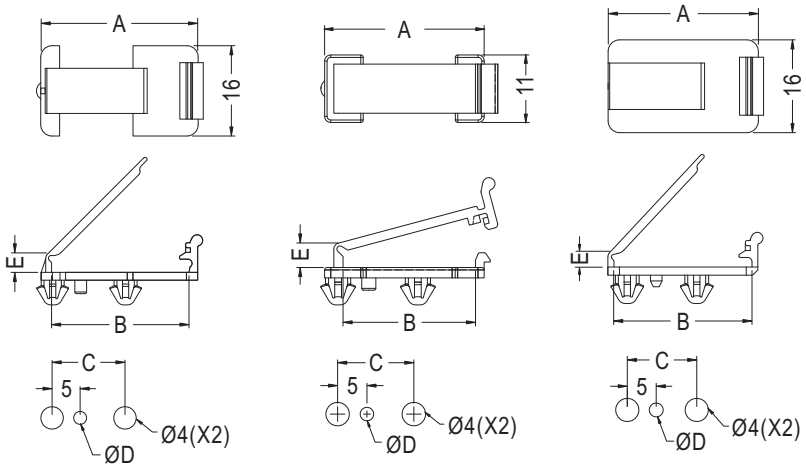

MOUNTING HOLES
THICKNESS: T

◆ **MIBB-1**


MOUNTING HOLES
THICKNESS: T

◆ **MIBB-2**


MOUNTING HOLES
THICKNESS: T

◆ **MIBB-3,MIBB-5**

Part No.	A	B	C	D	E	T	Package
MIBB-1	27.9	24.5	13.0	2.3	3.5	0.5~0.8	1000
MIBB-2	26.0	21.6	13.0	2.3	4.0	0.5~0.8	
MIBB-3	25.9	23.85	12.0	2.4	3.5	1.0	
MIBB-5	25.9	23.85	13.0	2.4	3.5	1.0	

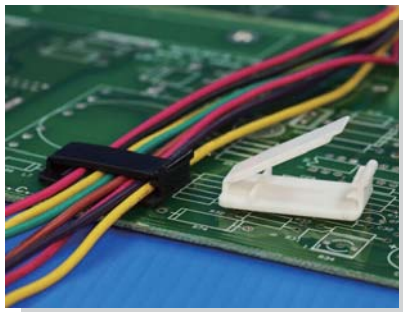

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

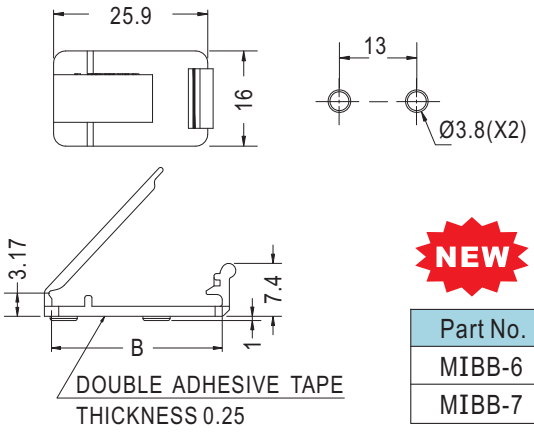

NEW


Part No.	B	Package
MIBB-6	23.9	1000
MIBB-7	23.85	

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，
維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

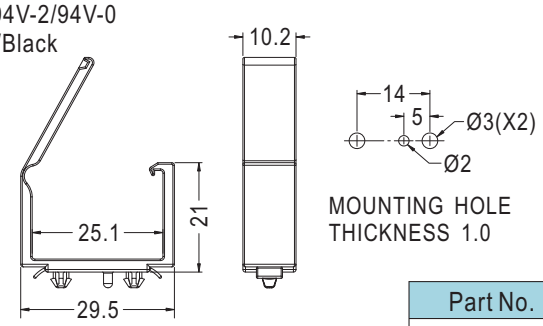

MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
MIBA-4	500


電線固定座 WIRE SADDLE

用途：用於電子，電腦內部電線固定，
裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
CHASSIS THICKNESS: T

Part No.	A	B	D	E	T	Package
CHWC-1	44.8	31.6	15.0	15.0	0.8	500

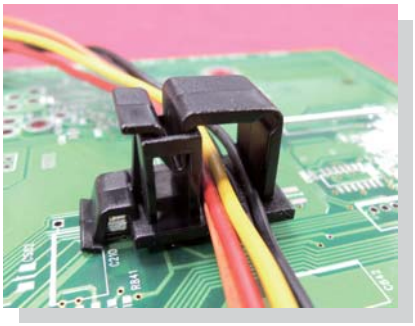


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	D	E	T	Package
CHWC-2	21.7	8.5	15.0	14.5	1.0	500

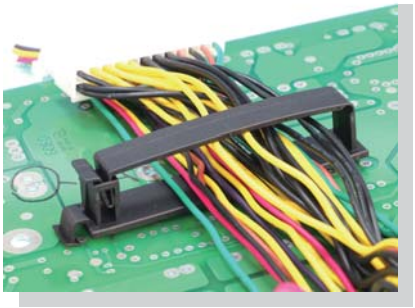


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	D	E	T	Package
CHWC-6	80.0	66.6	15.0	17.15	1.2	500

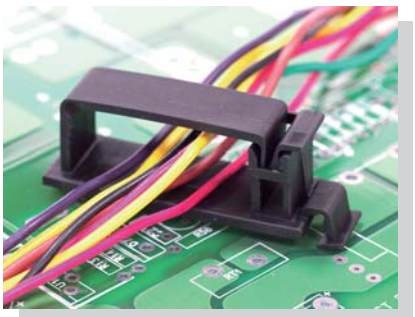

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm







MOUNTING HOLES
THICKNESS: T


Part No.	A	B	D	E	T	Package
CHWC-3	45.0	31.6	15.0	14.95	1.2	500

用途：用於電子，電腦內部電線固定，
裝配容易，美觀不脫落。

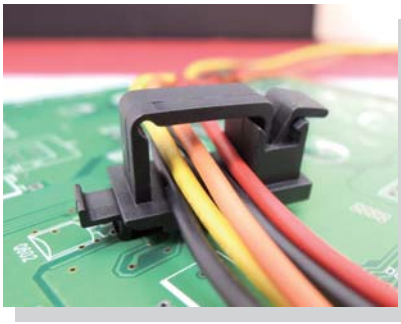


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS 0.8

Part No.	A	B	C	D	E	F	G	H	I	J	K	Package
CHWB-1	20.7	10.3	7.0	10.2	9.51	4.5	4.0	2.0	9.9	2.2	5.2	500
CHWB-2	35.28	25.25	11.0	15.2	13.17	4.0	3.0	1.5	26.0	2.1	5.5	

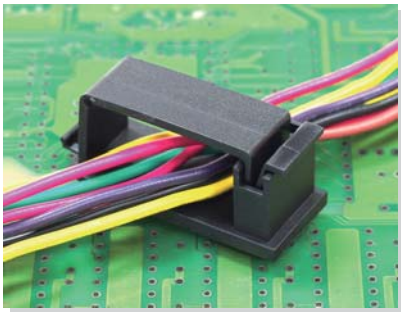

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES
THICKNESS 0.8

Part No.	Package
CHWB-4	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	D	E	G	T	Package
FCJA-1	44.5	31.8	18.6	14.8	6.5	0.8~1.6	200

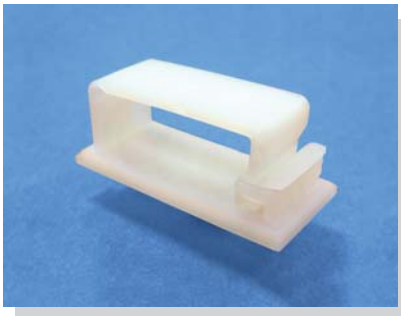

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	B	D	E	G	J	T	Package
FCUT-1	45.4	31.8	19.8	15.2	6.5~7.0	7.2	0.8~3.0	500


電線固定座 WIRE SADDLE

用途：用於電子，電腦內部電線固定，
裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	G	T	Package
FCT-1	77.4	64.0	64.5	19.6	7.8	4.8	0.8~2.2	100
FCT-1L	77.0			20.0	12.9			



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	F	G	T	Package
FCT-2	53.8	40.0	30.0	19.0	8.9	30.0	4.0	0.8~2.2	100
FCT-3	45.8	32.0	25.0			25.0			



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	G	T	Package
FCT-4	67.5	54.0	40.0	10.0	13.2	4.0	2.0	100
FCT-4S							0.8~1.0	
FCT-4M							0.8~2.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	G	T	Package
FCT-5	77.7	64.2	40.0	19.7	14.8	4.8	0.8~3.2	100

用途：用於電子，電腦內部電線固定，
裝配容易，美觀不脫落。

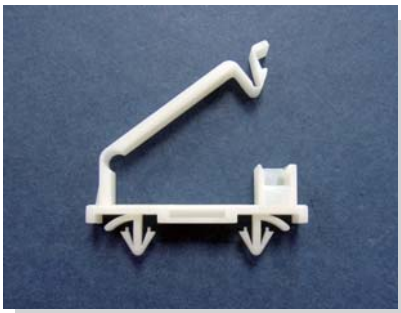


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

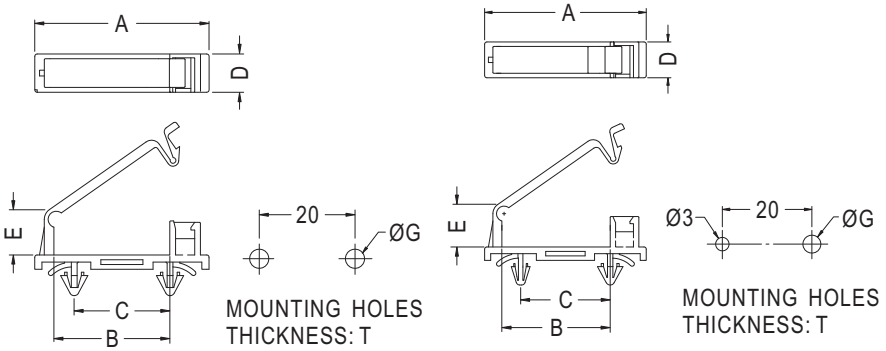


◆ **FCT-12**

Part No.	A	B	C	D	E	G	T	Package
FCT-6	36.0	24.2	20.0	8.0	9.9	4.0	0.8~1.2	100
FCT-6L	36.1	24.2	20.0	8.0	9.9	4.0	0.8~2.0	
FCT-8	40.0	28.3	20.0	7.9	11.4	4.0	0.8~1.2	
FCT-12	36.0	24.2	20.0	8.0	9.5	4.0	0.8~1.2	

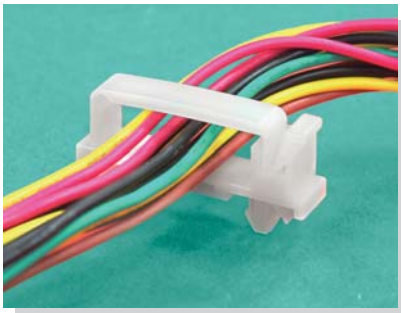


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

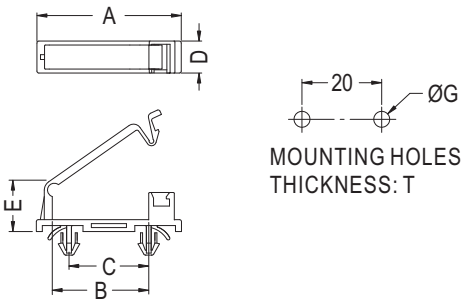

Part No.	A	B	C	D	E	G	T	Package
FCTB-1	36.5	24.2	20.0	8.0	12.9	4.0	1.2~2.5	100
FCTB-2							1.2~3.25	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

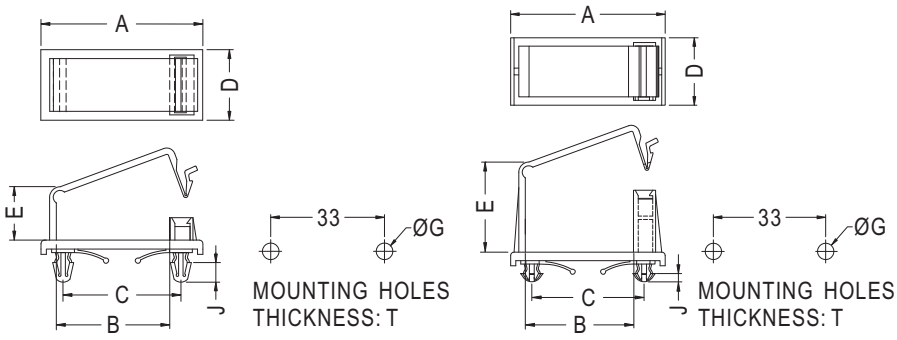


◆ **FCT-11**


Part No.	A	B	C	D	E	G	J	T	Package
FCT-7	45.4	31.8	33.0	19.8	14.9	4.8	5.5	0.8~2.2	100
FCT-9	45.4	31.8	33.0	19.8	14.9	4.8	2.4	0.8~2.2	
FCT-11	45.4	31.8	33.0	19.8	26.5	4.8	2.4	0.8~2.2	

電線固定座 WIRE SADDLE

用途：用於電子，電腦內部電線固定，裝配容易，美觀不脫落。

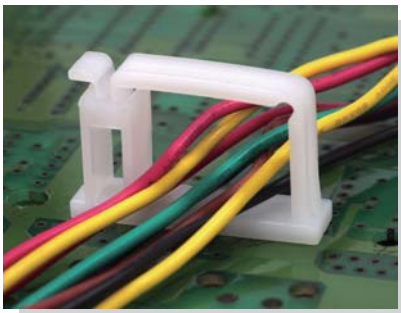

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

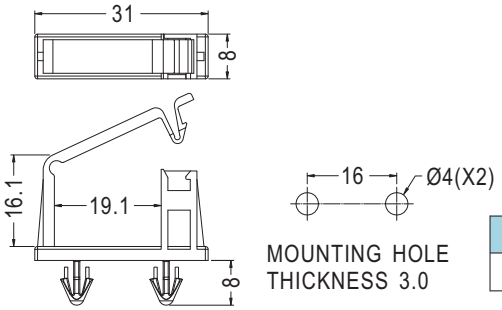


Part No.	Package
FCTC-1	100

電線固定座 WIRE SADDLE


用途：背膠式，用於電子，電腦內部電線固定，裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
FCS-15	500

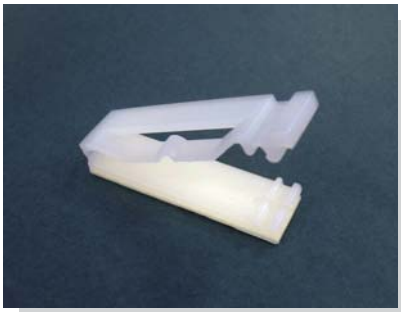


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FCS-20	200

排線固定座 FLAT CABLE CLAMP

用途：可背膠或螺絲固定，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。

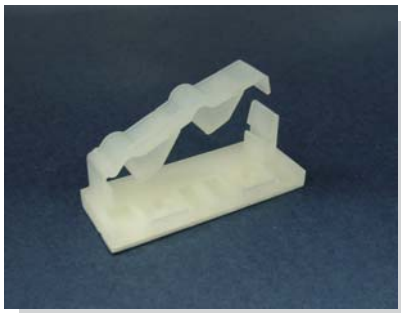

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

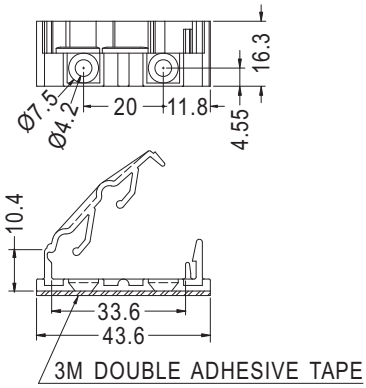


Part No.	Package
FCL-33	200

排線固定座 FLAT CABLE CLAMP

用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

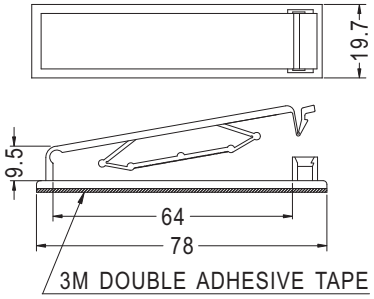


Part No.	Package
FCB-1	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

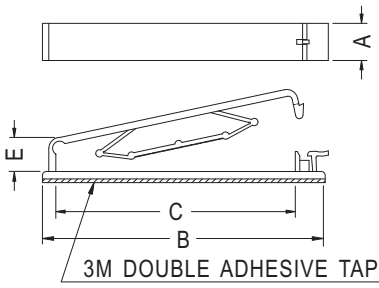


Part No.	A	B	C	E	S	Package
FCB-40	10.2	65.0	53.8	8.23	40 PIN	200
FCB-50	10.0	77.0	64.5	9.2	50 PIN	100

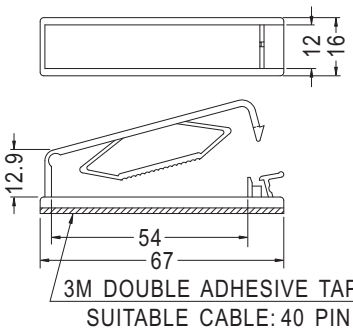




◆ **FCB-40MT**
沒有擋板

Part No.	Package
FCB-40M	100
FCB-40MT	

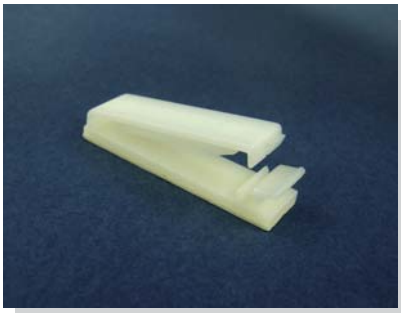


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

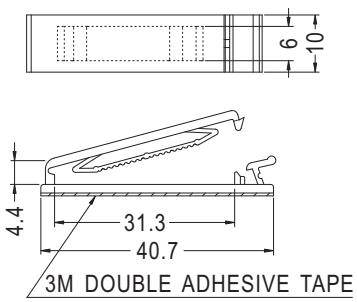


Part No.	Package
FCI-1	200

排線固定座 FLAT CABLE CLAMP

用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。

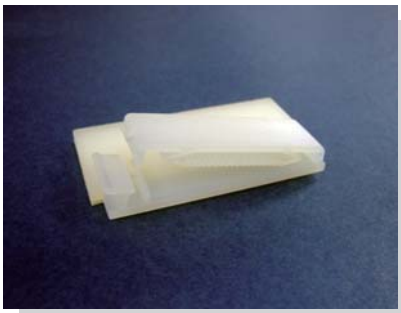


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

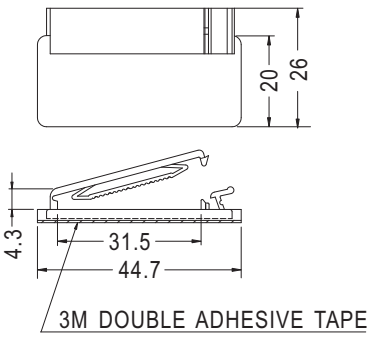

Part No.	Package
FCI-2	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

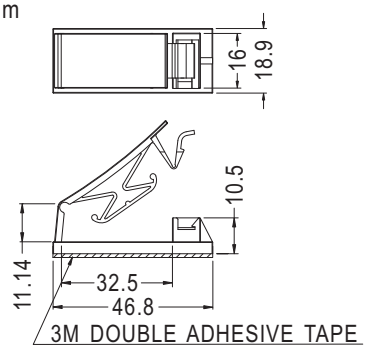


Part No.	Package
FCAM-1	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

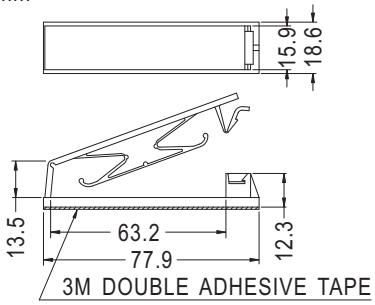

Part No.	Package
FCK-50	100

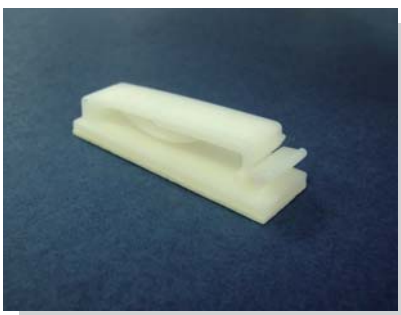


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

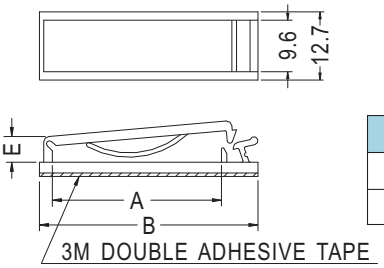


Part No.	A	B	E	Package
FCE-1	31.5	40.7	4.8	200
FCE-2	52.0	61.2	4.8	100

排線固定座 FLAT CABLE CLAMP

用途：背膠式，用於電子，電腦內部排線固定，裝配容易，美觀不脫落。

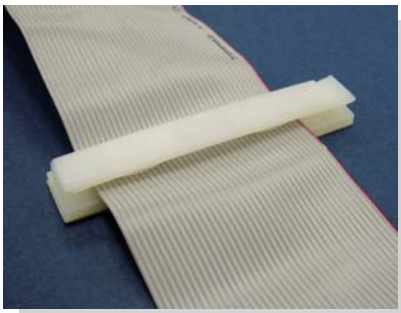


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

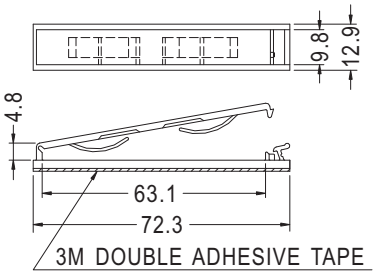

Part No.	Package
FCE-3	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

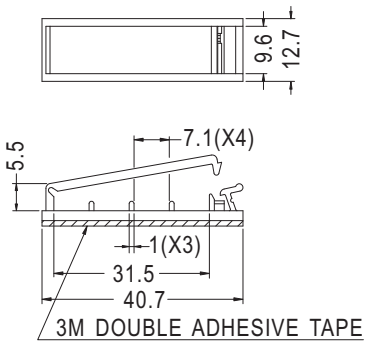


Part No.	Package
FCUB-2	200

電線固定座 WIRE SADDLE

用途：背膠式，用於電子，電腦內部電線固定，裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FCUB-1	200

電線固定座 WIRE SADDLE

用途：用於電子，電腦內部電線固定，裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



CHASSIS: ØG
MAX. THICKNESS: T


Part No.	A	B	D	E	G	J	T	Package
FCJ-30	44.3	31.2	18.8	9.4	6.5	5.5	0.5~2.2	200
FCJ-30S	44.5	31.2	19.0	13.5				


電線固定座 WIRE SADDLE

用途：用於電子，電腦內部電線固定，
裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLES
THICKNESS: T


Part No.	A	B	C	D	G	T	Package
WDT-20	28.0	20.6	20.0	8.0	3.0	0.8~1.2	500


□ □ □ □ □ FLAT CABLE CLAMP

用途：用於電子，電腦內部排線固定，
裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	G	J	T	Package
FDT-2	28.0	21.0	19.6	8.0	5.5	3.0	2.8	0.8~1.2	1000
FDT-2-1.6	28.0	21.0	19.6	8.0	5.5	3.0	2.8	0.8~1.6	

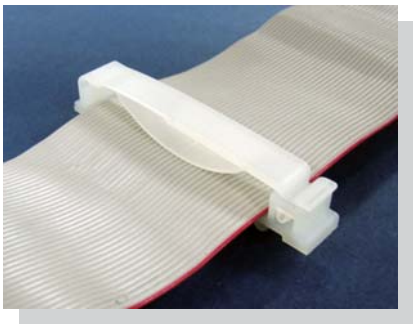

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	G	T	Package
FDT-4	67.0	53.5	40.0	10.0	9.0	4.0	0.8~2.0	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLES
THICKNESS: T


Part No.	A	B	C	D	E	G	J	T	Package
FDT-3	43.5	30.0	20.0	10.0	5.0	4.0	3.0	0.8~2.0	500

排線固定座 FLAT CABLE CLAMP


用途：用於電子，電腦內部排線固定，裝配容易，美觀不脫落。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLES
THICKNESS: T
SUITABLE CABLE: S




MOUNTING HOLES
THICKNESS: T
SUITABLE CABLE: S


◆ **FCD-2**

Part No.	A	B	C	D	E	G	S	T	Package
FCD-1	78.0	65.0	64.0	19.7	9.2	4.8	50 PIN	0.8~2.2	50
FCD-2	77.0	64.5	64.5	20.0	20.0	4.8	50 PIN	2.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLES
THICKNESS: T
SUITABLE CABLE: S


Part No.	A	B	C	D	E	G	S	T	Package
FCD-35	55.0	39.6	35.0	12.5	9.0	4.0	35 PIN	0.8~2.2	100
FCD-40	65.0	53.8	40.0	10.2	8.0	4.0	40 PIN	0.8~2.2	
FCD-50	77.0	64.3	49.7	10.0	9.2	4.0	50 PIN	0.8~2.2	


電線固定座 WIRE SADDLE

用途：固定電線於機殼上，方便堅固。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

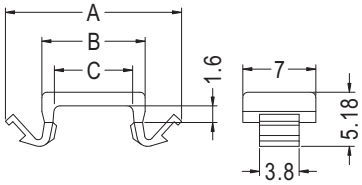





MOUNTING HOLES
THICKNESS 0.6~0.8

Part No.	A	B	C	F	Package
CCMH-7.5	16.88	9.9	7.5	7.3	1000

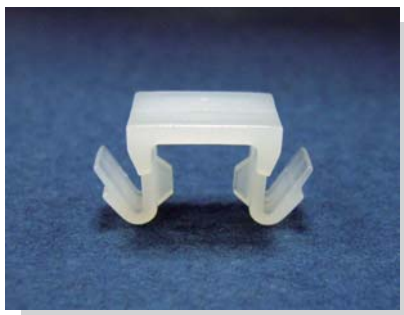

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLES
THICKNESS 1.0~1.2


Part No.	A	B	C	F	Package
CCMH-12	15.2	9.8	6.8	4.0	1000
CCMH-15.1	18.1	12.9	10.0	7.1	


電線固定座 WIRE SADDLE

用途：固定電線於機殼上，方便堅固。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES
THICKNESS 1.9

Part No.	A	B	C	F	Package
CCMHA-6	21.3	8.5	6.5	6.5	1000

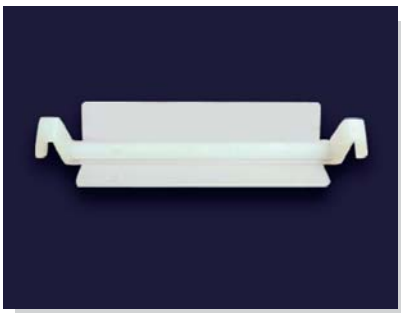

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

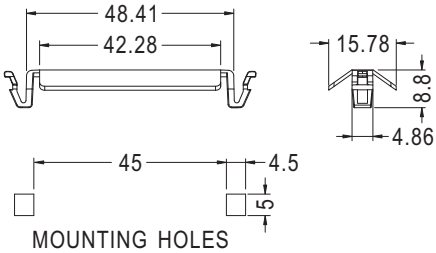


MOUNTING HOLES


Part No.	Package
CCMH-50	500

電線固定座 WIRE MOUNT


用途：用於電子，電腦LCD-TV內部排線固定，裝配容易，美觀不脫落。

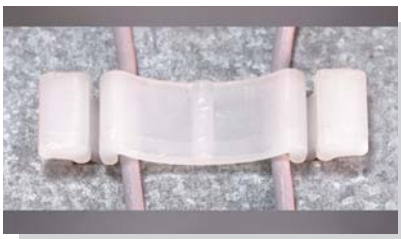

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLES
◆ **CCMB-15,CCMB-30**



MOUNTING HOLES
◆ **CCMB-31**






MOUNTING HOLES
◆ **CCMB-10**

Part No.	A	B	C	F	Package
CCMB-10	20.0	12.36	10.36	10.0	1000
CCMB-15	27.0	17.4	15.35	15.0	
CCMB-30	42.0	32.18	30.18	30.0	
CCMB-31	30.3	20.5	18.2	18.4	



- Material: PPO
- Color: Black
- Unit: mm

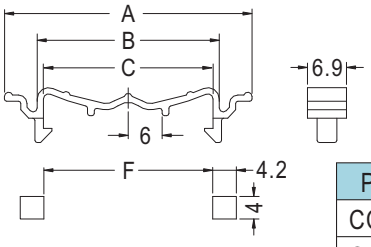


MOUNTING HOLES

Part No.	A	B	C	F	Package
CCMA-30	43.8	32.2	30.0	30.0	1000
CCMA-40	53.8	42.2	40.0	40.0	

用途：可將電線固定於機殼上，電線不易磨損，配線整齊、美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

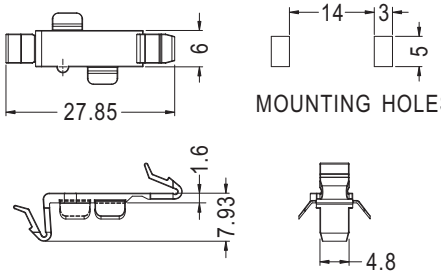

Part No.	Package
CCMD-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

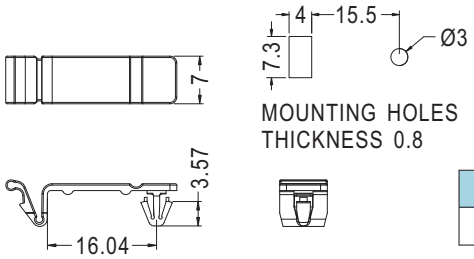

Part No.	Package
CCMC-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

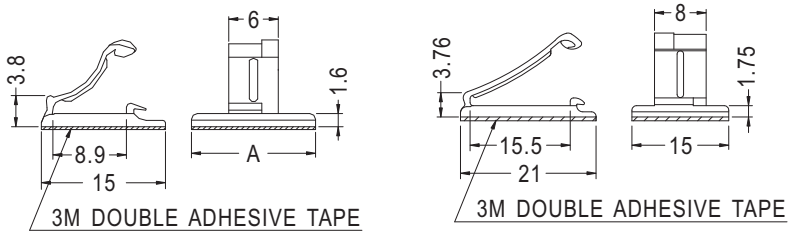


Part No.	A	Package
WDF-1	15.0	1000
WDF-3	6.0	

Part No.	Package
WDF-2	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

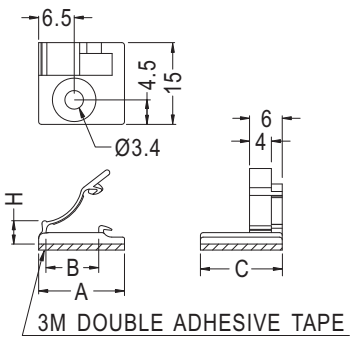


Part No.	A	B	C	H	Package
WDF-4	15.71	9.67	15.0	4.27	1000

電線固定座 WIRE SADDLE

用途：用於電子，電腦內部電線固定，
裝配容易，美觀不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	Package
WDF-6	15.9	9.8	1000
WDF-7	17.6	11.5	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

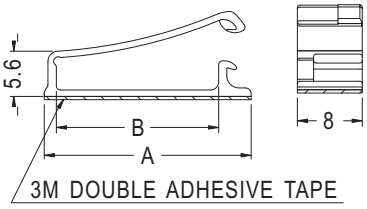


Part No.	A	B	Package
WDF-8	25.5	20.0	1000
WDF-9	35.5	30.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

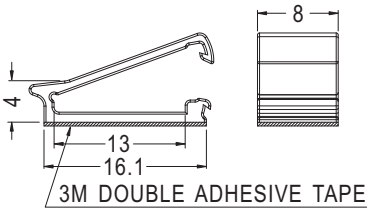

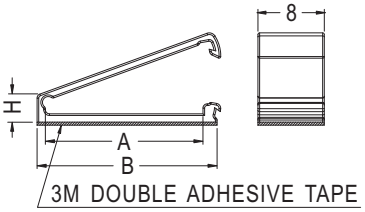


Part No.	Package
WCD-1	1000

Part No.	A	B	H	Package
WCD-2	19.0	21.7	3.38	1000
WCD-3	18.5	21.85	4.87	

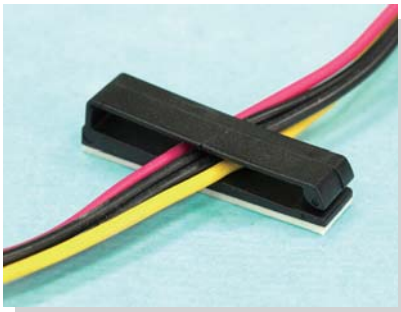

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

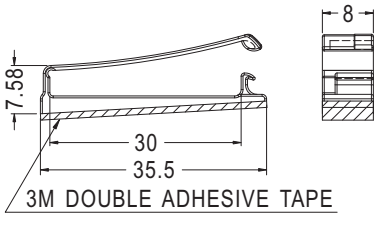


Part No.	Package
WDF-10	1000

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

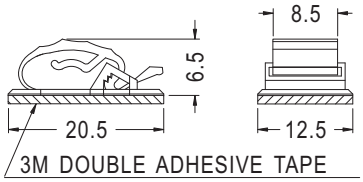


Part No.	Package
WCA-1	1000



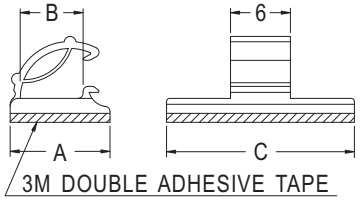

Part No.	A	B	C	Package
WCC-1	10.0	6.3	19.0	1000
WCC-1S	10.0	6.3	11.0	1000
WCC-2	14.0	10.5	19.0	500
WCC-8	10.0	6.0	19.5	1000




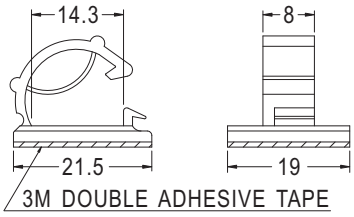

Part No.	Package
WCC-3	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

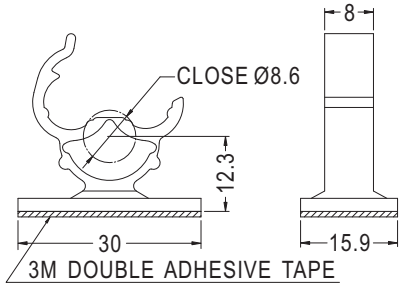

Part No.	Package
WSK-1	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

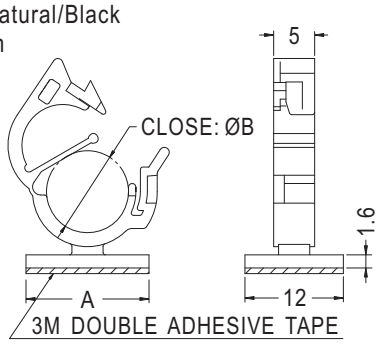


Part No.	A	B	Package
CHO-7.6	15.0	7.6	500
CHO-10	19.0	10.0	
CHO-12	20.0	12.0	

電線固定座 WIRE SADDLE


用途：小型化，背膠式，可快速捆紮及解開電線。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
WCC-5	1000

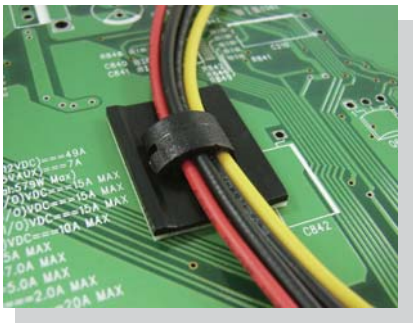


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

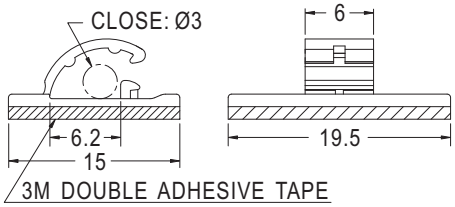


Part No.	Package
WCC-6	1000

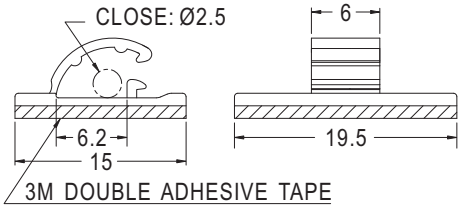

Part No.	Package
WCC-7	1000

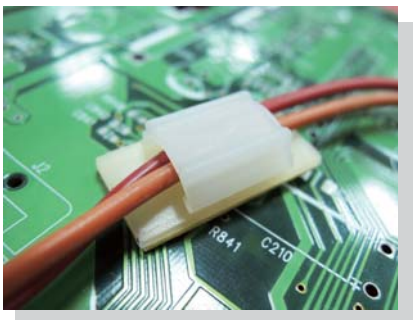

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

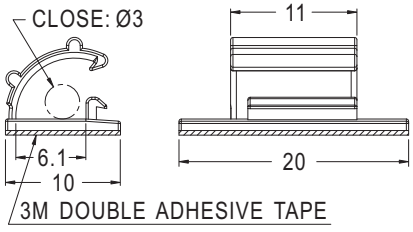


Part No.	Package
WCC-9	500

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	C	K	Package
MISD-1	11.0	10.0	500


電線固定座 WIRE SADDLE


用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T


Part No.	C	G	T	Package
MISA-3	6.0	9.58	0.8	1000

電線固定座 WIRE SADDLE


用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

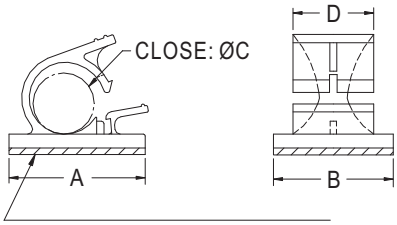

3M DOUBLE ADHESIVE TAPE

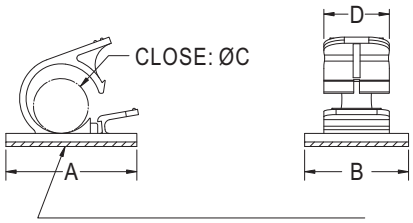


3M DOUBLE ADHESIVE TAPE

◆ **FWU-11**

Part No.	A	B	C	D	Package
FWU-1	13.0	10.0	4.0	6.8	1000
FWU-2	15.0	13.0	6.0	9.0	
FWU-3	21.6	19.0	9.0	12.8	500
FWU-4	25.0	20.0	11.0	13.2	250
FWU-5	32.0	25.4	13.4	16.0	200
FWU-6	35.8	24.8	18.0	16.8	100
FWU-7	56.1	50.0	25.4	20.1	50
FWU-8	56.1	50.0	30.0	20.1	
FWU-9	37.6	31.5	18.0	17.0	100
FWU-10	31.0	19.0	9.0	12.8	200
FWU-11	13.0	10.0	5.0	6.8	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

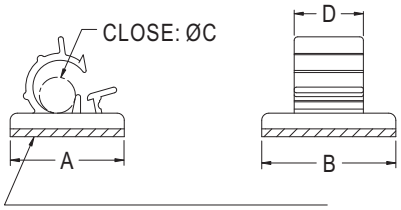


3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package
FWAS-1	16.0	18.8	5.0	9.7	500
FWAS-2	25.3	25.4	11.0	16.1	250
FWAS-3	37.0	29.3	19.6	16.9	100
FWAS-4	57.1	50.5	26.8	31.7	50
FWAS-5	22.1	25.4	6.35	16.0	250
FWAS-6	30.73	25.4	12.7	16.26	100

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線維修方便，不佔空間。

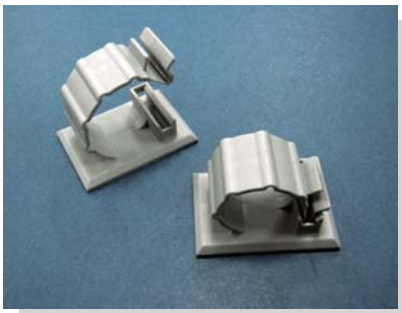

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm




3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	Package
FWC-6	17.5	20.5	6.2	8.6	200
FWC-7	25.5	17.5	7.0	9.8	
FWC-10	30.3	23.9	10.3	12.0	
FWC-10S	30.0	21.0	10.0	12.0	
FWC-15	29.9	23.9	14.5	14.0	
FWC-19	35.7	25.2	18.5	15.9	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

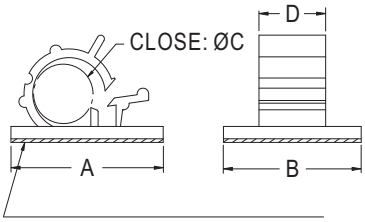


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	Package
FWS-1	21.0	19.0	8.2	9.2	500
FWS-2	25.0	20.0	9.0	12.0	250
FWS-3	25.0	19.7	10.6	12.1	
FWS-4	29.0	20.0	12.6	14.0	
FWS-7	29.6	19.5	12.8	14.8	
FWS-8	21.6	17.0	10.4	12.0	
FWS-10	19.0	19.0	6.8	8.8	500


電線固定座 WIRE SADDLE

用途：固定電線，採背膠式，免打洞，維修容易。

E217732
UL 1565

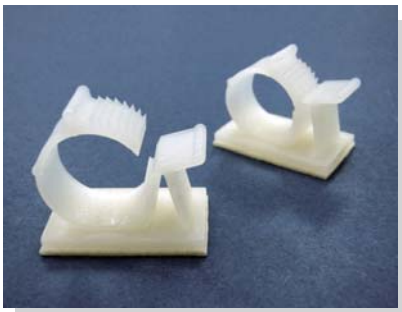

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	Package	UL
AWC-1	24.8	18.8	7.9~10.3	10.2	250	UL
AWC-2	25.4	15.0	11.0~13.3	10.0		UL
AWC-2A	30.2	15.0	11.9~14.3	10.0		
AWC-6	31.8	19.1	11.9~14.3	10.2		
AWC-3	34.4	18.8	14.7~19.1	12.7	100	UL
AWC-4	36.0	19.0	18.0~22.0	12.7		UL
AWC-5	39.8	19.8	22.0~26.5	13.0		UL



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLES


Part No.	Package
AWE-1	500

電線固定座 WIRE SADDLE

用途：背膠式，亦可配合螺絲，固定電線，美觀不脫落。

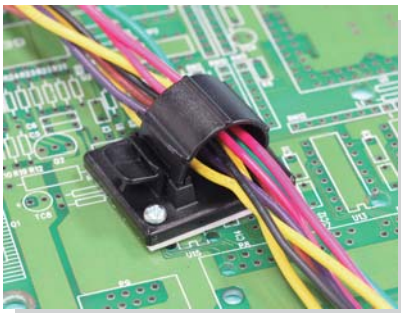


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

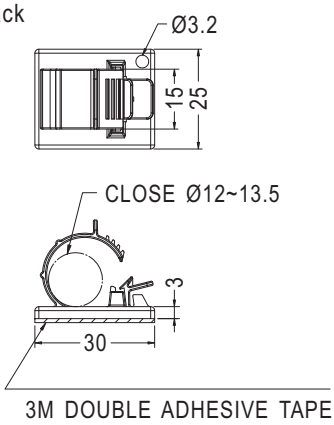


Part No.	Package
FWD-1	1000

電線固定座 WIRE SADDLE

用途：配合螺絲，固定電線美觀，不脫落。

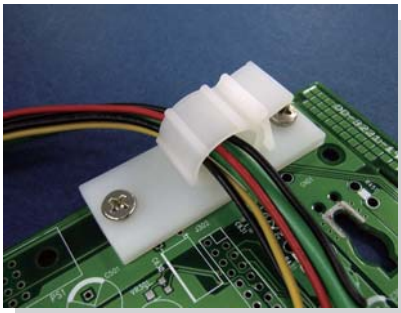

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
AWCA-1N	1000

電線固定座 WIRE SADDLE

用途：用於機器上之電線固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

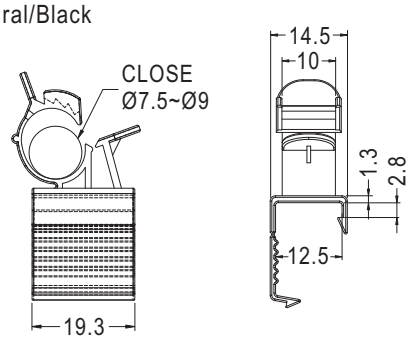


Part No.	Package
AWCB-1	500

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。

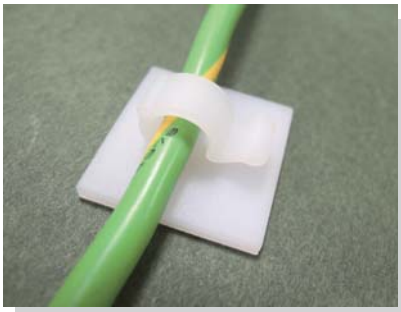


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

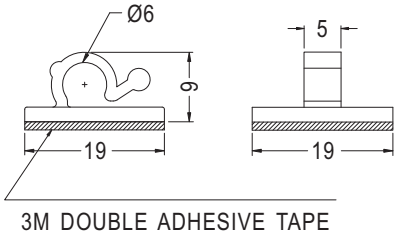


Part No.	Package
WRA-6	1000

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。

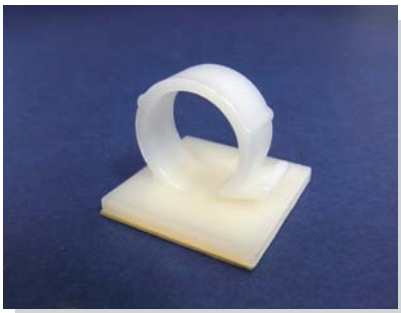


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

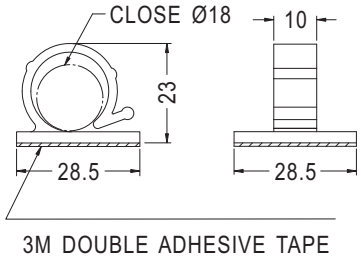

Part No.	Package
WRA-18	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

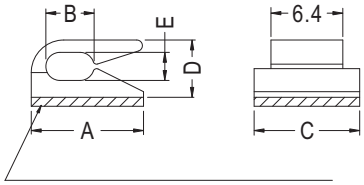

Part No.	A	B	C	D	E	Package
WC-6	10.0	4.3	9.4	5.1	2.5	1000
WC-7	12.0	6.25	9.4	5.5	2.5	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

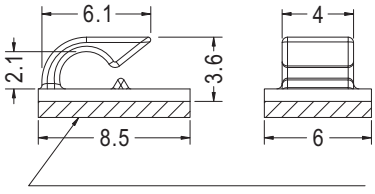

NEW


Part No.	Package
WC-12	1000

電線固定座 WIRE SADDLE

用途：用於消 C.R.T 磁線圈之固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

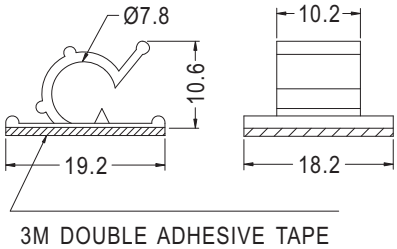


Part No.	Package
WC-1	500


用途：背膠式，固定電線於機器中，整齊美觀。

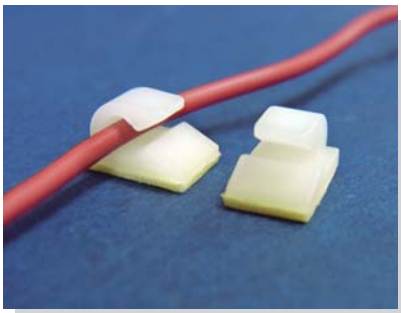


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

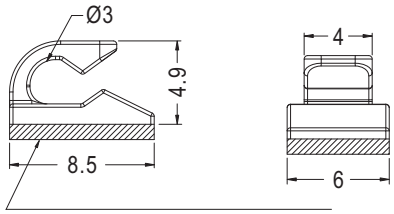


Part No.	Package
MWS-37	1000

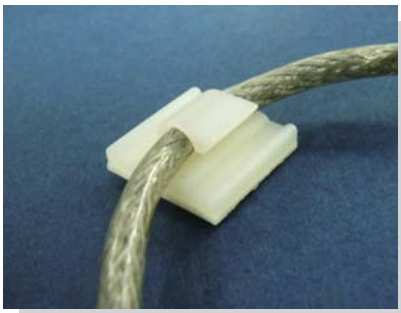


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

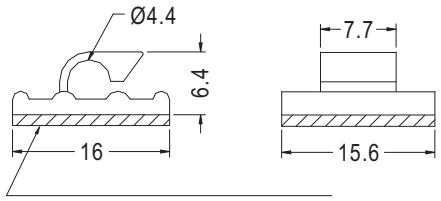

Part No.	Package
WC-5	1000

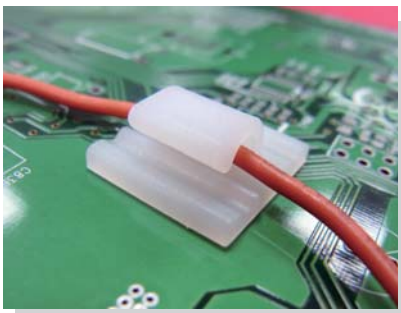


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

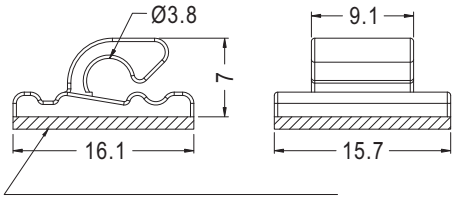


Part No.	Package
WC-10	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

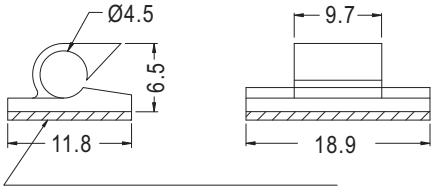


Part No.	Package
WCL-11	1000

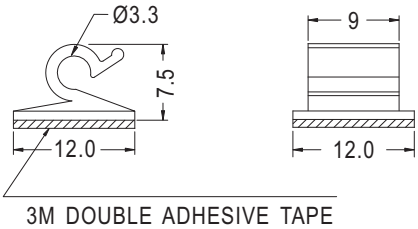


Part No.	Package
WCL-12	1000

電線固定座 WIRE SADDLE

用途：背膠式，固定電線於機器中，整齊美觀。

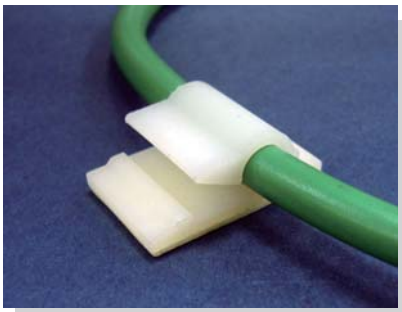

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

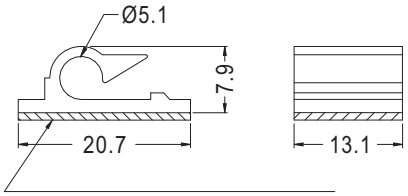


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-1	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

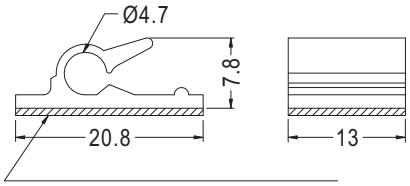


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-13	1000

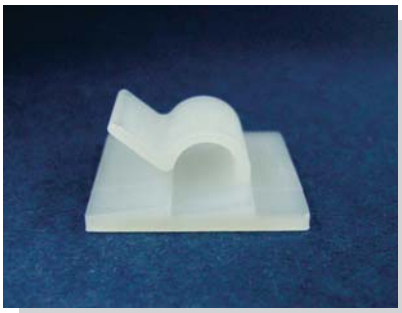


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

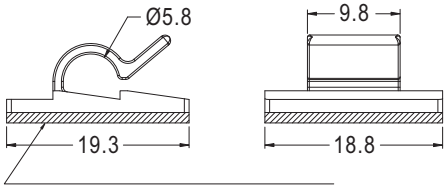


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WCL-15	500

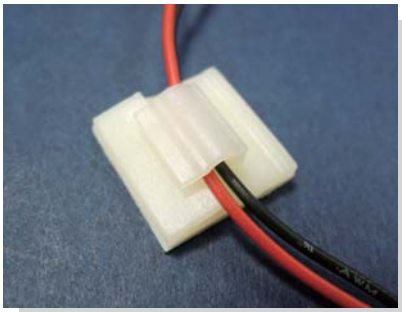

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

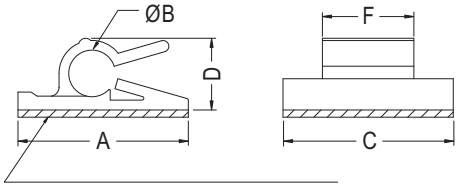


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	F	Package
WCT-4	15.9	4.0	15.9	5.7	9.7	500
WCT-5	19.0	5.2	19.0	8.0	10.2	
WCT-6	19.0	6.0	20.0	9.9	10.0	

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

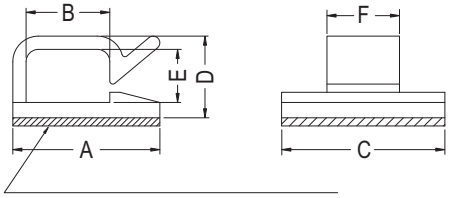


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	F	Package
WCL-4	14.4	8.2	16.0	8.0	5.2	7.1	1000
WCL-5	16.8	10.2	16.0	9.5	6.7	7.0	500
WCL-6	19.0	12.5	19.0	11.0	8.1	9.7	
WCL-7	20.8	13.6	19.0	11.3	8.2	9.0	
WCL-14	15.4	9.9	16.0	7.3	4.7	7.0	1000

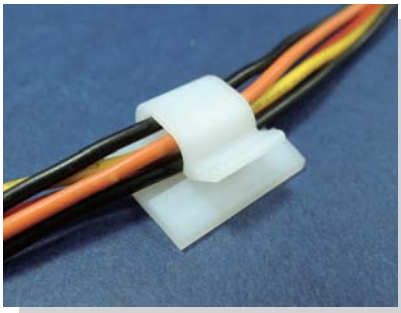

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

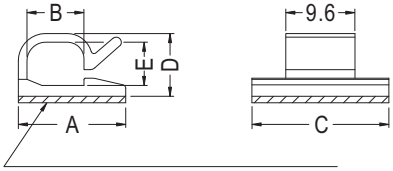


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	Package
WCL-18	14.9	7.9	19.0	8.7	6.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

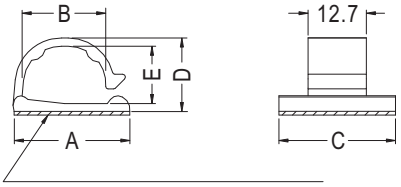


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	Package
WCL-10	25.4	18.2	25.4	16.0	12.5	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

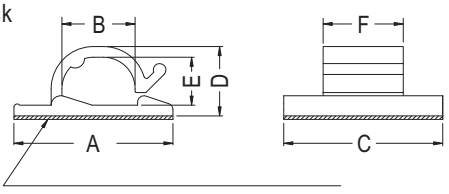


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	F	Package
WCL-8	25.4	11.6	15.5	11.3	7.8	6.5	500
WCL-9	25.2	11.6	25.2	11.0	7.6	12.7	

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

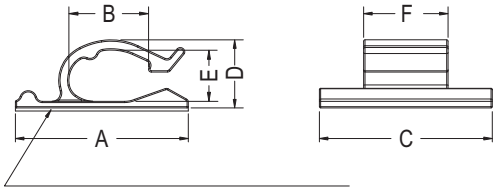


NEW

Part No.	A	B	C	D	E	F	Package
WCL-24	25.4	11.71	25.4	10.0	7.5	12.4	500

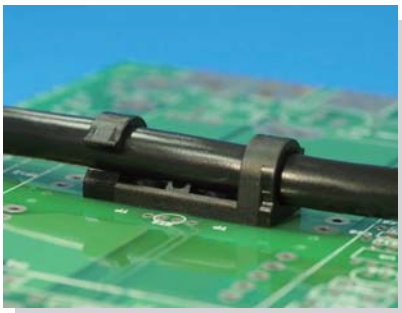


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

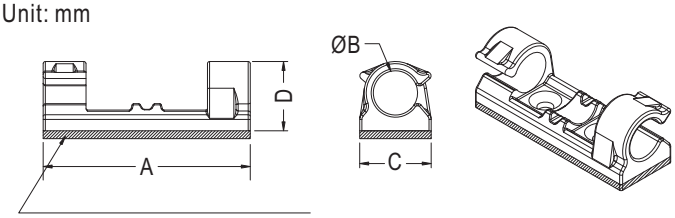


NEW


Part No.	A	B	C	D	Package
WCL-25	29.0	6.2	10.0	9.7	500
WCL-26	33.0	9.0	13.0	12.7	

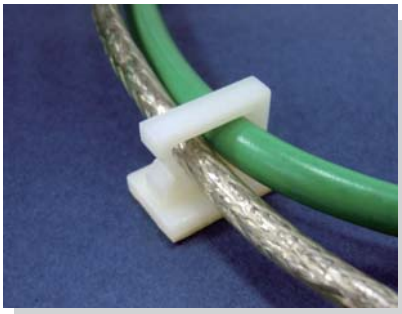


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

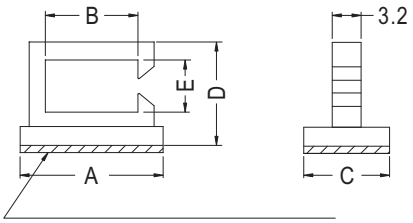

Part No.	A	B	C	D	E	Package
WSS-1	15.9	10.3	9.5	11.6	5.8	1000

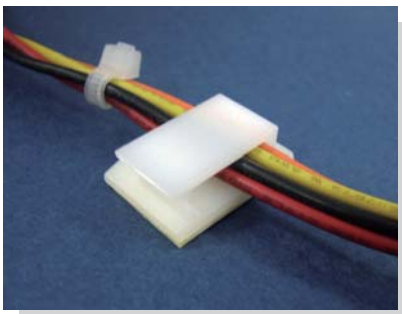


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

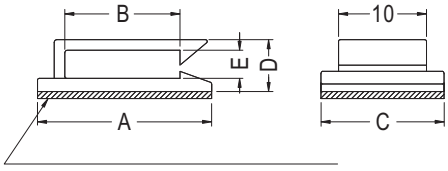


Part No.	A	B	C	D	E	Package
MWS-30	19.8	13.1	14.0	5.9	3.2	1000

用途：背膠式，固定電線於機器中，整齊美觀。

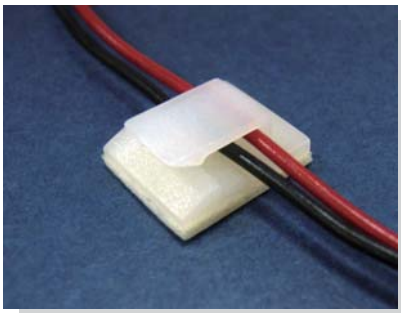


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

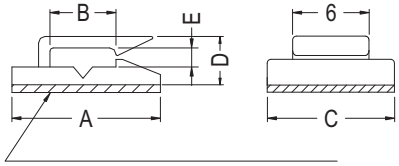


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	Package
WCLA-1	11.7	5.2	10.0	3.8	1.5	1000

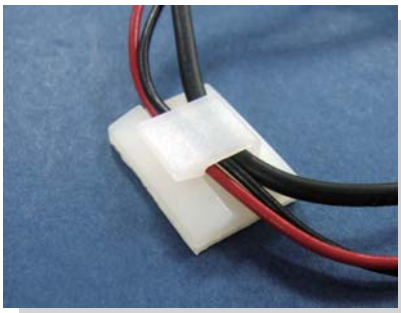


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

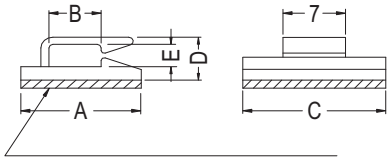


3M DOUBLE ADHESIVE TAPE


Part No.	A	B	C	D	E	Package
WC-4	12.0	5.2	16.0	4.8	2.5	1000

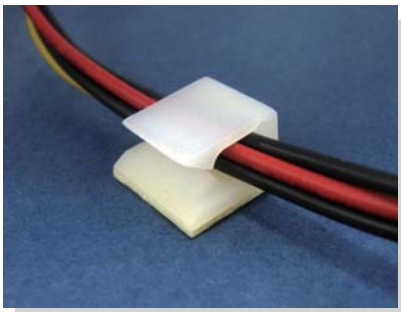

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE



3M DOUBLE ADHESIVE TAPE

◆ **WSB-6**




3M DOUBLE ADHESIVE TAPE

◆ **WSB-4**

Part No.	A	B	C	D	E	F	Package
WSB-1	12.0	6.2	12.1	6.3	3.6	9.1	1000
WSB-2	16.0	11.7	16.0	9.1	6.0	9.0	
WSB-3	14.1	7.6	15.8	9.1	6.1	9.0	
WSB-4	15.0	6.6	17.0	9.2	6.2	9.0	
WSB-5	14.0	10.5	12.1	6.25	3.5	10.0	
WSB-6	15.0	6.6	17.0	9.2	6.2	9.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

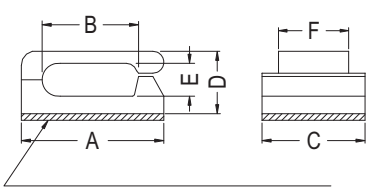


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	E	F	Package
MWS-2	13.0	8.5	9.2	5.6	3.0	6.3	1000
MWS-3	16.0	11.5	13.0	5.6	2.9	9.0	


用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。

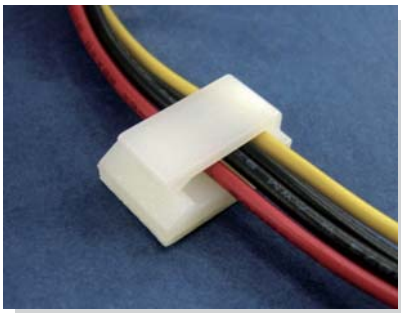


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

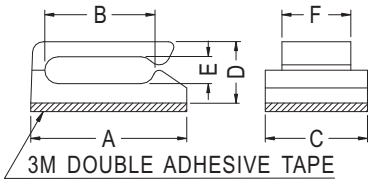


Part No.	A	B	C	D	E	F	Package
MWS-2D	14.5	10.2	9.5	5.7	2.5	6.4	1000
MWS-27	12.5	8.4	9.5	5.2	2.8	6.5	
MWS-45	12.7	8.1	12.7	5.0	2.5	6.4	
MWS-46	9.8	6.65	9.5	3.85	1.4	6.4	

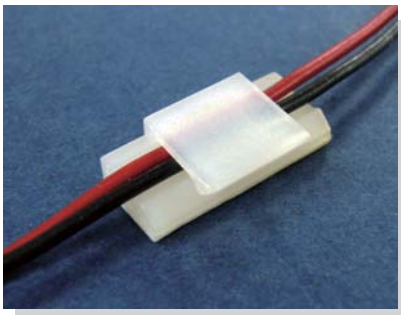


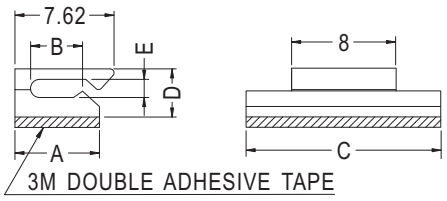


Part No.	A	B	C	D	E	Package
MWS-22	6.5	4.0	15.0	3.7	1.4	1000

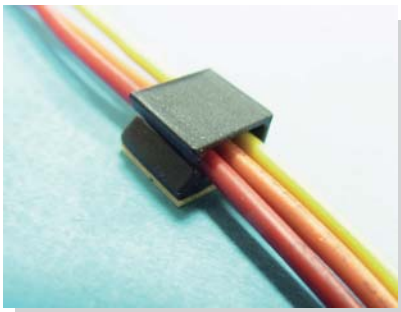


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

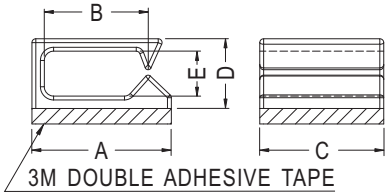

Part No.	A	B	C	D	E	Package
MWS-32	9.0	6.7	8.0	4.5	2.9	1000
MWS-42	9.0	6.73	4.0	4.5	2.9	

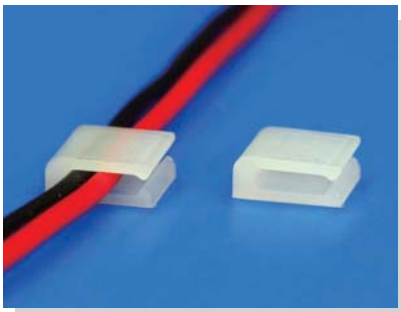

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

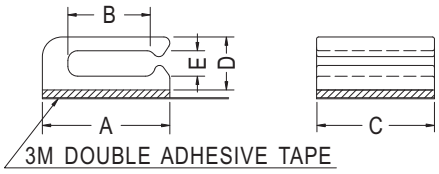


NEW

Part No.	A	B	C	D	E	Package
MWS-52	6.5	4.2	6.0	2.7	1.3	1000

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

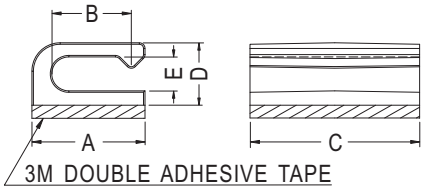

Part No.	A	B	C	D	E	Package
MWS-43	4.0	2.82	6.0	2.2	1.2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

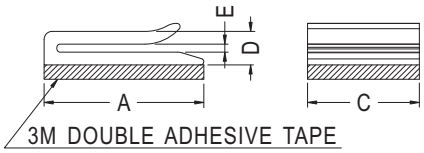

Part No.	A	C	D	E	Package
MWS-33	10.0	7.0	2.1	0.5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

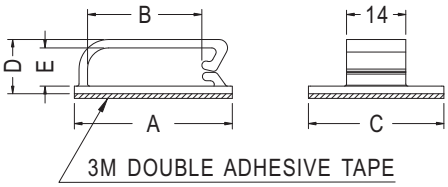

Part No.	A	B	C	D	E	Package
MWS-49	37.3	27.0	32.0	12.8	9.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

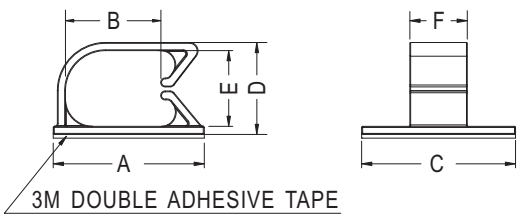


NEW

Part No.	A	B	C	D	E	F	Package
MWS-54	37.1	23.4	37.8	22.6	18.6	14.1	100


用途：可背膠或使用螺絲固定，可快速拆卸，固定電線維修方便，不佔空間。

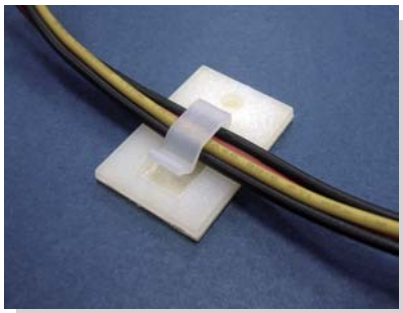


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

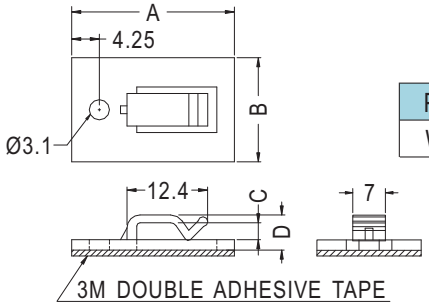


Part No.	A	B	C	D	Package
WCS-1	25.0	16.0	2.6	5.4	500

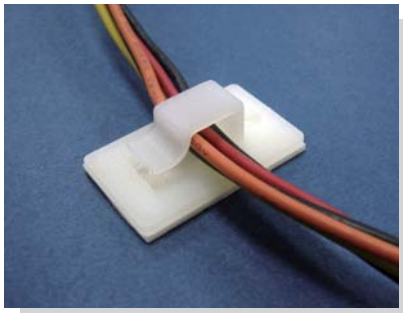


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

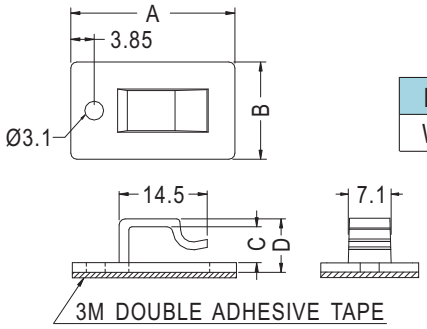


Part No.	A	B	C	D	Package
WCS-2	27.0	16.0	5.9	8.8	500

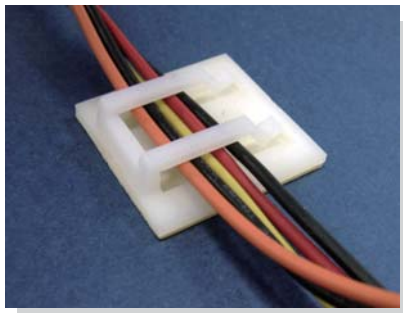


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

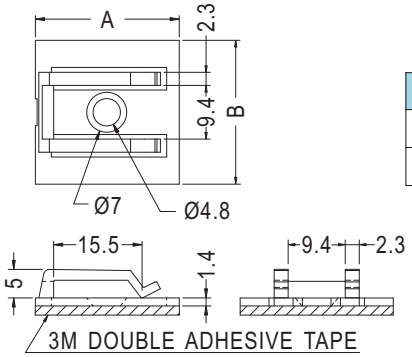

Part No.	A	B	Package
FCP-22	25.2	25.2	500
FCP-22SN	24.2	25.2	

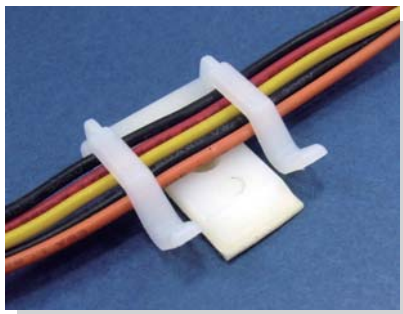


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

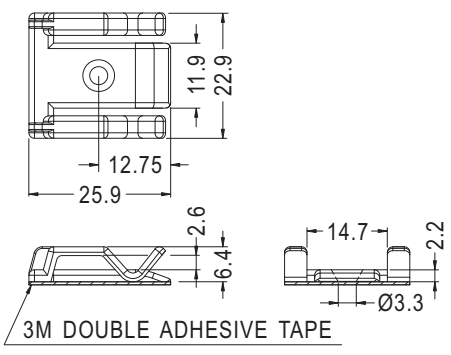


Part No.	Package
FCP-25	500

電線固定座 WIRE SADDLE


用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。

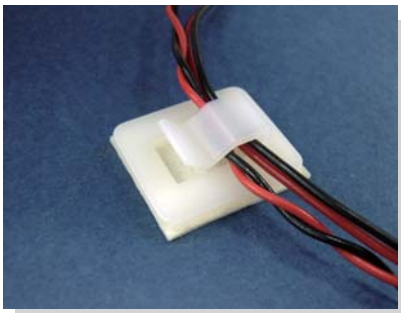


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

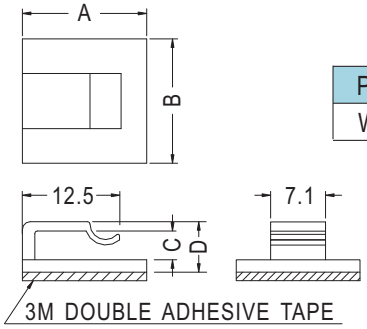


Part No.	A	B	C	D	Package
WCS-3	16.0	16.0	3.7	6.5	500

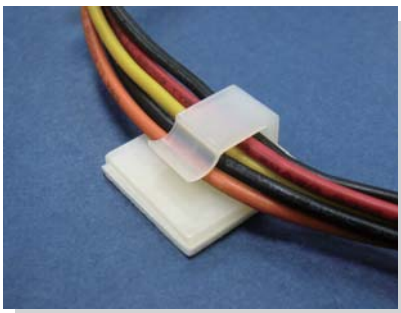


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

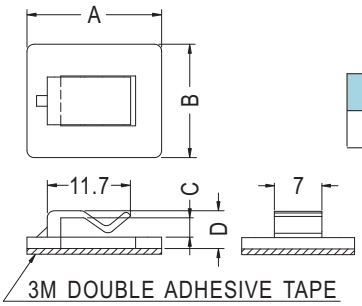

Part No.	A	B	C	D	Package
WCS-4	18.9	15.9	2.7	5.3	500

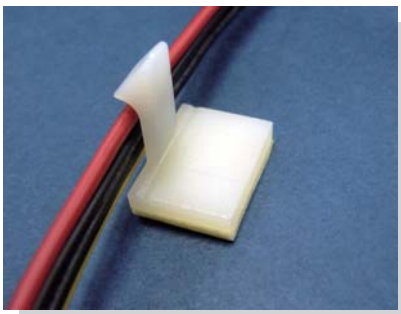

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

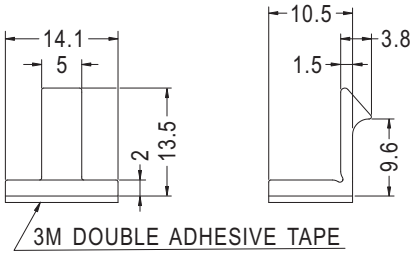


Part No.	Package
WCLL-1	500

電線固定座 WIRE SADDLE

用途：背膠式，可快速捆紮電線安裝容易，經特殊處理，不刮手，不會刮傷電線。




- Material: STEEL
- Unit: mm

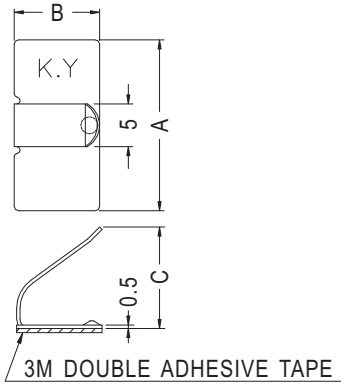


Part No.	A	B	C	Package
WCM-1	20.0	10.0	11.6	1000
WCM-2	25.0	15.0	17.1	500

電線固定座 WIRE SADDLE


用途：背膠式，可快速捆紮電線安裝容易，經特殊處理，不刮手，不會刮傷電線。

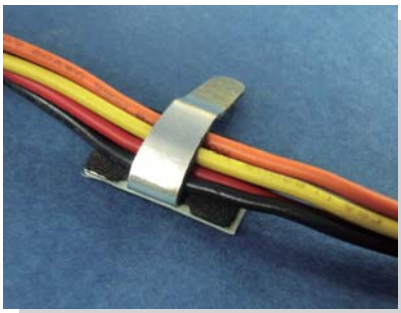


- Material: SPTE
- Unit: mm

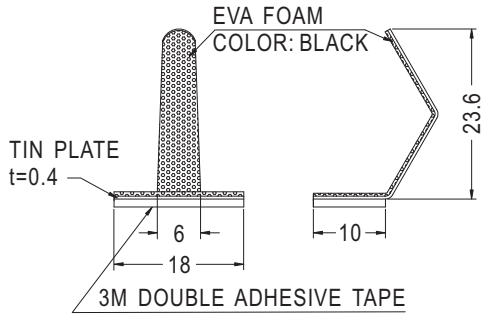

Part No.	Package
WCM-5L	1000

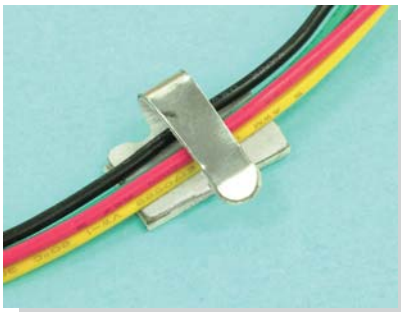


- Material: SPTE
- Unit: mm

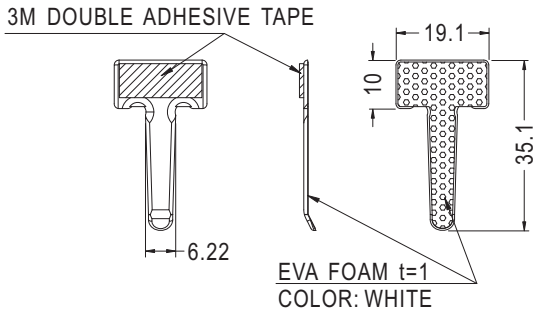


Part No.	Package
WCM-9A	1000

電線固定板 CABLE HOLDING PLATE

用途：背膠式，用於電線或零件之固定。

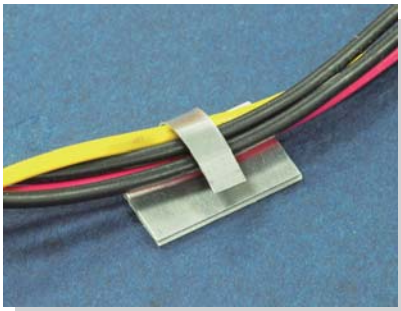


- Material: SPTE
- Unit: mm

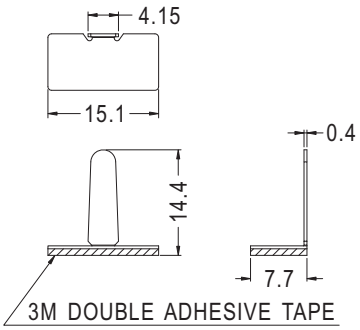


Part No.	Package
WCM-10	1000


- Material: Aluminum

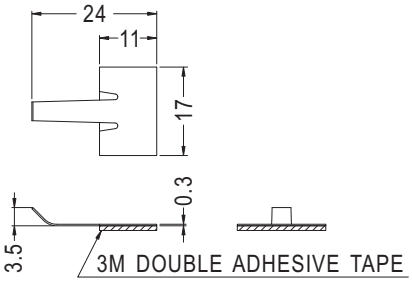

Part No.	Package
WCM-11	1000

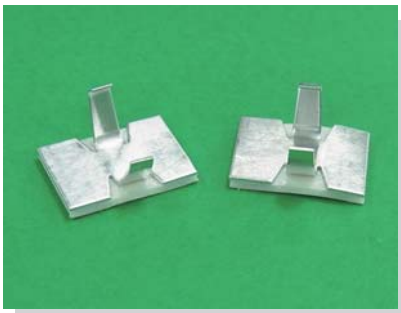

- Material: Aluminum
- Unit: mm




Part No.	H	L	T	W	Package
ALACO-01	9.4	16.0	0.45	10.6	500
ALACO-02	14.9	19.0	0.7	16.0	

電線固定座 WIRE SADDLE


用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

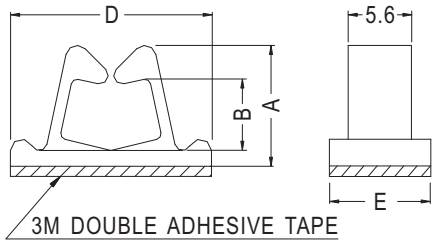


Part No.	A	B	D	E	Package
WT-2	10.7	6.3	17.8	8.9	1000
WT-2L	10.8	6.5	25.5	12.6	

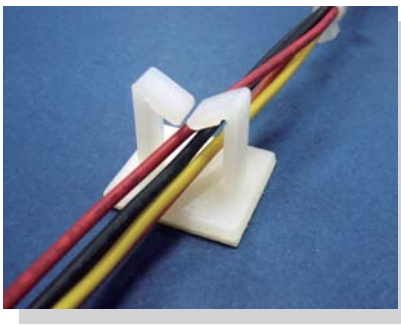


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

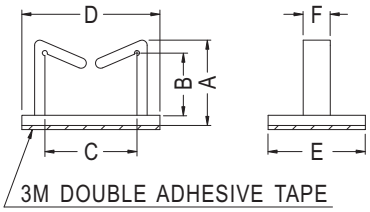




◆ **WT-5,WT-8**



◆ **WT-7,WT-10**



◆ **WT-9**


Part No.	A	B	C	D	E	F	Package
WT-1	17.2	12.2	11.5	21.0	19.0	5.3	500
WT-3	16.7	12.16	18.0	27.0	19.0	5.3	
WT-4	26.0	21.2	11.5	21.0	19.0	5.3	
WT-5	17.1	11.5	11.5	15.4	12.5	5.3	
WT-6	17.0	12.17	11.5	17.0	12.5	5.3	
WT-7	28.5	25.1	5.8	9.0	20.0	8.0	
WT-8	17.5	12.7	16.5	20.5	19.0	7.0	
WT-9	15.4	10.5	11.2	21.0	19.0	5.3	
WT-10	19.2	15.45	6.8	10.0	20.0	5.0	

電線固定座 WIRE SADDLE

用途：超小型，背膠式，可快速固定及解開電線。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	F	Package
WLL-1	6.5	3.8	4.5	9.6	1000
WLL-1S	6.2	4.23	4.3	9.6	
WLL-13	6.2	4.23	4.3	8.5	
WLL-16	6.5	4.3	4.5	9.5	

電線固定座 WIRE SADDLE

用途：超小型，背膠式，可快速固定及解開電線。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-14	1000

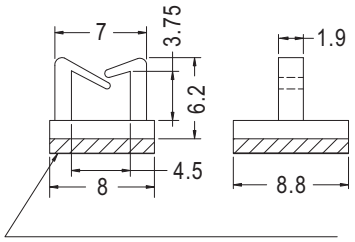


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-24	1000

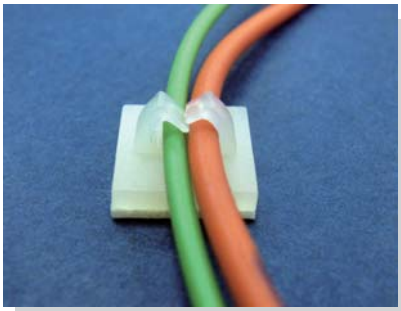


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

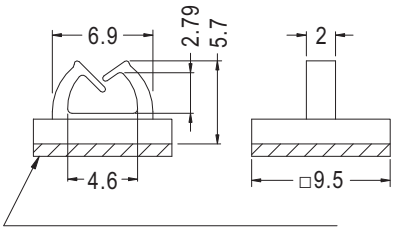


3M DOUBLE ADHESIVE TAPE

Part No.	Package
WLL-2	1000

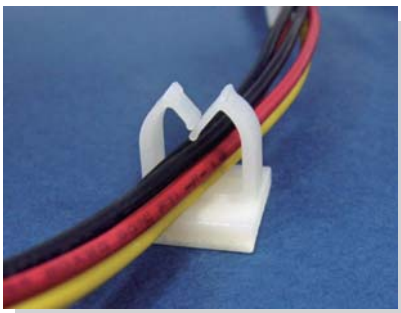

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

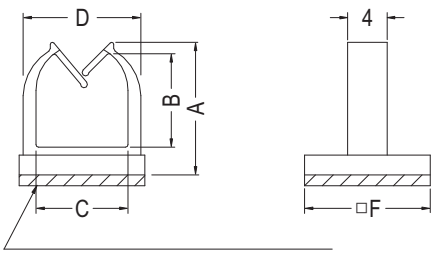


3M DOUBLE ADHESIVE TAPE

Part No.	A	B	C	D	F	Package
WLL-3	13.4	9.46	9.3	11.9	12.7	1000
WLL-21	9.3	5.5	6.6	9.0	12.7	
WLL-22	11.2	7.3	8.0	10.8	12.7	
WLL-23	15.0	11.1	9.2	12.0	12.7	

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

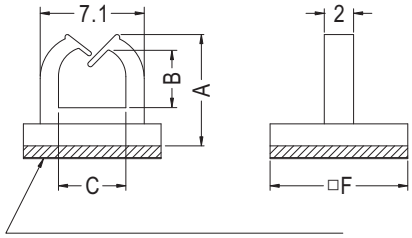


Part No.	A	B	C	F	Package
WLL-6	7.6	3.94	4.6	9.4	1000
WLL-6L	9.3	5.64	4.6	9.4	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

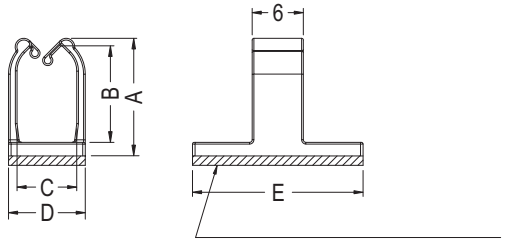


Part No.	A	B	C	D	E	Package
WLL-9	13.8	11.31	7.0	9.0	20.0	1000
WLL-18	13.8	11.18	6.0	8.0	20.0	

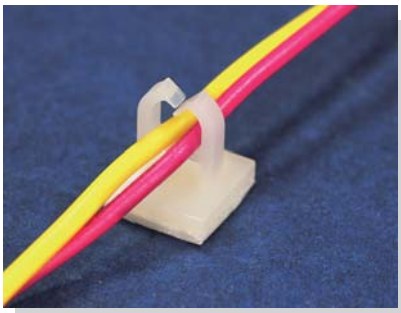


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

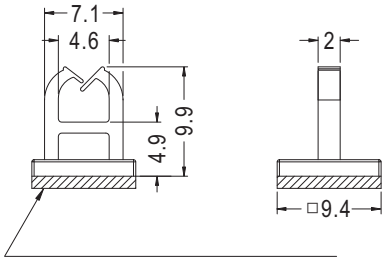

Part No.	Package
WLL-17	1000

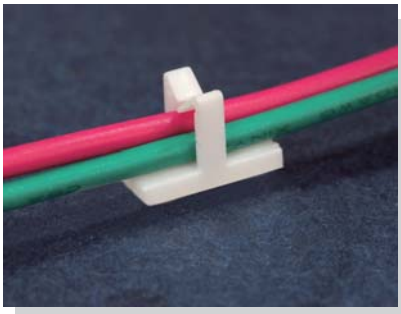


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

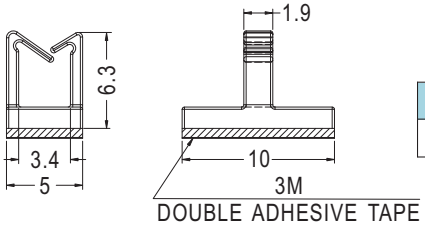


Part No.	Package
WLL-19	1000

電線固定座 WIRE SADDLE


用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。

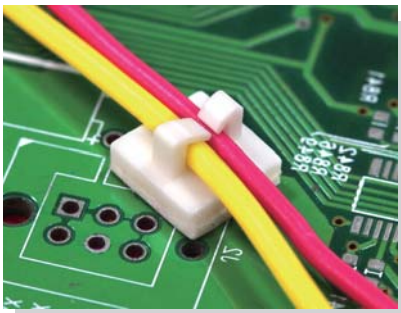


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

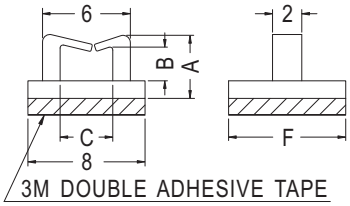


Part No.	A	B	C	F	Package
WLL-20	4.3	2.3	3.6	8.0	1000

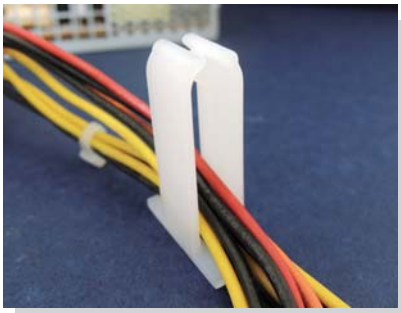


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

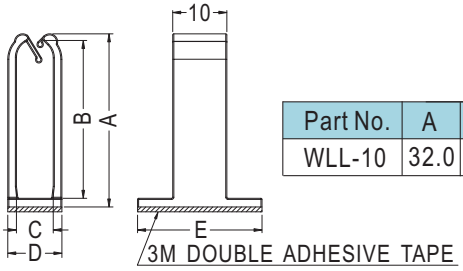

Part No.	A	B	C	D	E	Package
WLL-10	32.0	29.16	6.8	10.0	23.0	1000

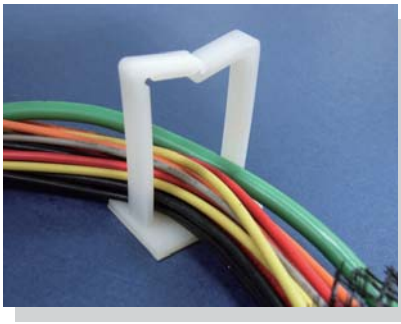


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	E	Package
WLU-1	40.1	38.1	23.0	30.0	20.0	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

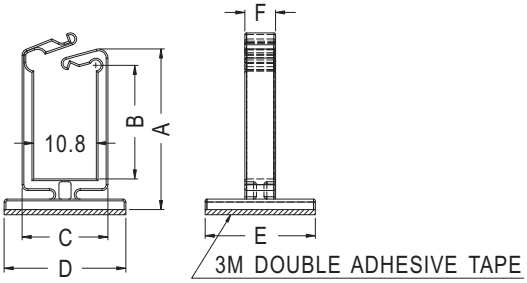


Part No.	A	B	C	D	E	F	Package
WLU-2	27.7	19.57	14.8	21.0	19.0	5.3	200
WLU-3	27.7	19.6	14.8	16.0	19.0	9.3	

用途：背膠式，亦可鎖螺絲，可快速拆卸，固定電線，維修方便，不佔空間。

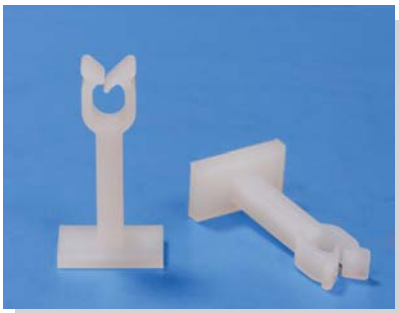


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

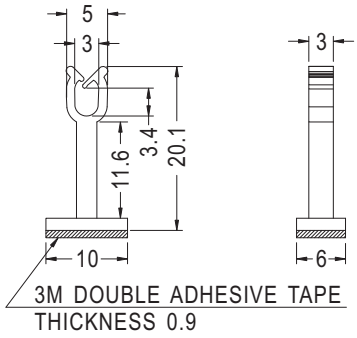

Part No.	Package
WLLD-14	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

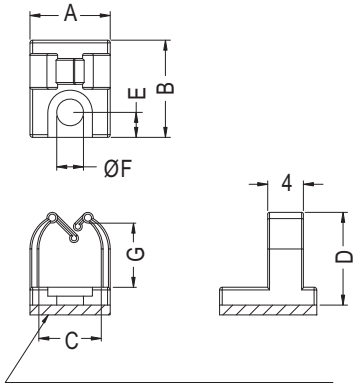

Part No.	A	B	C	D	E	F	G	Package
WLL-8	9.0	10.9	7.0	10.4	2.8	3.0	7.2	1000
WLL-11	9.0	10.9	7.0	14.0	2.85	2.7	10.8	
WLL-12	9.0	10.9	7.0	10.4	2.8	2.6	7.2	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

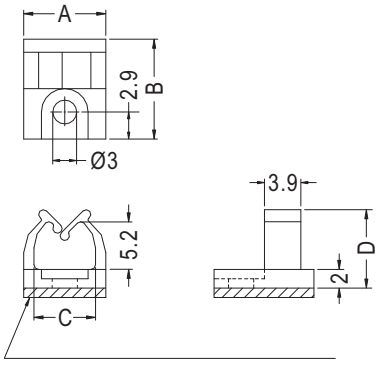


Part No.	A	B	C	D	Package
MWS-9	8.8	10.7	6.6	8.4	1000

隔離束線座 WIRE SADDLE

用途：可背膠或使用螺絲固定，可快速拆卸，固定電線維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

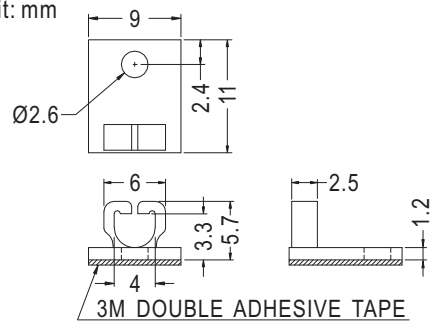


Part No.	Package
IMN-1	1000

隔離束線座 WIRE SADDLE


用途：配合螺絲，固定電線，整齊美觀。

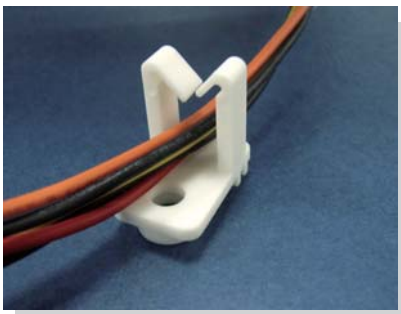


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

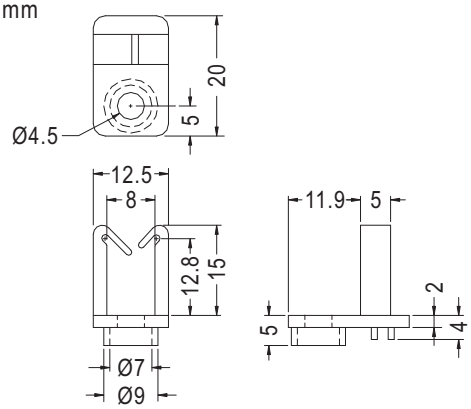


Part No.	Package
CHU-1	1000

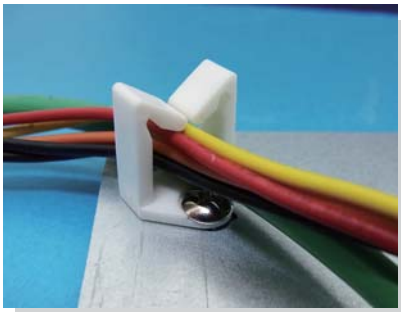


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

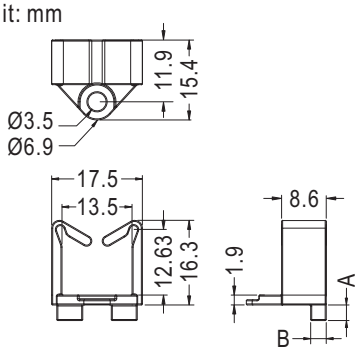

Part No.	A	B	Package
CHUA-1			1000
CHUA-2	3.0	3.0	

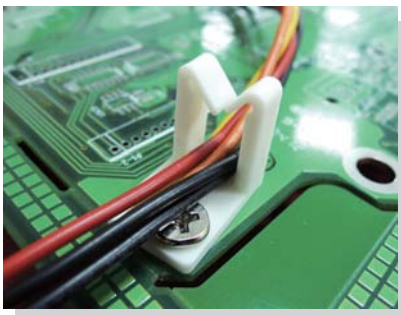


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
CHUB-1	12.5	18.5	8.0	1000

隔離束線座 WIRE SADDLE


用途：使用螺絲固定，可快速拆卸電線，維修方便，不佔空間。

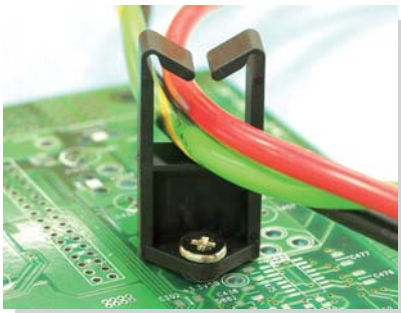


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

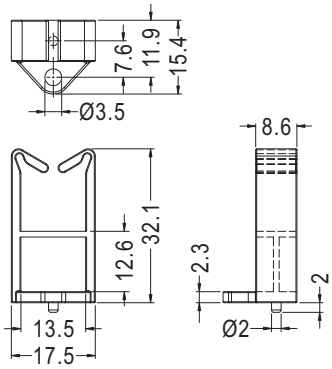

Part No.	Package
CHUC-1	1000

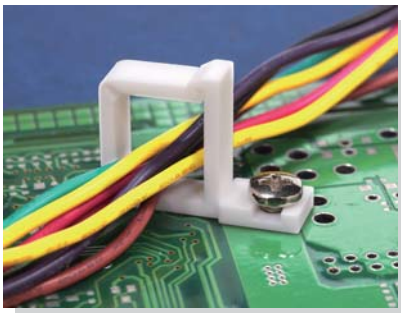


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CHUE-1	1000

電線固定扣 CABLE CLAMP

用途：配合螺絲，固定電線整齊，美觀。

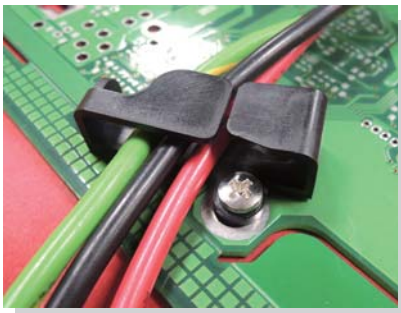

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

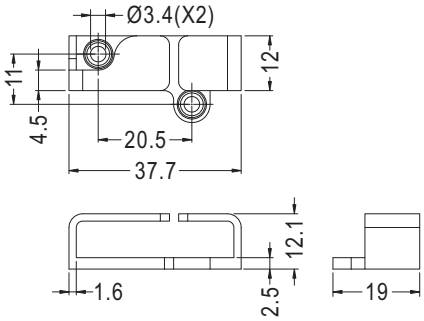


Part No.	Package
CCE-1	1000

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
WLLT-1	1000

電線固定座 WIRE SADDLE


用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

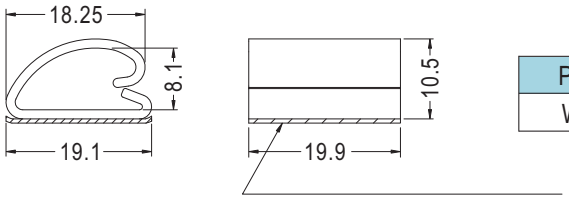


Part No.	Package
WUD-1	1000

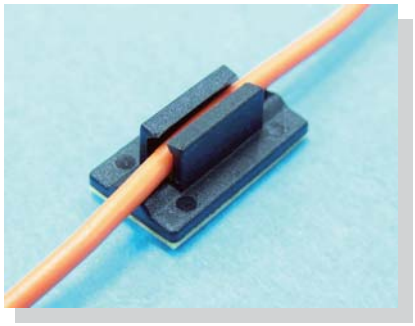


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

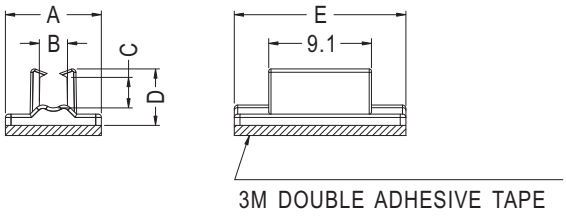


Part No.	A	B	C	D	E	Package
WTC-2	8.5	2.5	2.7	5.0	15.2	500
WTC-3	9.0	3.6	4.0	6.5	16.0	

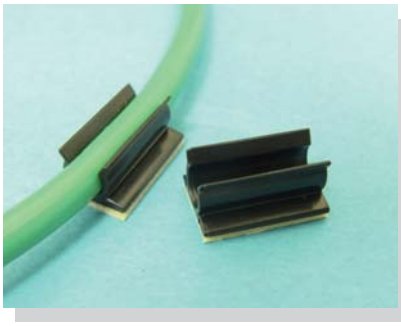


- Material: ABS
- Color: Black
- Unit: mm

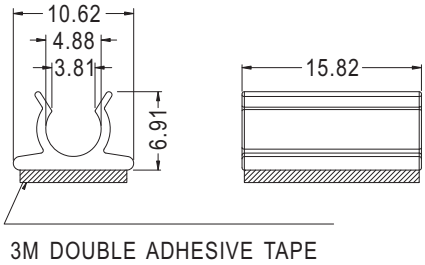

Part No.	Package
THVC-1	500

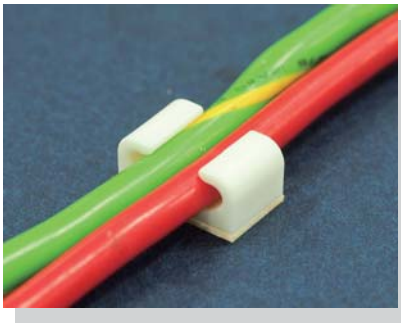


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

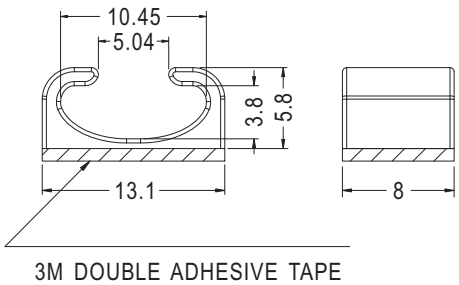


Part No.	Package
WLLT-3	1000

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。

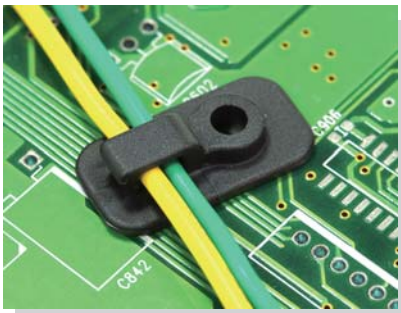


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MIB-21	1000

電線固定座 WIRE SADDLE

用途：背膠式，用於電子、電腦內部電線固定，裝配容易，美觀不脫落。

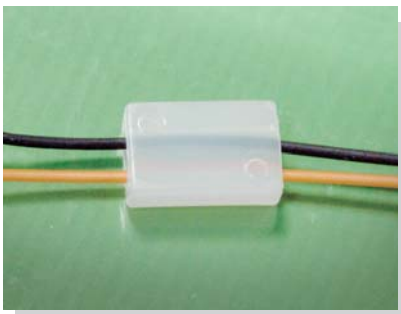


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MWA-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

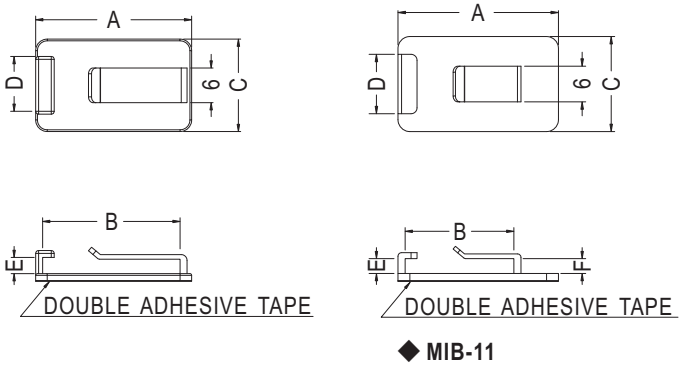

◆ **MIB-11**




Part No.	A	B	C	D	E	F	Package
MIB-9	27.0	23.8	16.0	9.5	2.5	2.8	1000
MIB-10	27.0		16.0			2.5	
MIB-17	31.9	28.7	16.0	10.0	2.8	2.5	
MIB-11	27.0	18.3	16.0	10.0	2.5	2.5	

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

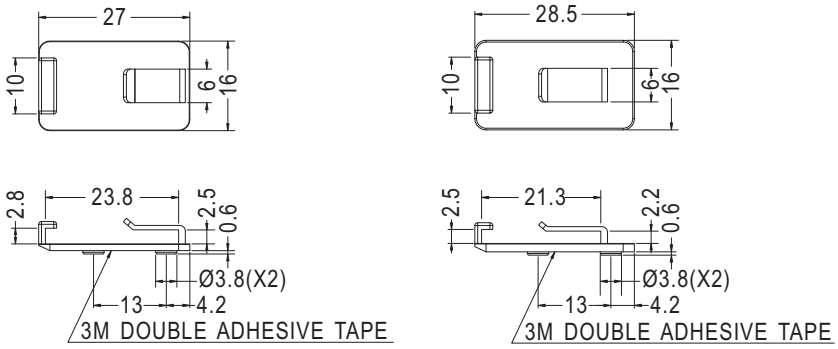


Part No.	Package
MIB-33	1000


Part No.	Package
MIB-34	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

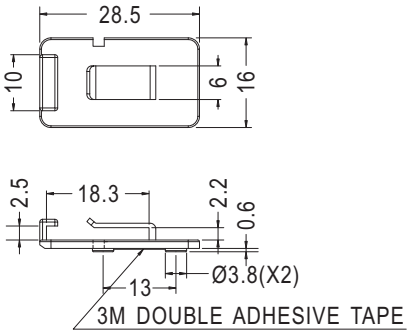

Part No.	Package
★ MIB-35	1000

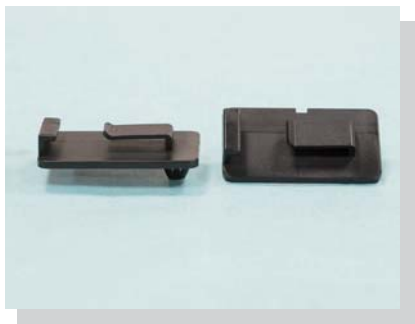

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

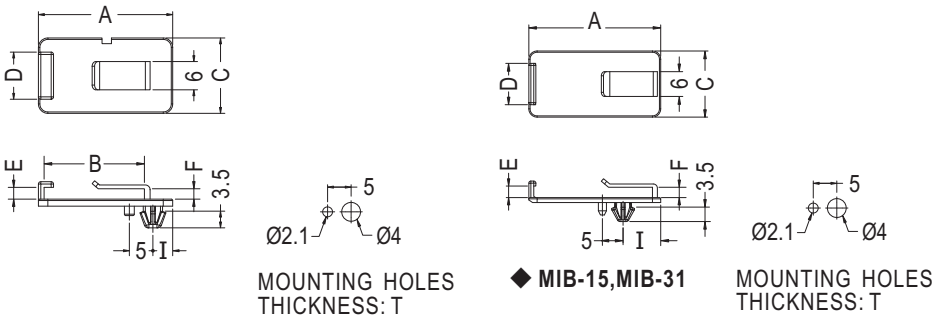



Part No.	A	B	C	D	E	F	I	T	Package
MIB-15	31.9	28.7	16.0	10.0	2.8	2.5	9.1	0.5~0.8	1000
MIB-16	28.5	21.3		10.0	2.5	2.2	4.2		
MIB-27	28.5					2.2	4.2		
MIB-31	28.5	21.3		10.0	2.5	2.2	4.2		

用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS: T

Part No.	A	B	D	E	F	G	I	J	K	T	Package
MIB-1	27.0	23.8	10.0	2.8	2.5	6.0	4.2	13.0	2.4	0.6~0.8	1000
MIB-3	27.0				2.5	6.0	4.2		2.4	0.6~0.8	
MIB-4	31.9	28.7	10.0	2.8	2.5	6.0	9.1		2.1	0.5~0.8	
MIB-5	46.2	43.0	10.0	2.8	2.5	6.0	23.4		2.1	0.5~0.8	500
MIB-7	22.5	19.8	10.0	2.3	1.5	6.0	4.2	12.0	2.1	0.5	1000
MIB-8	28.5	25.25	10.0	2.5	2.55	6.0	4.2	13.0	2.4	0.5	
MIB-12	31.9	28.7	10.0	2.8	1.7	6.0	9.1		2.1	0.5~0.8	
MIB-13	31.9	28.7	12.0	2.8	1.4	12.0	9.1		2.1	0.5~0.8	
MIB-14	27.0				2.5	6.0	4.2		2.4	0.6~0.8	
MIB-25	27.0	23.8	10.0	2.8	2.5	6.0	4.2		2.2	0.6~0.8	









MOUNTING HOLES
THICKNESS: T


◆ **MIB-23**






MOUNTING HOLES
THICKNESS: T

◆ **MIB-22**







MOUNTING HOLES
THICKNESS: T


◆ **MIB-26**

Part No.	A	B	D	E	F	H	I	K	T	Package
MIB-2	27.0	18.3	10.0	2.5	2.5	3.5	4.2	2.3	0.6~0.8	1000
MIB-6	28.5	21.3		2.5	2.2	3.5			0.6~0.8	
MIB-22		25.25		2.55	2.5	3.5			0.8	
MIB-23		21.3			2.2	2.7		2.4	1.0	
MIB-24				2.5	2.2	2.7			1.0	
MIB-26				2.5	2.2	3.5			0.6~0.8	

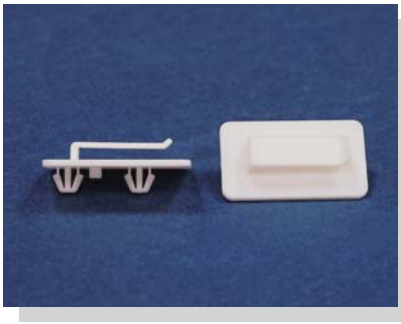

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm







MOUNTING HOLE
THICKNESS 0.6~0.8

Part No.	Package
MIB-28	1000


電線固定座 WIRE SADDLE


用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。

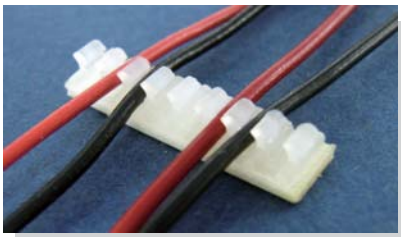

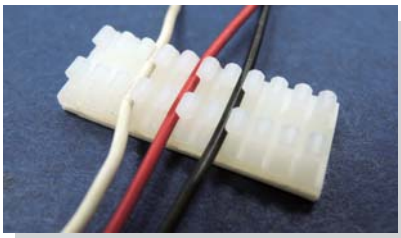


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

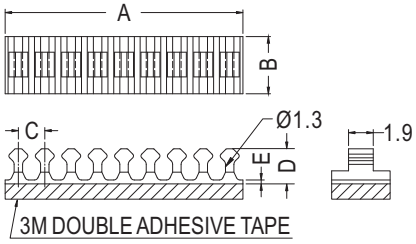

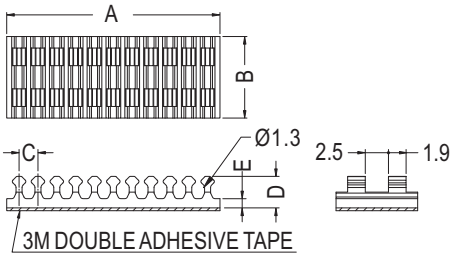


◆ **MU-02-10**


Part No.	A	B	C	D	E	Package
MU-01-8	18.3	4.4	2.03	2.7	0.3	500
MU-02-10	23.0	8.8	2.03	3.4	1.0	200

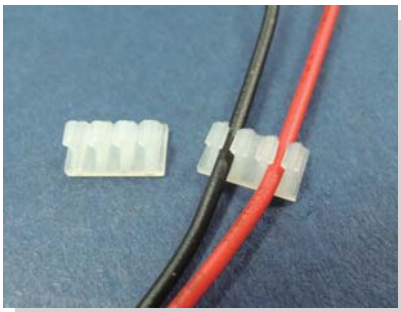


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



◆ **MU-03-3**




◆ **MU-03-4**




◆ **MU-03-5**


Part No.	A	B	C	D	E	Package
MU-03-3	8.13	4.5	2.03	3.4	1.0	500
MU-03-4	10.0	4.5	2.03	3.4	1.0	
MU-03-5	12.0	4.5	2.03	3.4	1.0	

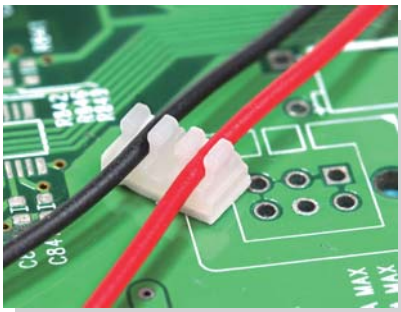


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



◆ **MU-05-2**



◆ **MU-05-3**




◆ **MU-05-4**


Part No.	A	B	C	D	E	Package
MU-05-2	6.1	4.5	2.03	3.4	1.0	500
MU-05-3	8.13	4.5	2.03	3.4	1.0	
MU-05-4	10.16	4.5	2.03	3.4	1.0	


電線固定 座 WIRE SADDLE

用途：背膠型，快速拆卸，固定電線維修方便，不佔空間。

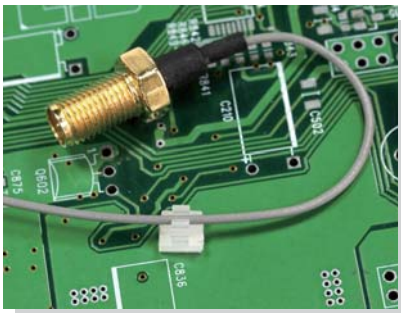


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
MU-07-2	1000

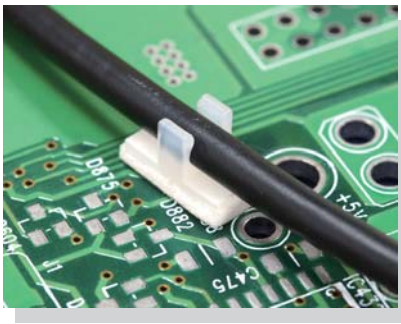


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
MUC-1	1000

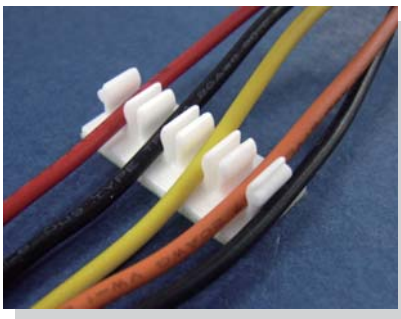


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

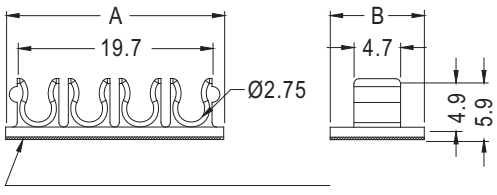


Part No.	A	B	Package
MUA-1	22.0	9.5	500

插頭固定座 PLUG SADDLE

用途：可快速拆卸，固定插頭。

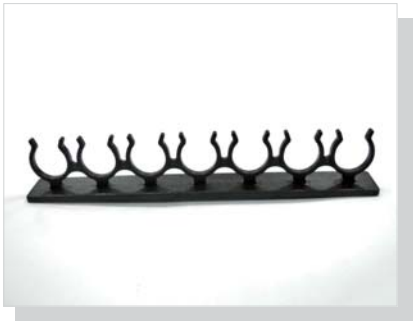

- Material: PP
- Color: Natural/Black
- Unit: mm

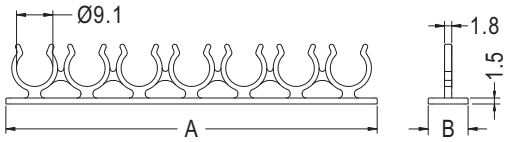


Part No.	A	B	Package
JETM-7	93.0	10.0	100

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方變，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

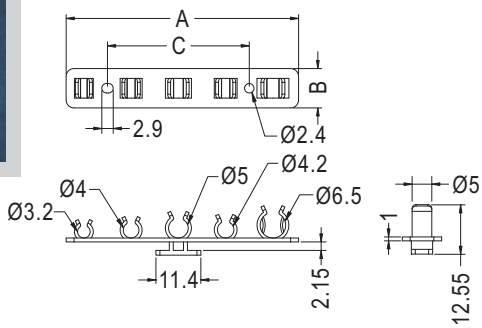


Part No.	A	B	C	Package
JETM-1	59.0	10.0	36.0	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

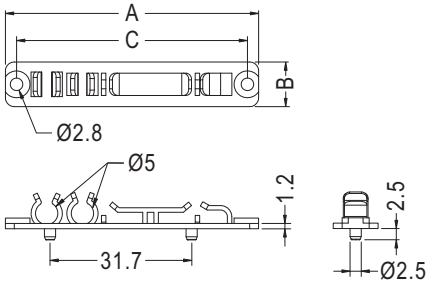

Part No.	A	B	C	Package
JETM-2	56.7	10.0	51.7	100

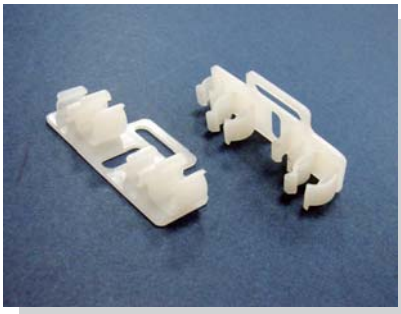


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

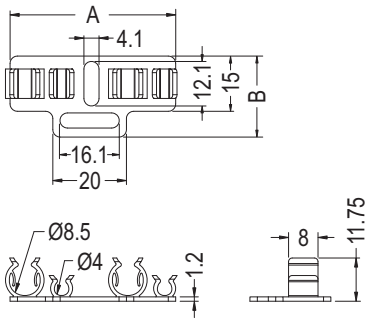



Part No.	A	B	Package
CMG-1	45.0	22.0	500

用途：快速拆卸，固定電線維修方便，不佔空間。

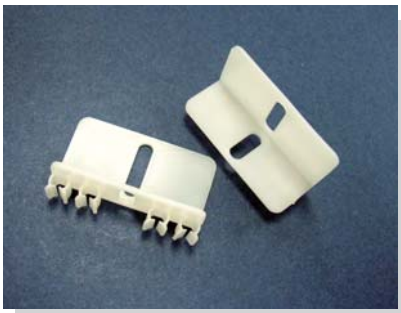


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




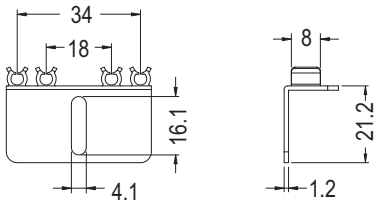


Part No.	A	B	Package
CMG-2	40.0	15.0	500

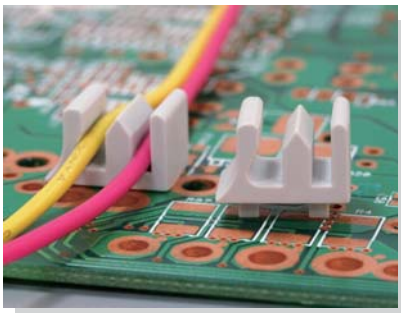


- Material: PC+ABS
- Flame Class: 94V-0
- Color: Gray
- Unit: mm







MOUNTING HOLE




Part No.	Package
CFMG-1	1000

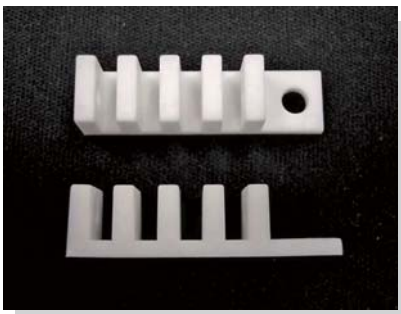


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	B	Package
AIM25071	30.0	8.0	1000

用途：可將電線固定於機殼上，電線不易磨損，配線整齊美觀。

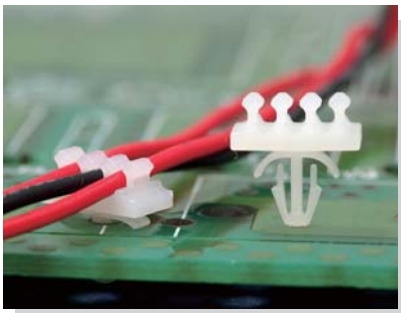


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T


Part No.	A	B	G	T	Package
MUT-2	11.7	8.5	3.5	1.6	1000



CHASSIS Ø2.0
THICKNESS: T


Part No.	A	B	T	Package
MUT-5	6.3	3.5	1.0	1000






MOUNTING HOLE
THICKNESS: T


Part No.	A	B	T	Package
MUT-6	7.0	3.6	0.8	1000



CHASSIS Ø2.5
THICKNESS: T


Part No.	A	B	T	Package
MUT-11	9.0	4.5	1.6	1000

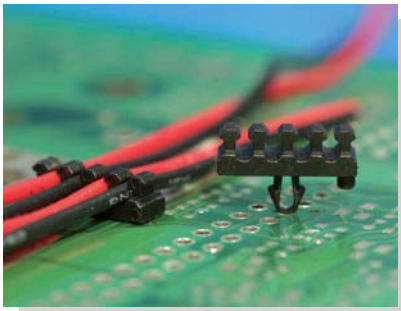


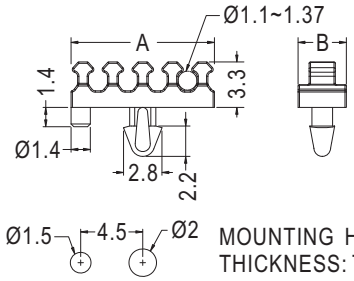

MOUNTING HOLE
THICKNESS: T


Part No.	A	B	T	Package
★MUT-10	10.4	3.5	1.2	1000






CHASSIS: ØG
THICKNESS: T


Part No.	A	B	G	T	Package
MUT-1	22.0	9.5	1.75	1.6	500

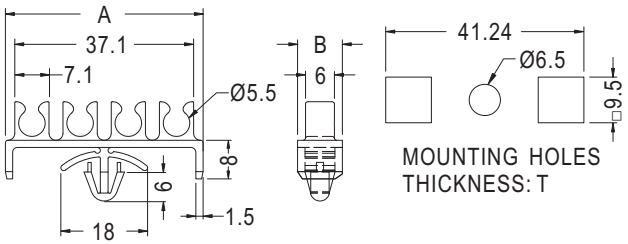

MOUNTING HOLES
THICKNESS: T

Part No.	A	B	T	Package
MUT-3	41.0	9.3	1.6~2.5	500

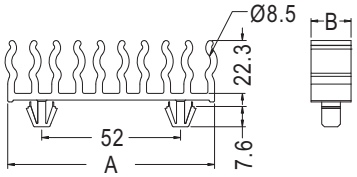





MOUNTING HOLES
THICKNESS: T

Part No.	A	B	T	Package
MUT-4	77.5	15.0	1.5~2.0	200

- Material: POM
- Color: Natural
- Unit: mm





MOUNTING HOLES
THICKNESS: T


Part No.	A	B	T	Package
MUT-8	46.5	10.0	1.0~1.5	500

天線束線座 WIRE HOLDER

用途：將天線固定於機殼上，電線不易磨損，配線整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

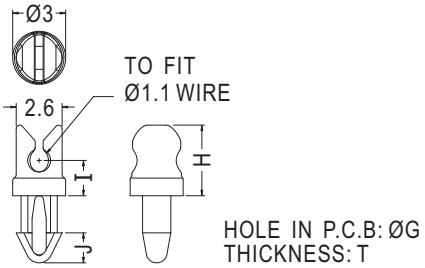


Part No.	G	H	I	J	T	Package
CHBB-2	2.0	4.0	2.0	1.7	1.6~2.0	2000
CHBB-2-1					1.0~1.2	
CHBB-2-0.8					0.8	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

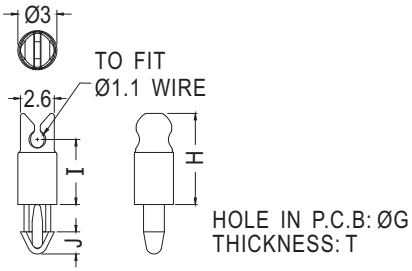


Part No.	G	H	I	J	T	Package
CHBB-5	2.0	7.0	5.0	1.7	1.6~2.0	2000
CHBB-5-1					1.0~1.2	
CHBB-5-0.8					0.8	

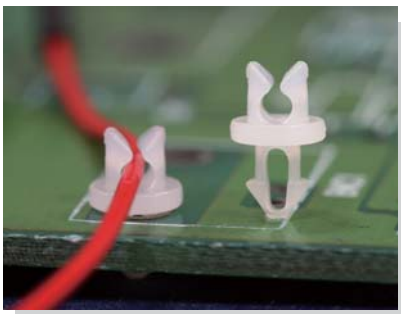


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

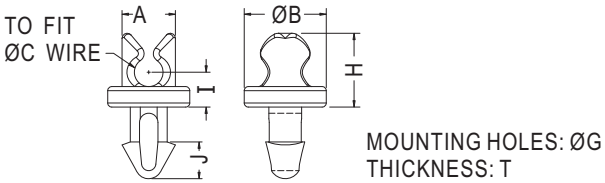

Part No.	A	B	C	G	H	I	J	T	Package
★CHBB-1.6	2.8	4.0	1.4	1.8	3.6	1.6	1.7	1.2	2000
CHBB-1.7	2.6	4.0	1.37	2.0	3.6	1.7	1.8	1.6	

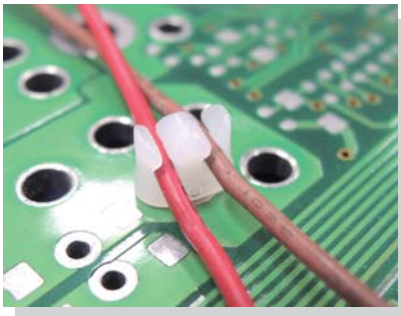

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

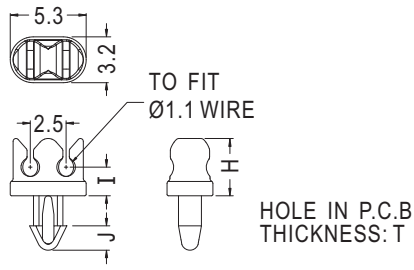


Part No.	G	H	I	J	T	Package
CHBB2-2	2.0	4.0	2.0	1.7	1.6~2.0	2000
CHBB2-2-0.8					0.8	
★CHBB2-2-1.2					1.2	

天線固定座 WIRE SADDLE

用途：將天線固定於機殼上，電線不易磨損，配線整齊美觀。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)




Part No.	Package
CHBD-1	1000

T8固定座 T8 MOUNT

用途：用於輕鋼架之固定網路天線。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

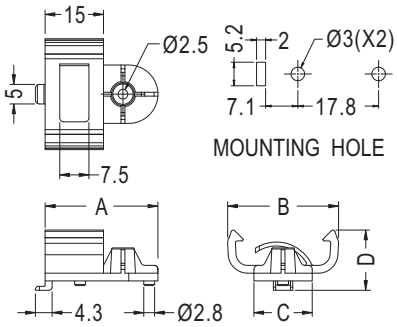


Part No.	A	B	C	D	Package
EM-550	31.5	18.3	8.0	14.1	500
EM-551	31.5	28.5	15.0	15.5	
EM-552	31.5	42.85	15.0	15.5	250

電線固定座 WIRE SADDLE


用途：可用背膠或螺絲固定，可快速拆卸電線，維修方便，不佔空間。

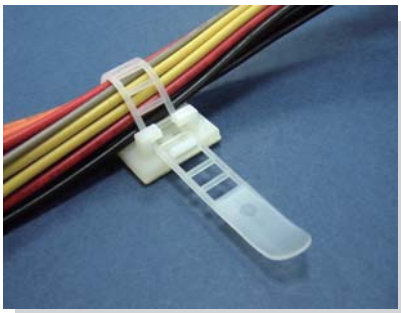

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

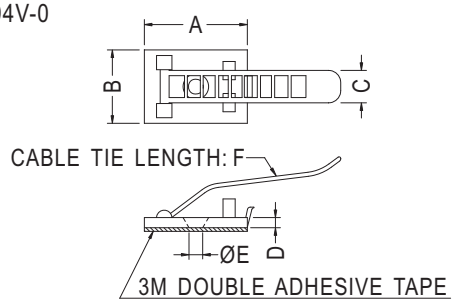

Part No.	A	B	C	D	E	F	Package
CL-1	25.4	18.1	8.0	2.5	3.9	64.2	200
CL-2	25.4	18.1	8.0	2.5	3.9	85.0	

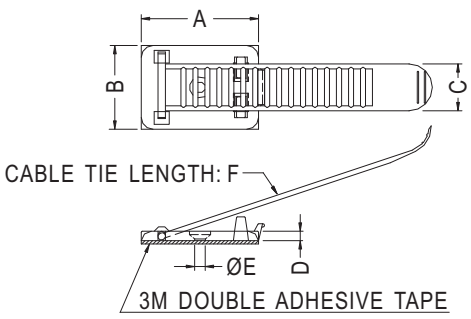


Part No.	A	B	C	D	E	F	Package
CL-3	35.0	25.0	14.0	2.8	3.2	88.3	200
CL-4	35.0	25.0	14.0	2.8	3.2	127.0	100
CL-5	30.2	21.0	12.0	2.5	3.5	91.0	
CL-6	30.0	21.0	12.0	2.5	3.7	117.0	
CL-7	20.0	15.0	5.0	2.5	3.4	55.0	200
CL-13	25.4	18.0	8.0	2.5	3.9	35.0	

電線固定座 WIRE SADDLE

用途：背膠式，可快速拆卸，固定電線，維修方便，整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

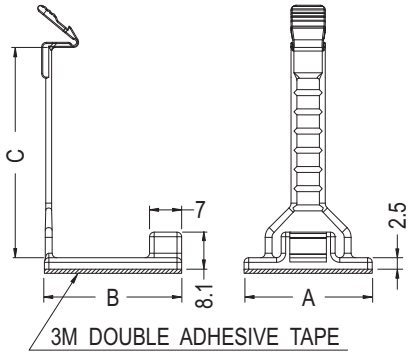

Part No.	A	B	C	Package
CLE-3	28.0	30.0	46.0	200



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
CLB-1	49.5	25.6	133.5	200

電線固定座 WIRE SADDLE

用途：可背膠或使用螺絲固定，固定電線，整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

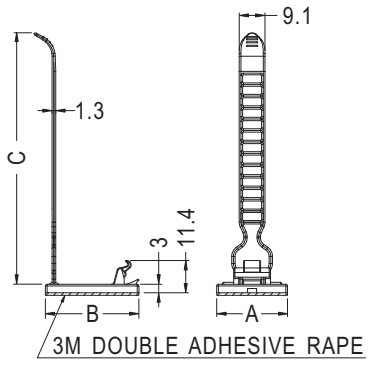


Part No.	A	B	C	Package
CLE-1	25.0	33.0	88.7	200


電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便不佔空間。

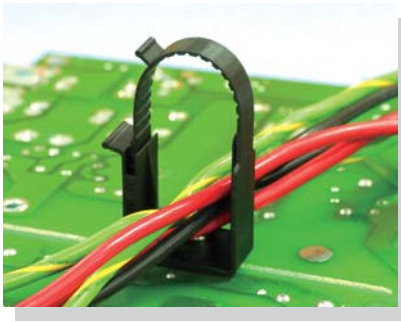

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

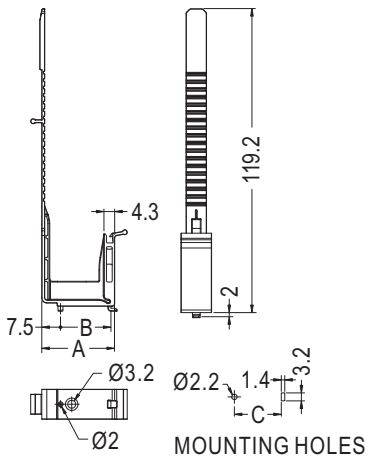

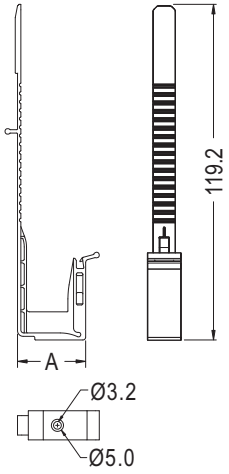

Part No.	A	B	C	Package
CLF-2	29.2	20.2	13.9	500
CLF-3	24.2	15.2	18.9	


Part No.	A	Package
CLF-4	24.2	500


電線固定座 WIRE SADDLE

用途：配合螺絲，固定電線整齊，美觀。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

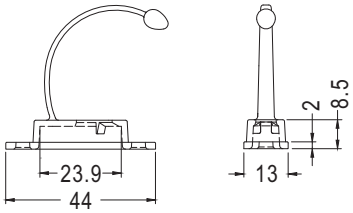





Part No.	Package
CLG-1	1000

電線固定座 WIRE SADDLE

用途：卡槽式，可快速捆紮及解開電線。

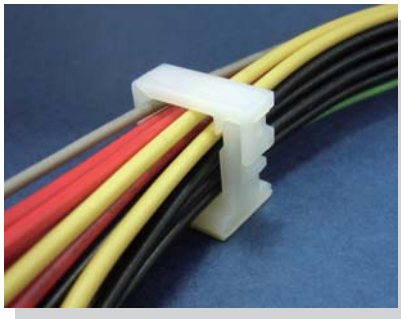


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	Package
WLF-1	19.05	11.0	12.8		500
WLF-2	18.95	11.0	12.8	3.0	

電線固定座 WIRE SADDLE

用途：卡槽式，可快速捆紮及解開電線。

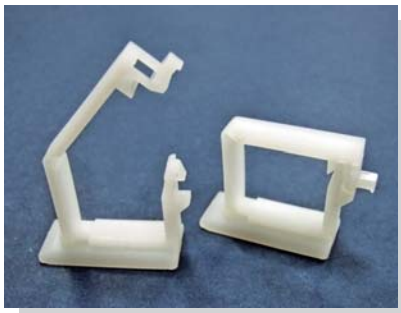


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

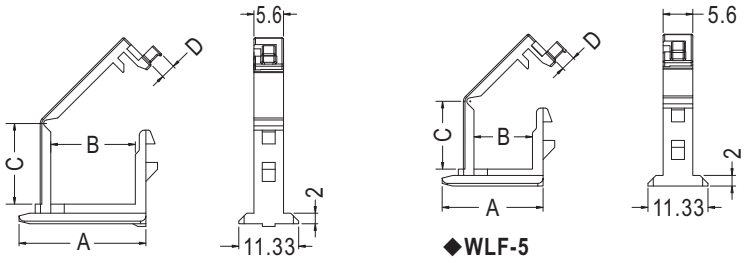


Part No.	A	B	C	D	Package
WLF-3	24.05	16.0	15.3	2.8	500
WLF-4	19.05	11.05	12.8	2.8	
WLF-5	19.05	11.05	12.8	2.8	

電線固定座 WIRE SADDLE


用途：背膠式，可快速捆紮及解開電線。

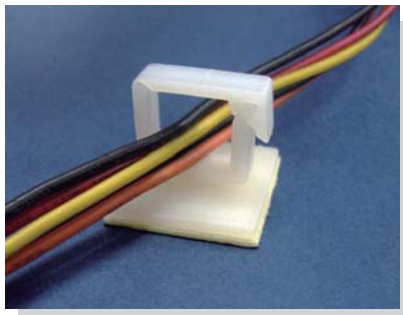


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

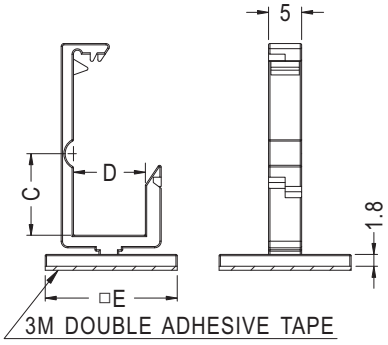


Part No.	C	D	E	Package
WLM-1	12.35	10.9	20.0	500

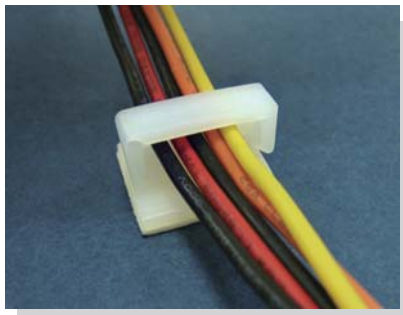

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



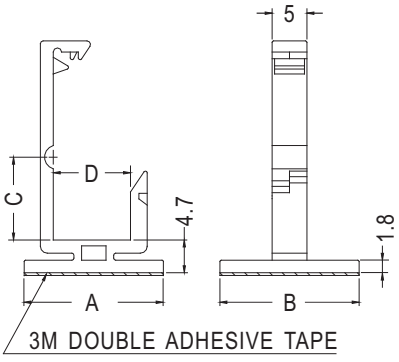


Part No.	A	B	C	D	Package
WLN-1S	16.0	14.0	5.5	11.1	500
WLN-6	13.0	12.0	6.0	8.1	


Part No.	A	B	C	D	Package
WLN-1	20.0	20.0	6.7	11.1	500
WLN-2	20.0	20.0	11.9	11.1	
WLN-3	20.0	20.0	15.7	15.7	
WLN-5	15.0	14.0	8.7	10.75	
WLN-7	16.0	12.0	8.7	10.75	

電線固定座 WIRE SADDLE

用途：可用背膠或螺絲固定，可快速捆紮及解開電線。

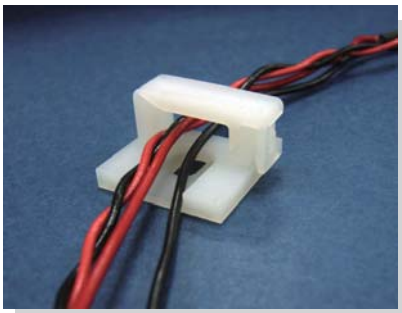


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

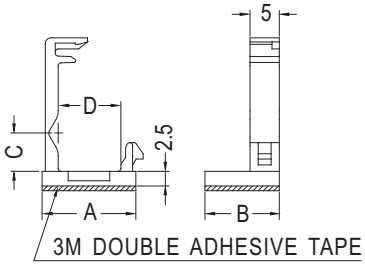


Part No.	A	B	C	D	Package
WLT-1	16.0	12.7	6.5	10.7	500
WLT-2	21.6	12.7	11.7	16.3	

電線固定座 WIRE SADDLE

用途：背膠式，可快速捆紮及解開電線。

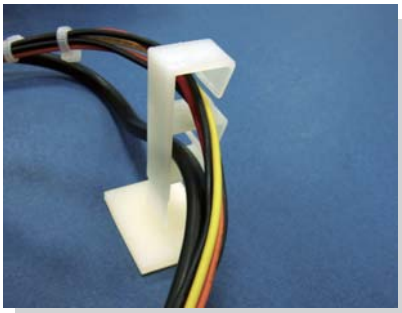


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
W2LK-1	50

電線固定座 WIRE SADDLE


用途：固定電線於PC板或機板上，維修方便，不佔空間。

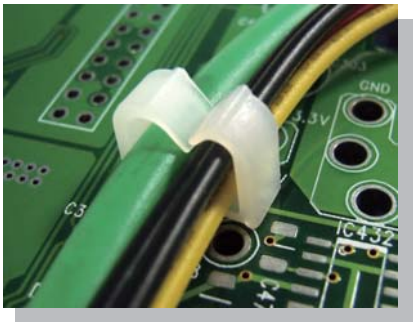


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	F	G	J	T	Package
MWS-12	10.5	7.9	4.1	9.3	6.4	3.0	2.8	0.8~1.6	1000

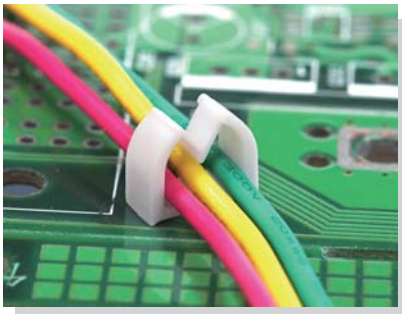


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




Part No.	A	B	C	D	F	G	J	T	Package
MWS-53	9.1	6.7	4.0	7.58	5.75	3.0~3.04	3.1	2.4	1000

用途：固定電線於PC板或機板上，維修方便，不佔空間。

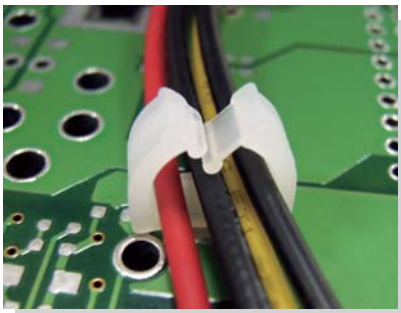


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-10	9.0	6.6	4.0	7.5	5.2	3.0	3.4	1.6	1000




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-31	10.7	8.3	4.0	9.6	7.0	3.3	3.3	1.0	1000

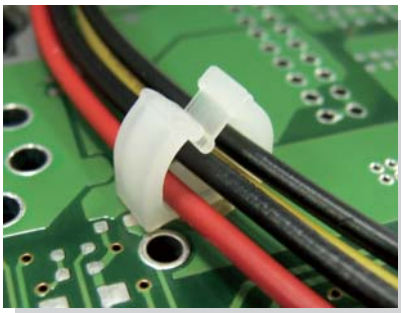

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-11	9.0	6.6	4.0	7.65	5.15	3.5	3.2	1.6	1000
MWS-11S	9.0	6.6	4.0	7.65	5.15	3.5	2.8	1.0	
MWS-15	10.7	8.3	4.0	9.6	7.0	3.0	3.4	1.6	
MWS-15S	10.7	8.3	4.0	9.6	7.0	3.0	2.4	1.6	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


E217732
UL 1565




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package	UL
MWS-6	12.0	8.8	4.0	11.0	8.5	3.5	2.8	1.0~1.6	1000	UL
MWS-7	9.2	6.8		7.6	5.0	3.0	2.7		2000	UL
MWS-41	12.0	9.0		11.5	8.48	3.5	2.8		1000	

用途：固定電線於PC板或機板上，
維修方便，不佔空間。

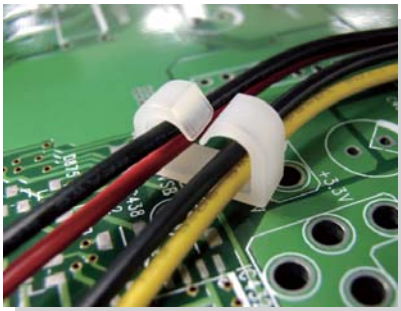


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-19	11.6	9.0	4.0	7.9	5.3	3.5	2.5	0.8~1.2	1000

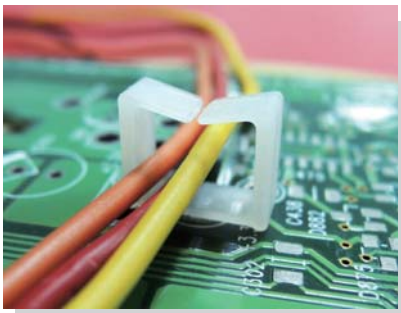


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-38	10.7	8.3	4.0	9.0	7.2	3.0	3.4	1.6	1000

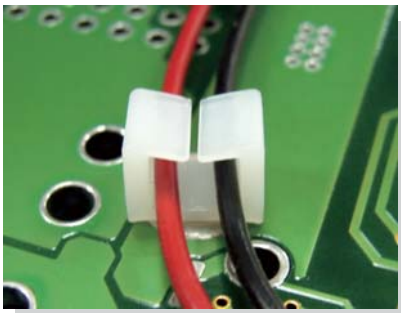


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-13	6.5	4.3	4.0	5.4	3.6	3.5	2.8	1.0	1000
MWS-13L	7.8	5.6	4.0	5.4	3.6	3.5	2.8	1.5	
MWS-14	6.5	4.3	4.0	5.4	3.6	3.5	2.8	4.0	

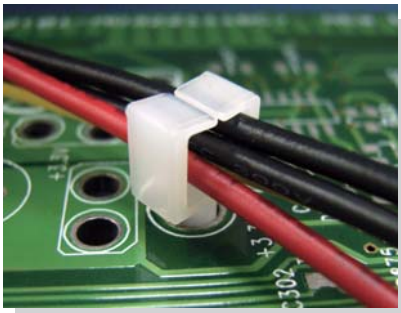


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-20	6.5	4.5	4.0	6.2	4.8	3.5	3.0	4.0	1000
MWS-25	6.5	4.3	4.0	6.2	4.8	3.5	3.0	2.5	

用途：用於電子、電腦內部電線固定，
裝配容易，美觀不脫落。

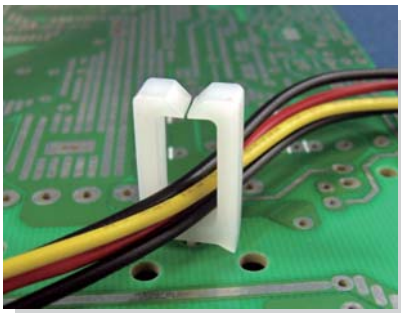

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	J	T	Package
CHY-1	10.25	6.25	4.5	18.0	13.0	4.8	4.8	1.8	1000
CHY-1S	10.25	6.25	4.5	18.0	13.0	3.0	2.5	1.6	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B: ØG
THICKNESS: T




P.C.B: ØG
THICKNESS: T
◆**MWS-24**

Part No.	A	B	C	D	F	G	J	T	Package
MWS-16	6.8	4.4	1.8	5.7	4.2	1.75	1.2	1.6	2000
MWS-24	6.98	4.25	2.0	11.3	9.5	2.8	1.46	2.0	

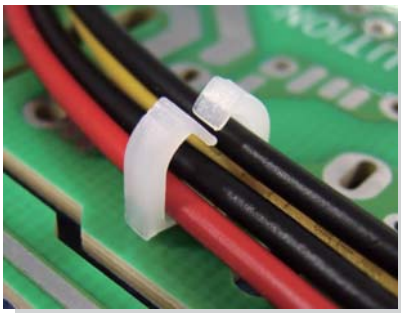

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWS-17	7.2	5.0	2.0	6.4	4.6	1.75	1.5	1.6	2000
MWS-44	8.5	6.5	2.0	7.0	5.2	1.75	1.5	1.6	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	J	T	Package
MWS-50	9.0	6.7	4.0	8.6	6.45	3.0	2.0	1.1	2000

電線固定座 WIRE SADDLE


用途：固定電線於PC板或機板上，維修方便，不佔空間。

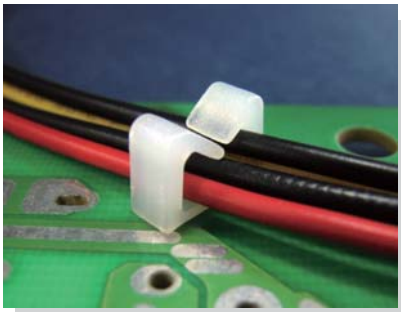


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

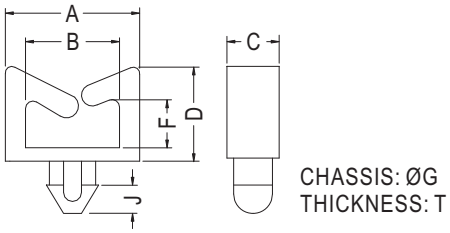


Part No.	A	B	C	D	F	G	J	T	Package
MWS-1	9.0	6.3	3.5	6.4	3.6	3.0	3.6	1.2~1.6	2000

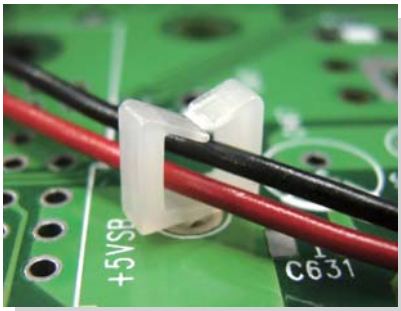


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

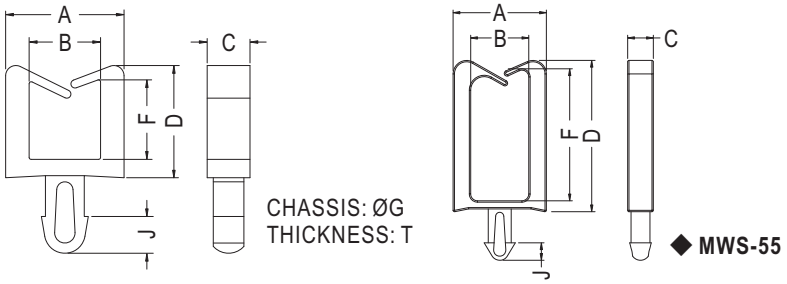


Part No.	A	B	C	D	F	G	J	T	Package
MWS-8	5.8	3.5	2.1	5.5	3.9	2.0	1.8	1.6~1.8	2000
★MWS-55	6.9	4.3	1.9	11.2	9.5	1.75	1.3	2.2	

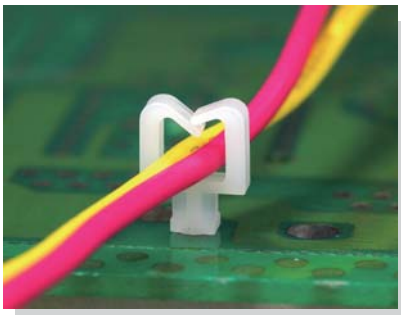


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

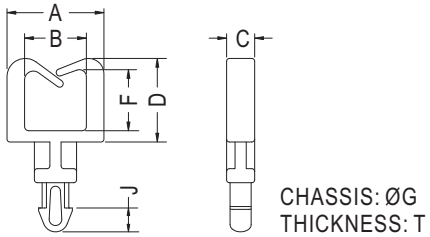

Part No.	A	B	C	D	F	G	J	T	Package
MWS-47	6.9	4.4	2.0	5.95	4.35	2.0	1.7	1.6	1000

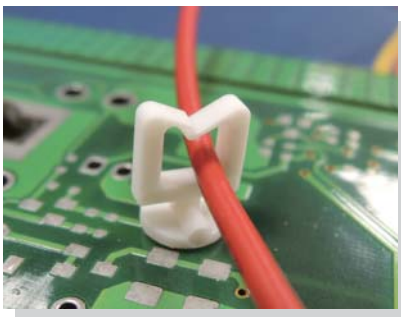


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

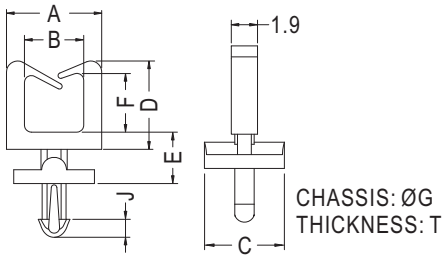


Part No.	A	B	C	D	E	F	G	J	T	Package
MWSD-3	6.9	4.3	5.8	6.4	3.73	4.26	1.8	1.3	2.4	1000
MWSD-4				7.3	6.4	5.1	1.78		1.57	

電線固定座 WIRE SADDLE

用途：固定電線於 PC板或機板上，維修方便，不佔空間。

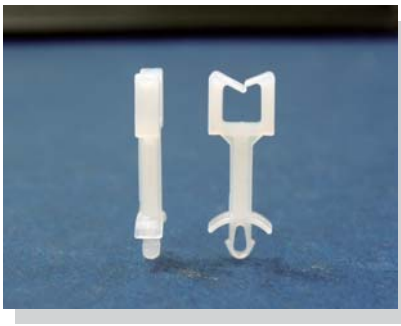


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

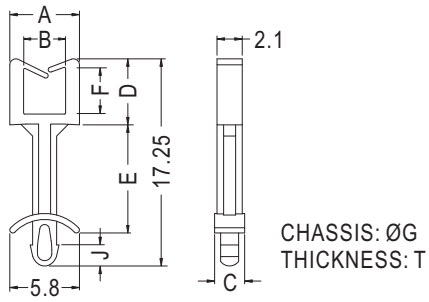

Part No.	A	B	C	D	E	F	G	J	T	Package
MWSE-1	5.8	3.5	2.5	5.5	9.0	3.9	2.0	1.75	1.6~1.8	1000
MWSE-2					7.0					



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

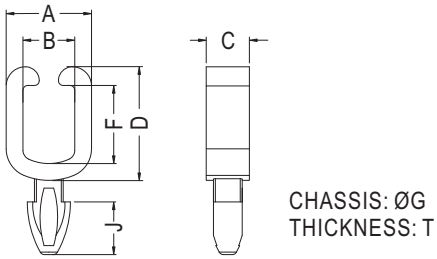


Part No.	A	B	C	D	F	G	J	T	Package
MWS-28	8.9	5.4	4.5	11.85	8.15	4.0	5.5	2.2	2000

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm



MOUNTING HOLE Ø1.0
THICKNESS 1.0


Part No.	Package
MWSC-7	1000

電線固定座 WIRE SADDLE

用途：可將電線固定於機殼上，電線不易磨損，配線整齊美觀。



- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

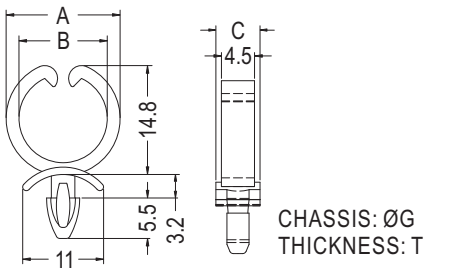


Part No.	A	B	C	G	T	Package
CHBA-1	15.5	12.0	6.0	3.5	0.8~2.2	1000
CHBA-2				3.2		

電線束線座 WIRE HOLDER

用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	G	T	Package
THCC-1	22.4	18.0	8.0	4.0	2.5	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

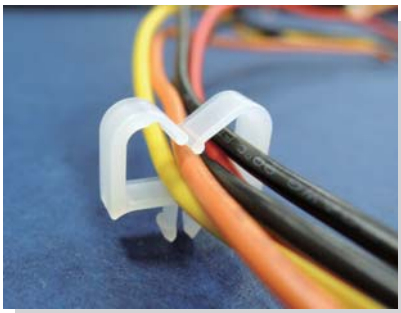


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
CHASSIS THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWSC-2	12.4	10.0	4.0	8.3	6.3	3.0	1.9	1.5	1000
MWSC-2L	12.4	10.0	4.0	8.3	6.3	3.0	1.9	2.0	

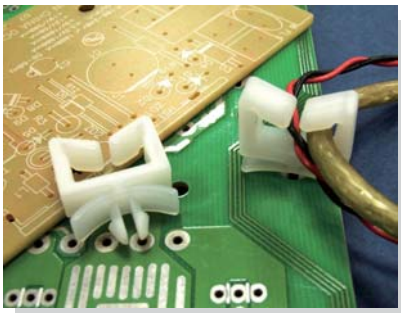


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	E	G	J	T	Package
CHAE-1	15.9	11.1	5.6	13.0	6.5	4.8	2.5	0.8~1.6	1000
CHAE-1S	15.9	11.1	5.6	13.0	6.5	4.4	2.5	0.8~1.6	

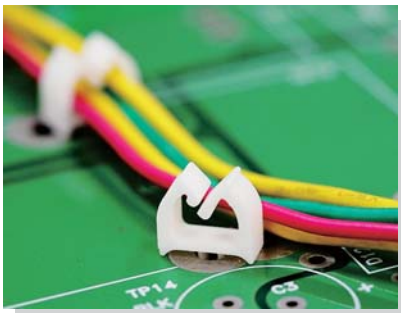

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	J	T	Package
MWSC-1	9.0	6.6	4.0	7.3	5.3	3.0	2.0	1.2~1.6	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

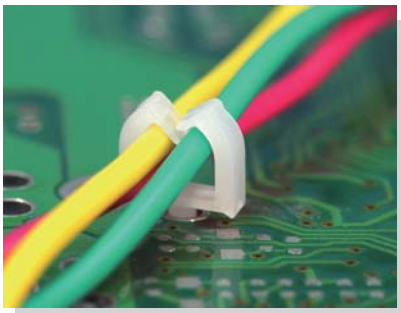


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




MOUNTING HOLE Ø1.7
THICKNESS: T

Part No.	A	B	T	Package
MWSC-3	6.3	4.46	2.4	1000
MWSC-4	4.0	2.2	2.4	
MWSC-5	4.0	2.2	1.6	
MWSC-6	6.0	4.2	1.6	

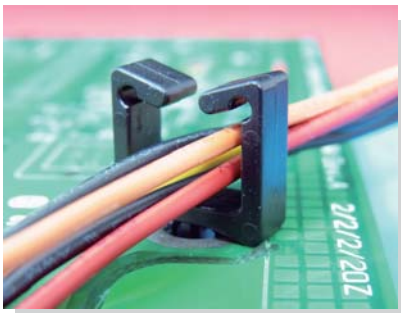

- Material: ABS+PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	E	G	J	T	Package
CHAW-1	14.9	10.9	5.5	14.2	8.8	4.8	5.6	1.1	1000

電線固定座 WIRE SADDLE

用途：可快速固定電線，安裝容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

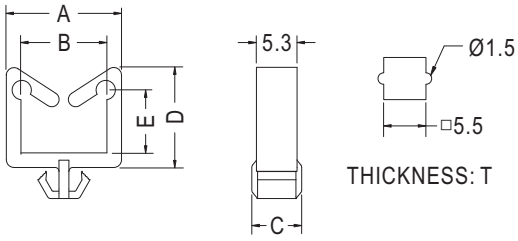

THICKNESS: T

Part No.	A	B	C	D	E	T	Package
CHAB-1	15.0	11.2	6.5	12.0	7.2	1.0	1000
CHAB-2	15.0	11.2	6.5	17.0	12.2	1.0	500
CHAB-3	15.0	11.2	6.5	26.0	21.2	1.0	

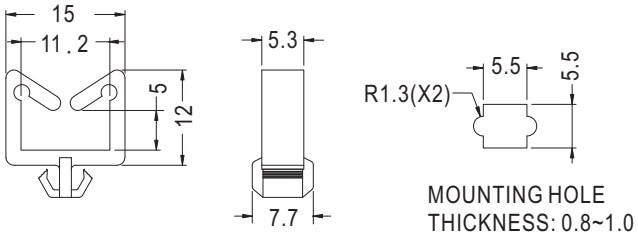


MOUNTING HOLE
THICKNESS: 0.8~1.0


Part No.	Package
★CHAB-1L	1000

電線固定座 WIRE SADDLE

用途：固定電線於木板或機殼上，維修方便，不佔空間。

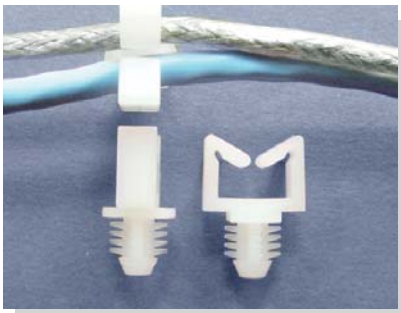


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

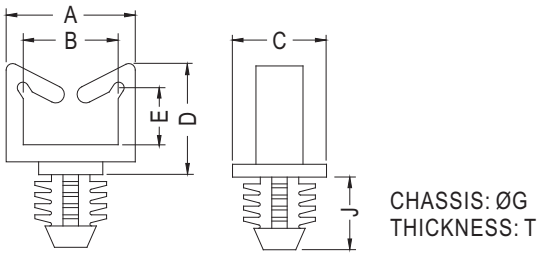


Part No.	A	B	C	D	E	G	J	T	Package
WSBH-7	15.1	11.1	11.0	13.0	6.7	7.9	8.5	6.4	1000
WSBH-12	15.5	11.1	11.1	18.3	12.3	7.9	8.5	6.4	
WSBH-19	15.1	11.1	11.1	27.2	21.0	7.9	8.7	6.4	
WSBH-29	15.1	11.1	11.0	35.0	28.7	7.9	8.5	6.4	

4

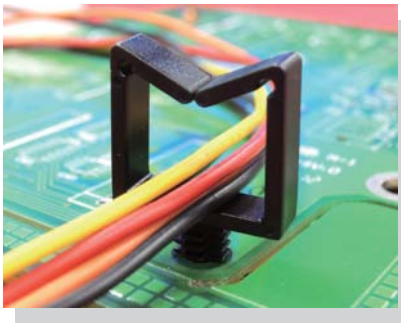


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

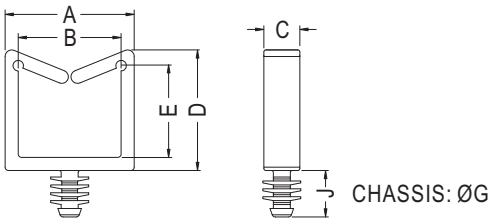


Part No.	A	B	C	D	E	G	J	Package
WSBH-13	19.7	15.7	5.5	18.2	14.0	5.3	7.3	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

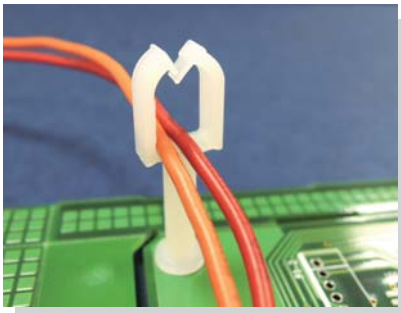

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

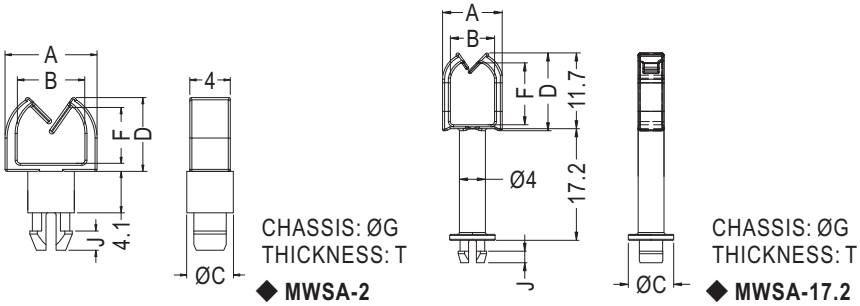


Part No.	A	B	C	D	F	G	J	T	Package
MWSA-2	9.1	6.7	4.6	7.3	5.5	3.8	1.9	1.6	1000
MWSA-17.2	9.2	6.8	7.0	12.0	9.5	3.8	1.8	1.7	

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
MWSL-6	9.2	6.8	7.0	7.6	5.2	3.0	2.8	1.0~1.6	1000

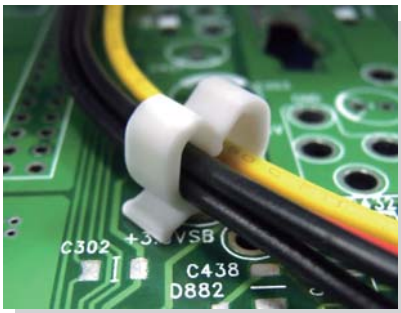

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




P.C.B: ØG
THICKNESS: T

Part No.	A	B	C	D	E	F	G	J	T	Package
MWC-2	9.7	7.2	4.0	7.1	4.5	5.6	3.0	2.2	0.6~1.6	2000
MWC-6	9.7	7.2	4.0	7.1	5.1	5.6	3.0	2.8	0.6~1.6	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm



P.C.B: ØG
THICKNESS: T

Part No.	A	B	C	D	E	F	G	J	T	Package
MWC-3	12.1	9.5	4.0	12.8	4.5	10.9	3.0	2.2	0.6~1.6	2000
MWC-10	12.1	9.5	4.0	12.8	5.3	10.9	3.5	3.0	0.6~1.6	


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

E217732
UL 1565



CHASSIS: ØG
THICKNESS: T




◆ CHA-3L



◆ CHA-5



◆ CHA-6




◆ CHA-9

Part No.	A	B	C	D	E	G	T	Package	
CHA-1	15.0	11.2	5.3	12.0	7.2	4.8~5.0	0.8~2.0	1000	UL
CHA-1L	15.0	11.2	5.3	12.0	7.2	4.8~5.0	2.2		
CHA-2	15.0	11.2	5.3	17.0	12.2	4.8~5.0	0.8~2.0	500	UL
CHA-3	15.0	11.2	5.3	26.0	21.2	4.8~5.0	0.8~2.0		UL
★CHA-3L	15.0	11.2	5.3	26.0	21.2	4.8~5.0	3.0		
CHA-4	15.0	11.2	5.3	34.0	29.2	4.8~5.0	0.8~2.0		UL
CHA-5	15.1	11.1	5.6	17.8	11.65	4.75	1.6~3.2		
CHA-6	15.0	11.2	5.3	17.0	12.2	4.8	0.8~2.2		
CHA-6L	15.0	11.2	5.3	17.0	12.2	4.8	0.8~2.5		
CHA-9	15.0	10.6	5.2	20.0	15.3	4.8	0.8~2.2		




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	E	G	J	T	Package
CHA-8	19.7	15.7	5.4	17.6	14.1	3.0	3.5	1.6~2.3	500

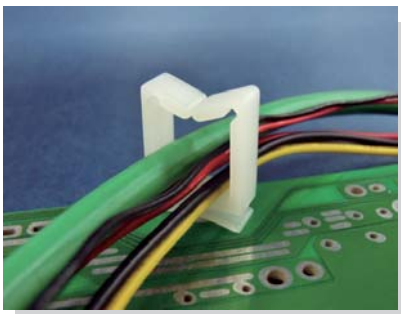


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	E	G	J	T	Package
CHP-1	19.7	15.7	5.4	18.2	14.0	4.8~5.0	5.7	1.2~2.1	500
CHP-2	15.0	11.0	5.5	17.0	12.6	4.8~5.0	5.7	1.2~2.1	
CHP-3	18.5	14.6	5.5	17.0	12.55	5.0	6.1	1.2~2.0	


用途：固定電線於PC板或機板上，維修方便，不佔空間。

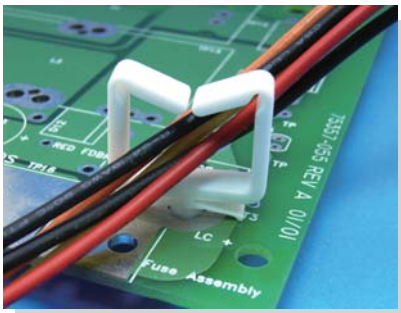


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

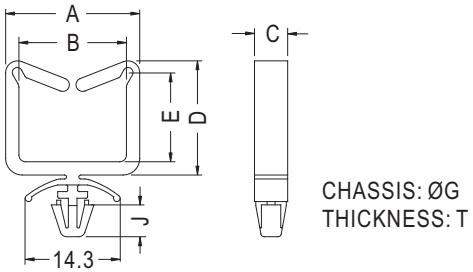


Part No.	A	B	C	D	E	G	J	T	Package
CHR-11	20.2	16.2	5.0	17.2	13.4	4.8	4.8	1.0~2.5	1000

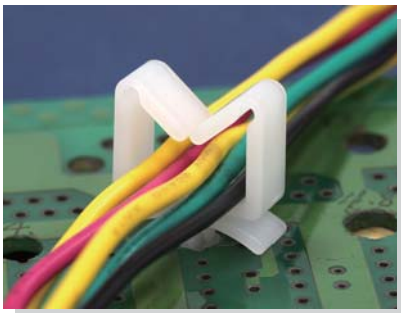


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

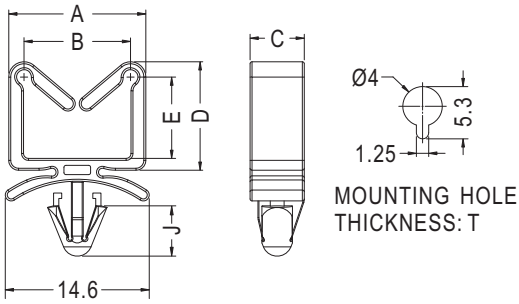

Part No.	A	B	C	D	E	J	T	Package
CHA-10	13.9	10.8	5.5	11.0	8.25	5.1	1.6	1000

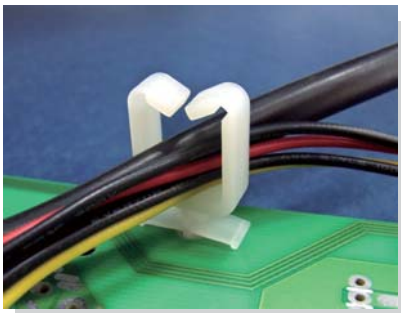


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

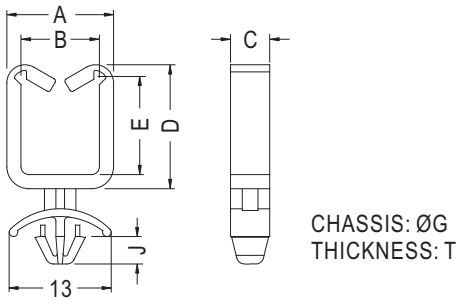

Part No.	A	B	C	D	E	G	J	T	Package
CHX-1	13.6	10.0	5.0	15.8	12.4	5.0	3.5	0.8~1.6	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

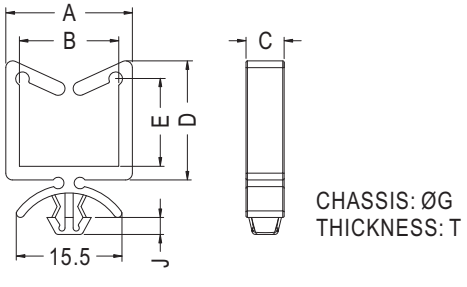


Part No.	A	B	C	D	E	G	J	T	Package
CHPA-1	18.6	14.6	5.6	17.5	12.87	5.0	2.5	2.4~3.0	1000

電線固定座 WIRE SADDLE


用途：固定電線於PC板或機板上，維修方便，不佔空間。

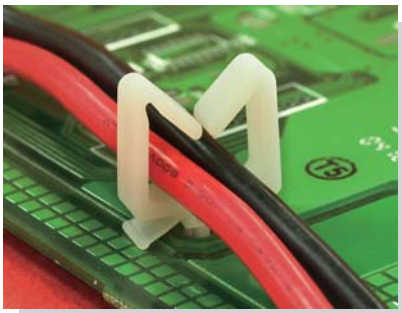


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	G	J	T	Package
CHPB-1	16.0	12.8	5.1	14.0	10.5	3.4~3.5	3.5	2.5	1000

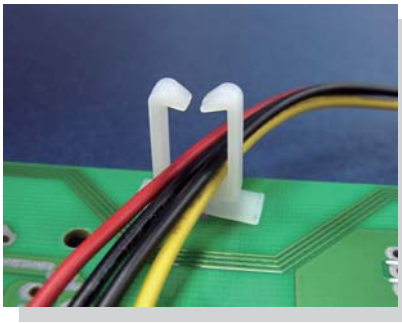


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	E	G	J	T	Package
CHAD-1	9.7	7.1	4.7	13.2	9.5	4.8	6.0	0.8~1.6	1000

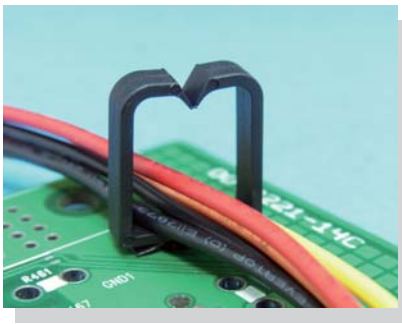


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	F	G	J	T	Package
MWS-34	14.6	12.0	4.0	16.8	14.0	4.0	2.4	0.8~2.0	500

電線固定座 WIRE SADDLE

用途：可快速固定電線，安裝容易。可板上拆卸。

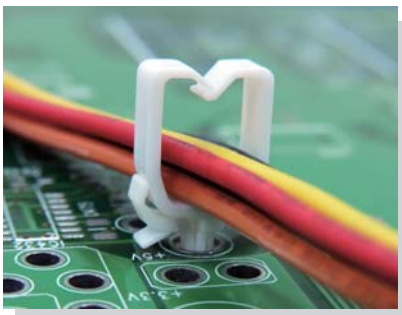

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	F	G	T	Package
MWSB-1	9.4	7.4	4.04	9.37	3.5	0.6~1.6	2000

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

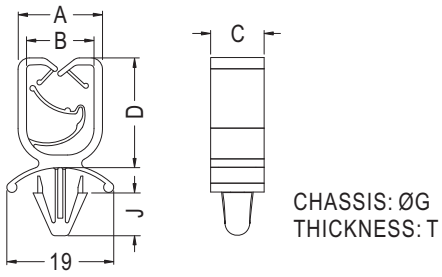


Part No.	A	B	C	D	G	J	T	Package
MWCA-1	15.0	12.0	9.5	19.5	6.3~7.0	7.6	0.6~3.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



◆CH-10,CH19

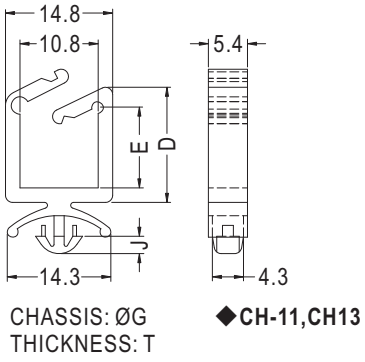


◆CH-11,CH13

Part No.	A	B	C	D	E	G	J	T	Package
CH-10	14.8	10.8	5.4	15.9	11.2	4.8~5.0	5.2	0.5~2.0	500
CH-11	14.8	10.8	5.4	15.9	11.1	4.8	2.4	0.8~1.6	
CH-13	14.8	10.8	5.4	20.6	15.8	4.8	2.4	0.8~1.6	
CH-19	14.8	10.8	5.4	25.2	20.5	4.8~5.0	5.2	0.5~2.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

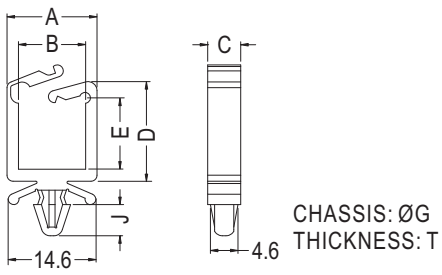


Part No.	A	B	C	D	E	G	J	T	Package
CH-14	15.0	11.2	5.5	16.6	11.9	4.8	5.2	0.8~1.8	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

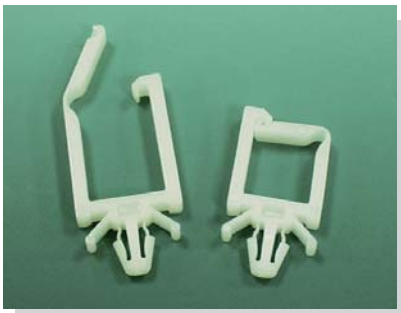


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
CHF-1	16.4	12.0	4.6	21.5	17.4	4.8	5.1	0.5~2.0	500
CHF-2	14.4	10.4	4.6	16.5	12.4				
CHF-3	18.4	14.0	5.0	24.0	20.0				

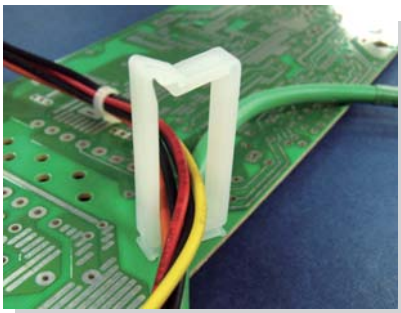

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	E	G	J	T	Package
CH-15	15.2	11.2	5.6	33.0	27.0	4.8	5.0	0.5~2.3	500
CH-15L								1.5~3.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

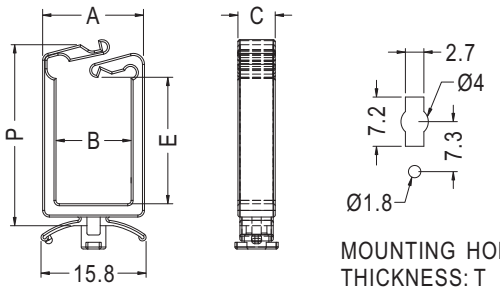


MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	E	P	T	Package
CHZC-1	15.3	11.3	5.6	4.8	13.0	0.8~1.6	500
CHZC-2				9.8	18.8		
CHZC-3				19.0	27.2		
CHZC-4				26.8	35.1		

用途：固定電線於PC板或機板上，維修方便，不佔空間。

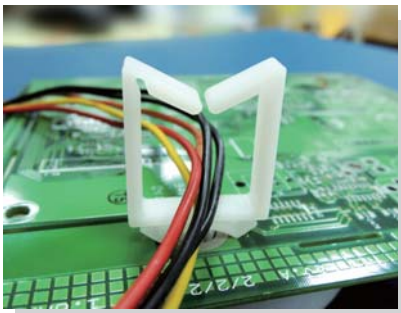


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	F	G	J	T	Package
CHAH-1	23.6	19.05	5.6	18.2	12.7	4.75	5.3	1.2	500
CHAH-2	23.6	19.05	5.6	27.1	21.6	4.75	5.3	1.2	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

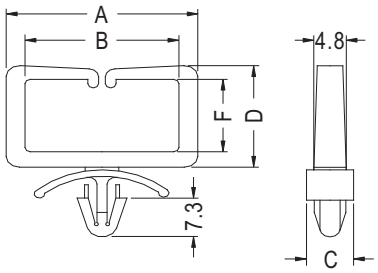

Part No.	A	B	C	D	F	G	T	Package
CHE-1	28.5	22.9	7.0	19.2	13.6	4.8~5.0	0.8~4.0	500
CHE-2	42.0	36.0	7.0	66.0	60.3	4.8~5.0	0.8~4.0	100

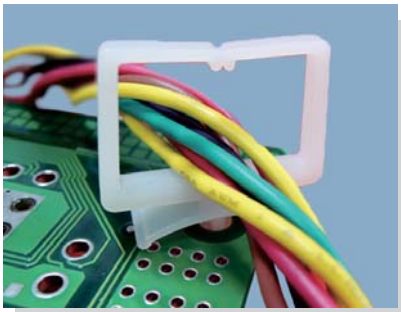


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	F	G	T	Package
CHE-3	25.0	21.0	6.8	17.4	13.6	4.8~5.0	0.8~2.5	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

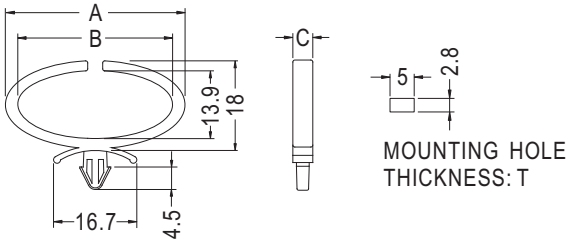


Part No.	A	B	C	T	Package
WUCD-36	36.0	31.0	4.0	0.8~2.0	1000

用途：固定電線於PC板或機板上，維修方便，不佔空間。

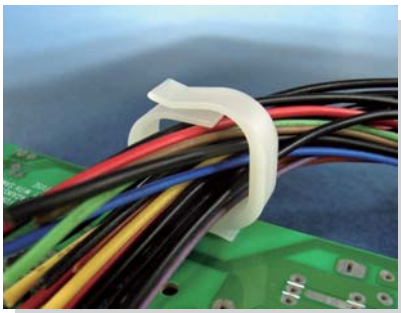


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

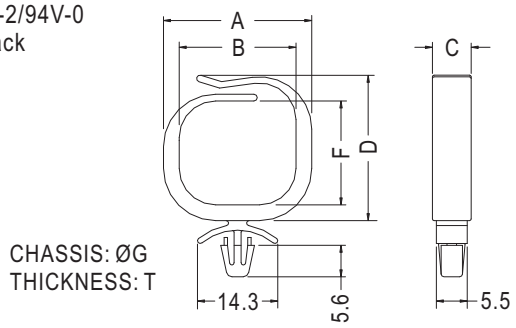

Part No.	A	B	C	D	F	G	T	Package
CHD-18	26.4	20.8	6.9	25.9	18.5	4.8~5.0	0.8~2.0	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

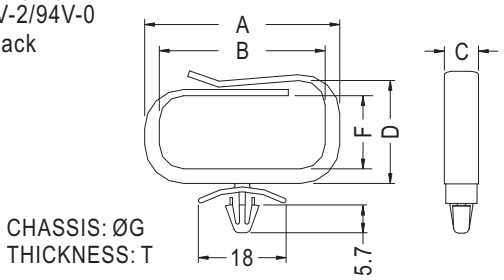

Part No.	A	B	C	D	F	G	T	Package
CHD15-34	40.0	34.0	7.0	21.12	15.0	4.8	0.8~2.0	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

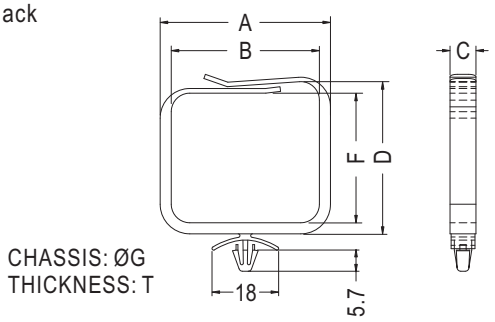

Part No.	A	B	C	D	F	G	T	Package
CHD35-40	46.0	40.0	7.0	41.12	35.0	4.8	0.8~2.0	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

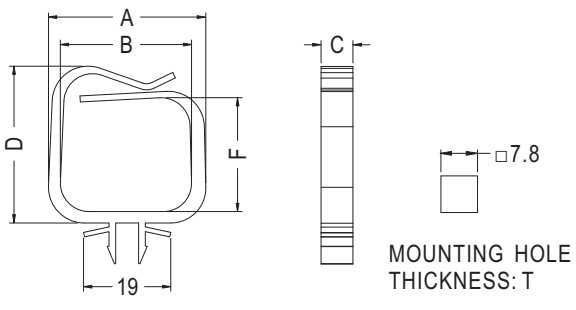


Part No.	A	B	C	D	F	T	Package
CHD-19	34.3	28.6	6.95	34.2	24.8	0.8~2.0	250

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

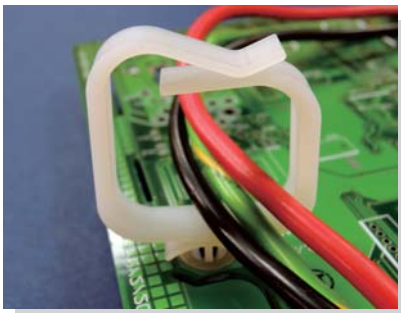


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

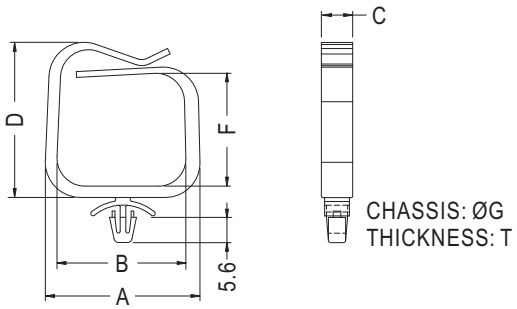


Part No.	A	B	C	D	F	G	T	Package
CHD-20	34.3	28.6	6.95	34.4	25.0	4.8	0.8~2.0	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

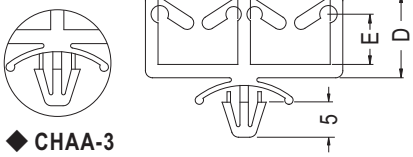

Part No.	A	C	D	E	G	T	Package
CHAA-1	28.2	5.3	12.0	7.2	4.8~5.0	1.2~2.1	1000
CHAA-3					4.8		

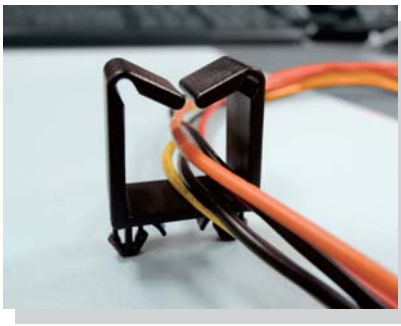


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

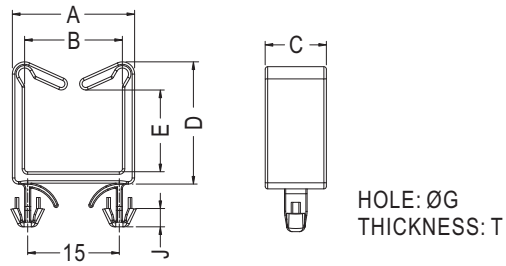


Part No.	A	B	C	D	E	G	J	T	Package
CHAF-3	20.0	16.0	10.0	20.0	13.4	4.0	3.0	0.8~2.5	1000

電線固定座 WIRE SADDLE

用途：快速拆卸，固定電線維修方便，不佔空間。

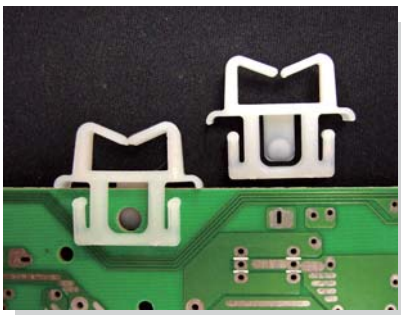


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

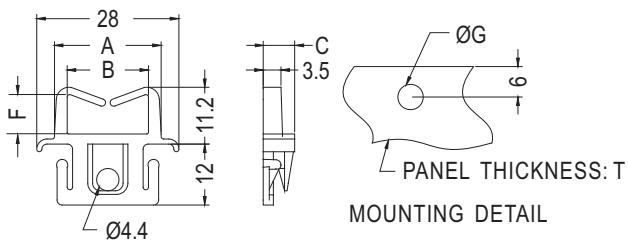


Part No.	A	B	C	F	G	T	Package
EDGE-1	21.0	16.0	6.2	7.75	5.0	1.0~2.0	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

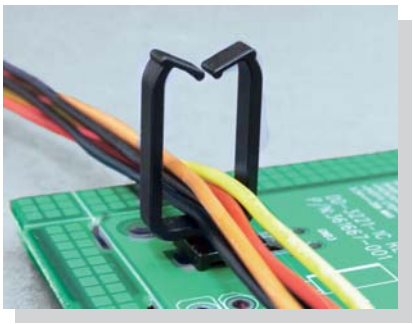


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

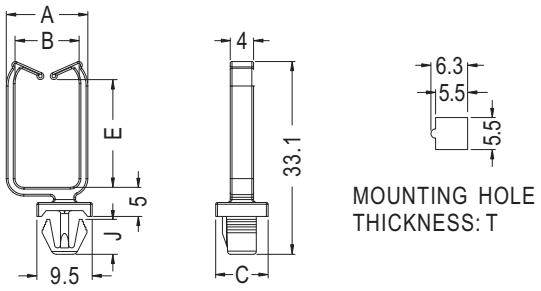


Part No.	A	B	C	E	J	T	Package
WSSA-1	14.0	11.0	9.0	18.5	6.0	0.8~2.0	500

電線固定座 WIRE SADDLE

用途：用於固定電線。

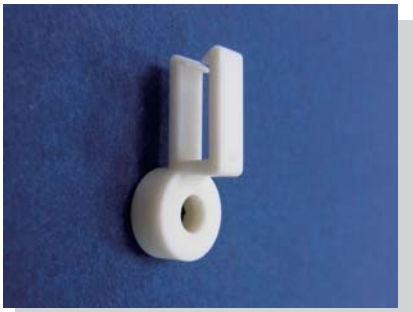

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

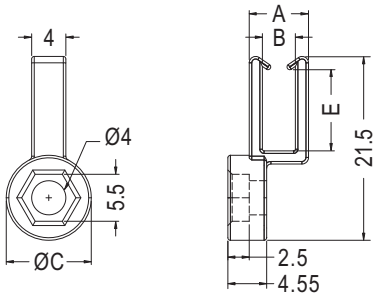


Part No.	A	B	C	E	Package
THP-1	6.95	3.85	9.95	9.5	500

電線固定座 WIRE SADDLE

用途：將電線固定於LCD-TV上，電線不易磨損，配線整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

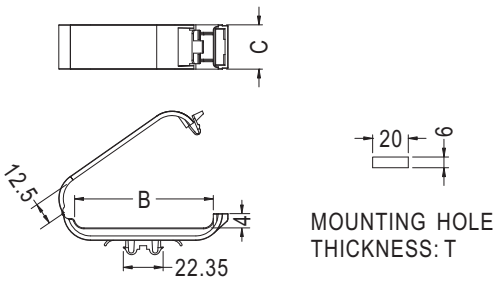

Part No.	B	C	T	Package
CMKB-1	77.9	24.9	1.0~2.5	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

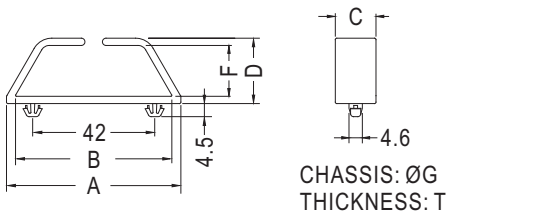


Part No.	A	B	C	D	F	G	T	Package
CHT-42	60.0	53.8	14.0	22.5	17.5	4.8	1.5	100

電線固定座 WIRE SADDLE


用途：將電線固定於LCD-TV上，電線不易磨損，配線整齊美觀。



- Material: PP (UL)
- Flame Class: 94HB
- Color: Computer/Black
- Unit: mm



MOUNTING HOLES




Part No.	A	B	C	F	Package
CHV-59	64.0	58.4	15.0	27.4	100


Part No.	A	B	C	F	Package
CHV-59K	64.0	58.4	15.0	27.4	100

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

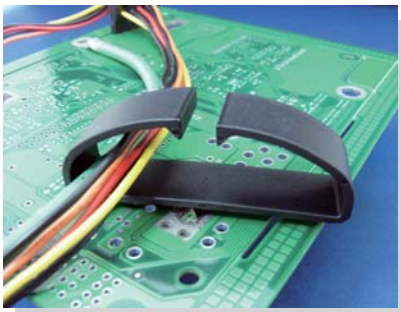

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

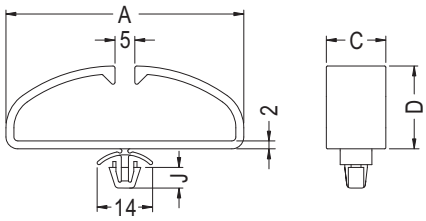

CHASSIS: ØG
THICKNESS: T


Part No.	A	C	D	G	J	T	Package
CHAU-1	60.0	15.0	20.9	6.0	5.2	0.8~2.5	500


電線固定座 WIRE SADDLE

用途：可將電線固定於LCD-TV上，電線不易磨損，配線整齊美觀。



- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm






CHASSIS: ØG
THICKNESS: T

Part No.	A	D	G	T	Package
WUCD-100	100.0	34.0	4.0	2.8	100


Part No.	A	D	Package
WUCDF-100	100.0	34.0	100


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

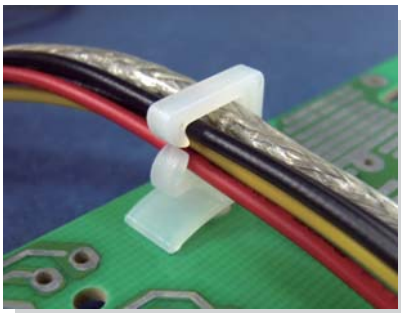


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
WAS-1	11.3	7.2	5.65	8.0	4.8	4.8	5.8	0.8~2.0	1000

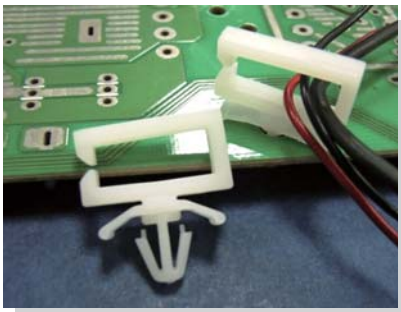


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	J	T	Package
WSS-2	14.0	10.2	5.3	11.2	5.6	4.8	5.1	0.8~2.0	1000
WSS-2L	17.0	13.2							

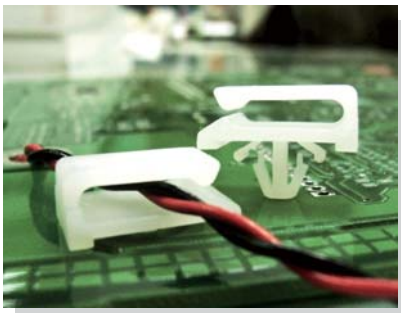


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	J	T	Package
MIS-2	14.5	10.2	9.5	5.9	2.5	3.0	2.8	0.6~1.8	1000
MIS-9		10.15				4.0	3.15	1.6	

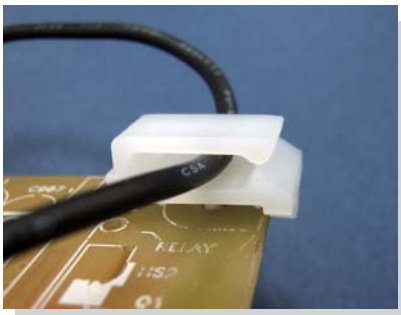

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLES: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	T	Package
MIS-11	14.5	10.2	9.5	5.8	2.5	3.0	0.6~1.8	2000
MIS-11L							1.0~2.2	

用途：固定電線於PC板或機板上，維修方便，不佔空間。

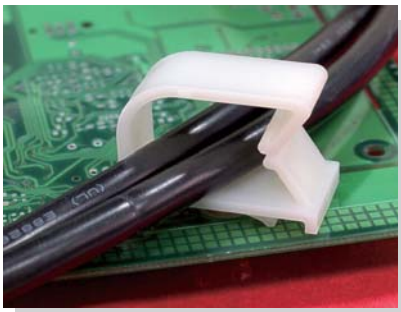


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

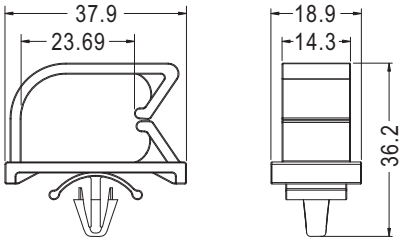


P.C.B Ø6.4
THICKNESS 1.9

Part No.	Package
MIS-20	500

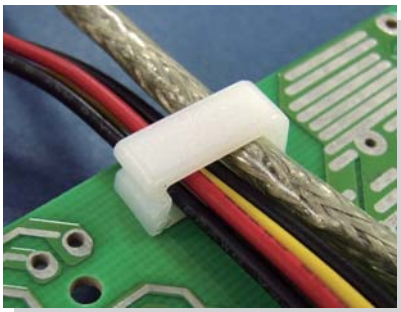


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

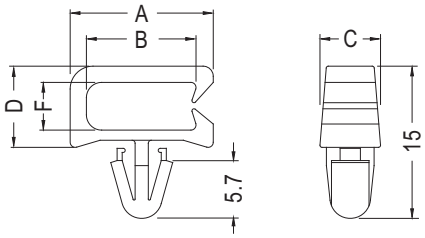


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	T	Package
MIS-3	14.1	10.8	6.0	8.0	4.7	4.8	0.8~1.6	2000

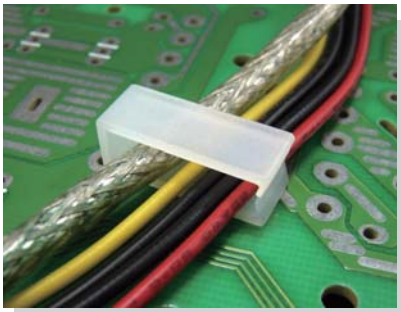

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

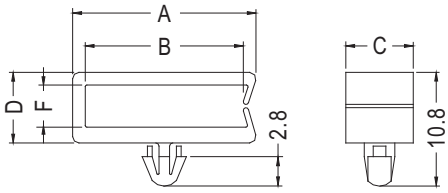


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	T	Package
MIS-5	17.4	15.0	6.4	6.7	4.0	3.0	1.0	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

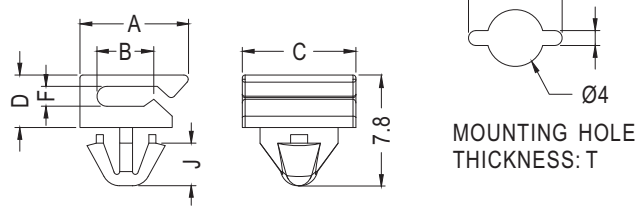

MOUNTING HOLE
THICKNESS: T


Part No.	A	B	C	D	F	J	T	Package
MIS-14	7.6	4.0	8.0	3.7	1.4	3.0	0.8	2000


隔離束線座 HARNESS CLIP STANDOFF


用途：固定電線於PC板或機板上，
維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










MOUNTING HOLES
THICKNESS: T


Part No.	A	B	C	D	F	H	J	L	T	Package
MIS-7	20.8	13.6	12.0	12.5	8.2	16.9	3.2	10.0	0.6~0.8	1000
MIS-8	16.8	10.5	12.0	10.3	6.5	14.3	3.2	7.0	0.8~1.0	
MIS-8M	16.8	10.5	12.0	10.3	6.5	14.8	3.2	7.0	1.2	
MIS-8L	16.8	10.5	12.0	10.3	6.5	15.2	3.2	7.0	1.6	

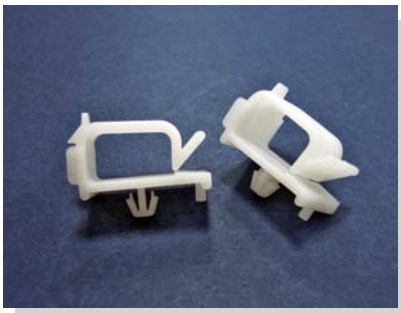

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










MOUNTING HOLES
THICKNESS: 0.6~1.0


Part No.	Package
MIS-10	1000

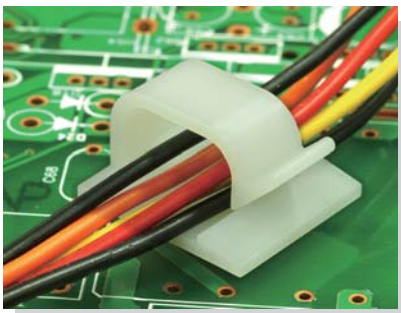

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










MOUNTING HOLES
THICKNESS: 1.0

Part No.	Package
MIS-17	1000








MOUNTING HOLES
THICKNESS: 1.0


Part No.	Package
MIS-21	1000

隔離束線座 HARNESS CLIP STANDOFF


用途：固定電線於PC板或機板上，維修方便，不佔空間。

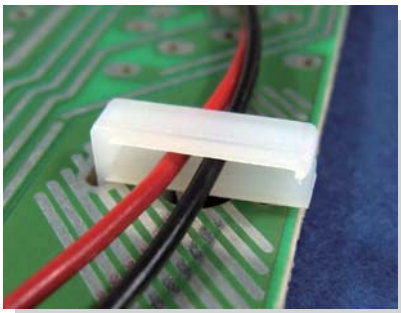


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

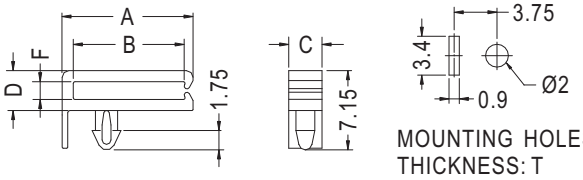


Part No.	A	B	C	D	F	T	Package
MIS-4	11.8	10.0	3.0	3.6	1.6	1.6	1000
★MIS-23	14.8	12.48	3.0	4.3	2.3	1.6	

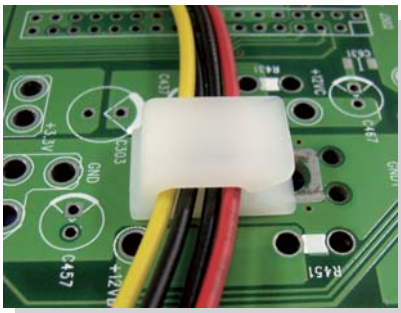


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

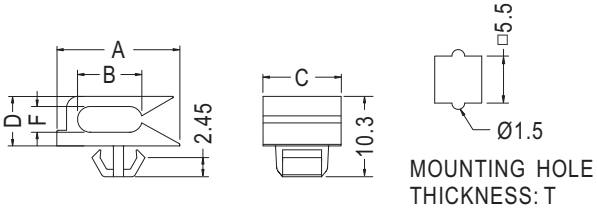

Part No.	A	B	C	D	F	T	Package
MIS-6	15.75	8.3	10.0	6.35	3.3	1.0	1000

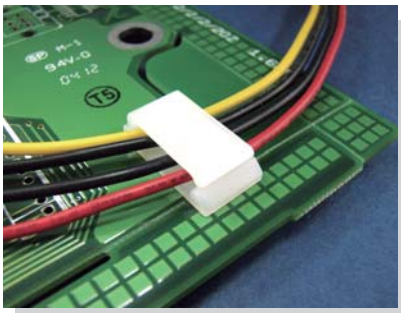

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

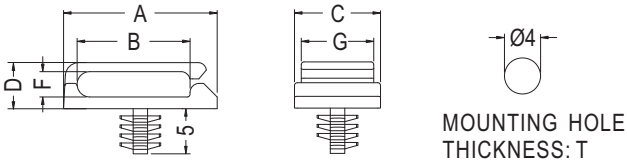


Part No.	A	B	C	D	F	G	T	Package
MISB-1	17.0	12.5	9.5	5.1	2.8	8.0	4.0	1000
★MISB-2	12.7	8.3	9.5	5.1	2.8	6.4	4.0	

電線固定座 WIRE SADDLE

用途：快速拆卸，固定電線維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

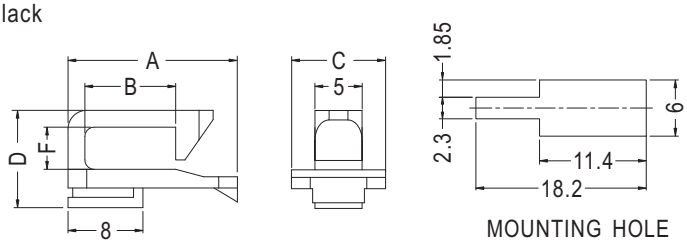


Part No.	A	B	C	D	F	T	Package
MISA-1	18.1	9.7	10.0	10.4	4.5	0.8	1000

電線固定座 WIRE SADDLE


用途：快速拆卸，固定電線維修方便，不佔空間。

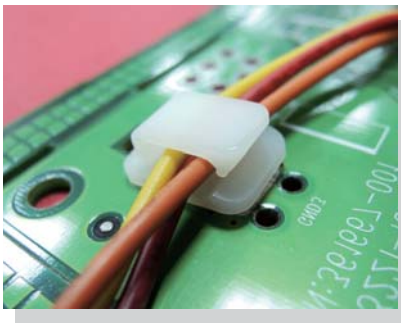


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

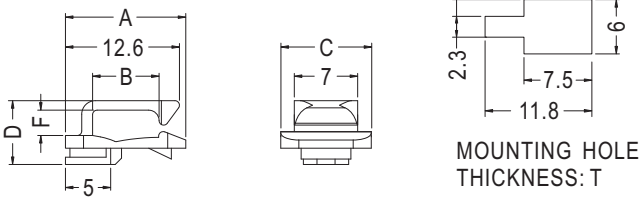

Part No.	A	B	C	D	F	T	Package
MISA-2	13.3	7.35	10.0	7.05	2.8	0.9	1000

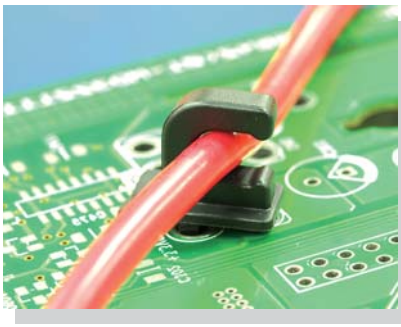

- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

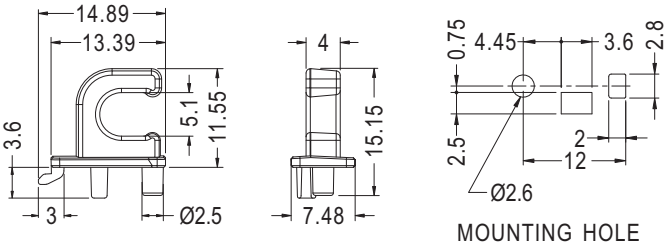


Part No.	Package
MISE-1	1000

隔離束線座 WIRE SADDLE SIDE ENTRY


用途：可快速固定電線，安裝容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

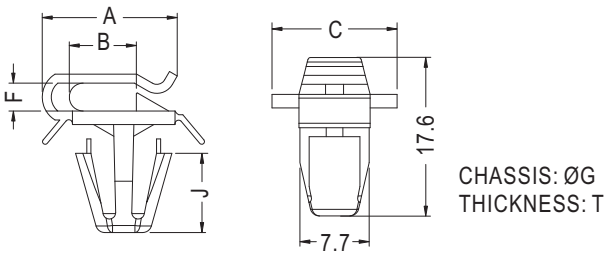

Part No.	A	B	C	F	G	J	T	Package
FCCA-1	15.0	7.45	13.9	3.1	8.0	8.8	1.0~2.8	1000

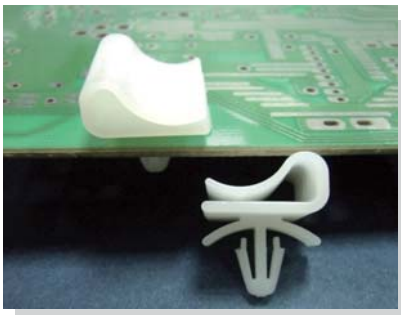


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

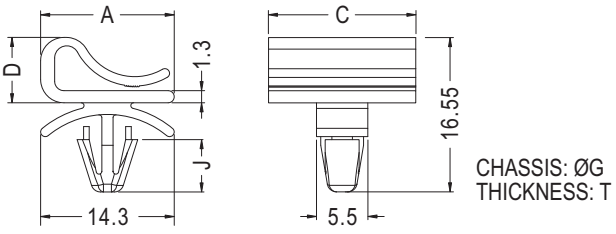


Part No.	A	C	D	G	J	T	Package
FCCB-1	14.3	15.8	7.0	4.8	5.6	0.6~2.0	1000

電線固定座 WIRE SADDLE

用途：可快速固定電線，安裝容易。

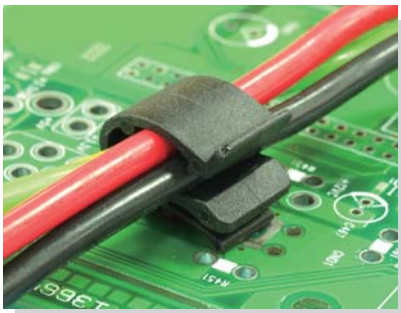


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

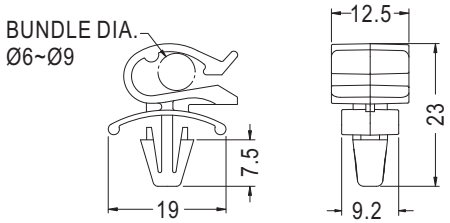


MOUNTING HOLE Ø6.3~Ø6.5
THICKNESS 1.0~3.0

Part No.	Package
FCCD-1	1000

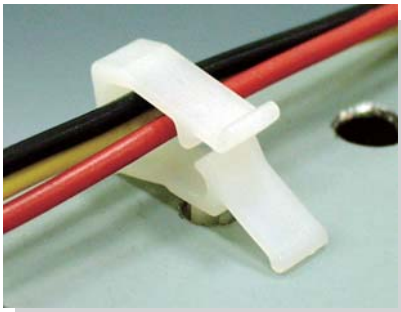

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

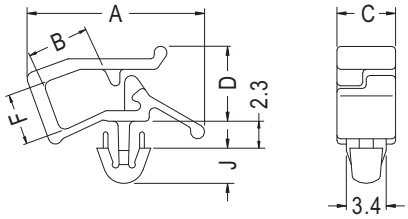


CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	J	T	Package
WPEM-1	20.3	7.2	5.0	8.5	6.2	3.5	3.0	0.5~1.6	1000
WPEM-1S	15.2	5.3	5.0	6.4	4.3				
WPEM-2	13.5	4.1	5.0	5.0	2.6				

排線固定座 FLAT CABLE CLAMP

用途：用於電子，電腦內部電線固定，裝配容易，美觀不脫落，固定力強。

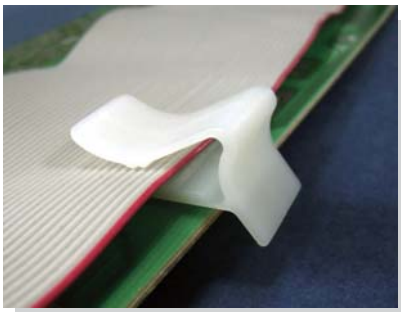

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

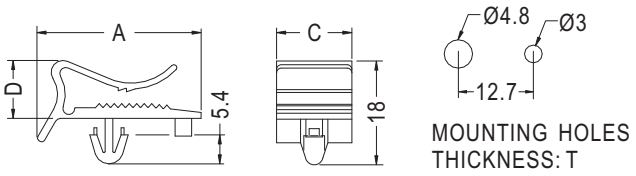


MOUNTING HOLES
THICKNESS: T

Part No.	A	C	D	T	Package
FCCT-12	28.0	12.7	9.8	0.8~2.5	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

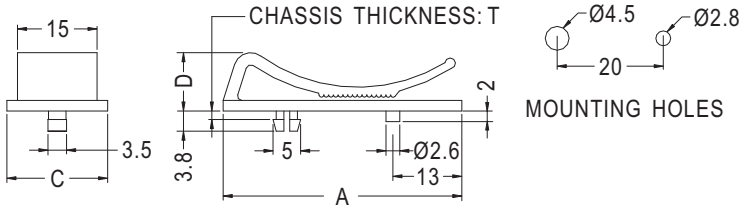


MOUNTING HOLES


Part No.	A	C	D	T	Package
FCG-15	45.0	19.0	11.0	1.2	1000


排線固定座 FLAT CABLE CLAMP

用途：用於電子，電腦內部電線固定，裝配容易，美觀不脫落，固定力強。

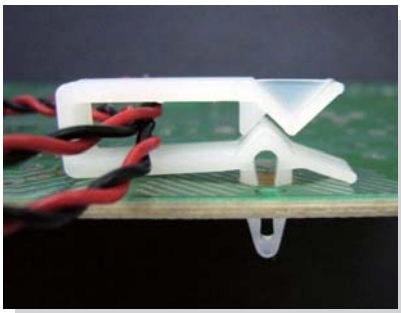

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm





CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	M	T	Package
WPEG-1	20.9	10.0	6.2	8.0	4.8	4.8	13.4	2.0	1000
WPEG-2	24.2	13.2					16.8		
WPEG-3	17.5	6.6					10.8		


電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







CHASSIS: ØG
THICKNESS: T

Part No.	A	C	D	G	T	Package
FCPT-1	17.1	12.7	6.4	3.0	1.6	1000

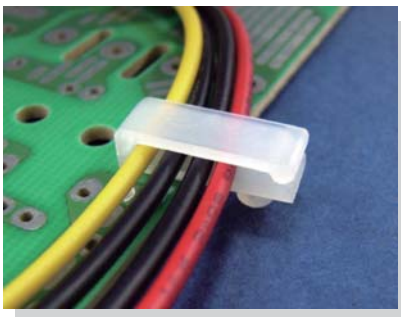


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	F	G	T	Package
MWS-4	14.0	11.0	5.0	4.2	1.9	3.0	0.8~1.0	2000

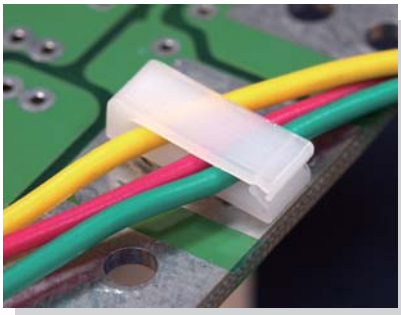

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	T	Package
MIS-18	14.0	11.9	5.0	4.3	2.1	3.0	0.8~1.0	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

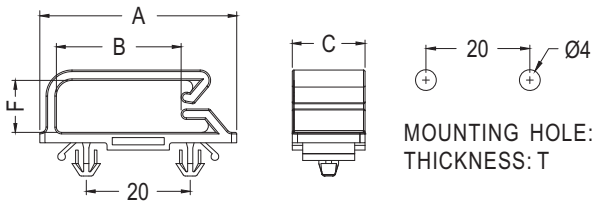

Part No.	A	B	C	F	G	T	Package
MIBA-1	37.9	24.0	14.0	18.7	4.0	0.8~2.0	500
MIBA-2	37.9	24.0	14.0	10.0	4.0	0.8~2.0	




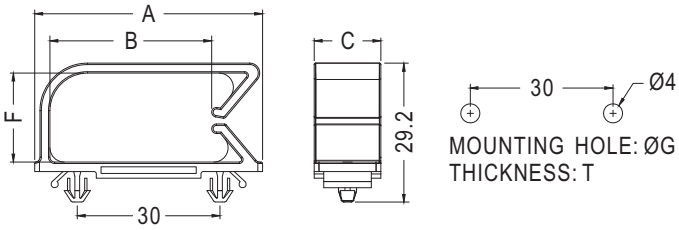


Part No.	A	B	C	F	G	T	Package
MIBA-3	47.9	34.0	14.0	18.7	4.0	0.8~2.0	500

電線固定扣 CABLE CLAMP

用途：可快速固定電線，安裝容易。

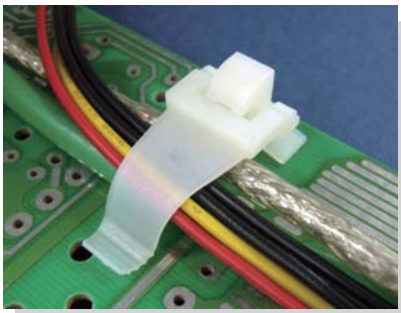

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

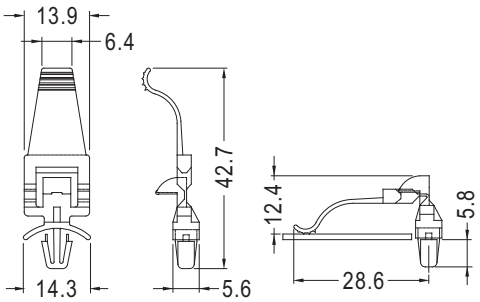


Part No.	Package
HFCC-12	1000

電線固定座 WIRE SADDLE

用途：固定電線於木板或機殼上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	G	J	Package
WSBC-1	10.0	5.0	3.0	9.5	1000

風扇束線座 FAN CABLE TIE MOUNT

用途：風扇電線之固定，整齊美觀。

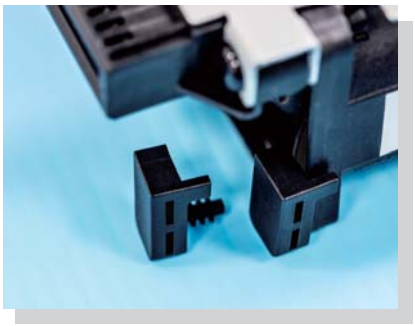

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




HOLE IN P.C.B: Ø3.5

NEW

Part No.	Package
WKM-2	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.4

Part No.	Package
WKM-10	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.3
CHASSIS THICKNESS 4.0


Part No.	Package
WKA-1	1000

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

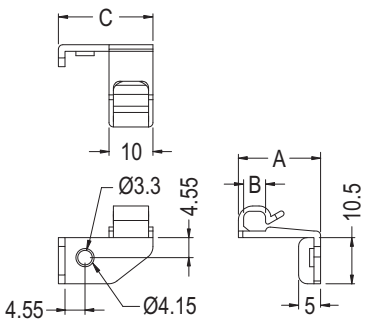



Part No.	A	B	C	Package
MISA-4	18.7	5.0	21.5	1000


用途：固定電線於PC板機板上，
維修方便，不佔空間。

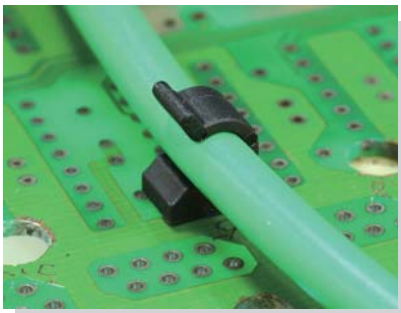

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS: T

Part No.	B	C	T	Package
CHQ-4.5	4.4	5.0	0.8~1.6	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS: T


Part No.	B	C	D	T	Package
CHQ-4	4.0	5.0	5.3	1.0~1.6	1000
CHQ-4L	4.0	5.0	5.5	1.0~1.6	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










MOUNTING HOLE
THICKNESS: T

Part No.	B	C	T	Package
CH-9	8.0	8.0	0.8~1.6	1000

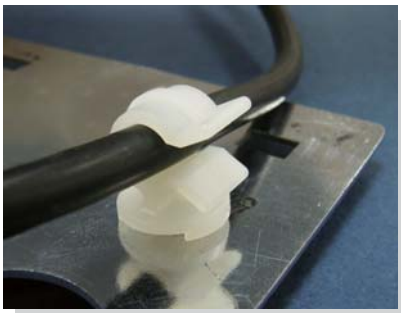

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE
THICKNESS: T


Part No.	B	C	T	Package
CH-12	7.8	14.8	0.8~1.2	1000


隔離束線座 HARNESS CLIP STANDOFF


用途：固定電線於機板上，維修方便，不佔空間。

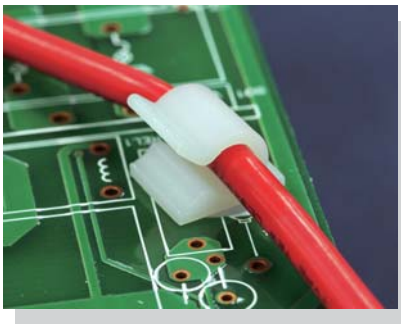

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










MOUNTING HOLE
THICKNESS: T


Part No.	B	C	T	Package
CHQC-1	5.5	10.0	2.0	1000
CHQC-1L	5.5	10.0	0.7~2.0	

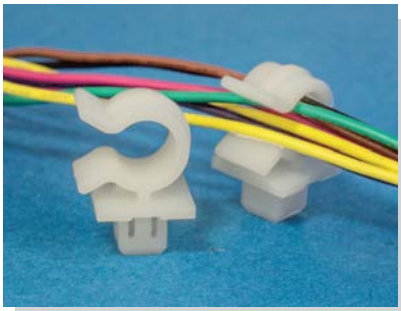

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS 1.8


Part No.	Package
CHQF-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








MOUNTING HOLE
THICKNESS 2.5


Part No.	Package
CHQE-1	1000


電線固定座 WIRE SADDLE

用途：用於Ø3.5板孔，可快速固定及解開電線。

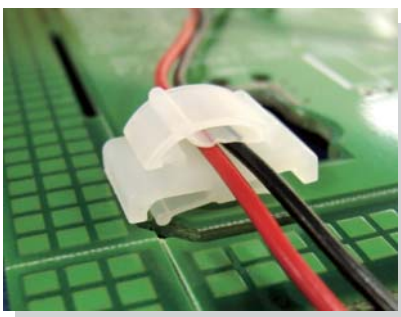

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	G	H	J	T	Package
WLO-1	13.5	6.2	8.0	8.2	3.5	14.0	3.1	0.8~2.0	1000
WLO-1-2.5	13.5	6.2	8.0	8.6	3.5	14.6	3.1	0.8~2.5	
WLO-2	16.2	10.3	8.0	12.0	3.5	17.6	3.1	0.8~2.0	
WLO-2-2.5	16.2	10.3	8.0	12.0	3.5	18.0	3.1	0.8~2.5	

用途：固定電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

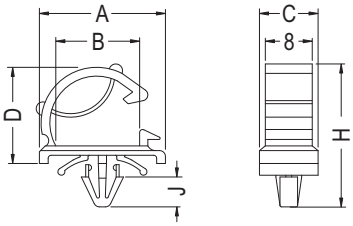


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	G	H	J	T	Package
WLO-3	21.5	14.3	10.0	16.4	4.8	24.6	5.1	0.8~2.5	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
EMF-6	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	C	G	T	Package
CCMI-1	20.0	6.2~6.7	0.5~2.0	1000

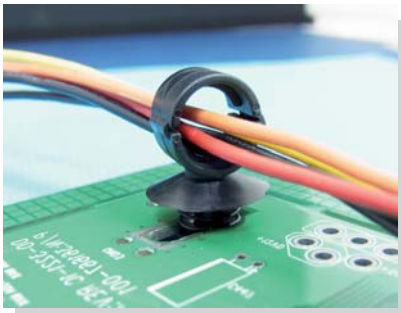

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

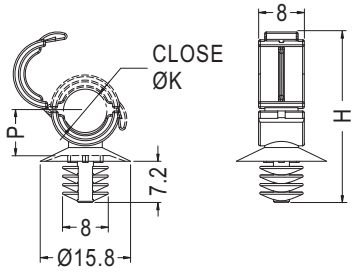


MOUNTING HOLE: ØG
THICKNESS: T


Part No.	G	H	K	P	T	Package
CCMK-1	6.5~7.0	24.4	5.5	6.3	0.8~9.0	1000
CCMK-2		29.8	8.0	7.7		

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

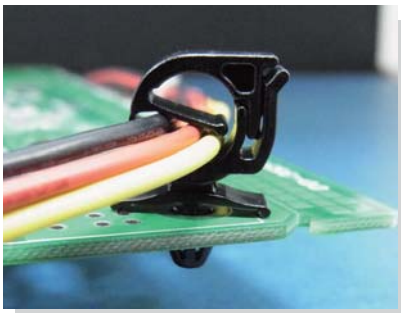


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	G	H	K	T	Package
CHN-7.6	4.0	26.7	7.6	0.8~1.6	500
CHN-10	4.0	31.0	10.0		
CHN-12	4.0	34.4	12.0		

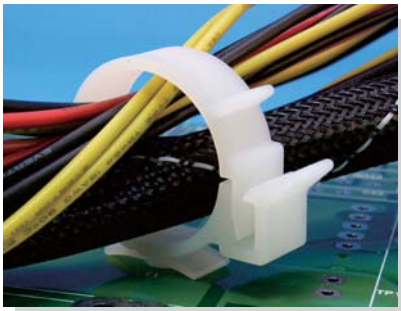


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	C	G	H	K	T	Package
FWT-25	9.5	6.5	52.8	25.0	0.8~1.6	100
FWT-30	9.5	6.5	59.7	30.0	0.8~2.0	

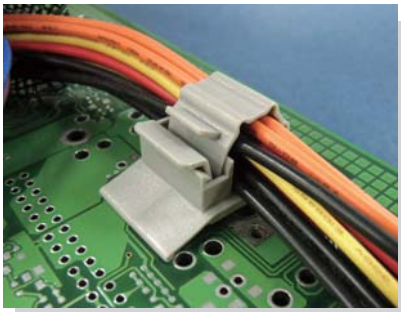

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm





CHASSIS: ØG
THICKNESS: T

Part No.	C	G	J	K	T	Package
CKS-7	15.0	6.4	4.9	7.0	0.8~2.3	200
CKS-10	17.2			10.3		
CKS-13-L	19.2			13.0	0.5~2.3	
CKS-14	19.3			14.8	0.8~2.3	
CKS-16-L	21.3			16.0	0.5~2.3	
CKS-20-L	23.2			20.0		
CKS-20-H				20.0	2.3~4.1	
★CKS-26-L	31.4		5.0	28.0	0.5~2.3	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

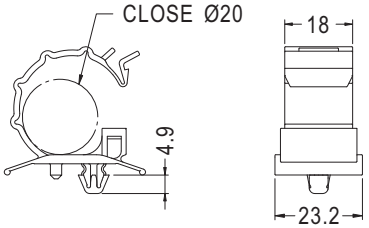



MOUNTING HOLE
THICKNESS 0.8~1.5


Part No.	Package
CKSA-20-L	200

T8 燈管固定座 T8 LAMP MOUNT

用途：可固定T8 LED燈管或電線使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	G	K	L	T	Package
AWD-1	5.5	27.8~33.8	26.0	1.0~1.2	50
AWD-2			9.0		100
AWD-3			26.0		50


電線固定座 WIRE SADDLE

用途：可固定電源線，避免不小心脫落，造成電腦停機。

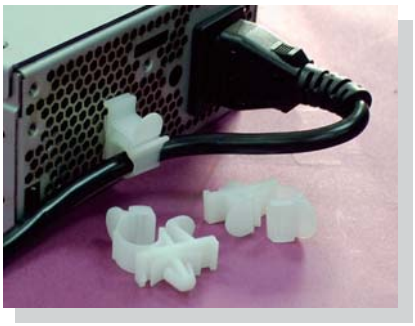


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	B	C	G	K	T	Package
AWK-10	22.0	12.2	6.5	7.0~9.5	0.8~1.6	2000




Part No.	B	C	G	K	T	Package
AWK-16	27.6	12.2	6.5	7.0~9.5	0.8~2.5	1000

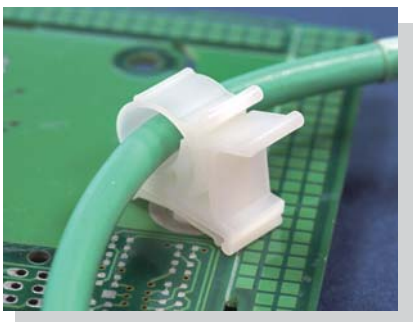

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm



◆ **AWKA-1**

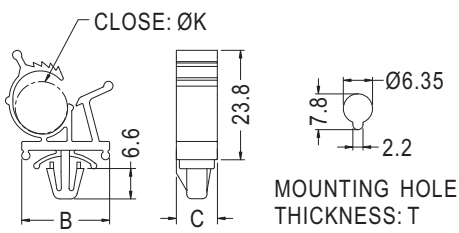


◆ **AWKA-2**


Part No.	B	C	K	T	Package
AWKA-1	19.1	8.9	7.9~10.2	0.8~1.5	500
AWKA-2					

電線固定座 WIRE SADDLE


用途：固定電線於PC板或機板上，維修方便，不佔空間。

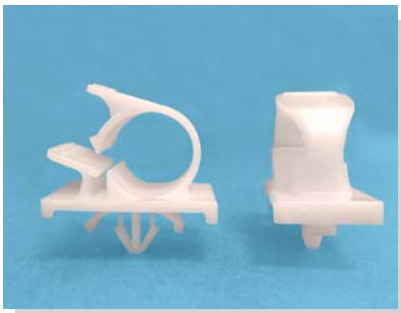


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	B	C	G	K	T	Package
FWK-5	31.8	19.3	5.0~6.0	12.7	0.6~2.7	1000

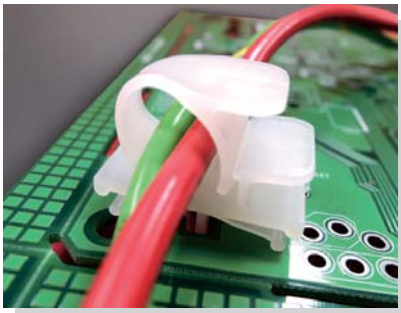


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	B	C	G	K	T	Package
FWKA-1	23.9	14.7	6.5~7.0	9.5	0.6~2.7	250

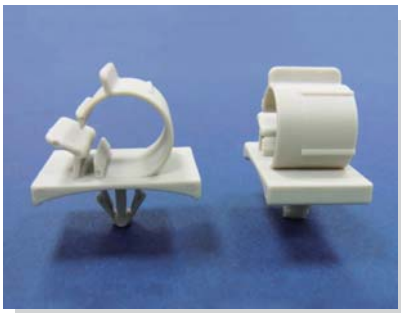


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

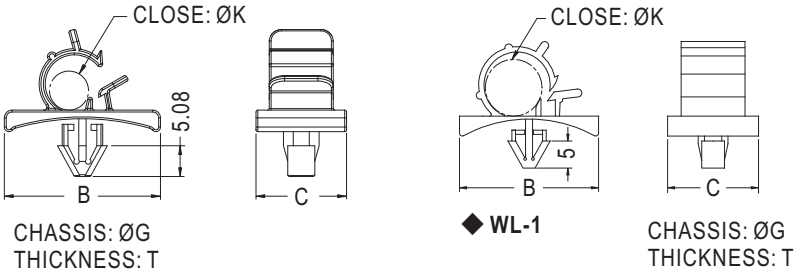

Part No.	B	C	G	K	T	Package
WL-1	25.7	16.8	6.5	10.5	0.8~1.6	500
WL-2	35.05	22.35	6.35	19.05	0.5~2.0	100
WL-3	25.4	14.73	6.35	6.35	2.3~3.8	500
WL-4	25.4	16.51	6.35	9.52	2.3~3.8	


電線固定座 POWER CORD RETENTION CLAMP


用途：可固定電源線，避免不小心脫落，造成電腦停機。

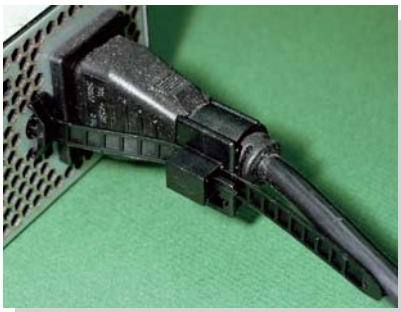

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


◆ SWPL-57

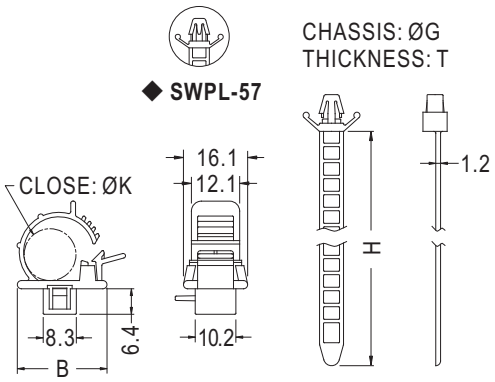

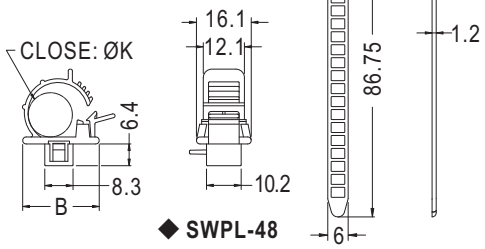


◆ SWPL-48


Part No.	B	G	H	K	T	Package
SWPL-1	22.5	4.8	86.75	11.0~13.0	0.8~2.0	100
SWPL-4				12.0~15.0		
SWPL-6		3.5		11.0~13.0		
SWPL-8	29.5	4.8		19.0~22.0		
SWPL-48	22.5	4.0		11.0~13.0		
SWPL-57		4.8		12.0~15.0	0.6~1.8	
★SWPL-74			112.50	11.0~13.0	0.8~2.0	

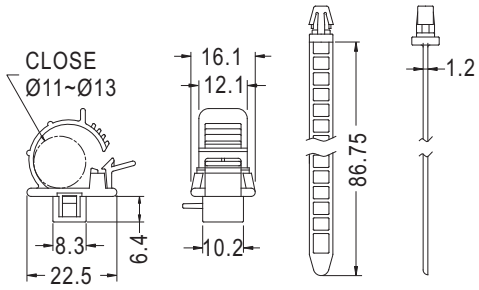


Part No.	G	T	Package
SWPL-2	4.8	2.0~3.0	100
SWPL-11	4.0	0.6~0.8	
SWPL-27	4.8	0.6~1.2	

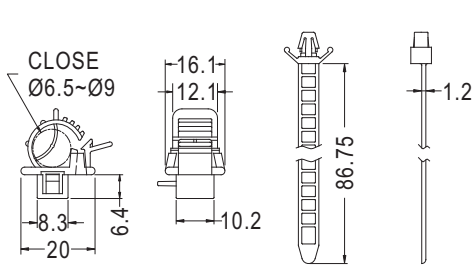

Part No.	Package
SWPL-3	100

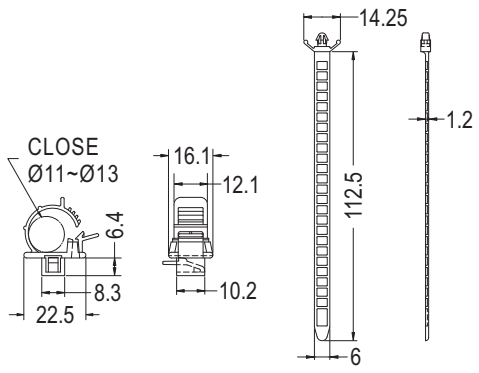


Part No.	Package
SWPL-22	100

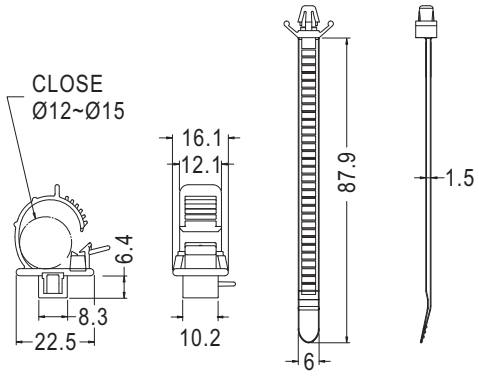


Part No.	Package
SWPL-58	100


電線固定座 POWER CORD RETENTION CLAMP

用途：可固定電源線，避免不小心脫脫落，造成電腦停機。

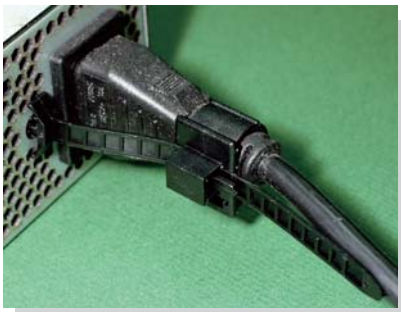


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

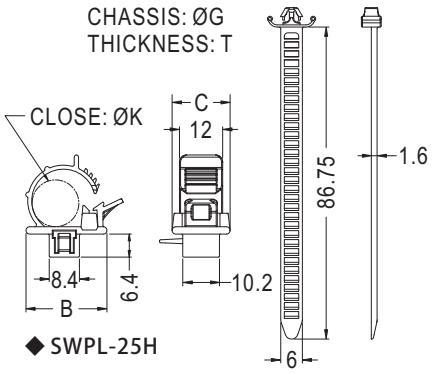


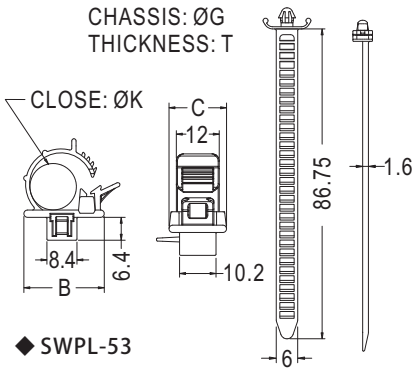


Part No.	B	C	G	K	T	Package
SWPL-25H	22.5	16.1	4.8	11.0~13.0	0.8~2.0	100
SWPL-53			3.5			

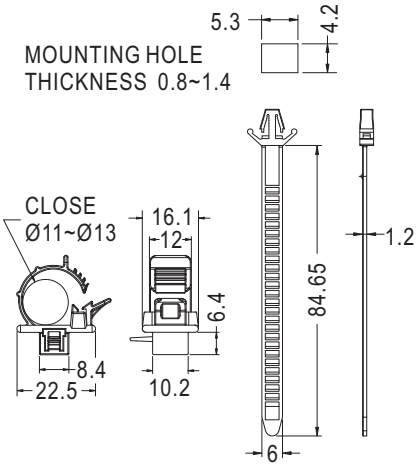


Part No.	Package
SWPL - 73	100

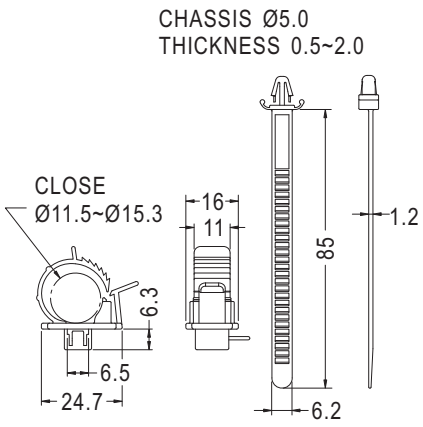


Part No.	Package
SWPL-65	100

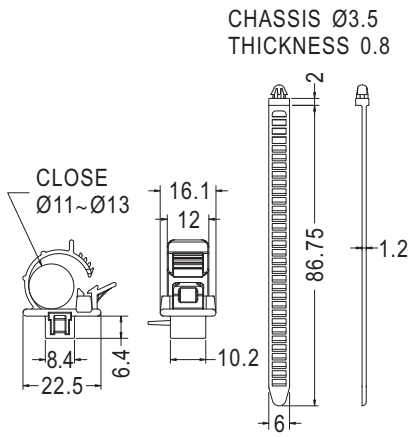

Part No.	Package
SWPL-66	100

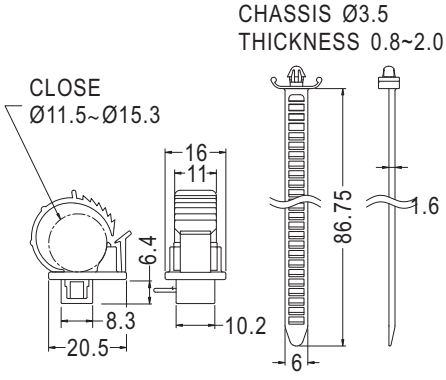

Part No.	Package
SWPL-67	100

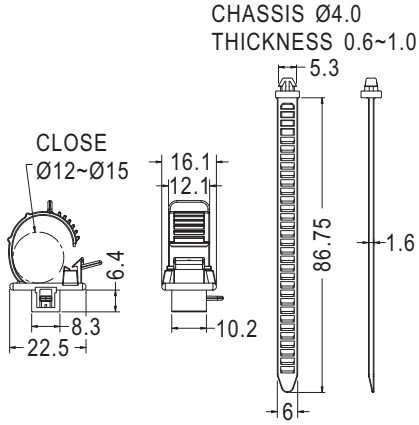

Part No.	Package
★ SWPL-88	100


電線固定座 POWER CORD RETENTION CLAMP

用途：可固定電源線，避免不小心脫落，造成電腦停機。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


MOUNTING HOLE: ØG
THICKNESS 1.8

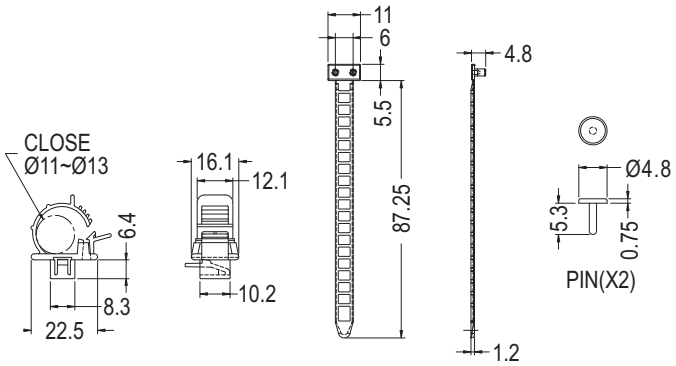


◆ 專利品 (P A T.)

Part No.	G	Package
SWPL-37-1	2.5	100
SWPL-37S-1	2.3	

MOUNTING HOLE Ø3.5
THICKNESS 2.0~2.8

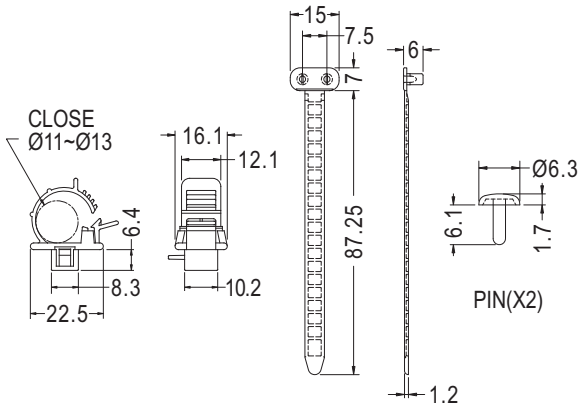


Part No.	Package
SWPL-76	100

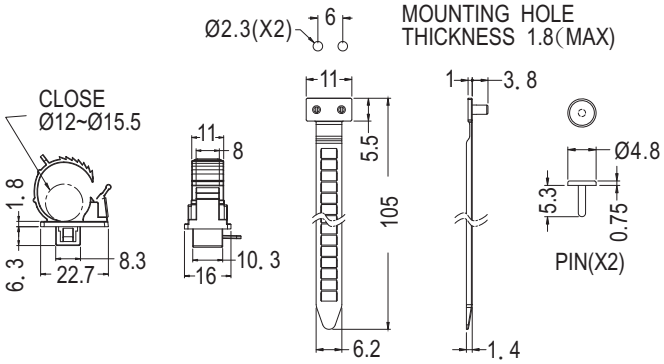


NEW

Part No.	Package
SWPL-94	100


CHASSIS Ø2.2
THICKNESS 0.8~1.0

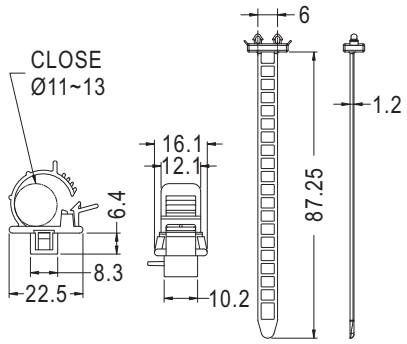

Part No.	Package
SWPL-15S	100

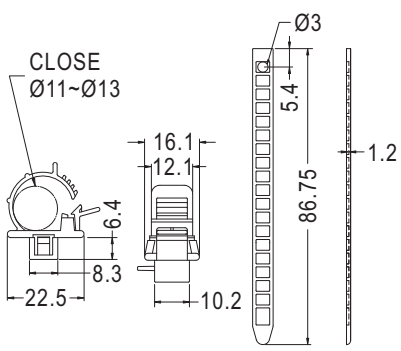

Part No.	Package
SWPL-19H	100

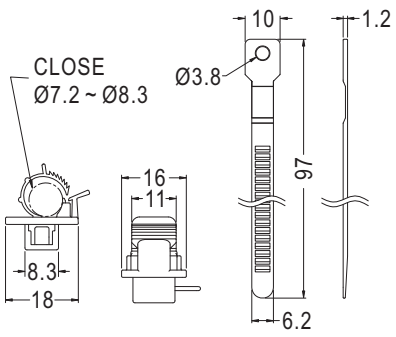

Part No.	Package
SWPL-72	100

電線固定座 POWER CORD RETENTION CLAMP


用途：可固定電源線，避免不小心脫落，造成電腦停機。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

CABLE Ø18
(DATA ONLY FOR REF.)

CHASSIS: ØG
THICKNESS: T

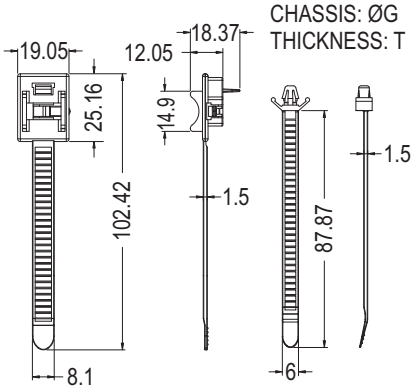


◆ 專利品 (PAT.)

Part No.	G	T	Package
SWPL-16	4.8	0.8~2.0	500

CABLE Ø16
(DATA ONLY FOR REF.)

CHASSIS: ØG
THICKNESS: T

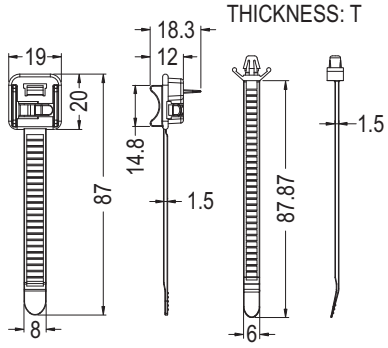


◆ 專利品 (PAT.)

Part No.	G	T	Package
SWPL-21	4.8	0.8~2.0	500

CHASSIS Ø4.8
THICKNESS 0.8~2.0


CLOSE Ø6.5~Ø8

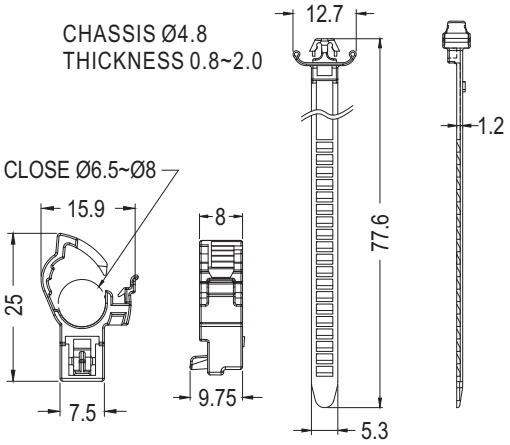

Part No.	Package
SWPL-18H	100

CHASSIS Ø4.8
THICKNESS 0.8~2.0

CLOSE Ø5~Ø10

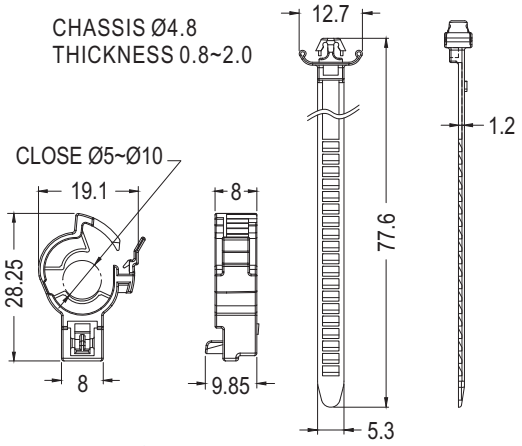


◆ 專利品 (PAT.)

Part No.	Package
SWPL-20H	100

MOUNTING HOLE
THICKNESS 1.8~2.8


CLOSE Ø6.5~Ø8

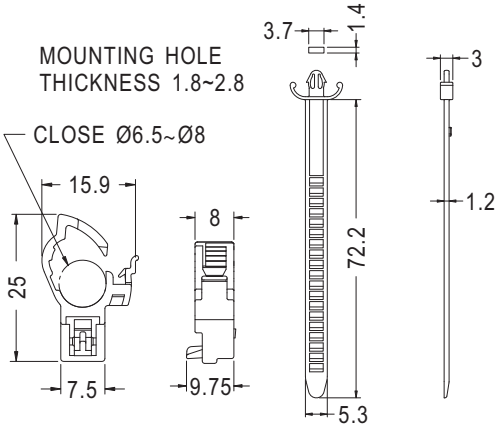

Part No.	Package
SWPL-69	100

CHASSIS: ØG
THICKNESS: T

CLOSE Ø6.5~Ø8

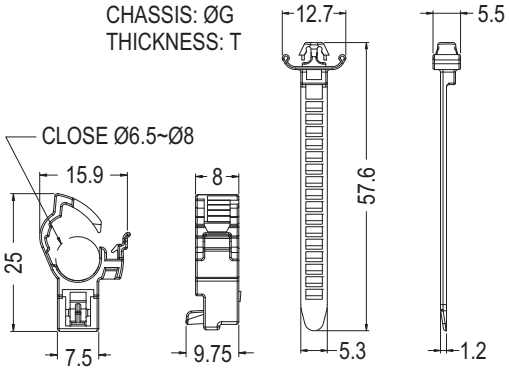

NEW

Part No.	G	T	Package
SWPL-82	4.8	0.8~2.0	500


電線固定座 POWER CORD RETENTION CLAMP

用途：可固定電源線，避免不小心脫落，造成電腦停機。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

MOUNTING HOLE
THICKNESS 0.8

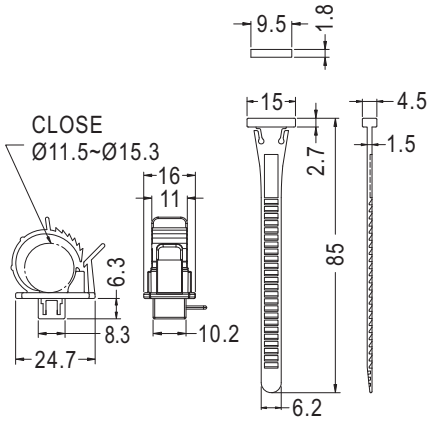


Part No.	Package
SWPL-23	100


MOUNTING HOLE
THICKNESS 0.8

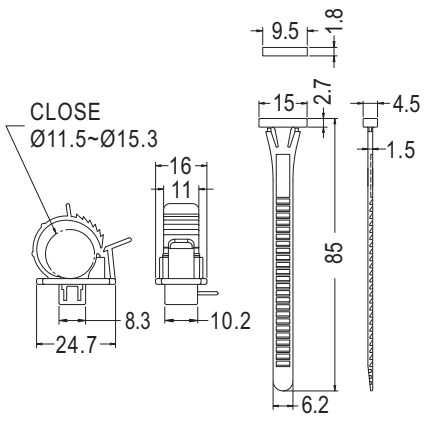


Part No.	Package
SWPL-64	100

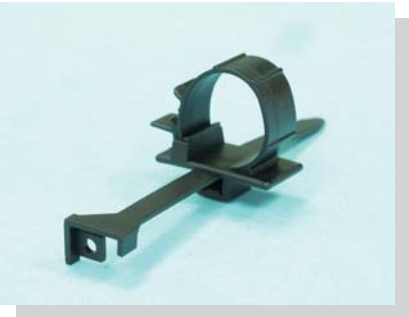

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

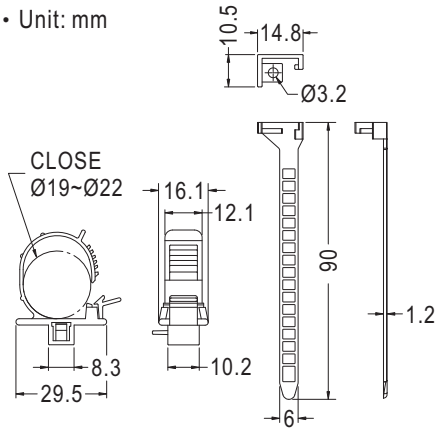

Part No.	Package
SWPL-43	100

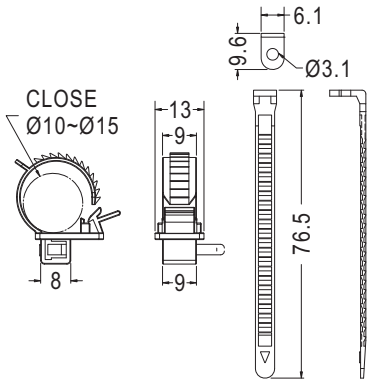


Part No.	Package
SWPL-78	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

CHASSIS Ø4.0
THICKNESS 1.0

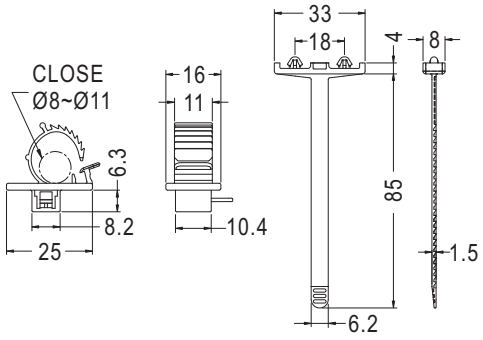


Part No.	Package
SWPL-46	100


電線固定座 POWER CORD RETENTION CLAMP

用途：可固定電源線，避免不小心脫落，造成電腦停機。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利申請中



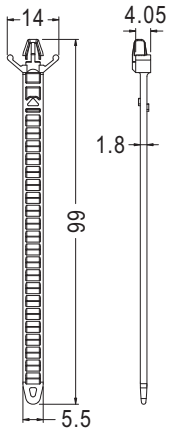


CHASSIS Ø4.0
THICKNESS 0.8~2.0


NEW

Part No.	Package
SWPL-87	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)

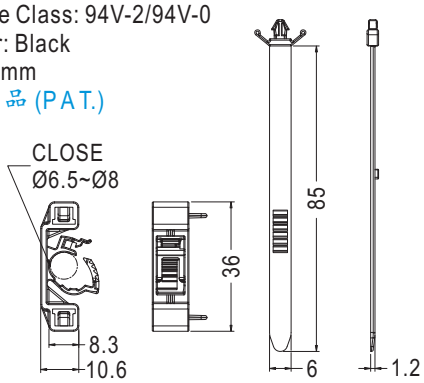




MOUNTING HOLE
THICKNESS 0.8~2.0


Part No.	Package
SWPL-50	100

電線固定座 POWER CORD RETENTION CLAMP

用途：固定電源線、USB...等，中間對接延長，避免脫落。

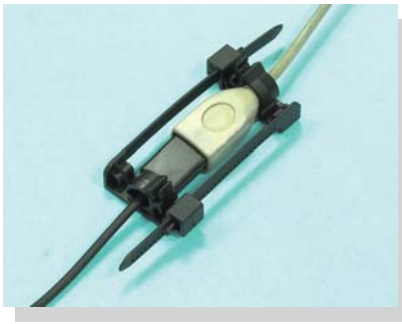

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)

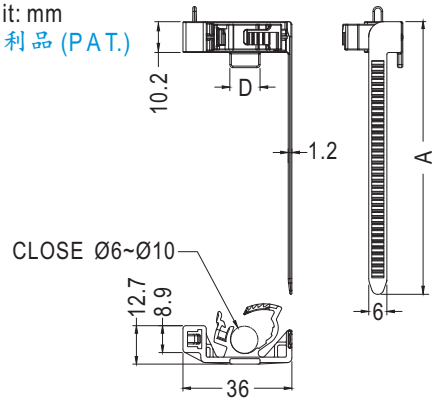


Part No.	A	D	Package
SWPL-52	90.17	10.0	100
SWPL-55	90.2		
SWPL-59	115.2	10.0	


電線插座固定座 POWER PLUG MOUNT


用途：避免電源插座脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Red/ Blue/Yellow/Green
- Unit: mm









Part No.	Package
SWKL-1	1000


Part No.	Package
SWKL-2	1000


HDMI固定座 HDMI MOUNT

用途：配合螺絲、束線帶，使用於USB、HDMI等線材端子，固定於機殼上，避勾到脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



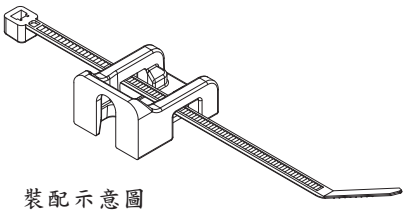


裝配示意圖




Part No.	Package
SWCM-1	1000


束線帶固定座 CABLE TIE MOUNT

用途：固定於機板上，配合束線帶使用，固定電線。

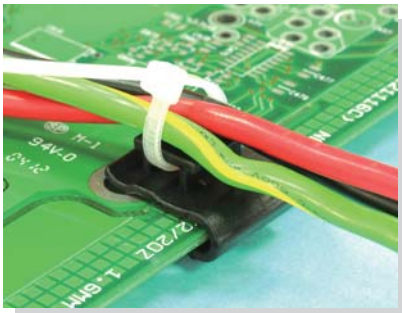


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




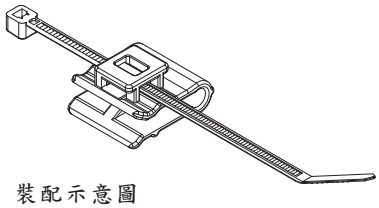


裝配示意圖




Part No.	Package
SWPC-1	500

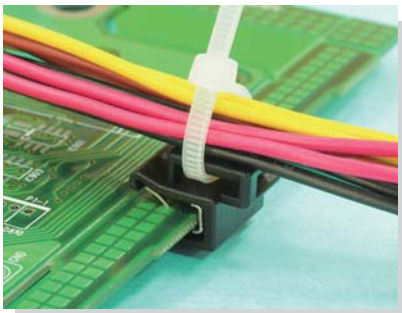


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



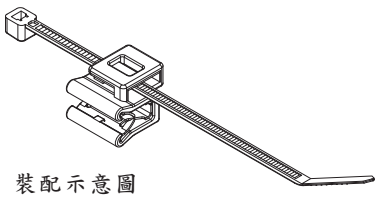

裝配示意圖

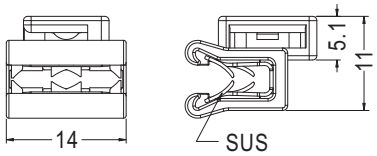

RECOMMEND SUITABLE FOR THICKNESS 1.5~2.0


Part No.	Package
SWPC-2	1000

電線固定座 WIRE SADDLE

用途：配合螺絲，固定電線，整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

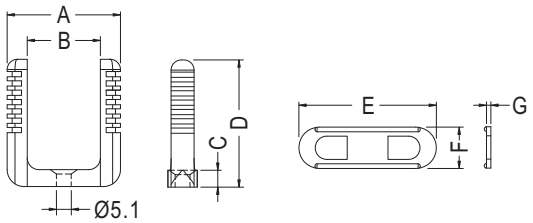


Part No.	A	B	C	D	E	F	G	Package
DC-1	38.9	25.1	5.8	43.7	47.2	14.2	1.5	100
DC-1.5	55.2	37.0	7.9	56.6	62.7	17.8	1.2	

隔離束線座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。

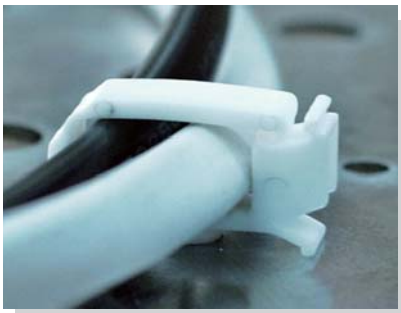

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

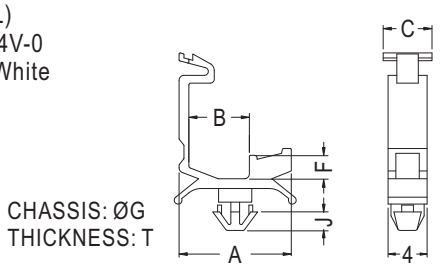


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	T	Package
CHI-3	11.5	6.2	5.0	2.4	3.5	1.9	0.8~2.2	1000
CHI-6	16.5	11.0	5.0	4.5	3.5	1.9	0.5~1.8	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

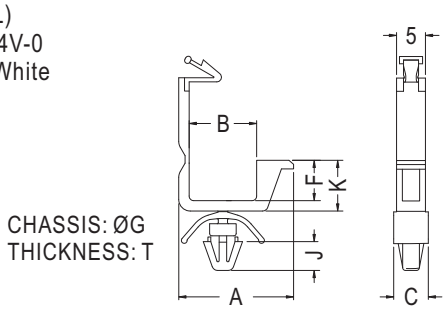


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	K	T	Package
CHK-6	19.8	11.6	6.0	5.2	4.8	5.0	7.0	0.8~3.5	1000
CHK-8				7.0			8.8		
CHK-12				12.4			14.2		500

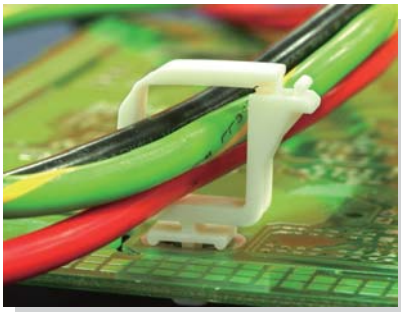


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

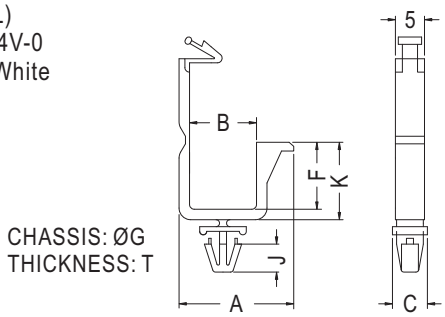


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	K	T	Package
CHK-13	19.7	11.5	6.0	11.5	4.8	4.8	13.3	1.6	500

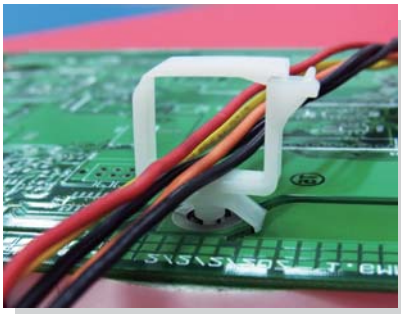

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

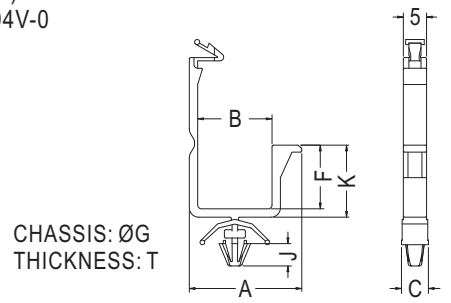

CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	F	G	J	K	T	Package
CHK-14	24.2	16.0	5.8	13.7	4.8	4.8	15.5	2.0~3.0	500
CHK-15	26.7	18.5	5.8	22.3	4.8	4.8	24.1	2.0~3.0	

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

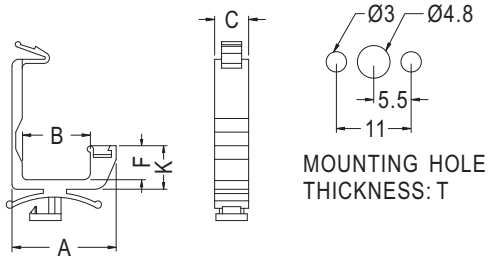


Part No.	A	B	C	F	K	T	Package
CHWA-2	15.3	10.0	5.0	5.0	6.4	0.5~1.6	500

電線固定座 WIRE SADDLE

用途：用於固定電線，整齊美觀。

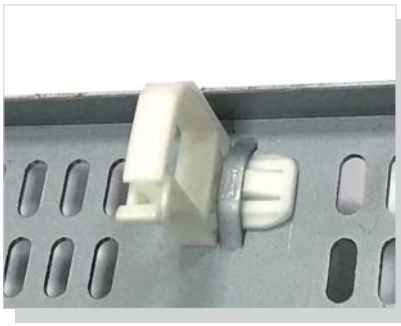


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

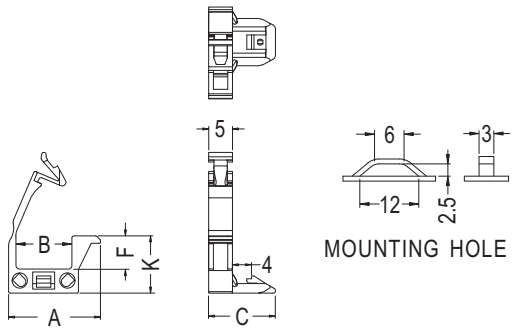


Part No.	A	B	C	F	K	Package
CHCK-1	19.25	11.74	14.0	6.95	12.0	500
CHCK-2		11.7		12.65	17.7	

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。

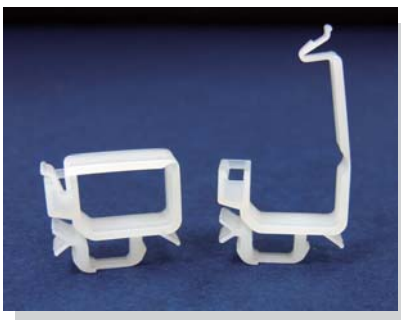


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

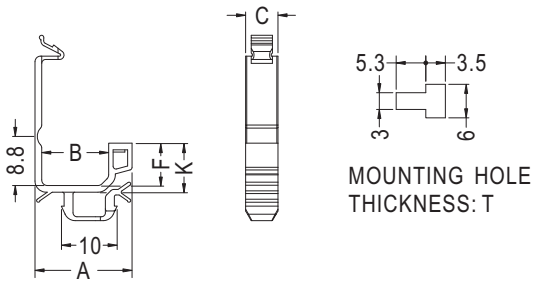


Part No.	A	B	C	F	K	T	Package
CHWK-1	17.4	12.0	5.8	7.6	8.8	0.8	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。

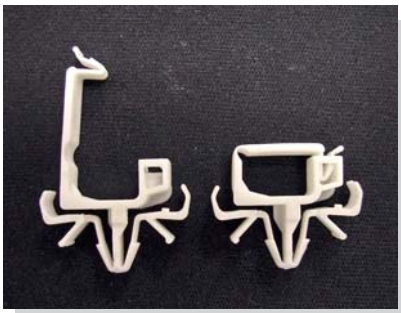


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	F	G	J	K	T	Package
CHWS-6	15.4	10.0	5.8	20.31	5.6	4.8	4.3	6.8	0.8~2.3	1000
CHWS-8.5	16.4	11.0		21.31	8.1			9.3		
CHWS-12	18.3	12.0		20.31	11.6			13.3		500
CHWS-14	21.4	16.0		23.31	13.6			14.8		
CHWS-20	25.4	20.0		27.31	19.6			20.8		
CHWS-30	31.4	25.6		33.31	29.4			30.8		250

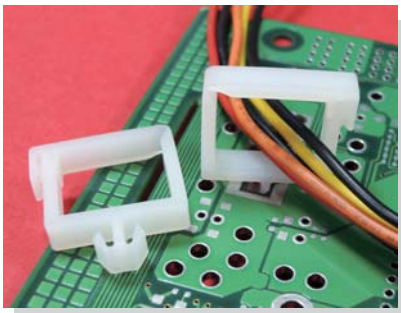


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




FOR CHAC-1L







MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	F	K	P	T	Package
CHAC-1	20.0	16.0	5.0	14.3	16.3	6.5	1.0	1000
CHAC-1L	20.0	16.0		14.3	16.3	6.7	2.0	
CHAC-2	15.1	11.1		10.5	12.5	6.5	1.0	
CHAC-3	15.1	11.1		5.3	7.3	6.5	1.0	

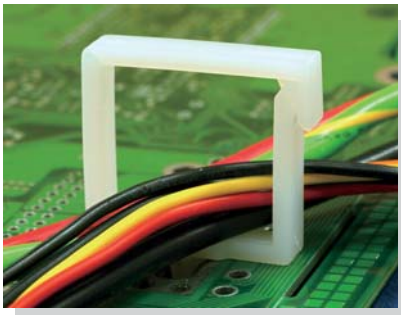

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS: T


Part No.	A	B	C	F	K	P	T	Package
CHAC-4	27.0	22.2	5.0	21.4	23.8	7.0	0.8~1.0	500

用途：固定電線於機板上，維修方便，不佔空間。

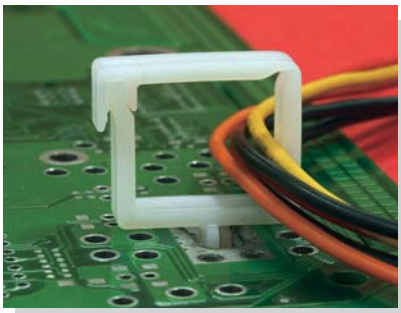


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	F	K	P	T	Package
CHAC-5-1	20.0	16.0	5.0	14.3	16.3	9.5	1.0	1000

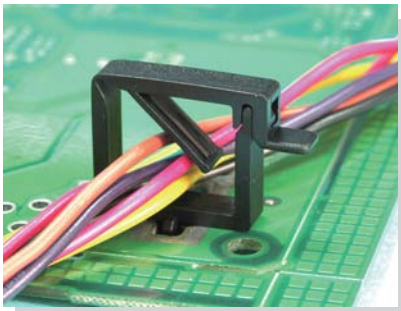








MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	F	K	P	T	Package
CHACA-1	20.0	16.0	5.0	14.3	16.3	9.5	1.0	1000

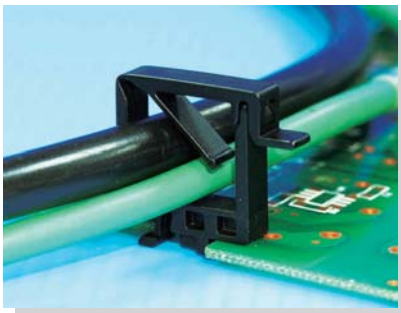

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES

NEW

Part No.	A	B	C	F	K	Package
CHACB-1	20.0	16.0	5.0	14.3	18.8	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	F	G	J	K	T	Package
CHL-3	9.0	6.7	4.0	4.0	3.0	3.4	5.3	1.2~1.7	1000

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。

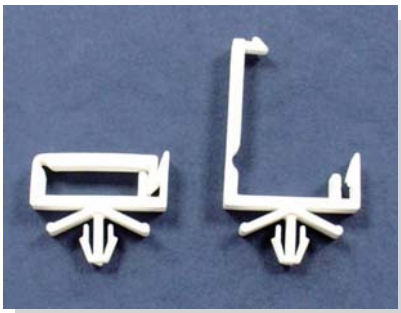


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	K	T	Package
CHJ-3	16.7	11.75	5.0	5.6	3.5	3.0	6.8	0.8~2.0	1000

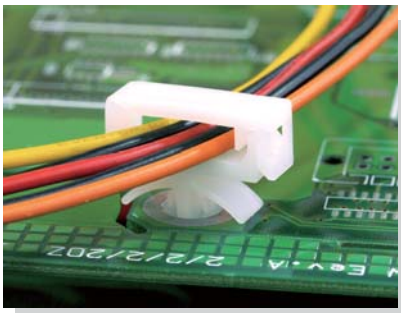


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	K	T	Package
CHWT-3.4S	17.5	13.5	5.0	3.1	3.5	3.0	5.1	1.8	1000
CHWT-3.4				3.1	4.8	5.6	5.1	2.0	
CHWT-4.8	14.7	10.7		4.5			6.5		
CHWT-8.8				8.5			10.5		500
CHWT-10	20.3	16.3		9.7			11.7		
CHWT-14.1				13.8			15.8		
CHWT-21.7	22.0	18.0		21.4			23.4		

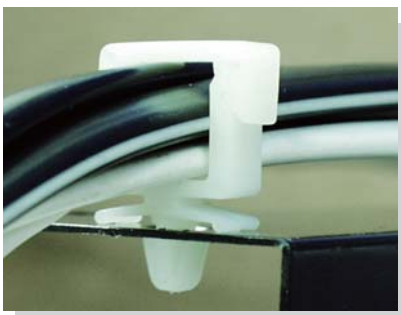

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	K	T	Package
CH-1	15.0	11.0	5.0	10.9	4.8	12.5	0.8~2.0	500

用途：固定電線於機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

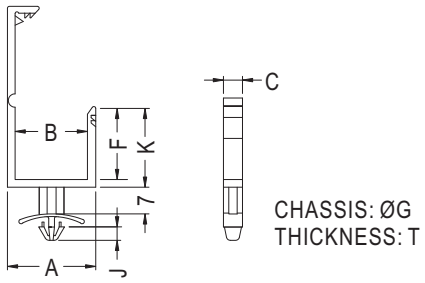

Part No.	A	B	C	F	G	J	K	T	Package
CHH-3	23.2	19.0	5.0	18.7	4.8	3.54	20.7	0.8~1.6	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

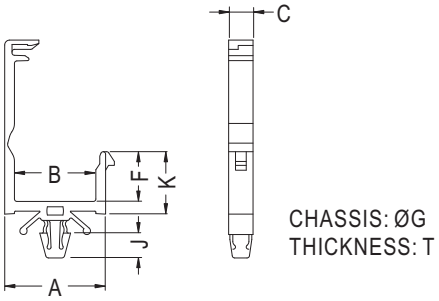

Part No.	A	B	C	F	G	J	K	T	Package
CHM-10	20.7	16.7	5.0	10.2	4.8	5.1	12.8	0.5~2.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

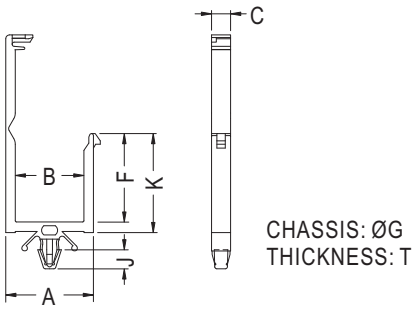


Part No.	A	B	C	F	G	J	K	T	Package
CHM-20	23.0	18.0	5.0	23.2	4.8	5.0	26.0	0.5~2.0	1000

電線固定座 WIRE SADDLE

用途：固定電線於機板上，維修方便，不佔空間。

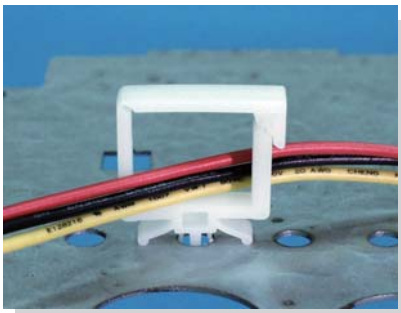

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

E217732
UL 1565

Part No.	A	B	C	F	G	K	T	Package	UL
CHC-1	20.25	16.0	5.0	14.0	4.8~5.0	15.9	1.2~2.4	500	UL
CHC-2	15.35	11.1		9.9		11.8			UL
CHC-3	15.35	11.1		4.9		6.8			UL
CHC-5	27.0	22.8		12.85	4.8	14.85	0.5~1.0		




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	K	T	Package
CHCS-1	15.35	11.1	5.0	4.9	3.0	2.8	6.8	0.8~2.5	500




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	K	T	Package
CHH-1	15.35	11.1	5.0	4.9	3.5	2.5	6.8	0.8~2.5	500
CHH-2				9.9			11.8		




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	J	K	T	Package
CHC-4	15.35	11.1	5.0	5.0	4.8	2.5	6.9	1.0	500

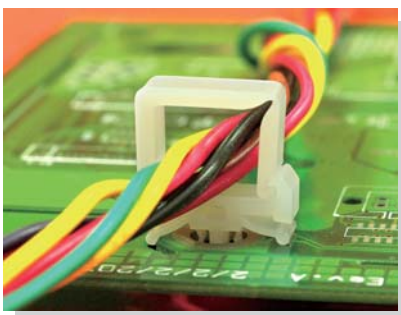


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.8~Ø5.0
THICKNESS 1.2~2.4

Part No.	Package
CHC-6	1000

用途：固定電線於PC板或機板上，維修方便，不佔空間。

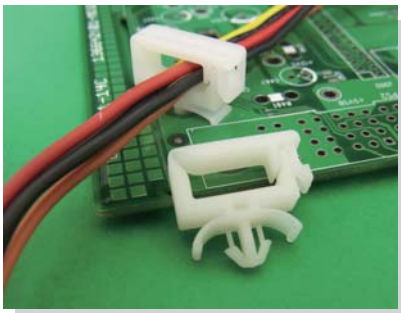

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	K	T	Package
CHZB-1	14.8	10.7	5.0	4.8	4.0	6.8	0.8~2.5	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS 0.8~1.6

Part No.	A	B	C	F	K	Package
CHZ-1	16.5	10.7	5.0	9.95	11.95	500
CHZ-2	22.1	16.3		10.85	12.85	
CHZ-3	22.1	16.3		14.95	16.95	
CHZ-4	23.8	18.0		22.55	24.55	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS 0.8~1.6

Part No.	A	B	C	F	K	Package
CHZA-1	14.8	10.7	5.0	4.8	6.8	1000
★CHZA-1S	14.8	10.7		4.8	6.8	
CHZA-2	14.8	10.7		9.0	11.0	
CHZA-3	20.4	16.3		9.9	11.9	500
CHZA-4	20.4	16.3		14.0	16.0	
CHZA-5	22.1	18.0		21.6	23.6	

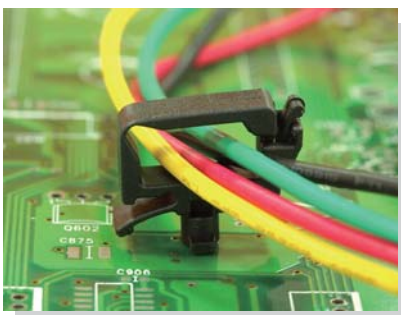

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES
THICKNESS 0.8~2.0


Part No.	Package
CHKA-1	1000

電線固定座 WIRE SADDLE


用途：固定電線於PC板或機板上，維修方便，不佔空間。

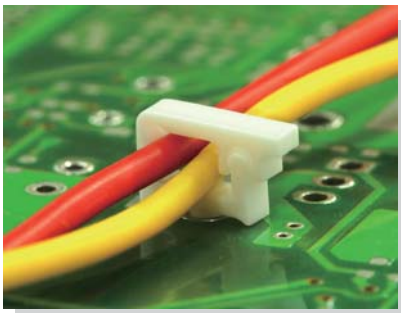


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

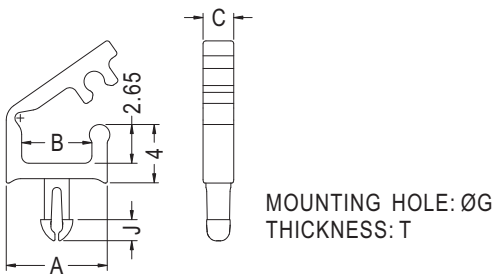


Part No.	A	B	C	G	J	T	Package
CHLB-1	6.9	4.8	2.1	1.7	1.5	2.4	1000

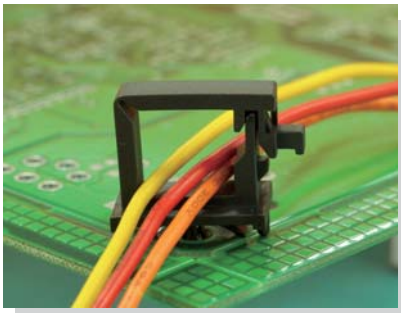


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

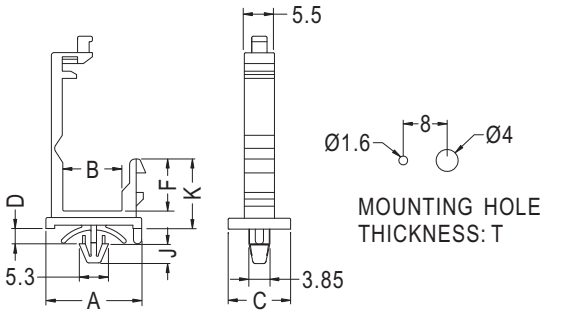


Part No.	A	B	C	D	F	J	K	T	Package
CHWE-1	17.5	10.8	11.4	2.79	9.5	3.5	12.7	1.6~2.0	1000
CHWE-1S				1.7				0.8~1.0	
CHWE-1M				2.0				0.8~1.0	

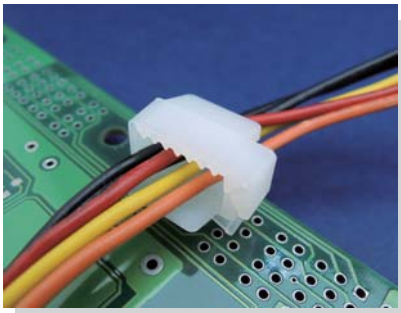


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

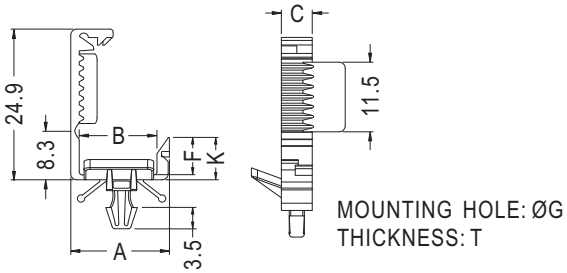

Part No.	A	B	C	F	G	K	T	Package
CHCA-1	16.1	12.85	5.1	6.2	3.5	7.0	1.0~2.5	500

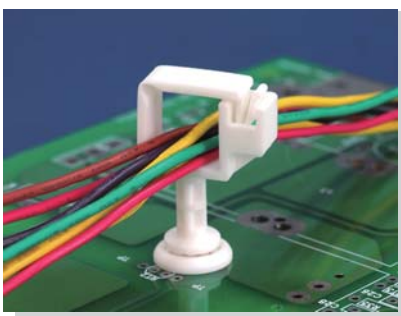


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm
- 專利品 (PAT.)

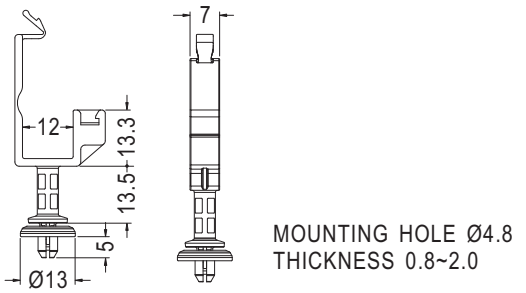


Part No.	Package
CHKC-1	1000


用途：固定電線於機板上，維修方便，不佔空間。

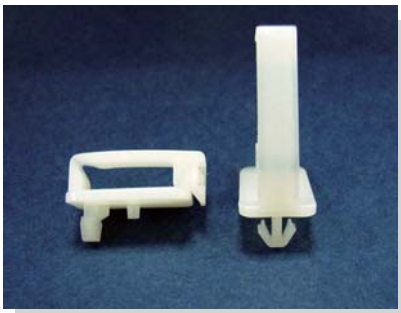


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

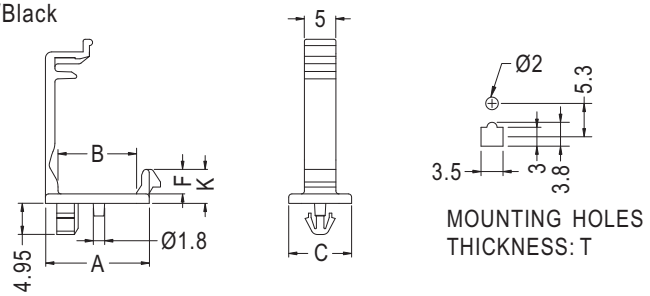

Part No.	A	B	C	F	K	T	Package
CHMK-1	16.5	12.5	10.0	3.9	5.4	2.0	1000

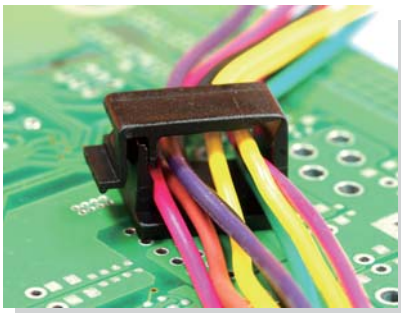


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

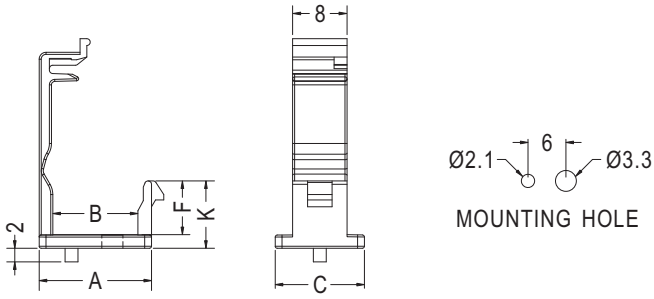


Part No.	A	B	C	F	K	Package
CHMK-2	16.5	12.5	13.1	7.9	9.9	1000
★ CHMK-3	16.5	12.5	13.1	11.0	13.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

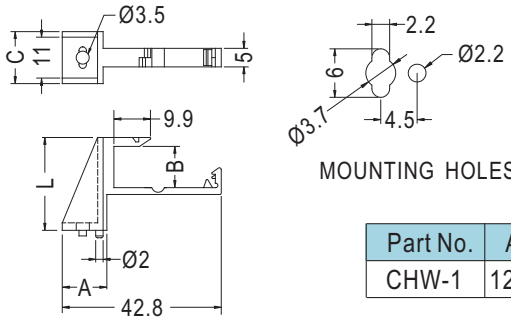

Part No.	A	B	C	L	Package
CHW-1	12.0	11.1	14.0	25.0	250

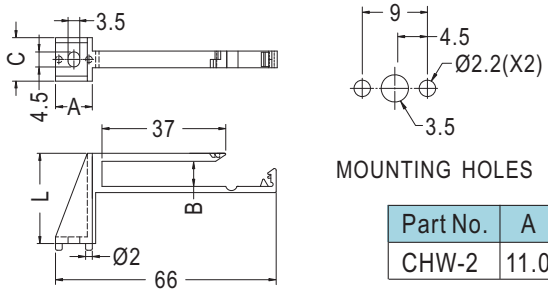


Part No.	A	B	C	L	Package
CHW-2	11.0	7.5	13.0	27.0	250

隔離束線座 HARNESS CLIP STANDOFF

用途：固定電線於機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	L	Package
CHW-1T	12.0	11.1	14.0	25.0	250


電線固定座 WIRE SADDLE

用途：背膠式，固定電線，維修方便。

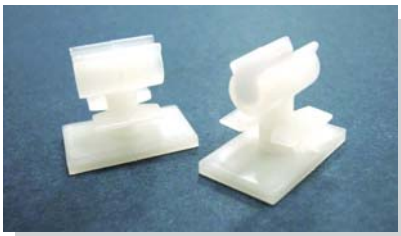




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	B	C	Package
THVA-1	3.2	15.9	500

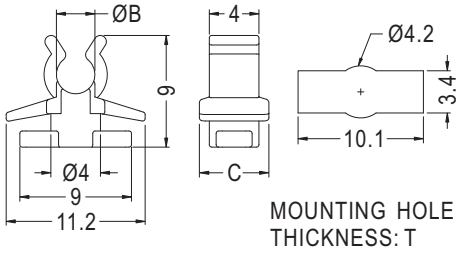


Part No.	B	C	T	Package
THVB-1	3.1	5.6	1.2	500

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	C	G	T	Package
OCSH-14	8.3	6.0	5.5	0.8~2.3	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	G	T	Package
OCC-4	5.5	4.2	6.55	6.5	1.2	500

用途：固定電線於PC板或機板上，維修方便，不佔空間。

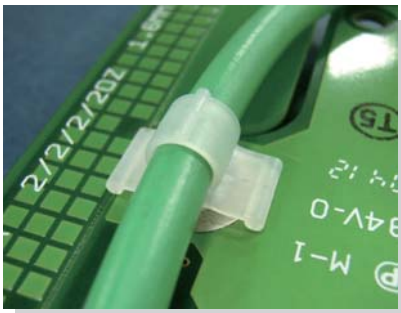


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

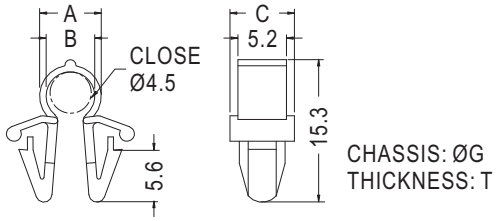


Part No.	A	B	C	G	T	Package
OCC-5	6.6	5.2	6.9	6.0	2.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

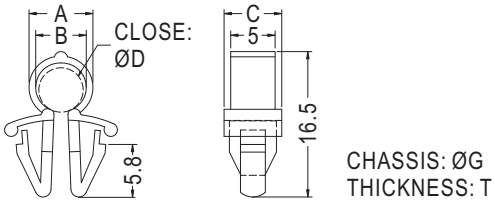

Part No.	A	B	C	D	G	T	Package
OCC6.5-5	7.0	5.5	6.5	5.0	6.5	2.0	1000

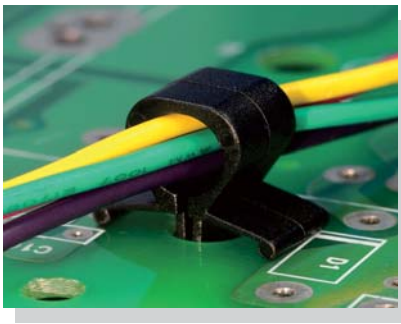


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

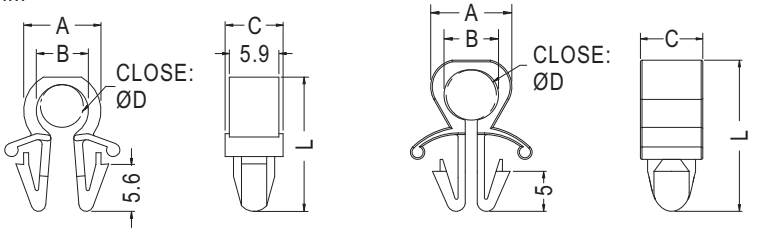

Part No.	A	B	C	D	G	L	T	Package
OCC-6	9.2	6.2	6.9	5.0	6.0	16.0	2.0	1000
★OCCB-6.5	10.15	6.82	7.8	6.3	6.5	18.9	2.5~4.0	500
OCC-8	11.2	8.2	6.9	7.0	6.0	17.6	2.0	
OCC-10	13.2	10.2	6.9	9.0	6.0	20.1	2.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

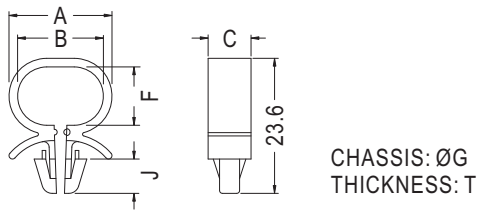


Part No.	A	B	C	F	G	J	T	Package
OCCB-15	18.0	15.0	7.5	10.2	6.0~6.5	6.0	0.8~2.5	500

電線固定座 WIRE SADDLE

用途：方便固定電線於PC板或機板上，堅固，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.5
THICKNESS 3.5

Part No.	Package
OCCB-20	500

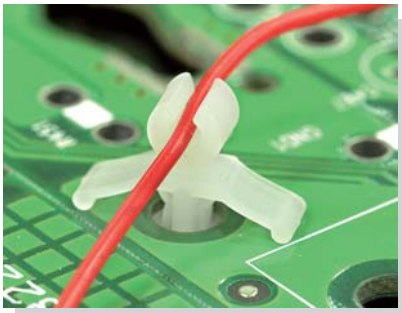


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	G	J	L	T	Package
THV-11	11.5	1.9	3.6	2.8	4.0	5.0	13.5	0.8~2.5	1000

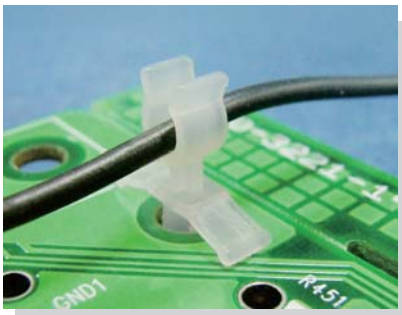

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS: ØG
THICKNESS: T




◆ **THV-3**
THV-4

CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	G	J	L	T	Package
THV-1	11.5	1.9	3.6	4.5	4.0	5.0	17.1	0.8~2.5	500
THV-3	11.2	2.6	3.6	4.6			16.8		
THV-4	11.2	2.6	3.6	8.5			20.7		
THV-7	11.5	1.9	3.6	12.5			25.1		




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

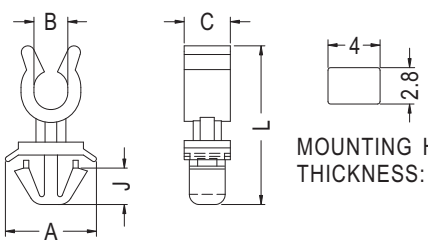


MOUNTING HOLE
THICKNESS: T

Part No.	A	B	C	J	L	T	Package
THV-5	7.0	2.6	3.6	5.0	12.4	0.6	500

用途：固定電線於機板上，維修方便，不佔空間。

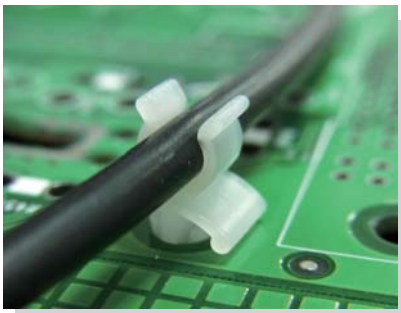


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

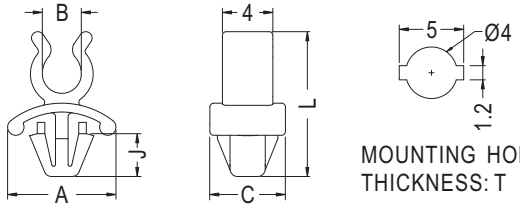

Part No.	A	B	C	J	L	T	Package
THV-6	8.6	3.3	6.0	3.4	11.6	0.8~1.2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

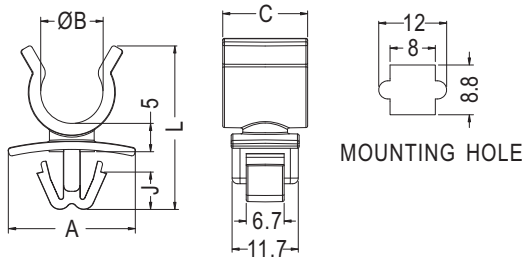


Part No.	A	B	C	J	L	Package
THV-9	22.45	11.0	15.0	6.65	28.9	1000




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent/White
- Unit: mm



Part No.	A	B	C	Package
THVD-1	8.9	6.0	7.0	500

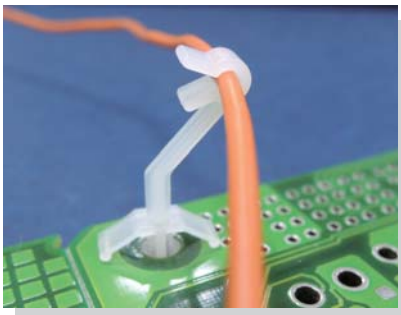

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

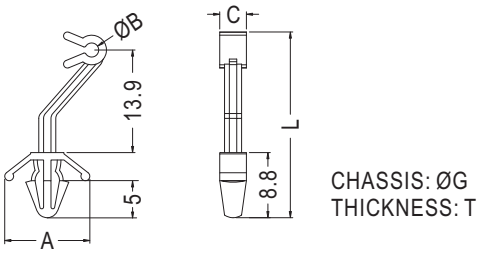


Part No.	A	B	C	G	L	T	Package
THV-8	11.5	1.9	3.6	4.0	25.1	0.8~2.5	1000

用途：固定電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

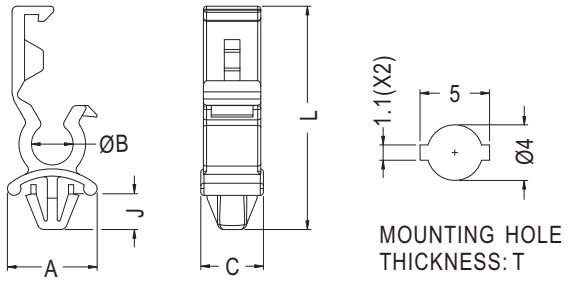


NEW

Part No.	A	B	C	J	L	T	Package
THV-14	8.6	4.0	6.0	3.4	21.4	1.2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

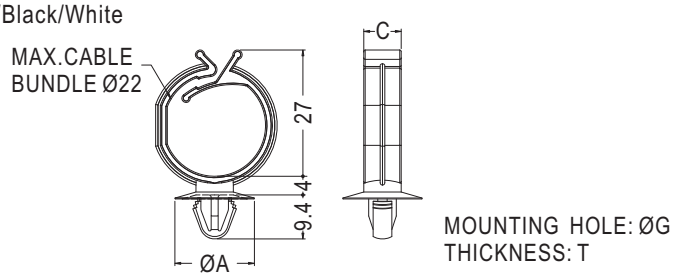


Part No.	A	C	G	T	Package
THW-2	17.0	8.0	6.5~7.0	0.6~2.0	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

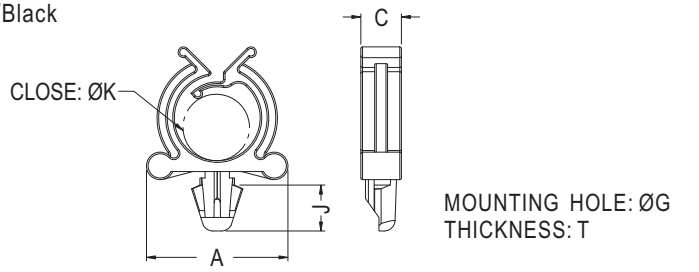

Part No.	A	C	G	J	K	T	Package
THW-1	26.2	7.5	6.35	8.7	12.3	0.8~1.6	500

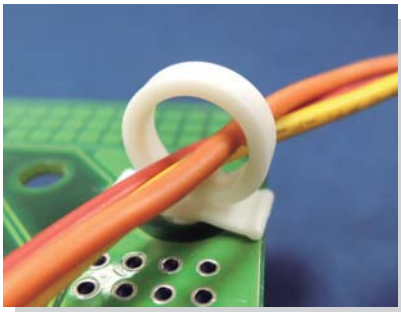

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

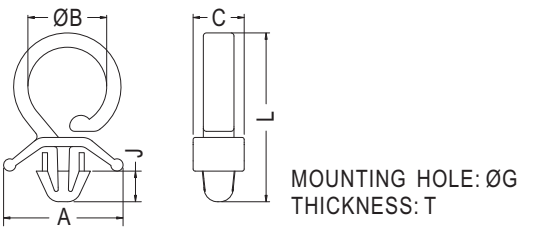


Part No.	A	B	C	G	J	L	T	Package
SLCB-8	11.7	7.7	5.0	4.0	3.0	16.5	0.6~2.0	1000

隔離束線座 HARNESS CLIP STANDOFF

用途：固定冷陰極管或電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

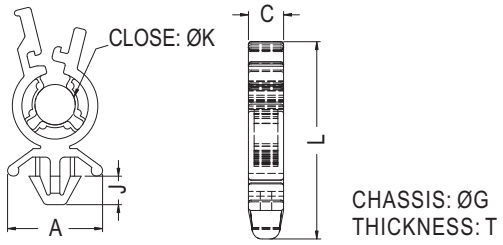


Part No.	A	C	G	J	K	L	T	Package
SLCPA-1	10.0	3.7	4.0	3.0	3.9	20.8	0.8~2.0	500
SLCPA-2	10.0	3.7	4.0	3.0	3.9	25.85	0.8~2.0	

隔離束線座 HARNESS CLIP STANDOFF

用途：固定電線於PC板或機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

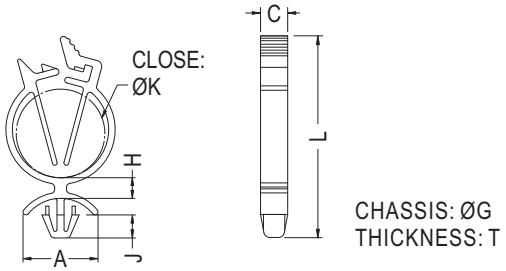

Part No.	A	C	G	H	J	K	L	T	Package
SLCA-15	12.7	4.6	4.8	3.5	3.9	15.0	34.14	0.8~2.0	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

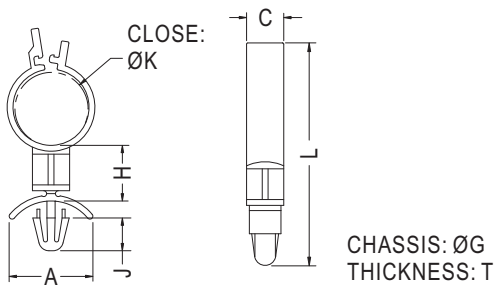

Part No.	A	C	G	H	J	K	L	T	Package
SLC-19	14.3	6.35	4.8	9.5	5.6	12.5	38.0	0.8~2.0	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

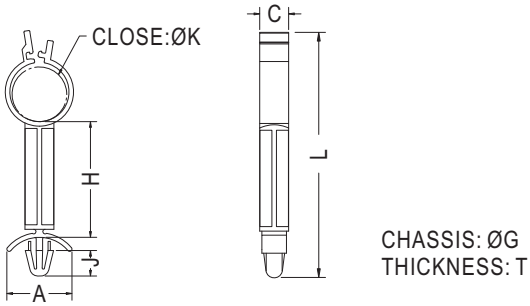


Part No.	A	C	G	H	J	K	L	T	Package
SLCC-12.7	14.3	6.35	4.8	12.7	5.6	12.0	41.2	0.8~2.0	500
SLCC-15.9				15.9			44.4		
SLCC-19.1				19.1			47.6		
SLCC-22.2				22.2			50.7		
SLCC-25.4				25.4			53.9		

用途：固定電線於PC板或機板上，強韌牢固，維修方便，不佔空間。

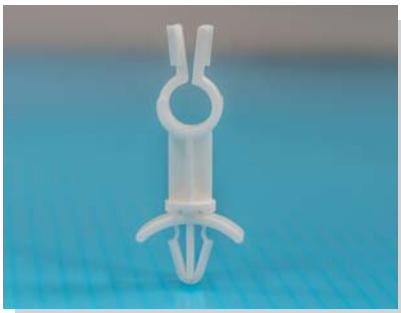


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm

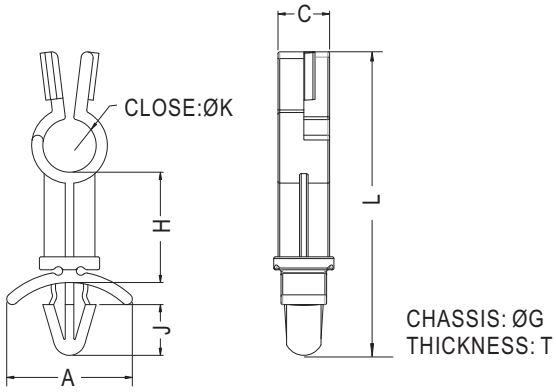


NEW


Part No.	A	C	G	H	J	K	L	T	Package
SLCE-13	14.6	6.0	4.8~5.0	13.0	5.9	6.2	35.0	0.7~2.0	500

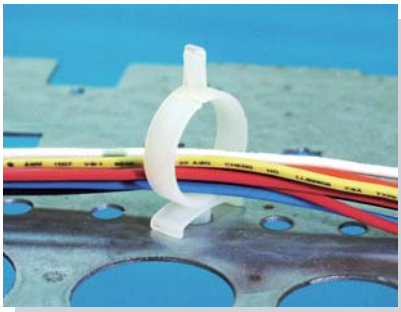


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

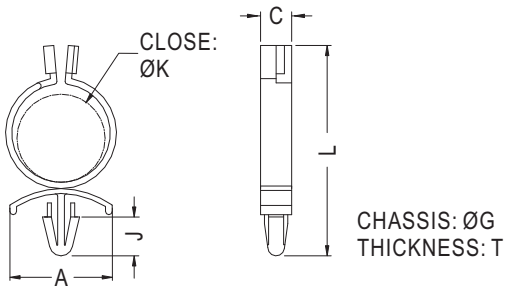

Part No.	A	C	G	J	K	L	T	Package
SLC-17	19.75	6.0	4.8	7.5	17.0	39.3	1.0~3.2	500

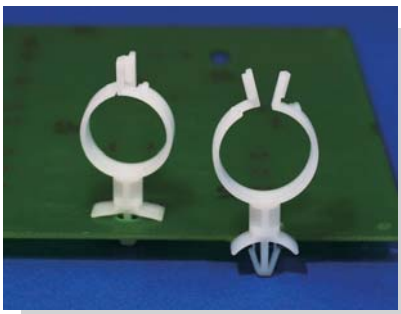

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

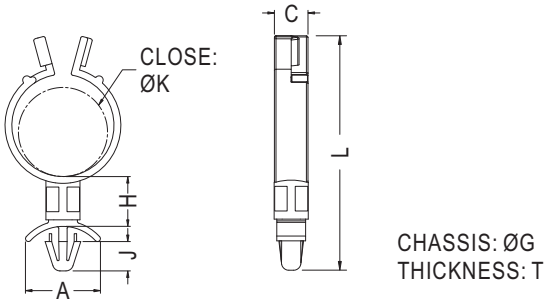


NEW

Part No.	A	C	G	H	J	K	L	T	Package
SLCD-9.5	14.3	6.4	4.8	9.5	5.6	17.5	44.78	1.6	500

用途：方便固定電線於PC板或機板上，堅固，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

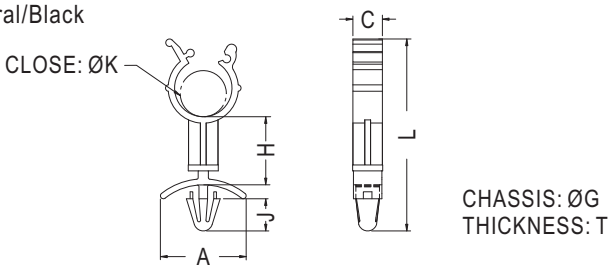


Part No.	A	C	G	H	J	K	L	T	Package
SLC-21	16.0	5.5	4.8	12.7	6.0	8.6	35.8	0.8~2.0	1000
SLC-22				12.7		12.2	39.4		500
SLC-24				6.4		8.6	29.5		
SLC-25				19.1		8.6	42.2		
SLC-26				19.1		6.1	39.4		
SLC-26L				19.1		6.7	39.4		




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

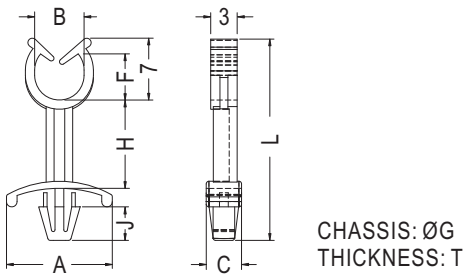



Part No.	A	B	C	F	G	H	J	L	T	Package
THE-11	12.0	5.6	4.0	5.22	3.5	10.0	3.8	22.9	0.6~1.6	500

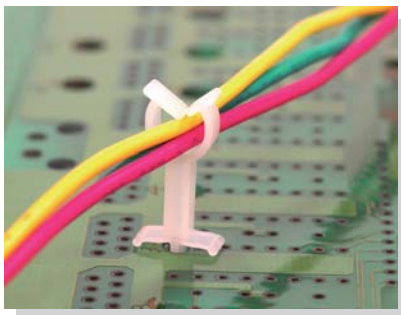

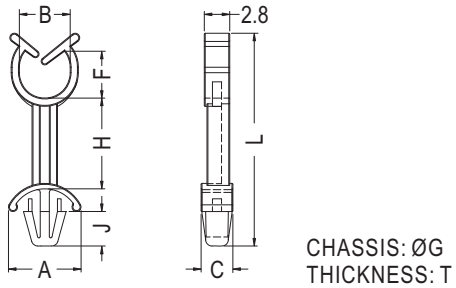

Part No.	A	B	C	F	G	H	J	L	T	Package
THE-39	7.5	5.6	3.5	5.15	3.5	10.0	3.8	23.45	1.2~2.0	500

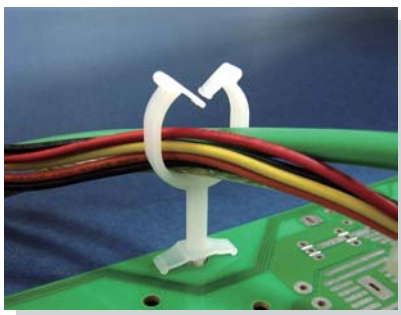


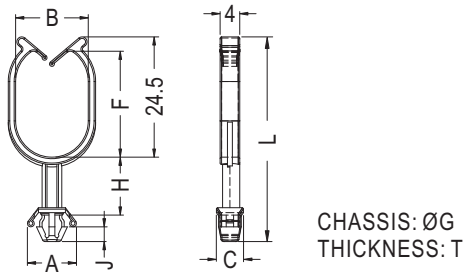

Part No.	A	B	C	F	G	H	J	L	T	Package
THE-38	10.0	14.8	5.5	21.6	4.8~5.0	11.8	3.0	41.7	0.5~2.0	500


隔離束線座 HARNESS CLIP STANDOFF

用途：固定電線於機板上，維修方便，不佔空間。

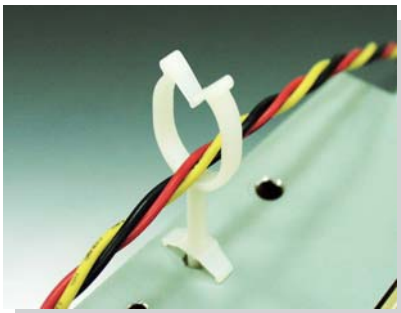


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

E217732
UL 1565




CHASSIS: ØG
THICKNESS: T



◆**THE-9**


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	F	G	H	J	L	T	Package
THE-9	14.3		7.0			9.5	5.6	37.3		
THE-12						12.7		38.5		
THE-17	14.1	14.8	5.7	16.2	4.8~5.0	16.8	3.6	42.6	0.5~2.3	500
THE-25						25.0		50.8		
THE-37						36.8		62.6		

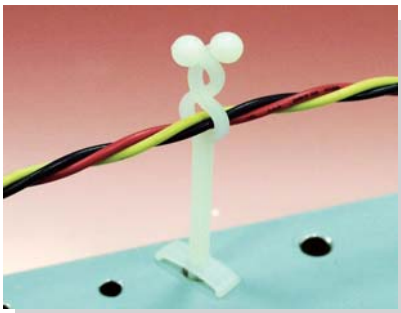

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


E217732
UL 1565




CHASSIS: ØG
THICKNESS: T

Part No.	A	C	G	H	J	K	L	T	Package	UL
THA-1	16.1	6.0	4.8~5.0	3.1	7.3	6.1	33.8	0.8~3.0	1000	UL
THA-2	16.0	5.9	4.8~5.0	20.0	7.3	6.1	51.0	0.8~3.0	500	UL
THA-3	16.0	5.9	4.8~5.0	35.3	7.3	6.1	66.0	0.8~3.0		UL
THA-4	16.0	6.0	4.8~5.0	2.8	7.3	9.8	39.6	0.8~3.0	1000	UL
THA-5	16.0	6.0	4.8~5.0	20.0	7.3	9.8	56.8	0.8~3.0	500	UL
THA-6	16.2	5.9	4.8~5.0	35.2	7.3	9.8	71.5	0.8~3.0		UL
THA-7	16.0	5.9	4.8~5.0	3.0	7.3	13.8	42.0	0.8~3.0	1000	UL
THA-8	16.1	6.0	4.8~5.0	20.4	7.3	13.8	59.3	0.8~3.0	500	UL
THA-9	16.0	5.9	4.8~5.0	35.8	7.3	13.8	74.7	0.8~3.0		UL
THA-10	16.0	6.0	4.8~5.0	16.2	7.3	18.4	63.5	0.8~3.0		UL
THA-11	16.0	5.4	4.8~5.0	3.0	7.3	22.3	56.8	0.8~2.5		UL
THA-12	16.0	6.0	4.8~5.0	15.3	7.3	9.7	53.1	0.8~3.0		UL
THA-14	16.0	6.0	4.8~5.0	8.0	7.3	18.7	55.3	0.8~3.0		UL
THA-15	16.4	6.0	4.8~5.0	10.5	7.3	6.8	43.8	0.8~3.0		
THA-16	10.5	6.0	4.8~5.0	5.6	7.3	7.0	34.7	0.8~2.0		
THA-19	13.8	6.0	4.8~5.0	4.4	7.2	9.8	40.9	0.8~2.5		
THA-21	12.9	4.8	3.0	8.0	3.7	7.7	37.7	0.8~2.4	1000	
THA-22	15.5	4.9	3.5	8.1	5.8	18.5	58.2	1.0~2.0	500	


用途：可快速捆紮及解電線，安裝容易。

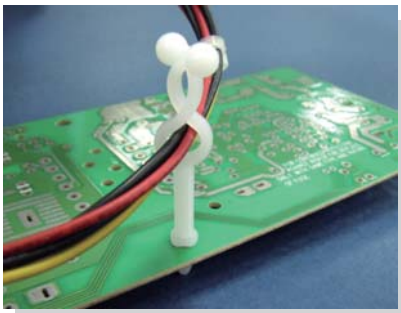


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

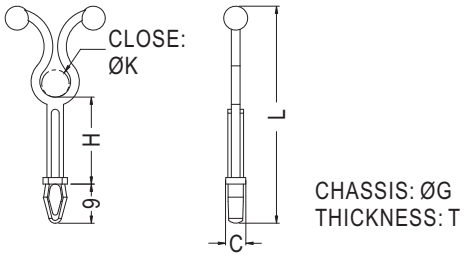


Part No.	C	G	H	K	L	T	Package
THN-1	4.6	4.6	20.0	6.0	49.9	2.5	500

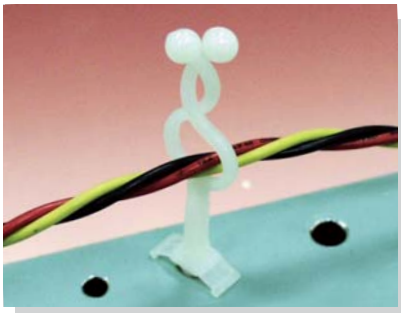


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

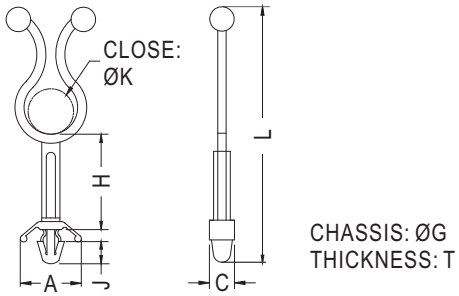



Part No.	A	C	G	H	J	K	L	T	Package
THC-1	13.8	5.5	4.8	21.0	5.0	10.4	56.5	0.8~2.2	500
THC-1S	9.2	4.9	4.0	3.0	3.1	7.2	26.7		1000
THC-2	13.8	5.6	4.8	34.0	5.0	5.0	59.8		500
THC-3	14.0	5.6	4.8	4.5	5.0	10.4	37.7		1000
THC-4	13.5	5.7	4.8	43.5	4.9	10.1	78.1		250

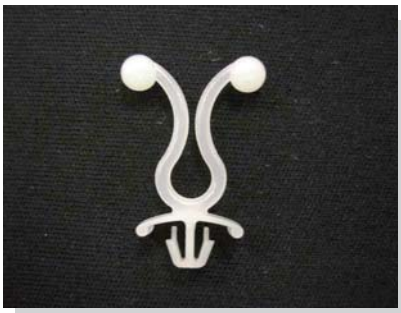

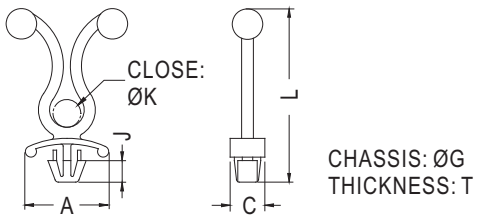

Part No.	A	C	G	J	K	L	T	Package
THC-5	12.0	5.0	4.0	3.1	4.0	25.0	0.8~2.0	1000

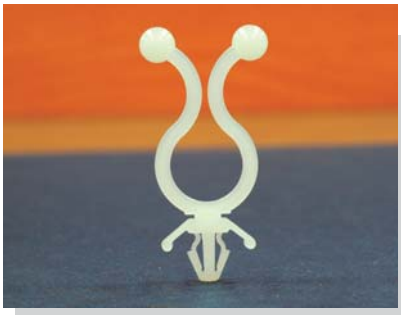


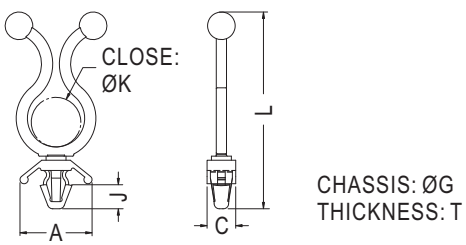


Part No.	A	C	G	J	K	L	T	Package
THC-6	14.1	5.6	4.8	4.7	9.7	38.5	0.8~2.5	1000

隔離束線座 HARNESS CLIP STANDOFF


用途：可快速捆紮及解電線，安裝容易。

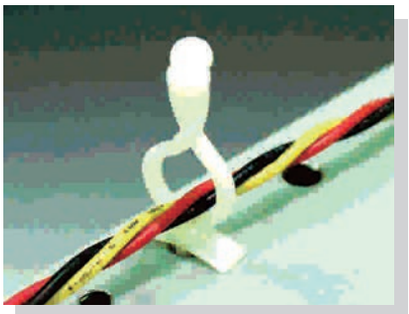


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

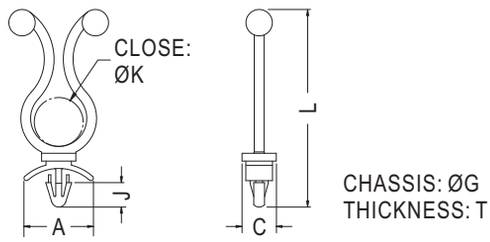

Part No.	A	C	G	J	K	L	T	Package
THI-4	14.2	7.0	4.0	5.0	10.0	40.4	0.8~2.0	500

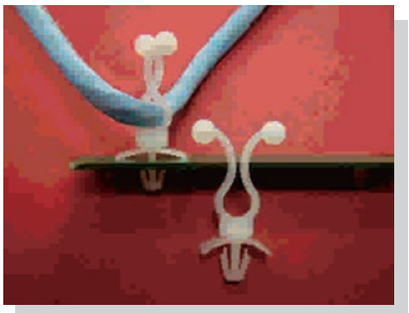


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

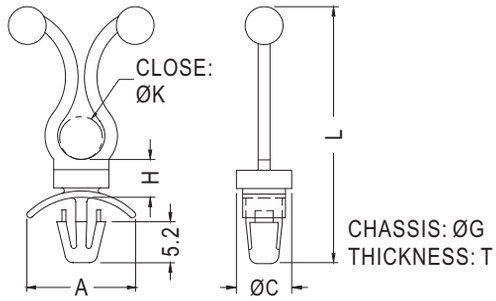

Part No.	A	C	G	H	K	L	T	Package
THL-4.8	13.8	7.0	4.8	4.8	5.2	32.5	0.8~2.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

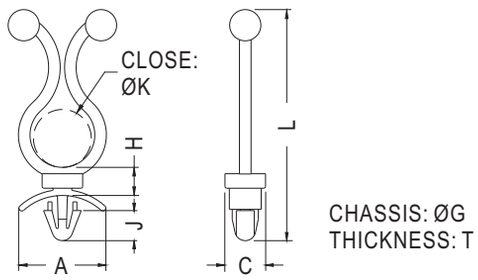

Part No.	A	C	G	H	J	K	L	T	Package
THD-1	15.0	7.0	4.8~5.0	4.9	5.2	9.8	40.2	0.8~2.0	500
THD-2				4.9	5.2	17.1	49.4		
THD-4				4.85	3.6	17.5	47.6		



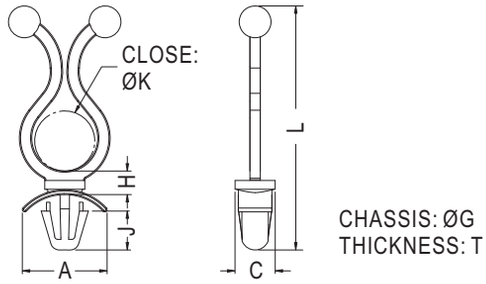


Part No.	A	C	G	H	J	K	L	T	Package
THD-3	15.9	6.8	6.0	4.0	6.6	10.2~12.7	41.4	0.78~2.0	500

隔離束線座 HARNESS CLIP STANDOFF

用途：可快速捆紮及解電線，安裝容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

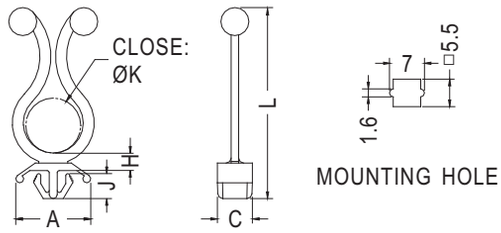


Part No.	A	C	H	J	K	L	Package
THG-12	15.0	7.0	3.5	5.0	11.0	38.3	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

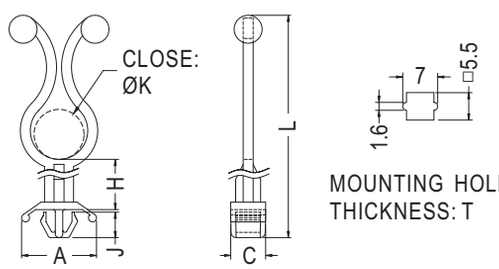


Part No.	A	C	H	J	K	L	T	Package
THG-13	15.0	7.0	47.0	5.1	10.0	81.45	0.8~1.6	500
THG-14			6.0	5.9	18.0	52.2	1.0~2.0	

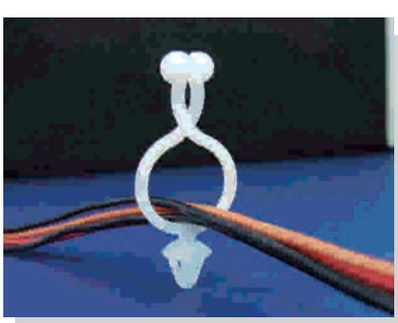


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

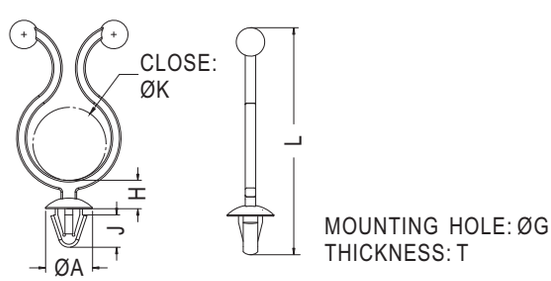

Part No.	A	G	H	J	K	L	T	Package
THCA-1	9.0	4.8~5.0	5.4	6.3	14.0	43.48	1.2~2.0	500

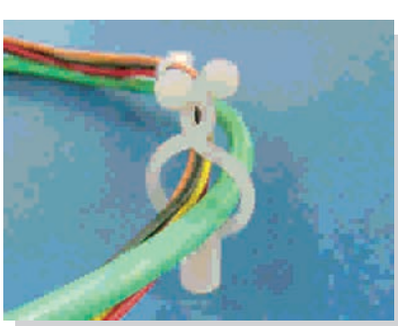

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

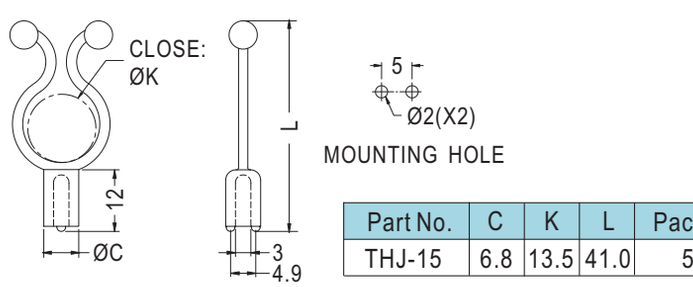


Part No.	C	K	L	Package
THJ-15	6.8	13.5	41.0	500

隔離束線座 HARNESS CLIP STANDOFF

用途：可快速捆紮及解電線，安裝容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	G	J	K	T	Package
THH-8	12.0	5.5	4.0	5.0	6.7	1.6~4.0	500
THH-9	12.0	5.5	3.0	3.5	6.7	0.8~2.0	

隔離束線座 HARNESS CLIP STANDOFF

用途：固定電線於PC板或機板上，維修方便，不佔空間。

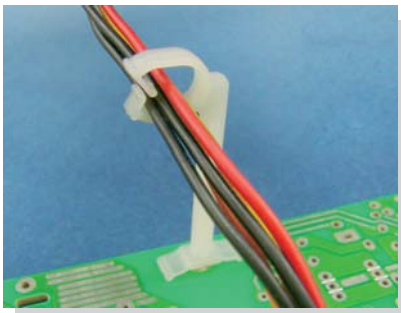


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	F	G	H	T	Package
THEL-41	14.0	7.5	5.4	11.0	9.5	4.8~5.0	34.2	0.5~2.1	500

隔離束線座 HARNESS CLIP STANDOFF

用途：固定電線於機板上，維修方便，不佔空間。

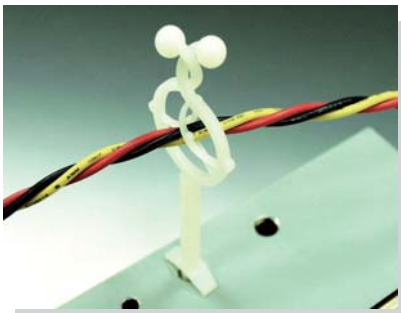

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




E217732
UL 1565

Part No.	A	B	C	G	H	J	T	Package
THF-1	14.1	20.5	5.7	4.8~5.0	32.1	3.6	0.5~2.3	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

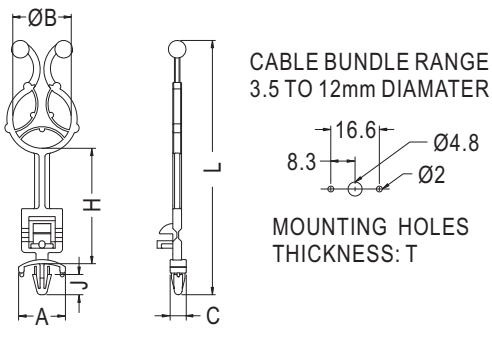


Part No.	A	B	C	H	J	L	T	Package
THFA-1	16.0	20.0	5.5	39.4	7.0	87.0	0.8~2.0	500

隔離束線座 HARNESS CLIP STANDOFF

用途：可快速捆紮及解電線，裝配容易，可用於木板上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

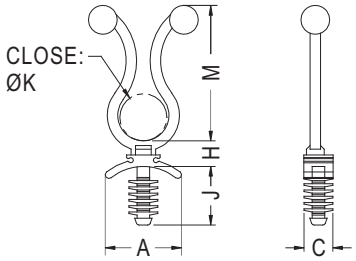


CHASSIS: ØG

Part No.	A	C	G	H	J	K	M	Package
WKL-10	14.6	5.5	5.0	4.9	11.2	9.0	25.9	500
WKL-10A		5.0	4.5					



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

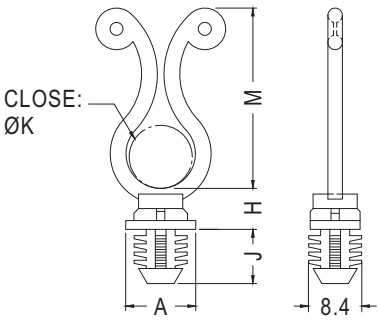


CHASSIS: ØG
PANEL THICKNESS: T

Part No.	A	G	H	J	K	M	T	Package
WTL-11	11.1	7.9	6.5	8.6	11.0	28.6	6.4	500
WTL-19					19.0	37.5		



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø7.9
PANEL THICKNESS 6.4

Part No.	H	K	M	Package
WTL-764	6.4	7.6~10.2	25.4	500
WTL-795	9.5			
WTL-7127	12.7			
WTL-7159	15.9			
WTL-1064	6.4	10.2~12.7	28.6	
WTL-1095	9.5			
WTL-10127	12.7			
WTL-10159	15.9			
WTL-1764	6.4	17.8~20.3	38.1	
WTL-1795	9.5			
WTL-17127	12.7			
WTL-17159	15.9			


用途：背膠式，可快速拆卸，固定電線，維修方便，整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

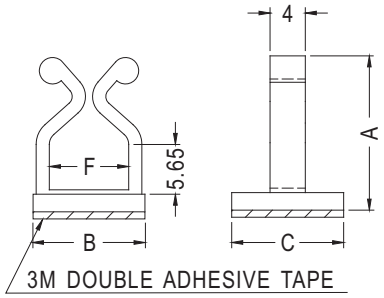


Part No.	A	B	C	F	Package
MWS-26	17.5	12.7	12.7	9.0	1000

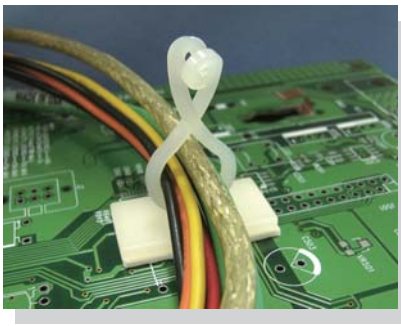


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

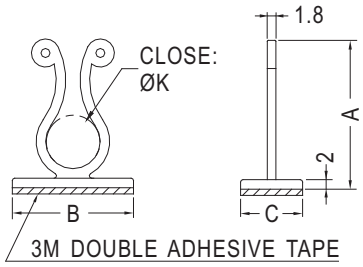

Part No.	A	B	C	K	Package
KLF-11	31.2	25.4	13.0	11.43	500

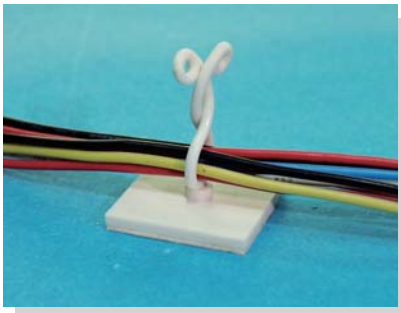


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

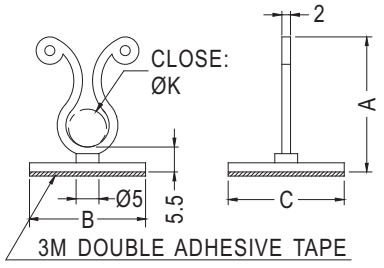


Part No.	A	B	C	K	Package
KLS-1	30.2	25.4	25.4	8.3	250

用途：背膠式，可快速捆紮及解開電線，裝配容易。


E217732
UL 1565

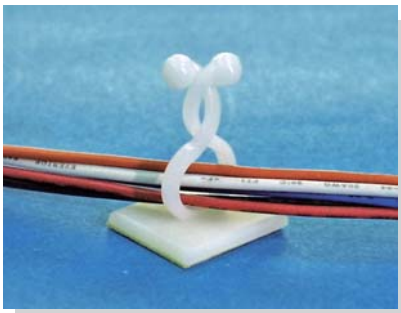


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	K	Package	UL
KL-1	31.9	20.0	20.0	13.8	250	UL
KL-2	26.2	20.0	14.0	8.5	500	UL
KL-2L	27.9	25.0	13.0	8.2		UL
KL-3	28.2	21.0	19.0	10.0		UL
KL-4	27.3	18.5	21.0	10.0		
KL-5	56.2	38.0	20.0	34.0	100	UL
KL-6	27.6	10.0	19.8	5.8	500	
KL-7	21.9	20.0	13.0	7.2		UL
KL-11	30.0	21.0	19.0	10.0		
KL-14	34.8	22.1	13.0	12.5	250	
KL-16	37.0	25.0	13.0	17.0		UL
KL-19	39.0	25.0	13.0	20.0		UL
KL-22	41.0	28.0	15.0	23.0		UL
KL-23	34.7	25.0	20.0	13.2		
KL-25	38.0	24.9	17.9	18.0		
KL-26	36.7	17.5	15.0	13.0		



◆ **KL-26**

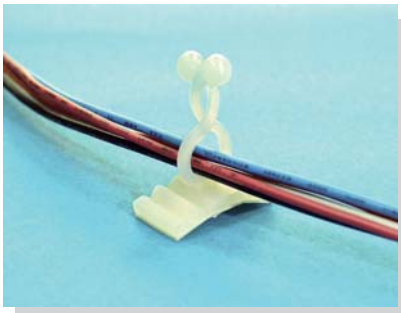


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	K	Package
KLB-1	27.4	25.0	13.0	8.4	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	K	Package
KLC-1	31.2	16.0	21.0	10.4	250

電線束線座 WIRE HOLDER

用途：背膠式，可快速捆紮及解開電線，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	K	Package
KLR-1	39.9	25.2	13.0	19.0	500


電線束線環 WIRE LOCK


用途：用於配線中，有快速捆紮及解開之優點，可重覆使用。

E217732
UL 1565



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






◆ TL-12,TL-34,TL-37


Part No.	A	K	Package	UL
TL-1	17.8	4.0	1000	UL
TL-2	23.8	7.3		UL
TL-3A	27.5	10.0		UL
TL-4	30.4	13.8		UL
TL-5	35.0	17.2		UL
TL-6	41.4	24.2	500	UL
TL-7	42.0	19.5		UL
TL-8	16.5	5.0		
TL-9	30.0	9.7		
TL-10	38.5	16.3		
TL-11	22.0	4.2		
TL-12	26.0	8.0		
TL-13	32.5	11.5		
TL-14	35.1	14.5		
TL-27	46.0	27.0		
TL-28	55.5	26.8		
TL-29	40.0	17.0		
TL-31	40.0	20.0		
TL-32	35.0	13.5		
TL-34	17.8	4.0		
★TL-37	44.3	23.0		


隔離束線座 WIRE SADDLE SIDE ENTRY

用途：可快速捆紮及解開電線，裝配容易。

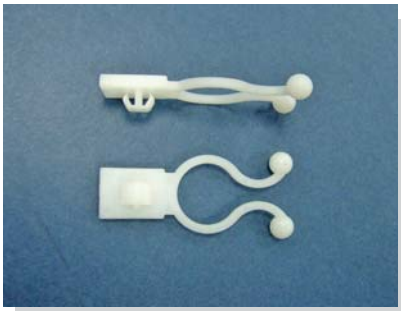

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE
THICKNESS: T


Part No.	K	T	Package
THJA-1	13.5	0.8~1.6	500

隔離束線座 HARNESS CLIP STANDOFF

用途：可快速捆紮電線，安裝容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

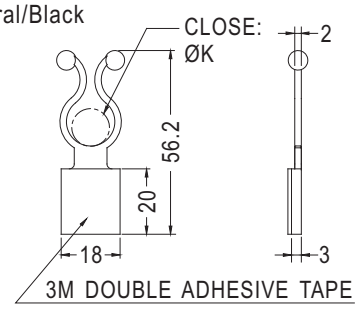


Part No.	K	Package
THM-1	13.0	1000


電線束線座 WIRE LOCK SPACER

用途：用於電子內部電線固定，安裝容易，美觀不脫落。

E217732
UL 1565

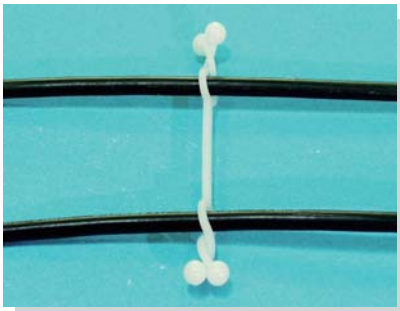

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

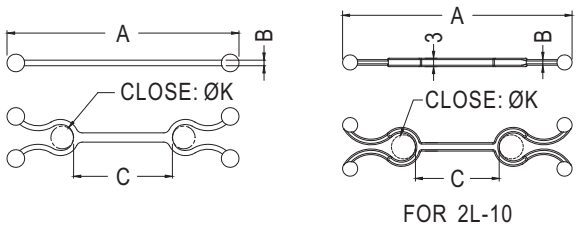


FOR 2L-10


Part No.	A	B	C	K	Package	UL
2L-7	75.0	1.8	33.2	6.3	500	UL
2L-8	56.0	1.6	13.2	8.5		UL
2L-10	82.2	2.0	30.0	8.6		


防落下固定帶 ANTI-EARTHQUAKE FASTENER

用途：預防LCD-TV於地震時落下，固定物件用。

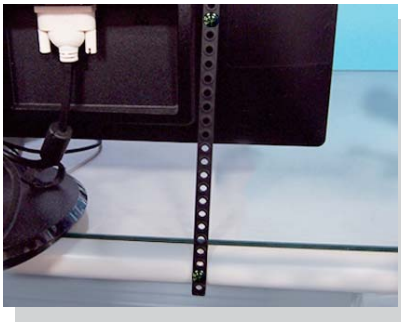

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	C	L	Package
CCHD-220	8.5	220.0	500

Part No.	C	L	Poles	Package
CCHD-172	10.0	172.75	19.0	500
CCHD-210	10.0	210.0	22.0	

- Material: PP
- Color: Black
- Unit: mm

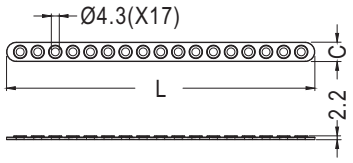

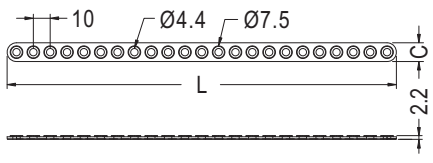


Part No.	C	L	Package
CCHD-175	11.0	175.0	500


Part No.	C	L	Package
CCHD-231	11.0	231.0	500

束線帶固定座 CABLE TIE MOUNT


用途：配合束線帶使用，固定電線背膠式亦可配合螺絲，使機器內部走線美麗、整齊。

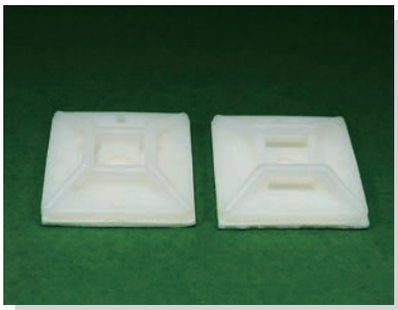


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

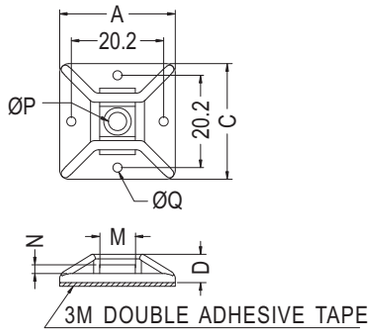


Part No.	A	C	D	M	N	P	Q	Package
CM-1	25.3	25.3	6.2	7.8	1.9	4.0	2.0	500

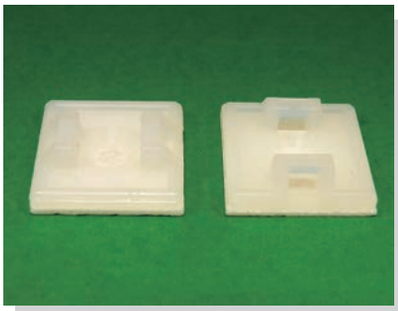

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

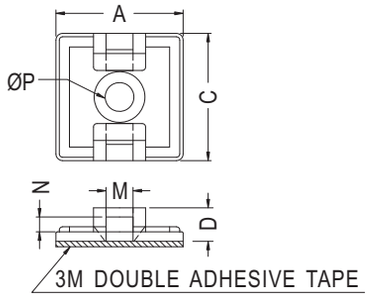



Part No.	A	C	D	M	N	P	Package
CM-18	18.8	18.8	4.95	4.0	2.25	4.25	1000

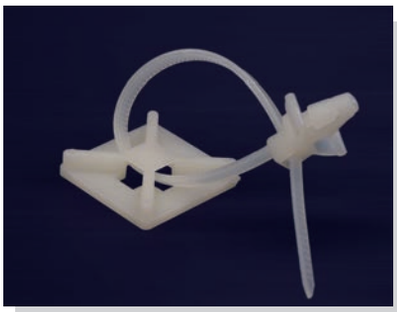

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

E217732
UL 62275

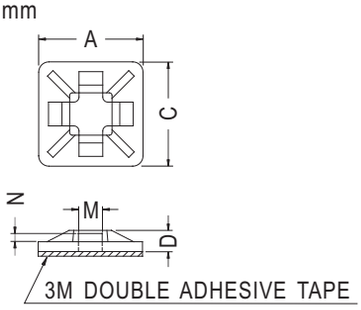


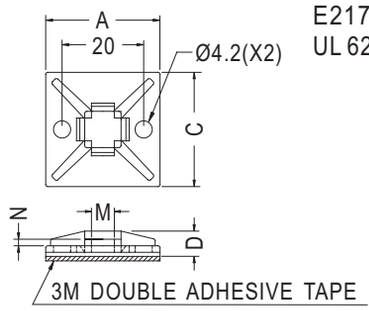


◆ **CM-28S**

Part No.	A	C	D	M	N	Package	UL
CM-13	13.0	13.0	3.2	3.2	1.3	1000	UL
CM-16	16.0	16.0	4.0	3.8	1.5		
CM-19	19.1	19.1	4.0	4.0	1.6	500	UL
CM-19L	19.5	19.5	4.8	5.0	1.7		
CM-20	20.0	20.0	4.3	4.8	1.6		UL
CM-28S	28.0	28.0	5.2	5.6	1.6	250	


用途：配合束線帶使用，固定電線，背膠式亦可配合螺絲，使機器內部走線美麗、整齊。

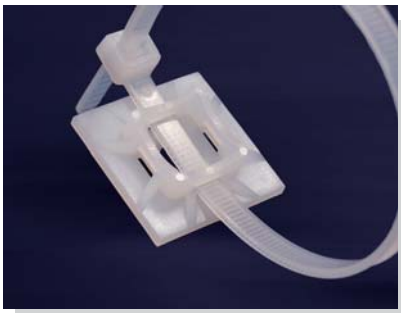


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

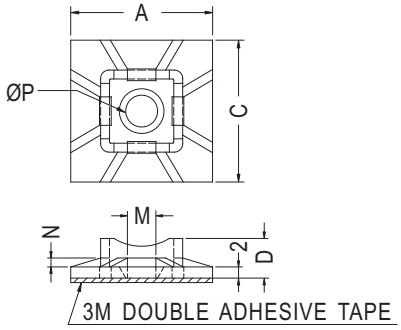


Part No.	A	C	D	M	N	P	Package
CM-25	25.4	25.4	7.1	5.1	1.6	5.7	500

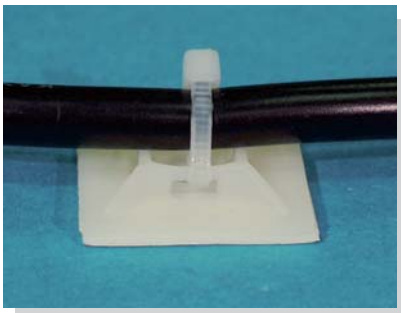


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

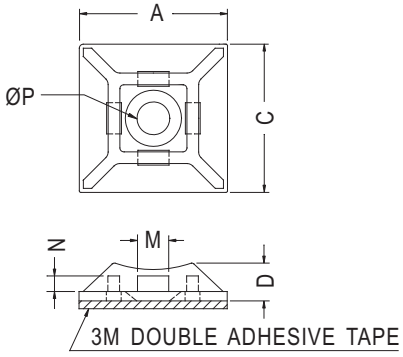

Part No.	A	C	D	M	N	P	Package
CM-19S	19.0	19.0	5.0	4.0	1.9	4.0	500
CM-28	27.8	27.8	5.5	6.0	2.0	5.6	250

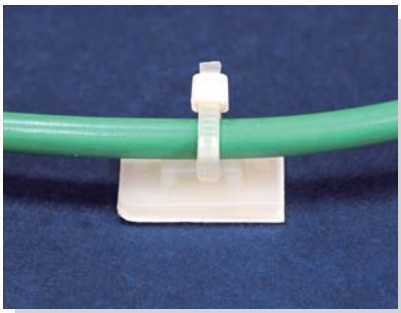


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

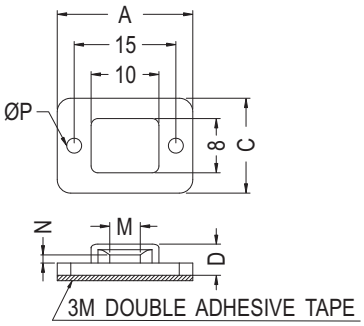


Part No.	A	C	D	M	N	P	Package
CM-29	20.0	14.0	4.6	4.5	1.2	2.2	1000


束線帶固定座 CABLE TIE MOUNT

用途：配合束線帶使用，固定電線背膠式亦可配合螺絲，使機器內部走線美麗、整齊。

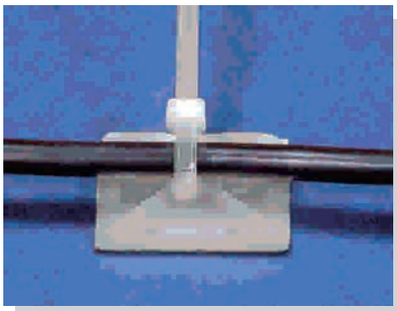

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	C	D	M	N	P	Q	Package
CM-30	32.4	25.1	5.8	8.3	2.8	3.3	1.9	250


束線帶固定座 CABLE TIE MOUNT

用途：用螺絲固定於機板上，配合束線帶固定電線。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	A	C	D	M	N	P	Package
TH-1	19.5	9.6	4.9	5.0	2.0	4.4	1000

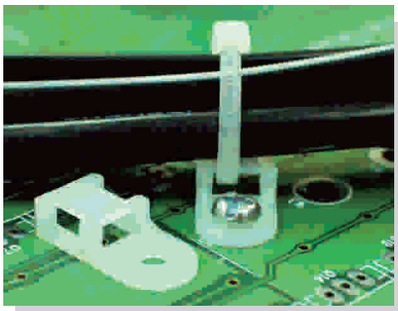

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	A	C	D	M	N	P	Package
TH-3	19.5	9.5	4.8	5.5	2.2	3.6	1000
TH-3L	19.5	9.5	4.8	5.5	2.2	4.7	

束線帶固定座 CABLE TIE MOUNT

用途：用螺絲固定於機板上，配合束線帶固定電線。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	M	N	P	Package
TH-4	19.0	9.52	4.95	4.95	1.68	4.3	1000
TH-7						6.5	





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

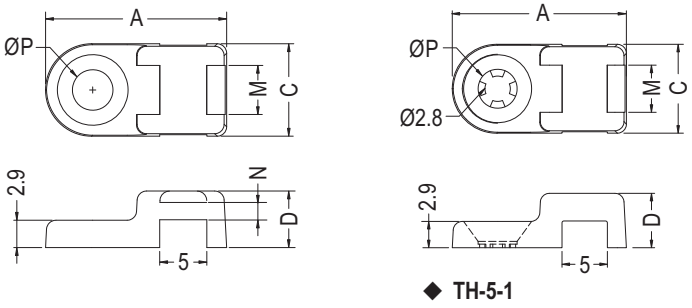


◆ TH-5-1

Part No.	A	C	D	M	N	P	Package
TH-5	19.2	9.8	6.0	5.2	1.9	4.3	1000
TH-5-1							




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	C	D	M	N	P	Package
TH-6	13.07	8.5	3.8	3.52	1.4	3.5	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	M	P	Package
TH-8	19.3	12.6	3.3	5.5	4.4	1000

束線帶固定座 CABLE TIE MOUNT


用途：用螺絲固定於機板上，配合束線帶固定電線。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	C	D	M	P	Package
TH-9	10.2	8.1	2.5	2.8	3.3	1000

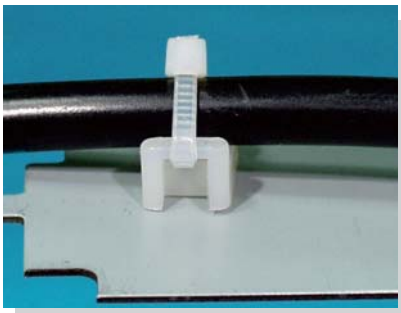

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	M	N	P	R	Package
TH-2	15.2	9.7	6.6	5.2	2.0	3.5	6.9	1000
TH-2S	13.3	8.2	5.85	3.6	1.75	3.2	5.9	

束線帶固定座 CABLE TIE MOUNT

用途：用螺絲固定於機板上，配合束線帶固定電線。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	M	N	P	R	Package
TM-2S6	14.9	9.6	7.2	5.6	1.5	3.7	7.8	1000
TM-2S8	14.9	9.6	7.2	5.6	1.5	4.5	7.8	
TM-3S8	22.0	16.0	9.6	9.2	2.3	4.5	8.0	500
TM-3S10	22.0	16.0	9.6	9.2	2.3	4.8	9.6	
TM-3S25	22.0	16.0	9.6	9.2	2.3	6.4	12.7	

束線帶固定座 CABLE TIE MOUNT


用途：用螺絲固定於機板上，配合束線帶固定電線。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

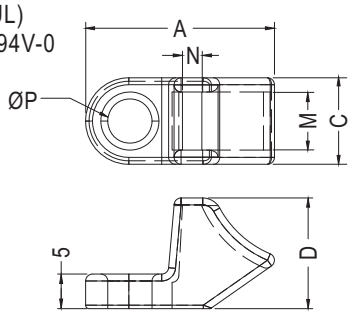


Part No.	A	C	D	M	N	P	Package
THMA-1	27.3	12.5	16.0	8.4	3.0	6.4	1000

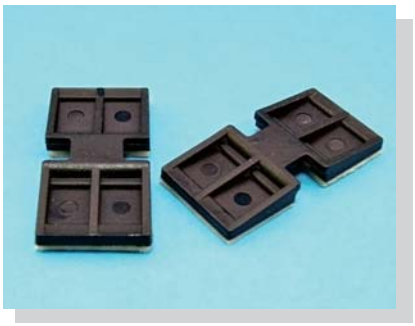

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
THU-1	1000




Part No.	Package
THU-2	1000

束線帶固定座 CABLE TIE MOUNT

用途：配合束線帶固定電線於機殼上，方便安裝，強韌牢固。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	G	H	J	M	N	T	Package
CCMF-2	17.7	6.0	6.1	9.0	7.0	1.6	0.8~9.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

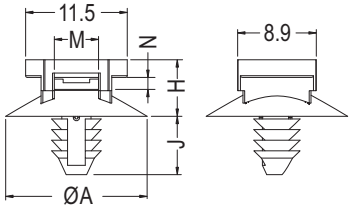

MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	G	H	J	M	N	T	Package
CCMF-3	16.0	4.5~5.0	6.4	6.6	5.0	1.15	0.8~7.0	1000

束線帶固定座 CABLE TIE MOUNT

用途：配合束線帶固定電線於機殼上，方便安裝，強韌牢固。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	G	H	J	M	T	Package
CCMF-5	15.8	6.5~7.0	6.3	7.2	5.0	0.8~3.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	G	H	J	M	N	T	Package
CCMF-7	16.0	6.4~7.1	6.4	11.1	5.0	1.15	0.8~6.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØG
THICKNESS: T

Part No.	A	C	G	H	J	M	N	T	Package
CCMF-1	11.1	8.3	7.9	4.4	8.6	3.8	1.6	6.4	1000

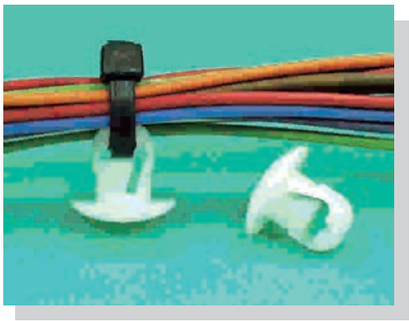

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

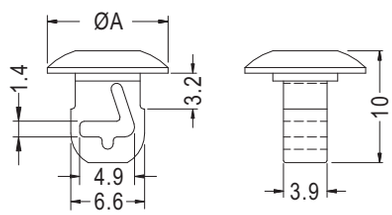


CHASSIS: Ø6.4

Part No.	A	Package
CCM-1	10.8	1000

用途：配合束線帶固定電線於機殼上，方便安裝，強韌牢固。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

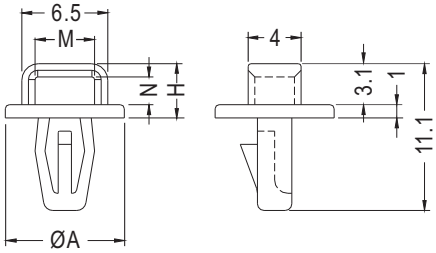


MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	G	H	M	N	T	Package
CCMT-2	9.0	4.0	4.1	4.5	2.1	1.6~2.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

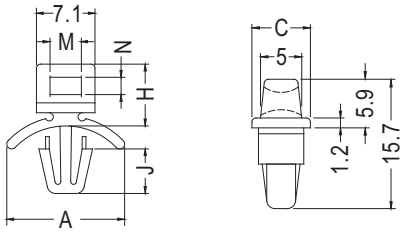


MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	C	G	H	J	M	N	T	Package
CCME-1	14.3	7.1	4.8	7.5	5.4	3.8	2.1	0.8~2.0	1000

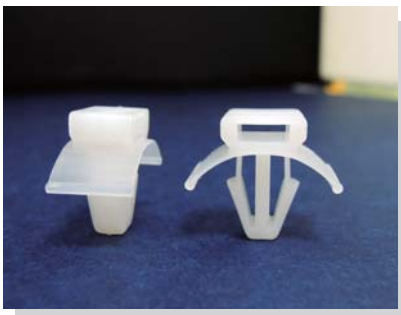

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

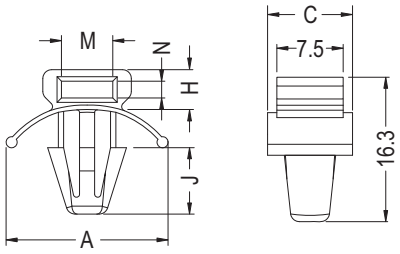


MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	C	G	H	J	M	N	T	Package
CCMW-3	18.3	9.6	6.2~6.35	4.5	7.5	5.8	1.9	0.8~3.6	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

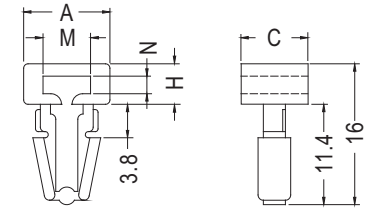


PANEL HOLE DIA: ØG
PANEL THICKNESS: T MAX.


Part No.	A	C	G	H	M	N	T	Package
CCMV-1	9.8	7.6	6.4	4.6	5.4	2.0	3.17	1000

束線帶固定座 CABLE TIE MOUNT

用途：配合束線帶固定電線於機殼上，強韌牢固。

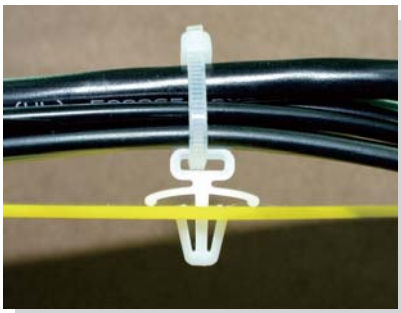



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

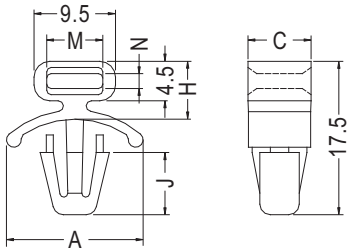

MOUNTING HOLE: ØG
THICKNESS: T

Part No.	A	C	G	H	J	M	N	T	Package
CCMW-1	15.6	7.2	6.4	6.6	7.1	6.4	1.7	1.2~2.8	1000

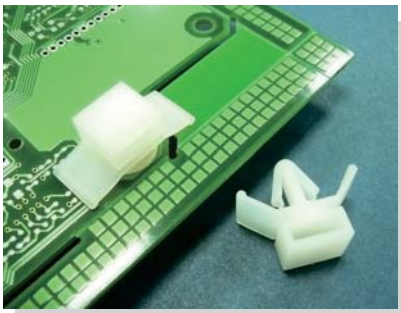



MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	C	G	H	J	M	N	T	Package
CCMW-2	21.0	10.0	6.2	7.1	7.5	8.2	2.4	0.8~3.2	1000

電線固定座 WIRE SADDLE

用途：固定電線於PC板或機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

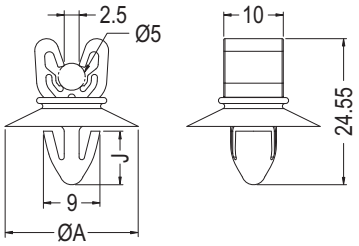


MOUNTING HOLE: ØG
THICKNESS: T


Part No.	A	G	J	T	Package
CHUK-1	22.4	8.0	9.0	1.2	500

插頭固定扣 SOCKET MOUNT


用途：配合束線帶固定電線於機殼上，方便安裝，強韌牢固。

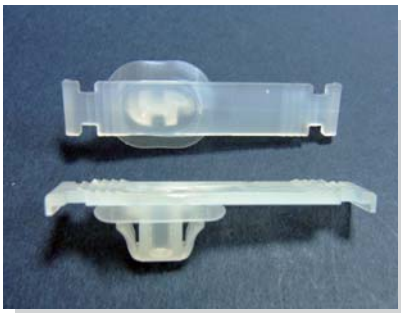


- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm

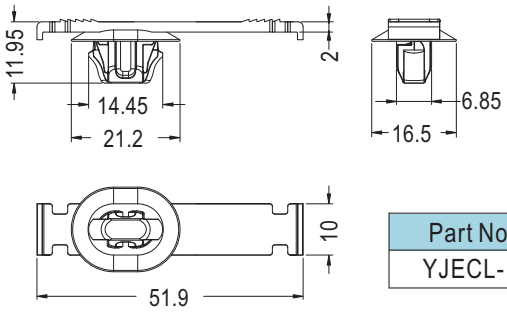

Part No.	Package
YJECL-1	500

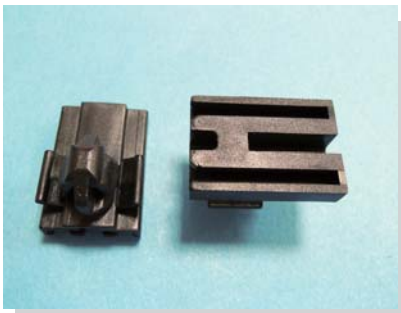




Part No.	Package
YJECL-2	500

電線固定扣 CABLE CLAMP


用途：用於電線之固定。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural/Transparent
- Unit: mm



CHASSIS: ØG
THICKNESS: T




Part No.	G	T	Package
LPZ-5	3.0	2.4	1000

電線固定扣 WIRE BUTTON

用途：固定電線於機器上，維修方便，不佔空間。




- Material: Nylon6/Nylon66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

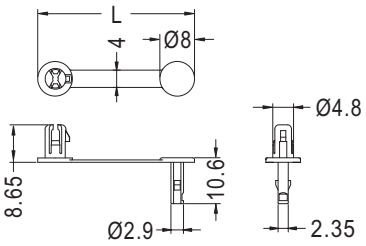

CHASSIS: ØG
THICKNESS: T

Part No.	G	L	T	Package
CCU-1	4.8	36.2	3.5	500

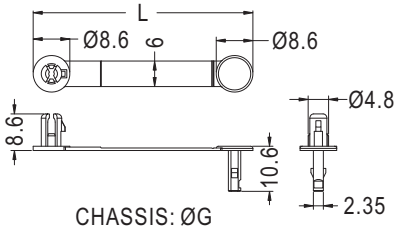


CHASSIS: ØG
THICKNESS: T

Part No.	G	L	T	Package
CCU-2	4.8	51.6	0.8~3.2	500
CCU-3		71.6	0.6~3.0	
CCU-4		99.0	0.6~3.0	

用途：配合螺絲，固定電線整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

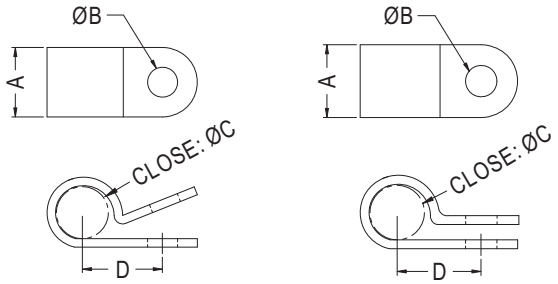


◆CC-10,CC-35,CC-50


Part No.	A	B	C mm	C inch	D	Package
CC-1SS	6.5	3.8	3.2	1/8	6.8	1000
CC-1S	9.2	5.4	3.2	1/8	8.2	
CC-1	13.2	5.4	3.0	1/8	8.9	
CC-2	10.0	5.4	4.5	3/16	10.2	
CC-3	9.3	5.0	6.2	1/4	10.2	
CC-4	9.5	5.0	7.6	5/16	10.5	
CC-4L	9.2	5.4	8.0	5/16	10.7	
CC-5	9.5	4.8	9.0	3/8	12.4	
CC-5L	12.3	5.4	9.0	3/8	13.2	500
CC-6	12.7	4.8	11.5	1/2	14.7	
CC-7	12.9	5.4	12.8	1/2	16.0	
CC-7S	12.5	4.8	15.5	5/8	17.1	
CC-8	12.9	5.4	17.0	3/4	20.2	200
CC-9	12.9	5.4	20.0	7/8	21.2	250
CC-10	12.9	5.4	24~27	1-1/8	23.5	200
CC-12	9.9	4.4	3.0	1/8	8.5	1000
CC-13	9.5	3.2	8.3	5/16	12.0	
CC-14	6.3	3.7	3.5	1/7	6.4	
CC-15	9.6	4.4	5.6	1/4	12.1	
CC-16	11.6	6.4	5.6	1/4	12.1	
CC-17	10.0	4.2	5.0	1/4	9.5	
CC-18	10.0	4.2	11.0	7/16	13.0	
CC-19	9.9	4.4	4.5	3/16	7.75	
CC-20	10.0	4.3	6.5	1/4	9.9	
CC-31	10.0	4.2	11.5	1/2	14.0	
CC-32	10.0	4.2	5.0	1/4	9.5	
CC-35	6.5	3.3	3.0	1/8	9.5	
CC-37	10.9	5.0	7.5	5/16	10.5	
CC-38	12.9	6.6	7.5	5/16	10.5	
CC-44	10.0	3.5	4.5	3/16	10.2	
CC-50	4.0	2.5	3.1	1/8	6.0	
CC-51	12.7	5.2	9.5	3/8	12.3	




Part No.	A	C	D	E	Package
CC-21	16.2	6.0	14.9	28.0	500



Part No.	A	C	D	E	Package
CC-23	12.9	13.3	14.15	29.0	500



Part No.	A	C	D	E	F	Package
CC-24	9.6	5.6	7.5	15.7	4.4	500
CC-45	9.6	5.6	7.5	15.7	4.5	




Part No.	A	C	D	E	Package
CC-25	9.5	3.2	9.86	17.0	500
CC-26	9.5	4.8	11.1	19.0	


用途：配合螺絲，固定電線整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	E	Package
CC-28	4.0	2.7	4.95	10.3	1000




Part No.	A	C	D	E	Package
CC-42	9.5	9.1	15.15	26.9	1000




Part No.	A	C	D	E	Package
CC-29	9.5	8.3	12.0	21.9	1000

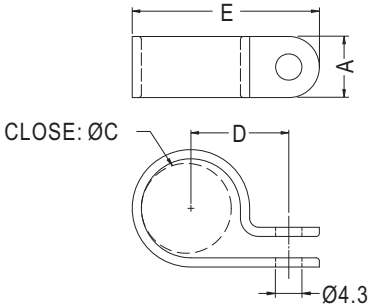


Part No.	A	C	D	E	Package
CC-46	10.0	14.7	16.0	30.6	1000




Part No.	A	C	D	E	Package
CC-49	12.4	19.6	21.1	38.0	500




Part No.	A	C	D	E	Package
CC-53	9.5	7.7	10.75	21.5	1000



Part No.	A	C	D	E	Package
CC-54	9.4	10.0	12.3	23.0	1000



Part No.	A	D	E	Package
CCP-2	10.0	13.4	27.0	1000

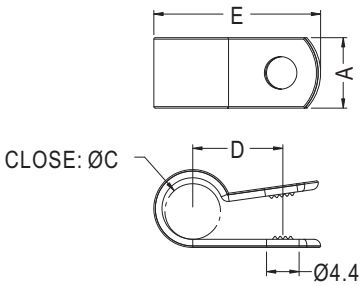


Part No.	A	C	D	E	Package
CCF-1	9.5	7.5	12.15	22.5	1000


用途：配合螺絲，固定電線整齊美觀。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	E	Package
★CC-55	12.7	3.2	8.3	17.25	1000



Part No.	A	C	D	E	Package
★CC-56	13.3	12.0	16.5	29.5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
CCO-1	3.5	500
CCO-2	4.7	





Part No.	A	B	D	G	H	Package
CCO-4	21.75	9.5	11.75	7.5	10.5	500
CCO-5	28.2	10.0	19.0	5.4	8.4	






Part No.	Package
CCO-6	500

用途：配合螺絲，固定電線整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	F	G	Package
CD-3.4	12.85	6.5	3.5	10.1	1.2	3.4	3.4	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	E	F	G	Package
CD-5	19.7	8.5	4.4	15.9	1.3	4.7	5.0	500

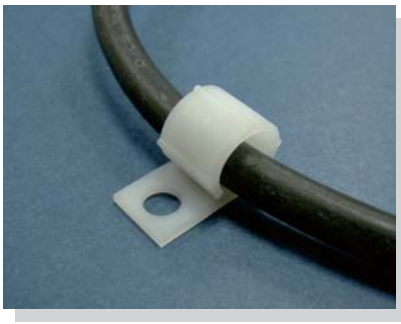


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	D	E	F	G	Package
CD-6	21.2	10.3	5.2	16.7	1.5	6.3	6.0	500
CD-6S			3.2					
CD-9.2	20.0	10.2	5.2	14.5	1.3	4.4	9.2	
CD-9.2S			3.2					



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

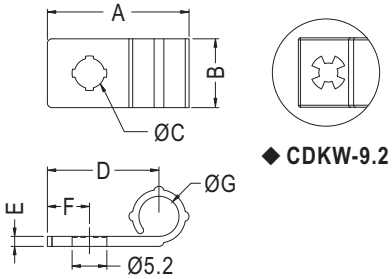


Part No.	A	B	C	D	E	F	G	Package
CDKW-6	21.2	10.3	4.5	16.7	1.5	6.3	6.0	1000
CDKW-6-3			3.0					
CDKW-9.2	20.7	10.2	2.8	14.0	1.3	4.4	9.2	

電線固定扣 CABLE CLAMP


用途：配合螺絲，固定電線整齊，美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	E	F	G	Package
CDV-2.3	18.3	7.0	3.2	1.5	3.5	2.0	1000

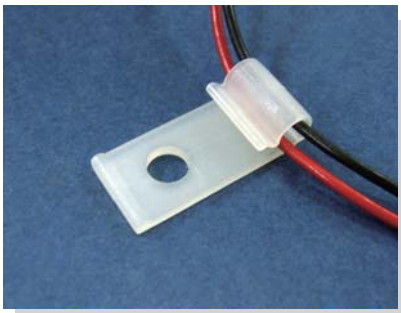


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	E	F	G	Package
CDV-3.2	19.1	8.4	4.0	1.3	5.8	3.2	1000

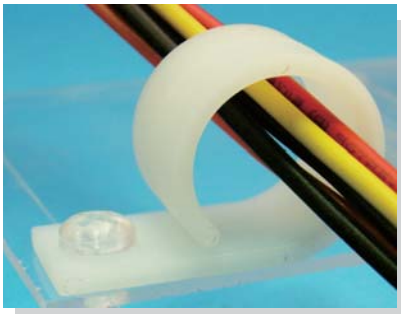

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

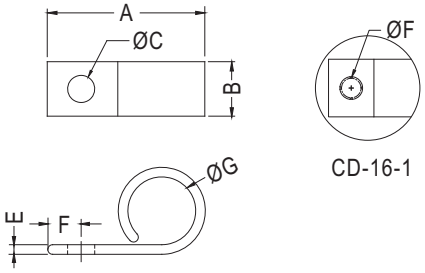


Part No.	A	B	C	E	F	G	Package
CD-12.7	29.5	10.2	5.08	1.8	6.35	12.7	500
CD-12.7-3.2	29.5	10.2	3.2	1.8	6.35	12.7	
CD-16	30.0	12.7	5.0	2.0	5.0	16.0	
CD-16-1	30.0	12.7	5.0	2.0	5.0	16.0	
CD-19	32.54	12.7	5.18	2.03	4.82	19.05	
CD-26	39.85	12.6	5.15	2.2	5.18	26.0	250
CD-40	53.5	12.6	5.0	2.5	4.8	36.9	100

電線固定扣 CABLE CLAMP


用途：配合螺絲，固定電線整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	E	F	H	I	Package
CCA-1	30.4	9.95	4.0	1.8	4.8	12.5	1.4	1000
CCA-2	30.4	9.95	4.0	1.4	4.8	12.5	1.3	

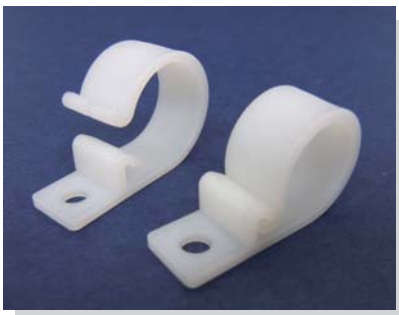

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

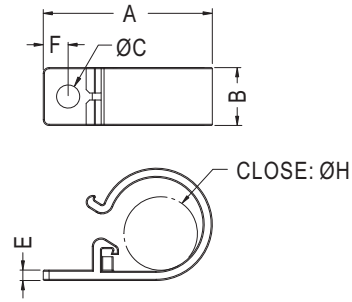


Part No.	A	B	C	E	F	H	Package
CCB-1	29.2	10.0	4.0	1.8	4.3	12.7	500
CCB-2	21.0	10.0	4.0	1.2	6.0	5.5	
CCB-2S	21.0	10.0	3.1	1.2	6.0	5.5	
CCB-3	39.6	12.7	4.0	2.0	4.2	17.8	200
CCB-4	50.0	12.7	4.0	2.2	4.3	25.0	


接地線夾 GROUNDING CABLE CLAMP

用途：用於夾持隔離電線再用螺絲固定，接地效果佳，防干擾。



- Material: SPTE
- Unit: mm

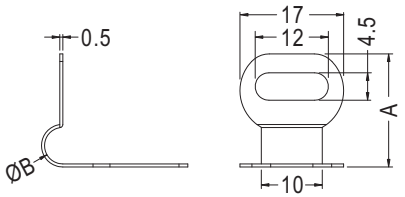




Part No.	A	B	Package
KMCC-1	18.55	6.0	500
KMCC-2	19.6	8.0	

接地線夾 GROUNDING CABLE CLAMP

用途：用於夾持隔離電線再用螺絲固定，接地效果佳，防干擾。




- Material: SUS
- Unit: mm

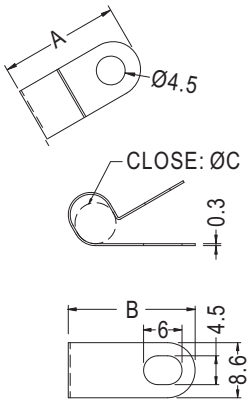


Part No.	A	B	C	Package
KTCC-3	17.20	17.60	3.0	1000
KTCC-4			4.0	
KTCC-5	17.90	18.70	4.8	
KTCC-6	18.70	19.80	6.4	
KTCC-9	18.65	20.62	9.0	




- Material: Aluminum
- Unit: mm



Part No.	Package
KTCC-12	1000

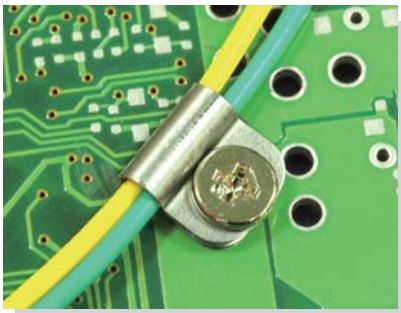

- Material: Steel
- Finish: Zinc Plated
- Unit: mm




Part No.	Package
KTCC-16	1000

電線固定扣 CABLE CLAMP

用途：固定電線於機器中整齊美觀。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CCMG-1	500

電線固定扣 CABLE CLAMP

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。




- Material: POM (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
CDK-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

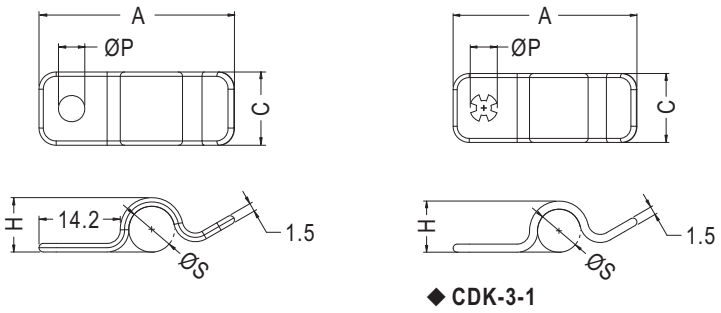


◆ **CDK-3-1**

Part No.	A	C	H	P	S	Package
CDK-3	34.15	12.8	9.5	4.6	8.0	1000
CDK-3-1	34.15	12.8	9.5	5.2	8.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
CDK-5	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CLIA-3	1000

電線固定扣 CABLE CLAMP

用途：背膠式，可快速拆卸，固定電線，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
CDK-2	13.2	10.0	2.4	5.0	3.2	1000
CDK-6	12.3	10.0	1.5	5.0	2.4	

電線固定扣 CABLE CLAMP

用途：固定電線於機器中，整齊美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
WCL-2	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

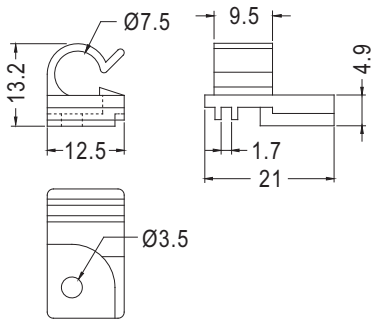

Part No.	Package
WCL-3	500

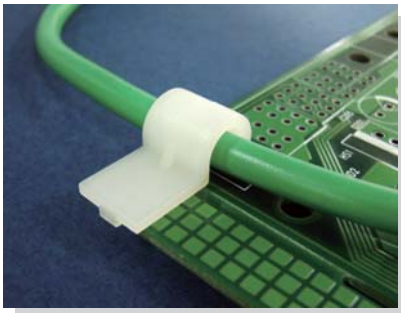

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

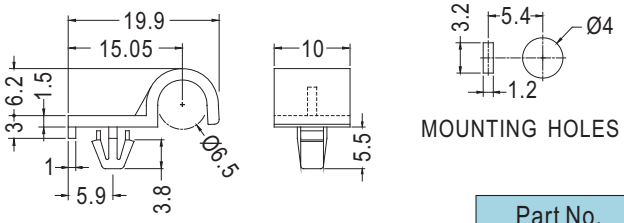


Part No.	Package
CLH-6	500

電線固定扣 CABLE CLAMP


用途：固定電線於機器中整齊美觀。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS: ØG
THICKNESS: T

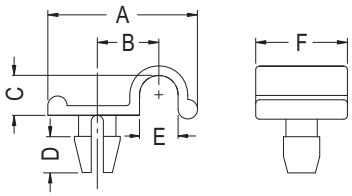

◆CLI-4 CHASSIS: ØG
THICKNESS: T


Part No.	A	B	C	D	E	F	G	T	Package
CLI-4	12.4	5.1	3.3	3.0	3.2	7.6	3.2	1.6	2000
CLI-5	14.1	6.1	4.9		4.8				
CLI-6	15.8	7.0	6.5		6.1				


電線固定扣 CABLE CLAMP

用途：適用螺絲M4、長12，可快速拆卸，固定電線，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

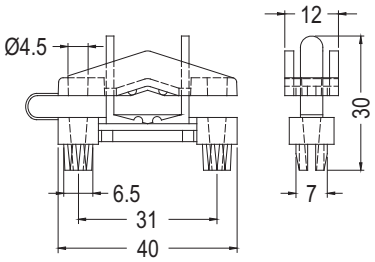



MOUNTING HOLES
THICKNESS MAX. 2.0


Part No.	Package
CLU-1	500


電線固定扣 CABLE CLAMP

用途：固定LCD-TV背部電線，美觀整齊。



- Material: HIPS (UL)
- Flame Class: 94HB
- Color: Gray
- Unit: mm






Part No.	Package
LCDCM-1	100

電線固定扣 CABLE CLAMP

用途：固定電線於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

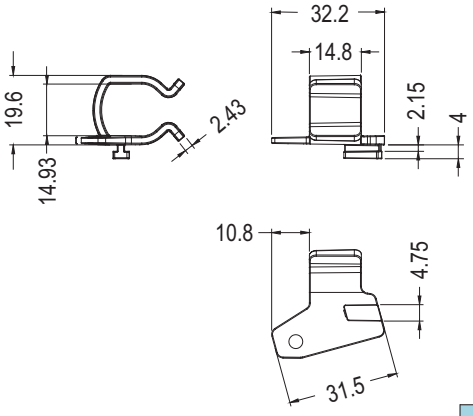


Part No.	Package
CCMJ-1	1000

電線固定扣 CABLE CLAMP

用途：固定電線於機器中，整齊美觀。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

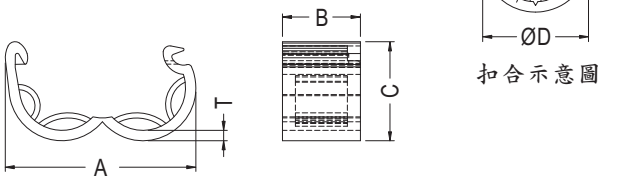


扣合示意圖

Part No.	A	B	C	D	E	T	Package
WAL-1	14.65	6.0	7.6	8.15	3.9	0.8	1000
WAL-2	18.34	5.3	11.6	10.2	5.3~5.5	1.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm




Part No.	Package
WAK-1	1000

電線固定扣 CABLE CLAMP

用途：固定電線於機器中，防止電線斷路。

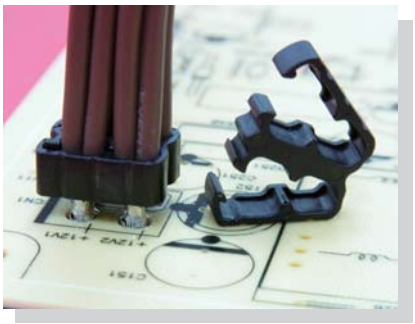


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

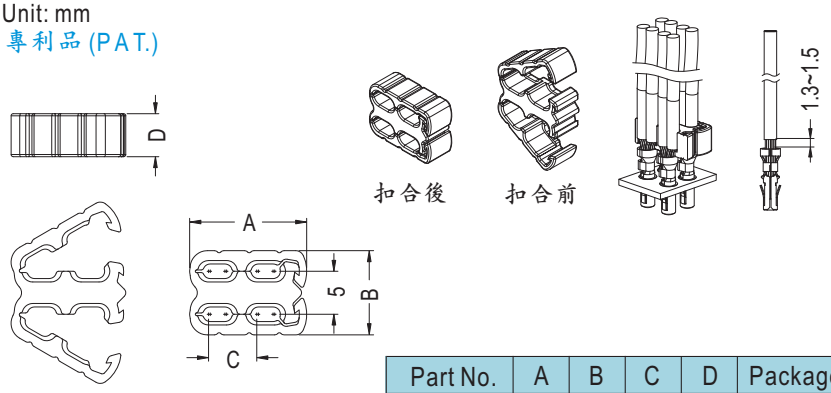


Part No.	A	B	C	D	Package
2WCA-2	13.6	9.8	5.6	5.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

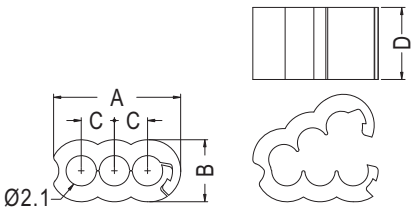


Part No.	A	B	C	D	Package
3WC-2	8.8	4.3	2.3	5.0	1000

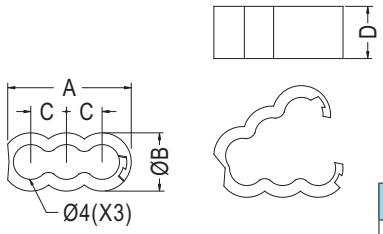

UNIT FOLDED VIEW

Part No.	A	B	C	D	Package
3WC-4	14.2	6.9	4.1	6.0	1000

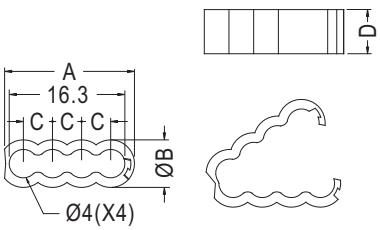


UNIT FOLDED VIEW


Part No.	A	B	C	D	Package
4WC-4	18.3	6.9	4.1	6.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm









UNIT FOLDED VIEW


Part No.	A	B	C	D	Package
5WC-3	19.0	7.2	3.1	6.0	1000

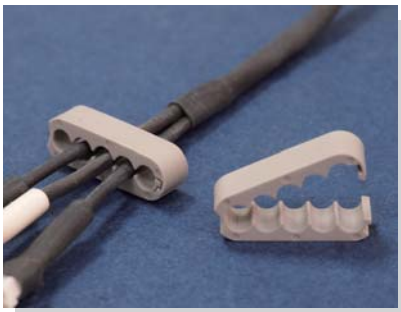

- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm









UNIT FOLDED VIEW

Part No.	A	B	C	D	Package
5WC-3.5	23.1	7.2	4.1	6.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
MUB-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm





NEW


Part No.	Package
MUB-2	1000


電線固定扣 CABLE CLAMP

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。



- Material: ABS(UL)/Nylon 66 (UL)/ PC+ABS(UL)
- Flame Class: 94V-2/94V-0/94HB
- Color: Natural/Black/White
- Unit: mm







Part No.	A	C	H	I	M	N	P	Package
CLT-1	27.8	11.0	7.8	19.0	9.7	2.7	4.4	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm







Part No.	A	C	H	I	M	N	P	Package
CLT-2	20.0	5.5	4.4	14.0	8.5	1.0	3.2	500



- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm






Part No.	A	C	H	I	M	N	P	Package
CLT-4	23.0	7.3	5.0	16.0	7.0	0.7	4.4	1000

電線固定扣 CABLE CLAMP

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。




- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	A	C	H	I	M	N	P	Package
CLT-5	24.0	7.5	5.5	16.0	11.0	2.1	4.4	1000




- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	A	C	H	I	M	N	Package
CLT-6	26.0	7.0	3.0	16.5	7.3	0.8	1000




- Material: PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm



Part No.	A	C	H	I	P	Package
CLT-18	26.0	6.2	3.0	18.0	4.0	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: White
- Unit: mm



NEW


Part No.	A	C	H	I	M	N	Package
CLT-19	20.5	5.5	6.0	15.0	7.15	1.5	1000

電線固定扣 CABLE CLAMP

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	H	I	P	Package
CLT-10	22.0	5.0	3.0	16.5	2.9	1000




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	A	C	H	I	M	N	P	Package
CLT-8	34.2	12.0	7.8	22.2	6.2	2.9	5.4	1000

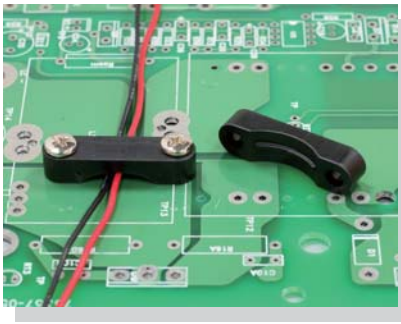


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	C	H	I	P	Package
CLT-14	32.0	8.0	6.5	24.0	4.2	1000

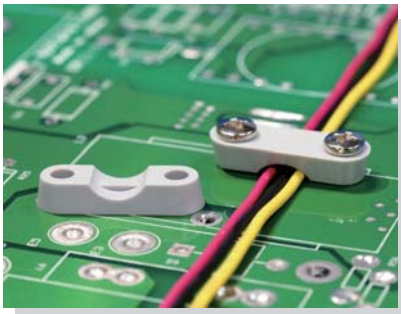

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



NEW


Part No.	A	C	H	I	M	N	Package
CLT-20	26.6	8.6	5.0	18.0	8.9	1.5	1000

電線固定扣 CABLE CLAMP

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



Part No.	A	C	H	I	M	N	P	Package
CLT-7	28.9	13.0	18.2	20.1	13.1	12.7	3.5	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	C	H	I	M	N	Package
CLT-9	23.0	7.0	14.6	18.7	10.2	13.1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	H	I	M	N	P	Package
CLM-7.5	28.0	8.0	8.0	21.0	7.6	6.8	3.0	1000

電線固定扣 CABLE CLAMP

用途：使用螺絲將電線固定於機器中，固定電線不易鬆動。




- Material: Steel
- Unit: mm

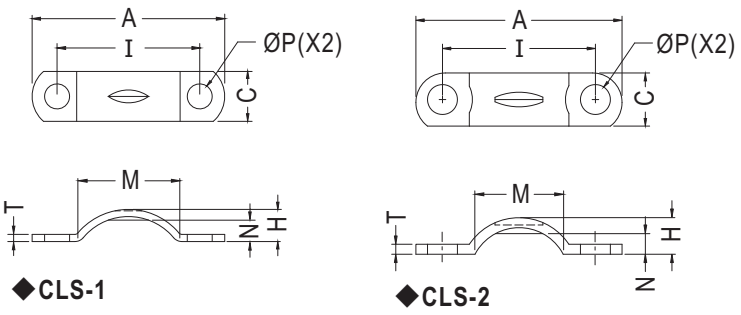


Part No.	A	C	H	I	M	N	P	T	Package
CLS-1	27.0	7.0	4.5	20.0	13.5	3.0	3.5	1.0	1000
CLS-2	31.0	8.0	5.5	23.0	13.3	3.1	4.5	1.5	




- Material: Zinc Plated Steel
- Unit: mm

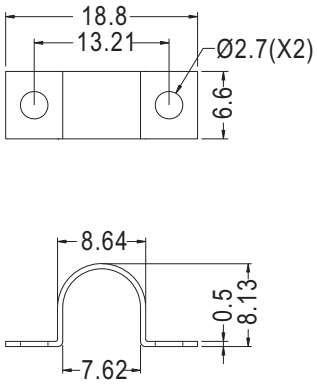

Part No.	Package
EM-514H	1000

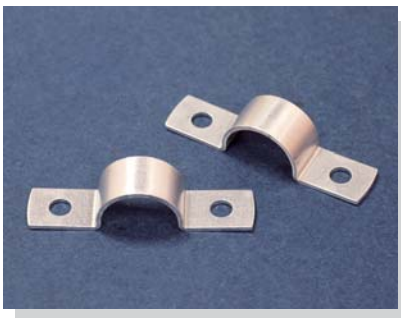

- Material: Aluminum
- Unit: mm

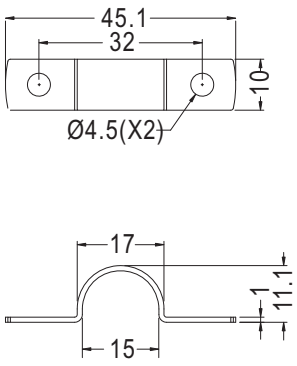


Part No.	Package
EM - 646	1000


用途：用於電線固定於軌道上。


◆線材請勿裝超過橫切面的80%。
◆Please don't fill the wire more than 80% of the cross-section.



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)
- 美國專利品 (USAPAT.)

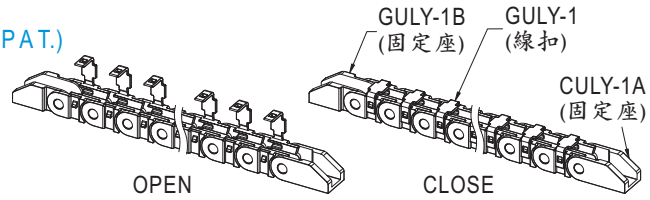


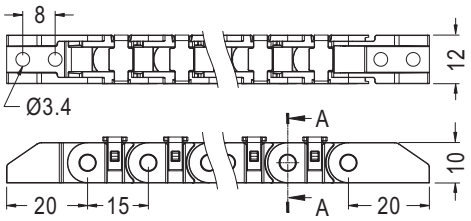






Part No.
GULY-1AB-XXF



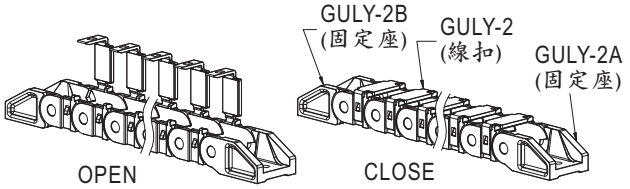


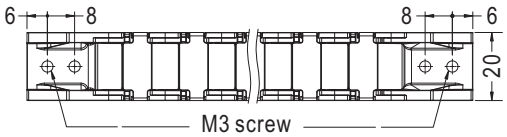





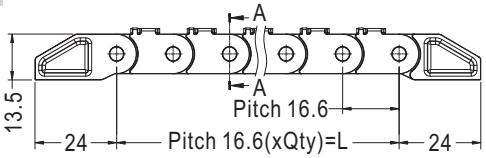



Part No.
GULY-2AB-XXF

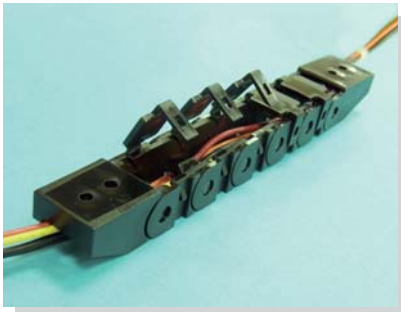

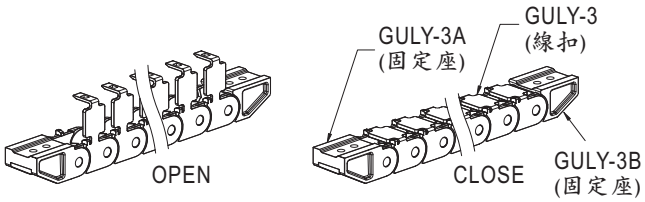









Part No.
GULY-3AB-XXF


用途：用於電線固定於軌道上。

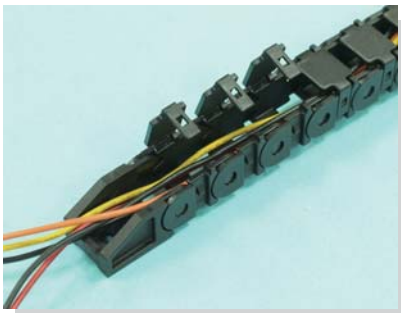


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)
- 美國專利品 (USAPAT.)


◆線材請勿裝超過橫切面的80%。
◆Please don't fill the wire more than 80% of the cross-section.

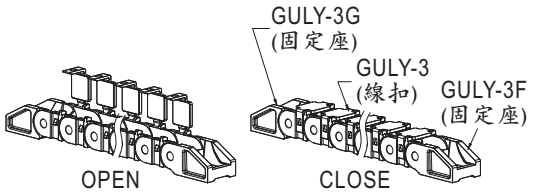


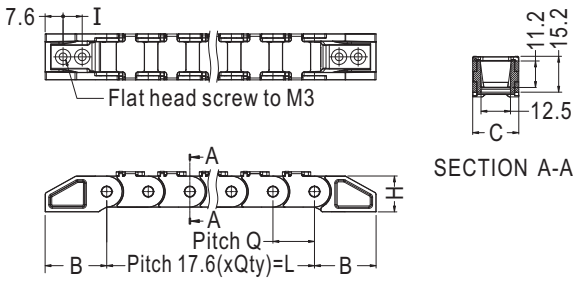

Part No.	B	C	H	I	Q
GULY-3FG-XXF	26.1	19.5	15.2	8.1	17.6

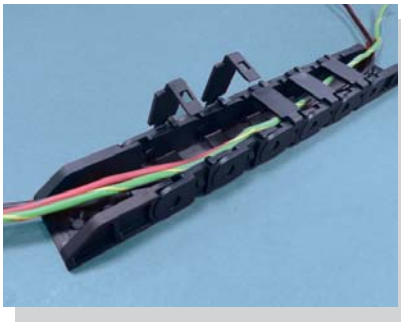


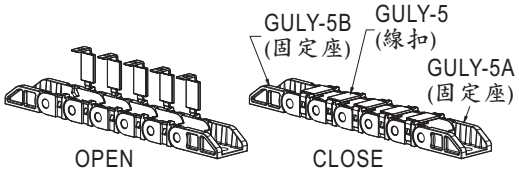


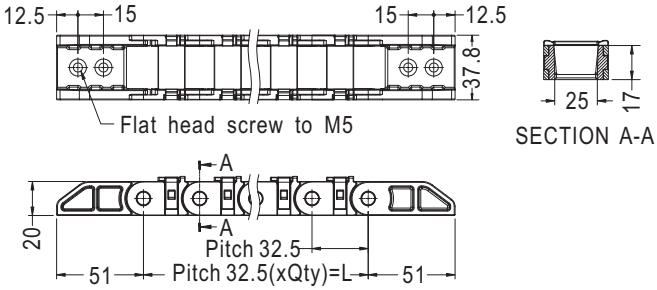

Part No.
GULY-5AB-XXF



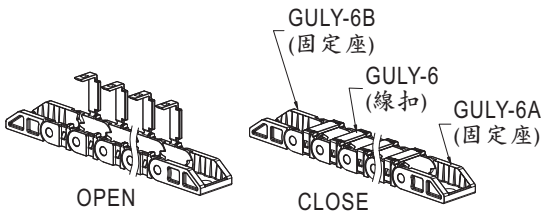


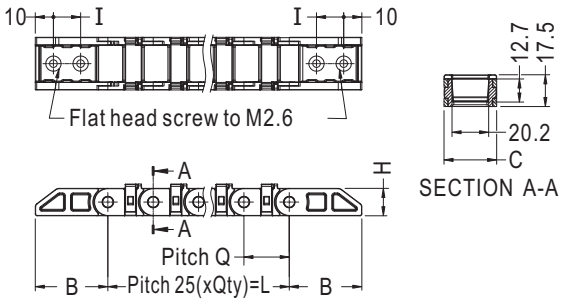


Part No.	B	C	H	I	Q
GULY-6AB-XXF	40.0	29.0	15.1	15.0	25.0


用途：用於電線固定於軌道上。

◆線材請勿裝超過橫切面的80%。
◆Please don't fill the wire more than 80% of the cross-section.

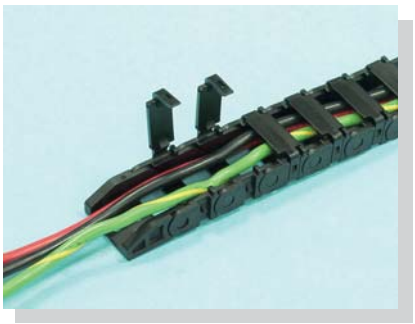



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)
- 美國專利品 (USAPAT.)

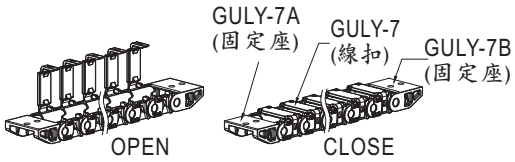


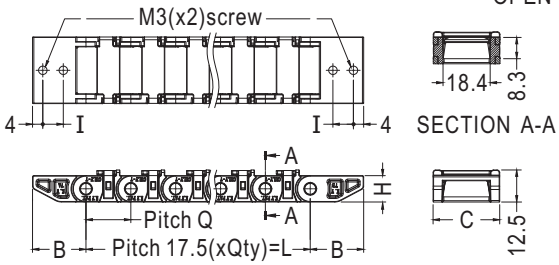

Part No.	B	C	H	I	Q
GULY-7AB-XXF	20.85	26.0	10.3	8.0	17.5

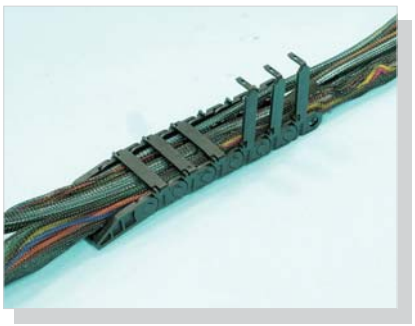


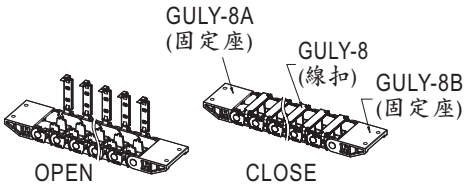


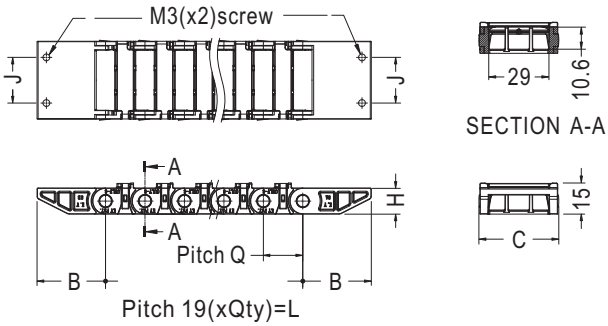

Part No.	B	C	H	J	Q
GULY-8AB-XXF	33.0	38.5	12.6	22.0	19.0



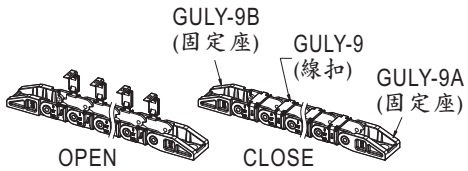

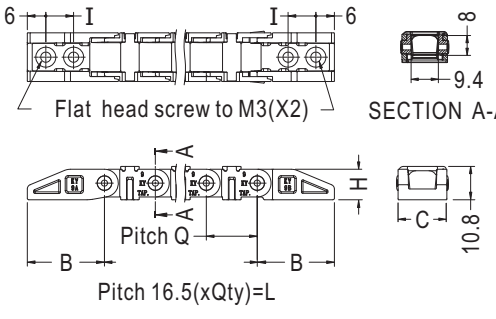


Part No.	B	C	H	I	Q
GULY-9AB-XXF	25.0	15.8	9.9	9.0	16.5


用途：用於電線固定於軌道上。

◆線材請勿裝超過橫切面的80%。
◆Please don't fill the wire more than 80% of the cross-section.





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)
- 美國專利品 (USAPAT.)

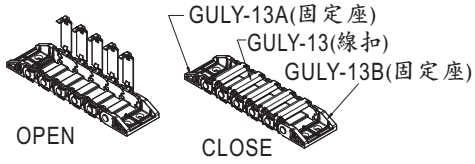


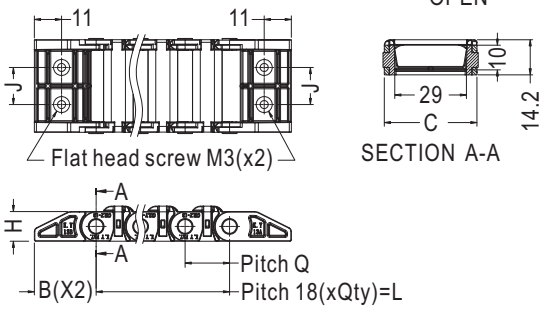


Part No.	B	C	H	J	Q
GULY-13AB-XXF	25.0	37.5	12.0	15.0	18.0

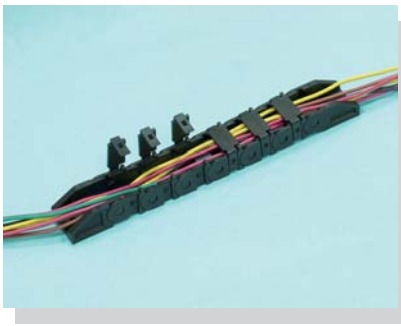


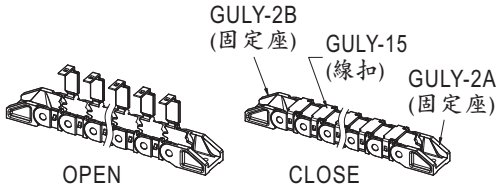


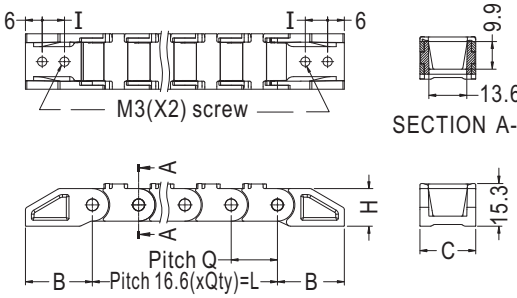

Part No.	B	C	H	I	Q
GULY-15AB-XXF	24.0	20.0	13.5	8.0	16.6

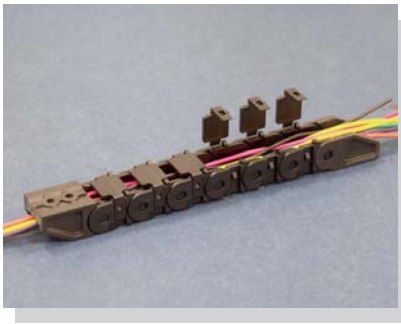

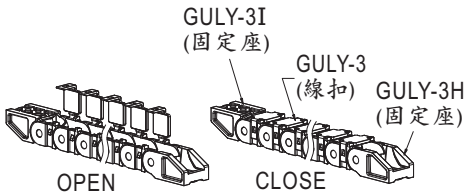

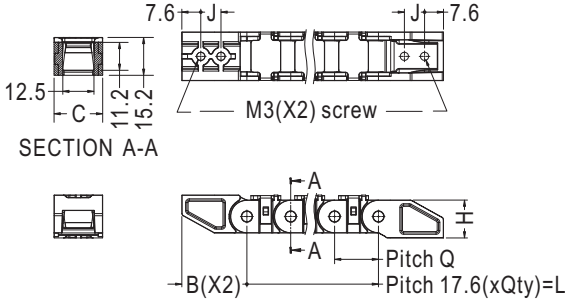


Part No.	B	C	H	J	Q
GULY-3HI-XXCF	26.1	19.5	15.2	8.1	17.6


軌道式線扣組 CABLE CARRIER


用途：用於電線固定於軌道上。

◆線材請勿裝超過橫切面的80%。
◆Please don't fill the wire more than 80% of the cross-section.

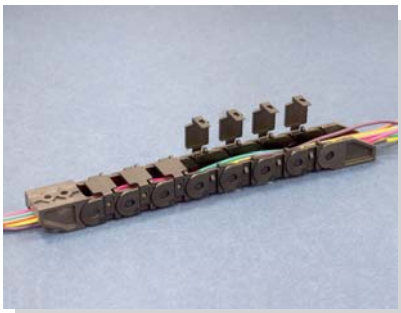

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)
- 美國專利品 (USAPAT.)

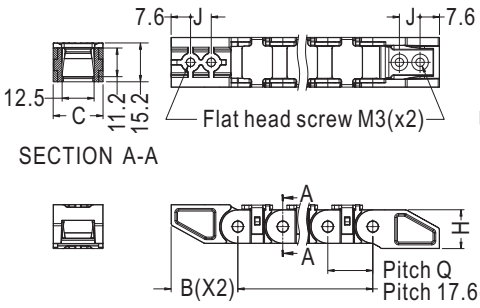

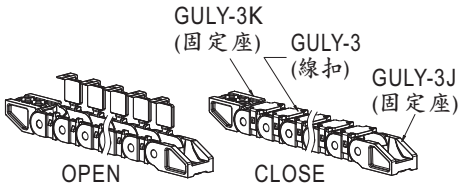

Part No.	B	C	H	J	Q
GULY-3JK-XXCF	26.1	19.5	15.2	8.1	17.6


旋轉軌道式線扣組 ROTARY CABLE CARRIER


用途：用於電線固定於軌道上，可轉方向，方便使用。

◆線材請勿裝超過橫切面的80%。
◆Please don't fill the wire more than 80% of the cross-section.




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)
- 美國專利品 (USAPAT.)

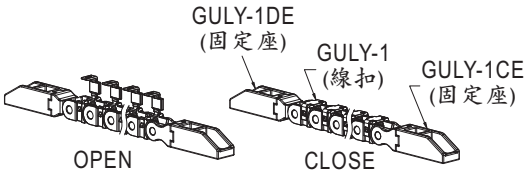


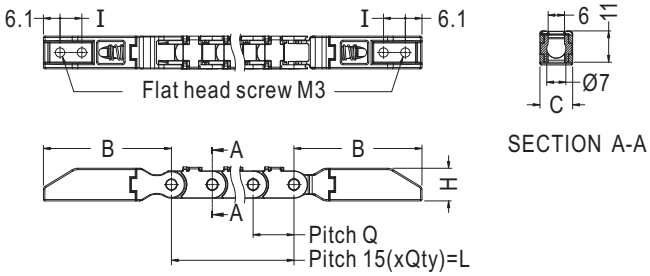

Part No.	B	C	H	I	Q
GULY-1CDE-XXF	47.0	12.0	12.0	8.0	15.0



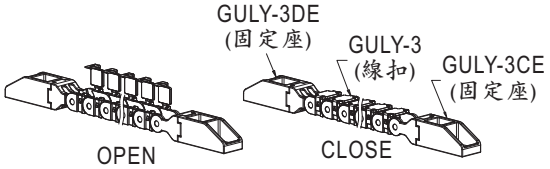


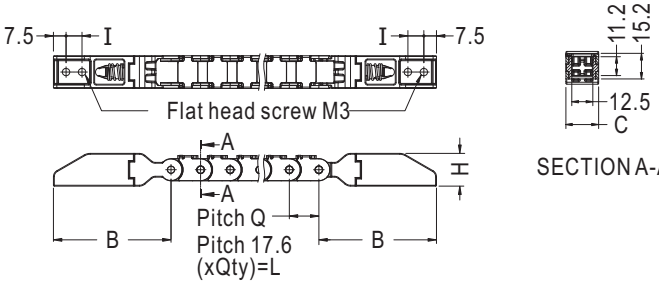

Part No.	B	C	H	I	Q
GULY-3CDE-XXF	70.0	19.5	19.5	9.5	17.6


軌道式線扣組 CABLE CARRIER

用途：用於電線固定於軌道上。

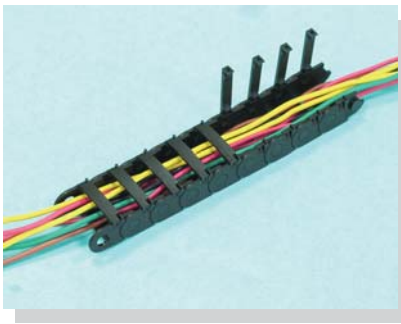


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)
- 美國專利品 (USAPAT.)


◆線材請勿裝超過橫切面的80%。
◆Please don't fill the wire more than 80% of the cross-section.

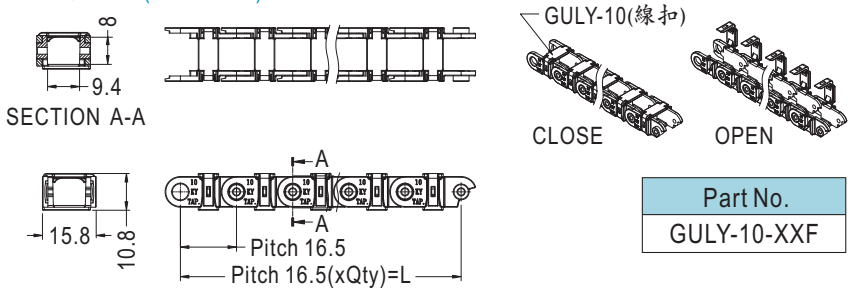

Part No.
GULY-10-XXF

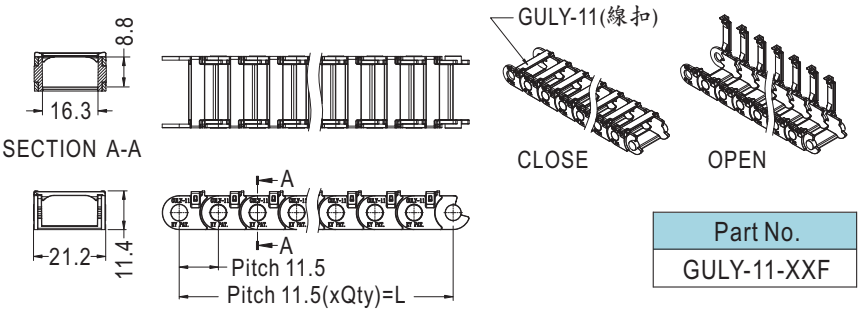

Part No.
GULY-11-XXF

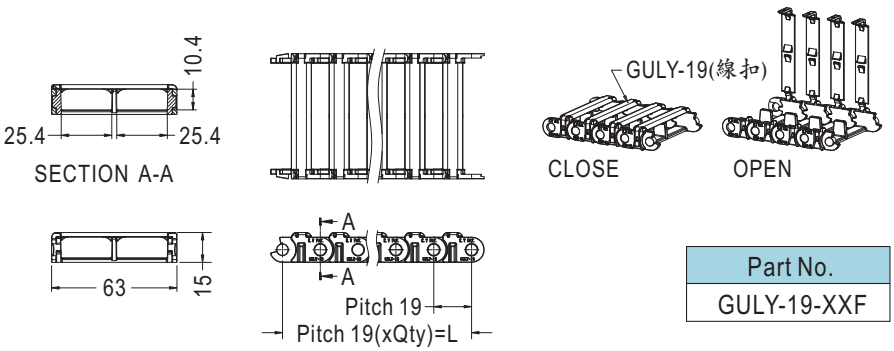


Part No.
GULY-19-XXF

電線束線環 HOSE CLAMP

用途：用於配線中，電線整理美觀不脫落。




- Material: POM(UL)/POM/Nylon 66 (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




Part No.	A(MIN.~MAX.)	B	Package
★ SMAP-5	7.5~8.5	6.0	500
SMAP-6	10.0~11.0	5.5	
SMAP-7	10.0~12.5	5.9	
★ SMAP-7S	8.0~10.0	6.5	
SMAP-10	14.0~16.0	5.9	
SMAP-11	11.0~12.0	5.5	
SMAP-16	17.5~21.0	5.9	250
SMAP-18	20.0~22.0	6.0	
SMAP-19	21.0~24.0	5.9	
SMAP-24	25.0~27.0	7.4	
SMAP-24S	21.0~25.0	5.6	
SMAP-28	27.0~32.0	7.3	
SMAP-32	29.0~34.0	7.3	
SMAP-34	33.0~37.0	7.4	

防高壓線環 F.B.T CLIP

用途：保護C.R.T高壓與管壁間之絕緣使用方便。

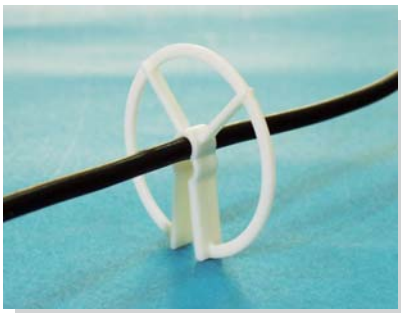

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




FIT CABLE: F

E217732
UL 1565


Part No.	A	B	C	D	F	Package
FBT-1	49.5	7.8	22.0	5.0	4.5~5.3	100
FBT-2	49.2	7.8	22.0	5.0	3.5~4.5	
FBT-3	50.2	7.4	23.0	5.0	2.5~3.5	
FBT-4	49.5	8.0	22.5	4.6	4.0~4.5 or 5.0~5.5	
FBT-5	49.2	8.0	22.0	4.7	3.7~4.2 or 4.5~5.2	


光纖固定座 FIBER CABLE HOUSING


用途：配合THA-、CH-系列產品使用，可固定光纖，不拆斷，不衰減。

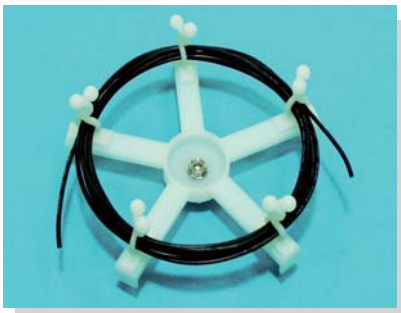

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm








MOUNTING HOLES
FITTING: U


Part No.	U	Package
FSB-1	Screw	50
FSB-1A	Adhesive	


光纖固定座 FIBER CABLE HOUSING


用途：配合WPEM系列產品使用，可固定光纖，不拆斷，不衰減。

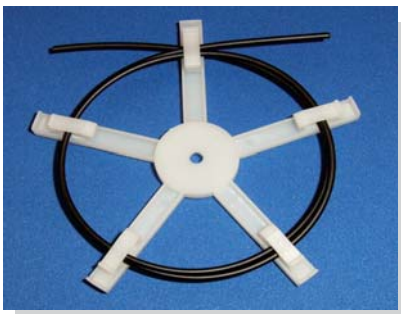

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

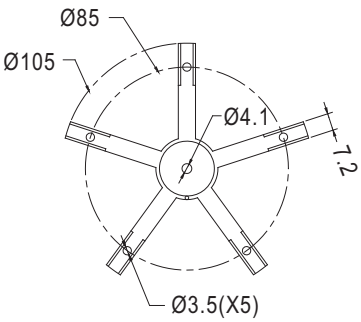






MOUNTING HOLES

Part No.	Package
FSB-2	50

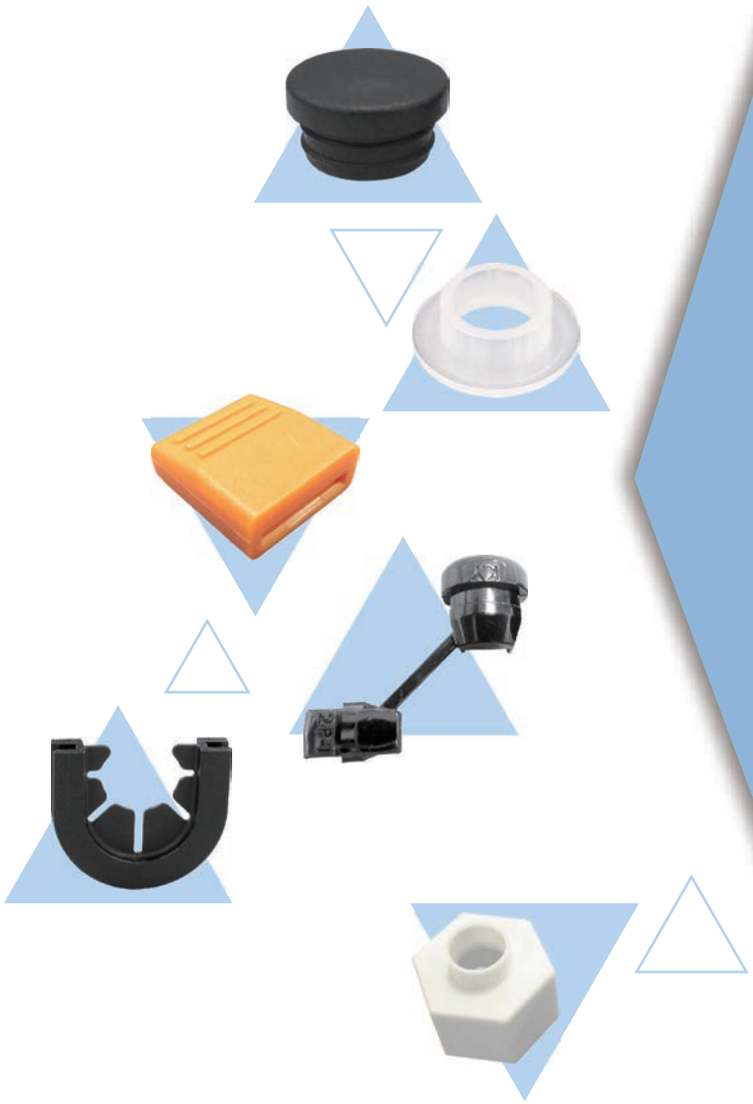


5


- ▶ 護線環
  Snap Bushing
- ▶ 橡膠線環
  Grommet
- ▶ 扣式塞頭
  Hole Plugs
- ▶ 電源線扣
  Strain Relief Bushing
- ▶ 束線帶
  Cable Ties
- ▶ 把手
  Handle
- ▶ 黏貼標誌貼紙
  Wire Label

護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

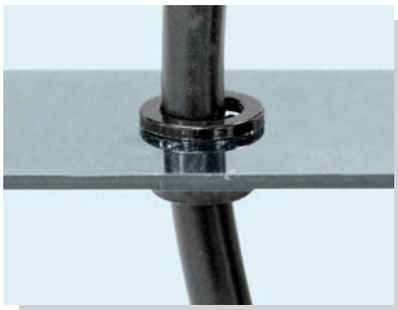

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE ØA

Part No.	A	B	C	D	F	G	搭配螺帽	Package
MGM-10	10.0~10.5	15.0	7.0	12.0	M10X1.5P	6.5	M-10N	500
MGM-12	12.0~12.5	18.0	8.8	12.0	M12X1.5P	8.5	KGB12-07A	
MGM-16	16.0~16.5	21.7	11.2	13.5	M16X1.5P	11.0	KGB16-10A	
MGM-20	20.0~20.5	26.8	15.2	13.5	M20X1.5P	15.0	KGB20-14A	100
MGM-25	25.0~25.5	32.6	19.2	14.0	M25X1.5P	19.0	KGB25-16A	
MGM-32	32.0~32.5	42.0	26.2	19.0	M32X1.5P	26.0	KGB32-25A	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489




MOUNTING HOLE: ØA
THICKNESS: E

Part No.	A	B	C	D	E	Package
312-3	8.0	9.5	5.2	8.2	0.8~1.8	1000
375-4	9.5	12.0	6.6	10.3	0.8~3.3	
0811	11.1	13.6	8.4			
0813	12.7	15.1	9.8			
1216	16.0	18.2	12.8			



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489

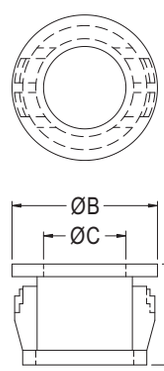

MOUNTING HOLE: ØA
THICKNESS: E

Part No.	A	B	C	D	E	Package
NB-0710	10.0	12.1	7.2	6.6	0.8~1.8	1000
NB-1217	17.5	20.0	12.7	10.3	0.8~3.3	200
NB-1419	19.0	21.5	14.3	11.3		
NB-1722	22.2	25.1	18.6	11.2		100
NB-1922		23.8	19.0	6.3	0.8~1.6	
NB-1925	25.4	27.8	19.4	10.8	0.8~3.3	
NB-2428	28.0	31.5	24.1	11.3	1.0~3.3	200
NB-2430	30.1	34.0	24.5	11.7	0.8~3.3	
NB-2535	35.0	37.8	25.8	11.3	0.8~3.5	
NB-2935		37.8	29.7			
NB-2634	34.2	38.0	26.2	11.5	1.0~3.1	
NB-3034			30.4			
NB-3338	38.0	41.2	33.3	11.6	1.0~3.3	
NB-4150	50.8	53.8	41.8	11.4	0.8~3.2	100
NB-4450			44.3			
NB-4757	57.1	63.0	47.3	18.1	6.35	
NB-5063	63.5	67.5	50.5			
NB-5563			55.5			


護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

E127489



MOUNTING HOLE Ø15.8
THICKNESS 0.8~1.6

Part No.	Package
NB-1215	1000


開口式護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法

E127489




MOUNTING HOLE: ØA
THICKNESS: E

Part No.	A	B	C	D	E	Package
0609C	9.5	11.9	7.3	6.5	0.6~1.6	1000
0813C	12.7	15.0	9.7	9.8	0.8~3.3	
1216C	15.9	18.4	12.8	10.4		
1419C	19.0	20.7	15.1			



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法

E127489



MOUNTING HOLE: ØA
THICKNESS: E


Part No.	A	B	C	D	E	Package
NB-09	9.5	12.4	7.6	6.0	0.8~1.2	1000
NB-12	12.7	16.8	10.8	7.3	0.8~1.0	500
NB-16	15.9	20.3	14.1			
NB-19	19.0	22.5	16.5			
NB-22	22.0	26.0	20.0			
NB-25	25.4	28.6	22.0	7.9	0.8~1.6	

開口式護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SB-2	1000

MOUNTING HOLE Ø11.1
THICKNESS 0.6~3.2



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
NBA-0611C	1000

MOUNTING HOLE Ø11.1
THICKNESS 0.6~3.2




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
NBA-0309C	1000

MOUNTING HOLE Ø9.5
THICKNESS 0.6~3.2

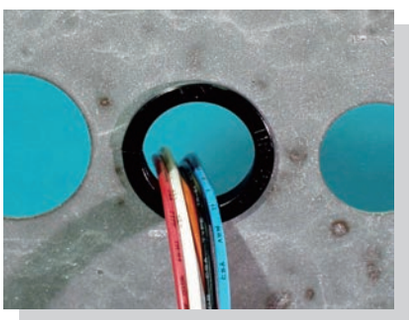

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法

E127489



MOUNTING HOLE: ØA
THICKNESS: E

Part No.	A	B	C	D	E	Package
NB-07A	7.0	10.4	6.0	4.8	0.8~1.0	1000
NB-12A	12.7	16.2	10.8	5.2		
NB-16A	16.0	19.3	13.0			500
NB-19A	19.0	23.0	15.6	5.5		
NB-21A	21.0	25.0	19.0	5.6		
NB-22A	22.0	25.8	19.5	5.5		
NB-23A	23.0	26.4	20.4			
NB-24A	24.0	27.0	20.8	5.3		
NB-27A	27.0	34.6	27.0	6.0		
NB-29A	29.0	34.0	26.3	7.0		
NB-30A	30.0	36.25	28.0			
NB-32A	32.0	36.9	30.0	6.7	0.8~1.2	

開口式護線環 SNAP BUSHING


用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法





E127489



MOUNTING HOLE: ØA
THICKNESS: E

◆ **NB-19.5T**





MOUNTING HOLE: ØA
THICKNESS: E


Part No.	A	B	C	D	E	Package	UL
NB-19.5T	19.5	24.1	17.5	5.5	0.6	500	
NB-22T	22.0	26.4	20.3		0.6~0.8		UL
NB-25T	25.4	30.3	23.3	8.0	0.6~1.6		UL
NB-25TS	25.0	30.3	23.3	8.0			UL



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法

E127489







MOUNTING HOLE: ØA
THICKNESS: E

Part No.	A	B	C	D	E	Package
NB-27C	27.0	34.6	27.0	6.0	0.8~1.2	500
NB-29C	29.0			7.0		
NB-32C	32.0	36.9	30.0	6.7		



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 採開口式量法






MOUNTING HOLE Ø22.0
THICKNESS 0.8~1.0

Part No.	Package
NB-22U	500







MOUNTING HOLE Ø22.0
THICKNESS 0.6~0.8

Part No.	Package
NB-22J	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm
- 採開口式量法





MOUNTING HOLE: ØA
THICKNESS: E


Part No.	A	B	C	D	E	Package
NC-7	7.25	11.0	6.0	3.2	1.1	1000


開口式護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Nylon 66 (UL)/POM
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 採開口式量法






MOUNTING HOLE: ØA

Part No.	A	B	C	D	Package
NC-28A	28.0	30.5	25.0	7.0	500

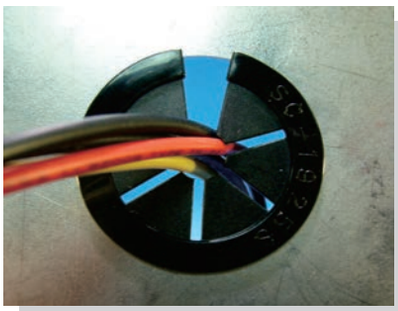

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法





MOUNTING HOLE: ØA
THICKNESS: E

E127489

Part No.	A	B	C	D	E	Package
SC-1925S	25.4	29.0	21.0	5.3	0.8~1.0	250
SC-1925A				11.4	0.8~3.0	
SC-1319A	19.0	22.6	15.3	9.75	0.8~3.2	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 採開口式量法

E127489




CLOSE



OPEN






MOUNTING HOLE: ØA
THICKNESS: E

◆ **SC-1421S,SC-1422S**






MOUNTING HOLE: ØA
THICKNESS: E

Part No.	Dimension						
	A	B	C	D	E	Package	UL
SC-0712	12.7	15.3	10.3	9.8	0.8~3.3	1000	UL
SC-1115	15.9	18.8	13.8	10.3			UL
SC-1421S	21.0	24.5	17.85	8.9	0.6~1.6	250	UL
SC-1422	22.2	25.5	18.5	10.3	0.8~3.3		UL
SC-1422S	22.2	25.5	18.5	7.0	0.6~1.2		UL
SC-2027	27.8	31.5	25.5	10.3	0.8~3.3	200	UL
SC-2331	31.8	38.7	29.3				UL
SC-2534	34.9	39.2	31.2				UL
SC-2638	38.1	42.6	32.6	10.7			UL


護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

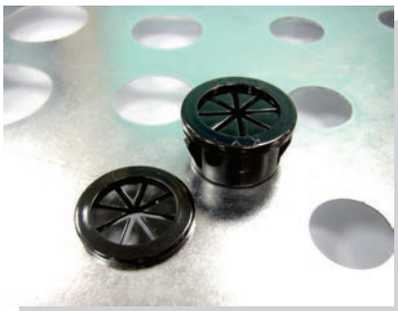

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm





MOUNTING HOLE: ØA
THICKNESS: E MAX.

E127489


Part No.	A	B	C	D	E	Package
SC-1216	15.9	18.3	12.8	10.3	3.2	1000


護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.2

Part No.	Package
NBR-7530	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 1.2


Part No.	Package
NBR-7530-2	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


E127489





MOUNTING HOLE
THICKNESS: E





MOUNTING HOLE
THICKNESS: E

◆ **NBR-7026,NBR-5520**

Part No.	B	D	E	F	G	H	Package	UL
NBR-3025	34.0	6.5	0.8~1.5	26.7	30.5	25.0	1000	UL
NBR-3725	41.5	14.3	1.2~3.0	32.2	37.0		500	UL
NBR-5030S	54.2	7.5	0.8~1.6	44.9	50.0	30.0	100	UL
NBR-5030		14.3	1.2~3.0					UL
NBR-5520	59.2		1.2~3.2	49.9	55.0	20.0		UL
NBR-7026	74.2			64.7	70.0	26.0		UL
NBR-8054	84.5		1.2~3.0	71.4	80.0	54.0	50	UL


護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


E127489



Part No.	Package
NBS-6423	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SBA-1	1000

線環 GROMMET

用途：用於電線之絕緣。

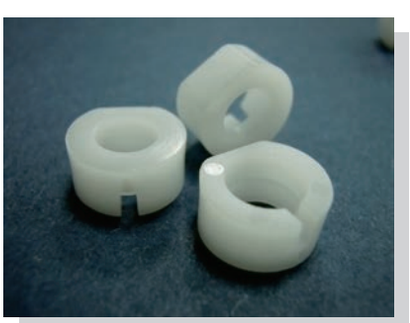

- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

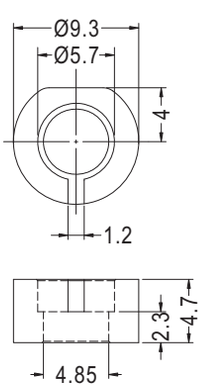


Part No.	Package
010406	1000


橡膠線環 GROMMET


用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm









◆ GM-16




◆ GM-17




◆ GM-35




◆ GM-38,GM-46




◆ GM-39




◆ GM-40,GM-44,GM-55, GM-60,GM-65




◆ GM-45




◆ GM-49



◆ GM-53



◆ GM-64




◆ GM-68


Part No.	A	B	C	D	E	Package
GM-1	8.0	4.8	3.2	1.6	6.4	2000
GM-1A	9.5	6.4	4.0	1.6	6.4	
GM-2	10.8	8.0	4.5	1.6	4.5	1000
GM-3	14.4	9.5	6.3	1.6	7.0	
GM-3A	14.2	11.0	8.0	1.6	4.8	
GM-4	17.5	12.7	9.5	1.6	6.8	
GM-5	22.0	17.5	14.2	1.6	4.8	
GM-6	22.0	19.0	16.0	1.6	5.5	500
GM-6A	25.0	19.5	18.0	1.6	6.0	
GM-7	31.4	25.2	18.5	1.6	8.0	250
GM-8	19.5	14.0	6.0	1.0	7.0	1000
GM-9	15.9	12.7	9.5	1.6	6.4	
GM-11	7.9	4.8	3.2	1.6	4.8	2000
GM-14NP	17.46	11.11	7.94	2.38	8.73	500
GM-15	10.8	8.0	5.0	1.6	4.5	2000
GM-16	18.0	14.7	7.0	4.2	18.0	250
GM-17	18.0	14.6	8.0	3.8	12.0	500
GM-18	13.0	8.4	5.5	3.3	6.3	1000
GM-30	13.3	9.0	5.8	2.0	6.2	
GM-35	8.0	6.0	3.4	1.0	3.0	
GM-38	10.4	8.1	3.6	1.15	7.15	
GM-39	10.5	7.5	5.2	1.4	5.5	
GM-40	24.0	17.5	14.0	3.0	7.0	500
GM-42	27.0	20.8	12.7	1.6	7.8	250
GM-43	11.0	7.9	4.7	1.6	6.0	1000
GM-44	12.3	8.0	5.0	4.0	8.0	
GM-45	16.0	9.5	6.2	2.0	7.0	
GM-46	7.5	6.0	3.5	1.0	5.0	
GM-47	17.5	13.5	10.0	2.0	7.0	
GM-48	10.8	8.0	4.5	1.2	4.5	
GM-49	7.8	5.8	2.33	0.8	4.0	
GM-50	17.5	12.0	10.0	2.0	6.8	
GM-51	12.0	9.0	6.5	1.5	5.5	
GM-53	7.5	4.5	3.5	2.0	4.0	
GM-55	7.0	6.0	3.5	1.0	5.0	
GM-56	7.7	5.0	3.1	1.3	2.8	2000
GM-57	8.8	6.0	4.1	2.5	7.0	
GM-58	11.0	9.0	6.0	2.5	6.6	
GM-60	7.0	6.0	3.5	1.0	3.0	
GM-61	17.5	12.7	9.0	1.6	6.8	1000
GM-62	17.5	12.7	8.6	1.6	6.8	
GM-64	12.9	10.5	9.3	0.8	2.4	2000
GM-65	24.0	18.0	14.0	3.0	7.0	1000
GM-68	15.0	12.1	6.0	3.0	5.0	
GM-163	13.5	9.5	6.3	1.6	7.0	

橡膠線環 GROMMET


用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

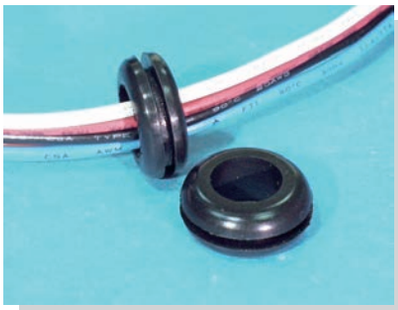


- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm




◆ GM-69,GM-147




◆ GM-138



◆ GM-159




◆ GM-137




◆ GM-139

Part No.	A	B	C	D	E	Package
GM-69	12.0	9.0	6.0	1.5	7.0	1000
GM-137	14.5	10.2	6.2	1.4	6.0	
GM-138	15.9	11.1	7.9	1.6	7.1	
GM-139	14.0	8.0	5.5	1.0	5.2	
GM-147	14.0	11.0	6.1	1.5	7.0	
GM-159	4.8	3.8	2.2	0.8	2.4	





Part No.	Package
GM-158	1000



MOUNTING HOLE Ø15.0~Ø15.5
(裝配孔尺寸僅供參考)


Part No.	Package
TF-346	1000

矽膠線環 SILICON GROMMET

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: Silicon Rubber
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
GM-140	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 2.0

Part No.	Package
TF-1333	1000


用途：用於硬碟及精密零件之防震。




- Material: NBR/Rubber/Silicon Rubber
- Color: Black
- Unit: mm




◆ GM-70




◆ GM-71,GM-81




◆ GM-80



◆ GM-98




◆ GM-99




◆ GM-154

Part No.	A	B	C	D	E	Package
GM-70	6.63	4.52	1.5	1.0	3.8	1000
GM-71	8.0	6.0	4.1	1.1	3.4	2000
GM-80	14.0	11.0	7.0	1.5	7.0	1000
GM-81	12.0	9.0	6.0	1.0	9.0	
GM-98	7.8	5.8	2.33	1.2	4.0	
GM-99	11.1	8.5	5.0	2.0	3.6	
GM-154	13.0	8.8	6.3	3.0	9.0	




◆ GM-136

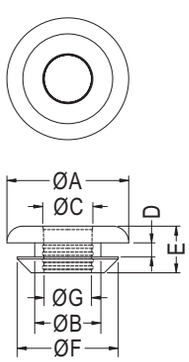

Part No.	A	B	C	D	E	F	G	Package
GM-67	17.5	9.5	7.2	2.0	6.7	14.5	6.8	1000
GM-73	17.5	9.5	6.8	2.0	6.7	14.5	6.3	
GM-74	18.5	10.5	8.2	2.0	6.7	15.5	7.8	
GM-75	19.5	11.5	9.2	2.0	6.7	16.5	8.8	
GM-77	21.8	13.8	11.2	2.0	6.7	18.8	10.8	
GM-82	17.5	9.5	6.2	2.0	6.7	14.5	5.8	
GM-96	17.5	11.5	7.2	2.0	6.7	16.5	6.8	
GM-97	17.5	11.5	7.6	2.0	6.7	16.5	7.2	
GM-136	12.0	8.5		1.1	3.6	9.5	6.7	2000




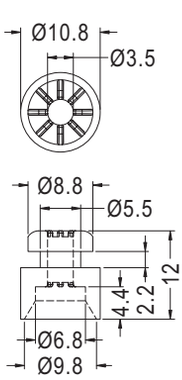

Part No.	Package
GM-92	1000




- Material: TPR
- Color: Black
- Unit: mm



Part No.	A	B	C	D	E	Package
GM-131	30.0	25.5	22.0	1.6	8.0	250


抗震線環 ANTI-VIBRATION GROMMET

用途：用於硬碟及精密零件之防震。

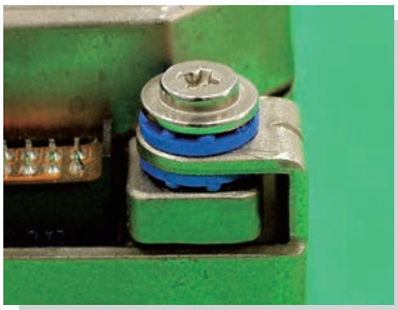


- Material: TPE/TPE(UL)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black/Blue
- Unit: mm

◆ G:為45度硬度， H:為55度硬度




Part No.	A	B	C	D	E	Package
TGM-14	14.0	9.5	4.85	1.6	8.1	1000
TGM-15	14.0	11.0	4.85	1.6	8.1	
TGM-16	14.0	9.5	4.85	1.0	7.5	
TGM-25	14.0	9.5	4.85	1.0	8.1	
TGM-29	14.0	9.5	4.85	1.2	7.4	
TGM-128	14.3	9.52	4.78	1.65	8.2	




◆ TGM-11可配合TGM3-10和TGM632-10螺絲用。

Part No.	Package
TGM-11	1000




◆ TGM-17可配合TGM-17SW螺絲用。

Part No.	Package
TGM-17	2000




Part No.	Package
TGM-18	1000




• Material: Silicon Rubber


Part No.	Package
TGM-21	1000




Part No.	A	B	C	D	E	Package
TGM-36	8.0	6.0	4.2	0.8	3.8	1000
★TGM-164	8.5	6.0	4.2	1.1	3.8	




Part No.	Package
TGM-38	2000




Part No.	Package
TGM-40	1000



Part No.	A	B	C	D	E	Package
TGM-44	11.0	8.0	6.0	2.0	5.0	1000
TGM-50	7.0	5.5	3.9	0.9	2.8	
TGM-56	12.7	9.5	4.8	1.6	5.4	
TGM-81	14.2	9.5	4.9	1.0	4.9	
TGM-130	14.2	9.5	5.4	1.0	4.9	
TGM-138	8.6	7.0	5.5	0.8	7.8	



Part No.	Package
TGM-41	1000



Part No.	Package
TGM-45	1000

用途：用於硬碟及精密零件之防震。




- Material: TPE/TPE(UL)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black/Blue
- Unit: mm


◆ G:為45度硬度， H:為55度硬度

◆ TGM-10可配合TGM-10SW螺絲用。

◆ TGM-13可配合TGM-13SW螺絲用。




Part No.	A	B	C	D	E	Package
TGM-10	9.62	6.3	3.9	1.6	5.8	1000
TGM-13	10.5	7.8	4.75	1.5	6.75	
TGM-22	9.62	6.3	3.9	3.0	7.0	
TGM-23	11.0	7.8	4.75	1.0	8.0	
TGM-24	9.62	6.3	3.9	1.0	5.8	
TGM-28	9.62	6.3	3.9	1.2	5.8	
TGM-42	12.0	9.0	6.0	1.0	9.0	2000
TGM-52	9.62	6.35	3.9	0.8	5.8	1000
TGM-82	9.6	7.1	4.3	2.6	6.6	
TGM-129	9.0	6.0	4.0	1.3	3.7	
TGM-151	9.2	6.5	4.1	1.0	4.6	
TGM-153	7.8	6.0	4.0	1.1	4.5	
★TGM-161	19.0	13.8	9.0	3.0	10.2	
★TGM-162	7.0	5.5	3.9	1.0	5.8	
★TGM-163	10.5	7.8	4.75	2.0	7.25	
★TGM-167	8.0	5.5	3.9	0.8	3.4	

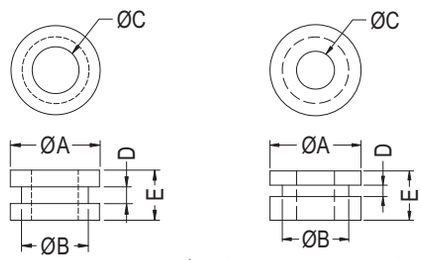


◆ **TGM-46,TGM-86,TGM-97**


Part No.	A	B	C	D	E	Package
TGM-20	8.0	6.0	4.2	1.5	4.6	1000
TGM-46	7.0	5.5	4.0	0.6	5.5	
TGM-86	9.6	7.0	4.0	1.2	5.2	
TGM-97	8.0	6.0	4.2	0.8	2.9	
TGM-116	10.0	7.0	5.0	2.0	5.0	
TGM-131	8.8	6.6	3.6	0.8	3.8	
TGM-137	8.8	6.0	4.2	0.9	2.9	
TGM-143	8.0	6.0	4.2	0.9	2.9	
TGM-145	9.6	7.6	5.6	0.8	2.8	
TGM-146	6.5	5.0	4.0	1.0	3.8	




Part No.	Package
TGM-49	1000




Part No.	Package
TGM-51	1000




Part No.	Package
TGM-64	1000



Part No.	Package
TGM-65	1000




Part No.	Package
TGM-67	1000




• Material: Silicon Rubber

Part No.	Package
TGM-68	1000




MOUNTING HOLE Ø7.0~Ø7.5
(裝配孔尺寸僅供參考)

Part No.	Package
TGM-71	1000




MOUNTING HOLE Ø6.0
(裝配孔尺寸僅供參考)

Part No.	Package
TGM-76	1000




Part No.	Package
TGM-83	1000



Part No.	Package
TGM-88	1000


抗震線環 ANTI-VIBRATION GROMMET

用途：用於硬碟及精密零件之防震。

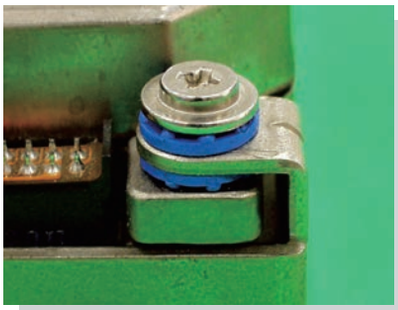


- Material: TPE/TPE(UL)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Flame Class: 94V-0
- Color: Black/Blue
- Unit: mm

◆ G:為45度硬度， H:為55度硬度




Part No.	Package
TGM-123	2000




- Material: Silicon Rubber


Part No.	Package
TGM-124	1000




Part No.	Package
TGM-140	1000




Part No.	Package
TGM-141	1000




Part No.	Package
TGM-149	2000



Part No.	Package
TGM-152	1000




Part No.	Package
★TGM-166	1000



Part No.	Package
TGU-1	1000



- Body Material: /TPE(UL)
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Flame Class: 94V-0
- Pin Material: Zinc Plated Steel
- Color: Black
- Unit: mm




Part No.	Package
TGM-96	1000

用途：用於硬碟及精密零件之防震。




- Material: TPE
- Pin Material: Zinc Plated Steel
- Color: Black/Blue
- Unit: mm

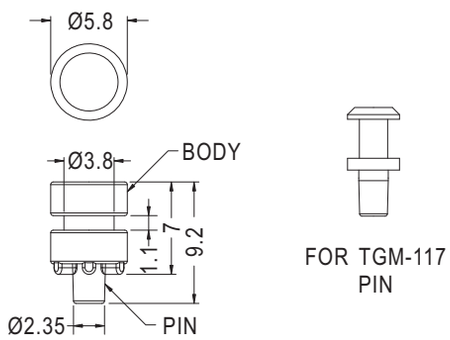


◆ TGM-117為專利品(PAT.)


Part No.	Package
TGM-73	1000
TGM-117	



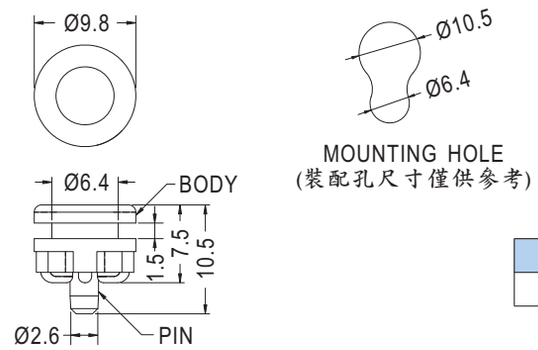



Part No.	Package
TGM-74	1000

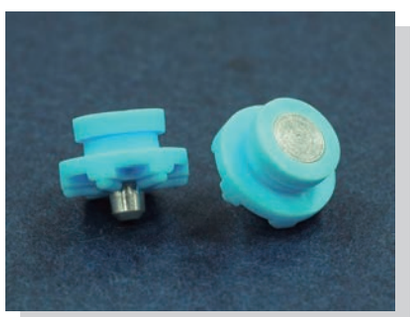

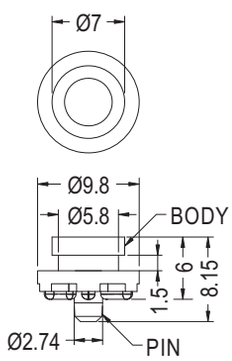

Part No.	Package
TGM-126	1000

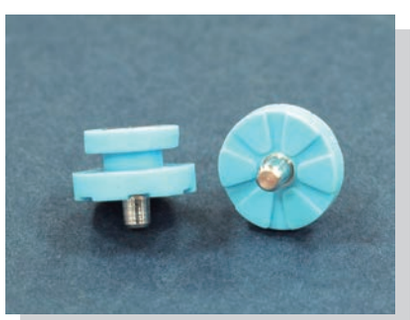

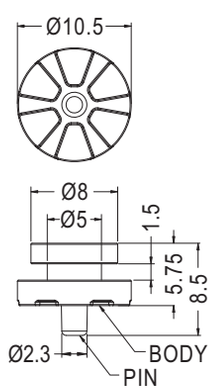


Part No.	Package
TGM-132	1000

抗震線環 ANTI-VIBRATION GROMMET

用途：用於硬碟及精密零件之防震。




- Body Material: TPE
- Pin Material: Zinc Plated Steel
- Color: Black/Blue
- Unit: mm




Part No.	A	B	C	D	E	L	Package
TGM-58	9.8	6.4	2.5	1.5	5.0	8.5	1000
TGM-112	9.8	6.4	2.5	1.5	5.5	9.0	



- Material: TPE
- Color: Black/Blue
- Unit: mm

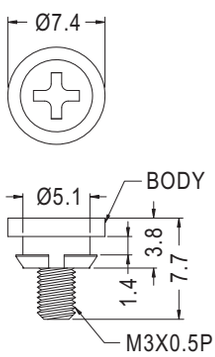



MOUNTING HOLE
(裝配孔尺寸僅供參考)


Part No.	Package
TGM-69	1000

磁碟機防震座 HDD ANTI-VIBRATION BASE

用途：用於磁碟機之防震保護。




- Material: TPE
- Color: Black
- Unit: mm

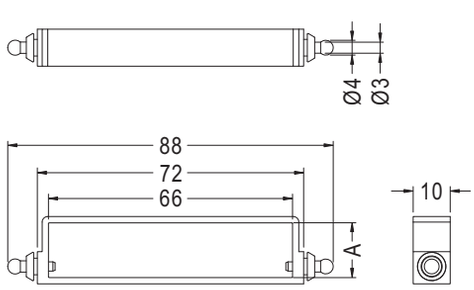


Part No.	A	HDD	Package
DKHR-1	14.8	3.5"	100
DKHR-7	6.7	2.5"	
DKHR-9	9.3		

螺絲 SCREW

用途：硬碟及精密零件之抗震線環用螺絲，可配抗震線環使用。

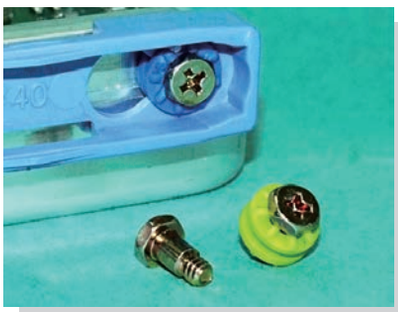


- Material: Steel
- Finish: Nickel Plating
- Unit: mm




◆可配抗震線環TGM-11使用

Part No.	T	Package
TGM3-10	M3X0.5	1000
TGM632-10	6-32 UNC	




◆可配抗震線環TGM-10使用


Part No.	Package
TGM3-8SW	1000



◆可配抗震線環TGM-17使用


Part No.	Package
TGM-17SW	1000






◆ **TGM3-9.8SW**

Part No.	A	B	C	D	E	T	Package
TGM3-9.8SW	10.0	3.4	4.8	1.0	6.4	M3X0.5	1000
TGM3-11SW	6.0	4.0	4.0	3.0	4.01	M3X0.5	
TGM4-11SW	8.0	5.15	5.0	2.7	4.01	M4X0.7	
TGM4-13SW	8.0	7.25	5.0	2.7	4.01	M4X0.7	




Part No.	Package
TGM4-13ST-1	1000



◆可配抗震線環TGM-10使用

Part No.	Package
TGM-10SW	1000

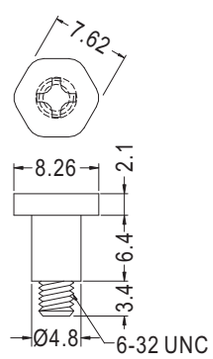

◆可配抗震線環TGM-13使用


Part No.	Package
TGM-13SW	1000

插梢 PIN

用途：硬碟及精密零件之抗震線環用插梢，可配抗震線環使用。



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm
- 專利品(PAT.)

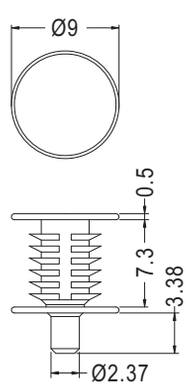


◆可配抗震線環TGM-128使用

Part No.	Package
TGM-128A	1000


用途：用於硬碟及精密零件之防震。




- Material: NBR/Rubber/Silicon Rubber
- Color: Black
- Unit: mm

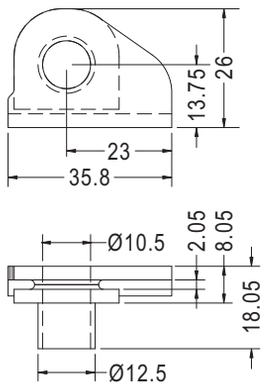


Part No.	Package
GM-25	1000

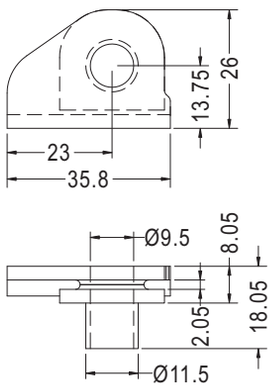


Part No.	Package
GM-26	1000

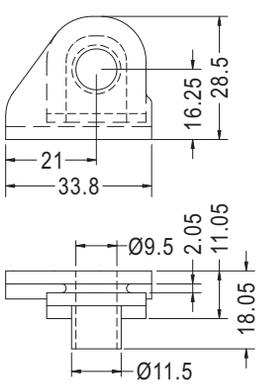


Part No.	Package
GM-27	1000

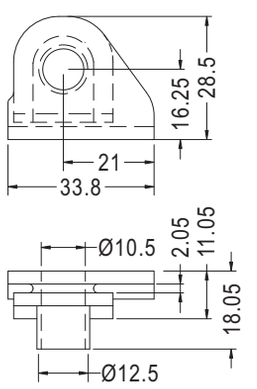


Part No.	Package
GM-28	1000

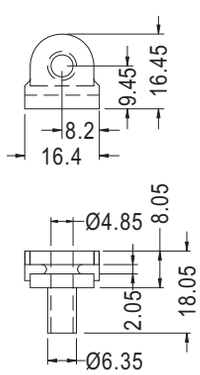


Part No.	Package
GM-31	1000

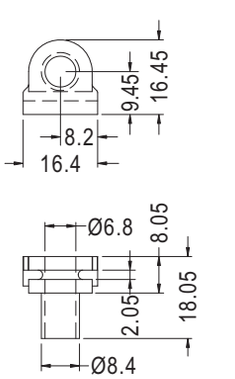

Part No.	Package
GM-32	1000

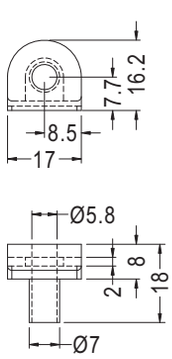

Part No.	Package
GM-33	1000

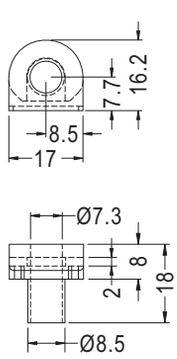


Part No.	Package
GM-34	1000

護線環 SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。



- Material: TPE
- Color: Black
- Unit: mm



MOUNTING HOLE: ØB


Part No.	A	B	C	Package
LGT-2	6.0	4.0	2.3	1000
LGT-6G	7.0	4.8	3.0	

矽膠護線環 SILICON SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-395	1000

天線護線環 ANTENNA SNAP BUSHING

用途：用於天線之絕緣與保護。

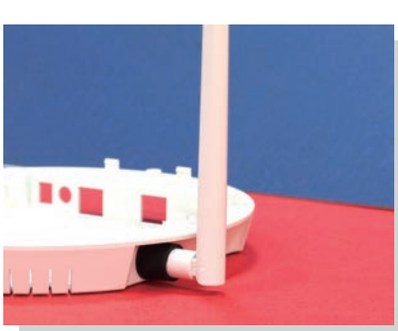

- Material: Silicon Rubber
- Color: White/Black
- Unit: mm




Part No.	Package
ANTCV-2	500


天線固定座 ANTENNA MOUNT

用途：用於機頂盒或路由器WI-FI天線之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.6


Part No.	Package
ANTCA-1	1000


WI-FI 線固定座 WI-FI WIRE MOUNT

用途：用於 WI-FI 天線固定，避免脫落。

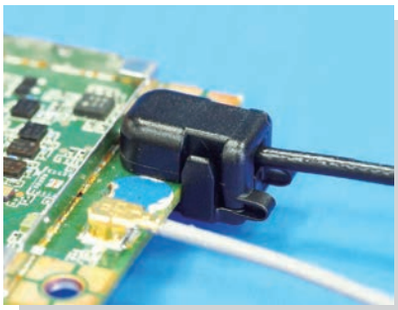



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (P.A.T.)



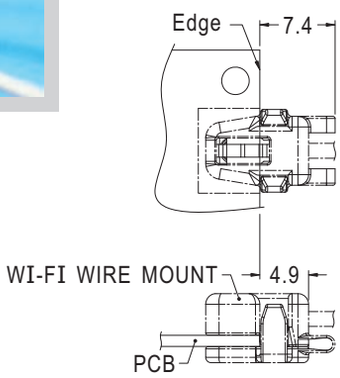

RECOMMEND
THICKNESS 1.0






NEW


Part No.	Package
ANTL-1	1000


天線固定座 ANTENNA MOUNT


用途：用於天線之固定與保護。

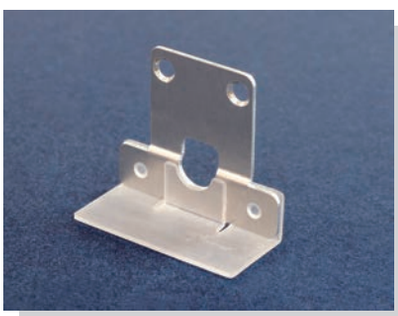

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








Part No.	Package
ANTCA-2	1000


扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE Ø5.5


Part No.	Package
MHCA5.5-5.6	1000

扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋裝配容易。

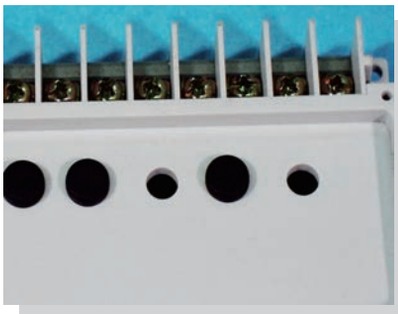


- Material: TPE/TPE(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE: ØB

Part No.	A	B	C	Package
MHD-3.3	7.5	3.3	3.55	1000
MHD-4.5	6.0	4.5	4.7	
MHD-5	7.0	5.0	5.2	
MHD-5L	7.0	5.0	5.2	
MHD-5.5	7.0	5.5	5.6	
MHD-5.5I	7.0	5.5	5.6	
MHD-6	8.0	6.0	6.2	
MHD-6.3I	9.0	6.35	6.6	
MHD-6.5	8.0	6.5	6.9	
MHD-7	9.0	7.0	7.2	
MHD-7S	9.0	7.0	7.3	
MHD-7.5I	10.0	7.5	7.9	
MHD-8	10.0	8.0	8.2	
★MHD-16	10.5	8.5X8.0	8.8	




MOUNTING HOLE: ØB or M4

◆ **MHD-3.3**




MOUNTING HOLE: ØB

◆ **MHD-4.5**



MOUNTING HOLE: ØB


◆ **MHD-5L**



MOUNTING HOLE: ØB

◆ **MHD-5.5,MHD-5.5I**


- Material: Silicon Rubber



MOUNTING HOLE: ØB


◆ **MHD-6.3I**

- Material: Silicon Rubber(UL)
- Flame Class: 94V-0



MOUNTING HOLE: ØB


◆ **MHD-7S**



MOUNTING HOLE: ØB

(裝配孔尺寸僅供參考)

◆ **MHD-7.5I**

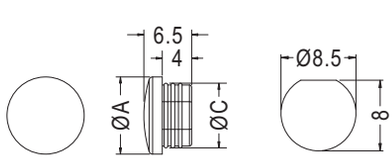

MOUNTING HOLE: ØB


◆ **MHD-16**

螺絲孔塞頭 SCREW HOLE PLUG

用途：用於內六角螺絲的孔塞。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø8.5


Part No.	Package
MHCA8.5-6.9	1000

扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	Package
MBH-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø7.5

Part No.	Package
MHC-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: White/Black
- Unit: mm




MOUNTING HOLE Ø11.0

Part No.	Package
MHE-11	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø12.0
CHASSIS THICKNESS 3.0

Part No.	Package
MHF-1	1000



MOUNTING HOLE Ø12.0
CHASSIS THICKNESS 3.0

Part No.	Package
MHF-2	1000


扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋裝配容易，輕微防水。



- Material: Nylon 66 (UL)/TPU
- Flame Class: 94V-2
- Color: Black
- Unit: mm





MOUNTING HOLE: ØD
THICKNESS 1.0~1.6


Part No.	A	B	C	D	Package
MBP-12.7	23.4	2.0~5.1	8.1	12.7	1000
MBP-15.9	26.2	3.3~9.5	8.1	15.9	
MBP-19.1	29.2	4.4~10.2	8.1	19.1	
MBP-22.2	32.5	3.3~11.4	8.1	22.2	500
MBP-25.4	36.3	5.1~18.2	8.1	25.4	
MBP-27.8	38.9	6.4~19.4	8.1	27.8	

扣式塞頭 HOLE PLUG


用途：可將多餘的機殼出線口遮蓋裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØA
THICKNESS: E




MOUNTING HOLE: ØA
THICKNESS: E

◆ **MBWK4-1**



MOUNTING HOLE: ØA
THICKNESS: E

◆ **MBWK-8**




MOUNTING HOLE: ØA
THICKNESS: E

◆ **MBWK-7**


Part No.	A	B	C	D	E	G	Package
MBWK-1	11.0~14.0	18.5	10.4	1.7	0.8~3.5	9.8	500
MBWK-2	22.0~26.0	30.0	11.6	1.9		15.5	
MBWK4-1	9.5~11.0	16.0	12.6	1.6	0.8~3.2	8.5	
★MBWK-7	44.7~49.0	52.0	11.5	2.2		43.6	
★MBWK-8	5.0~6.0	8.0	6.0	1.5	0.8~2.4		


塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋裝配容易。

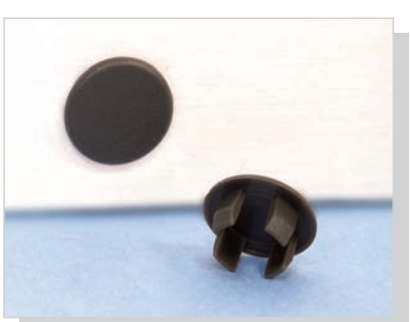

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE Ø12.0
THICKNESS 0.8~3.8


Part No.	Package
MBPP-12	1000

塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋裝配容易。

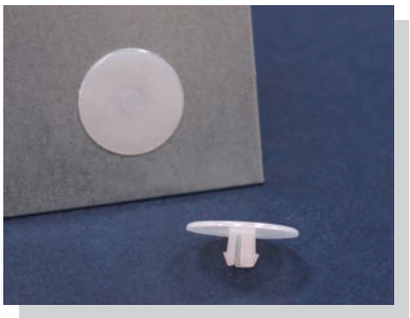

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.75~Ø5.1
THICKNESS 3.3~3.5

Part No.	Package
MBT-14	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø2.8
THICKNESS 1.2


Part No.	Package
FIXE-1	1000

扣式塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋裝配容易。




- Material: TPE
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØG
THICKNESS: F

Part No.	A	B	D	E	F	G	Package
CDELT-1	24.0	22.0	1.0	4.0	0.8~1.0	22.0	1000
CDELT-4	16.0	13.0	1.0	3.5	0.8~1.0	13.0	






MOUNTING HOLE: ØG
THICKNESS: F

Part No.	A	B	D	E	F	G	Package
CDELT-6	16.0	13.0	1.0	3.5	1.0	13.0	1000
CDELT-7	16.0	13.0	1.3	5.1	1.0~1.2	13.0	



- Material: TPE
- Color: Black
- Unit: mm



MOUNTING HOLE Ø22.0
THICKNESS 0.8~2.0


Part No.	Package
CDELT-11	500

扣式塞頭 HOLE PLUG

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。



- Material: TPE (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




MOUNTING HOLE Ø10.0
THICKNESS 0.8~2.0

Part No.	Package
CDELT-12	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

E127489




MOUNTING HOLE
THICKNESS: E

Part No.	B	D	E	G	H	Package	UL
M9.5U	12.0	10.5	0.8~3.5	9.5	7.9	1000	UL
M11U	14.5	10.6	3.3	11.0	9.9		UL
M12U	16.2	10.6	0.8~3.0	12.7	11.5	500	UL
M14U	17.8	10.6	3.3	14.3	13.4		UL
M16U	18.6	10.6	0.8~3.5	15.9	14.0		UL
M19U	22.7	10.6	0.8~3.0	19.0	16.5		UL
M22U	25.6	10.6	0.8~3.3	22.1	20.5		UL




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

E127489



MOUNTING HOLE: ØA
THICKNESS: E



THICKNESS: E
◆ **M13.5**

Part No.	A	B	D	E	Package	UL
M04	4.8	6.35	5.5	1.6	2000	UL
M05	5.0	6.4	6.0	0.6~2.0		UL
M06	6.4	7.6	5.6	1.6		UL
M07	7.0	10.9	7.0	0.8~1.8		UL
M07S	7.0	8.7	6.4	1.8	1000	UL
M08	8.0	9.5	7.6	1.6		UL
M09A	9.0	11.5	10.1	3.3		UL
M09S	9.5	13.0	5.5	1.4		UL
M09	9.5	11.9	10.1	3.3		UL
M10	10.3	11.9	6.4	1.6	500	UL
M11	11.0	14.0	10.1	3.3		UL
M12	12.0	14.3	10.1	3.3		UL
M13	12.7	14.6	10.1	3.3		UL
M13.5	13.5	15.2	6.2	2.2		UL
M14	14.0	16.3	10.1	3.3		UL
M15	15.0	17.3	10.1	3.3		UL


Part No.	A	B	D	E	Package	UL
M16	16.0	18.7	10.6	3.3	500	UL
M16S	15.9	20.0	7.7	2.0	1000	UL
M17	17.0	19.3	10.1	3.3	500	UL
M19	19.0	23.2	10.3	3.3		UL
M20	20.0	24.0	10.6	3.3		UL
M22	22.2	25.4	11.0	3.3	200	UL
M25	25.4	28.4	11.0	3.3		UL
M28	28.0	32.0	13.5	3.3		UL
M30	30.0	34.2	11.3	3.3		UL
M30L	30.1	34.0	11.8	0.8~3.2		UL
M32	32.0	36.0	12.0	3.3		UL
M35	35.0	38.1	11.5	3.2		UL
M38	38.1	42.4	11.8	3.2		UL
M44	44.5	48.4	11.8	3.2		UL
M50	50.8	56.4	17.0	6.4		UL
M53	53.0	57.5	19.0	0.8~6.5		UL
M63	63.5	71.2	19.1	0.8~6.4		UL


扣式塞頭 HOLE PLUG

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。



- Material: PE
- Color: Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.6~1.2

Part No.	Package
DVI-1	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 2.3

Part No.	Package
DVI-2	500

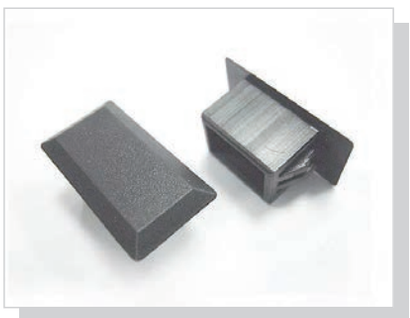

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS: F

Part No.	A	B	C	D	F	G	H	Package
MSQ-1	11.8	21.8	1.5	10.5	0.8~3.5	13.0	9.5	500
MSQ-2	11.9	35.0	1.5	10.5	0.8~3.5	26.0	9.5	
MSQ-4	12.0	16.0	1.5	10.5	1.4~3.5	13.0	9.5	
MSQ-5	15.0	15.0	2.0	11.0	0.75~3.8	13.5	13.5	
MSQ-6	14.0	24.3	1.5	10.5	0.8~3.5	16.0	11.5	
MSQ-7	8.0	18.0	1.5	10.5	0.8~3.5	16.5	6.5	
MSQ-9	19.0	19.3	1.5	10.5	0.8~3.5	17.3	17.0	
MSQ-10	15.7	39.0	1.5	10.5	1.4~3.5	35.5	12.2	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE
THICKNESS 0.8~3.5


Part No.	Package
MSQ-14	500

扣式塞頭 HOLE PLUG

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

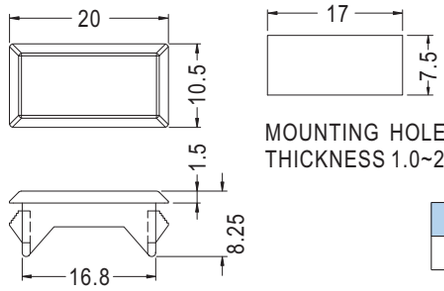


Part No.	Package
MSQ-8	500

塞頭 HOLE PLUG

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。




- Material: Rubber
- Color: Black
- Unit: mm

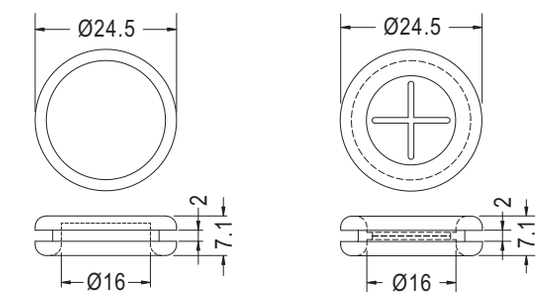

Part No.	Package
DGB-19	500
DGB-19A	



- Material: Rubber
- Color: Black
- Unit: mm

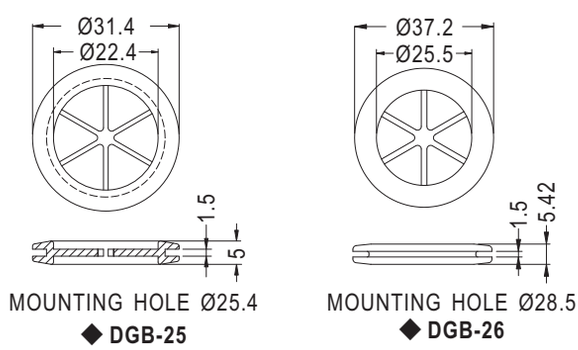


Part No.	Package
DGB-25	500
DGB-26	



- Material: CR (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




- Material: TPE
- Color: Black
- Unit: mm

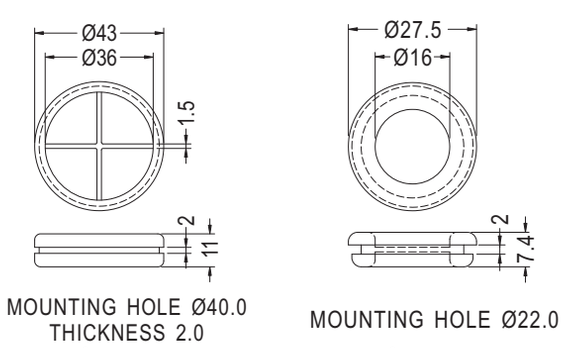


Part No.	Package
DGB-40	500
GDBB-1	1000

塞頭 HOLE PLUG

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。

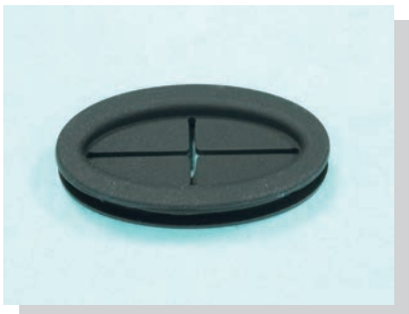


- Material: Silicon Rubber
- Color: Black
- Unit: mm



Part No.	Package
DGBB-1	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm

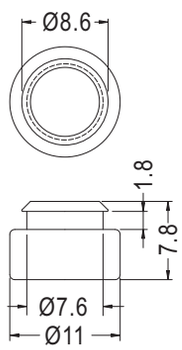


MOUNTING HOLE Ø7.0~7.3
THICKNESS 1.0~1.5
(裝配孔尺寸僅供參考)

Part No.	Package
TF-140	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE Ø7.0
(裝配孔尺寸僅供參考)

Part No.	Package
TF-039	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE Ø5.5~5.8
(裝配孔尺寸僅供參考)


Part No.	Package
TF-618	1000

塞頭 HOLE PLUG

用途：可將多餘的電源線扣機殼出線口遮蓋，裝配容易。



- Material: EPDM
- Color: Black
- Unit: mm



MOUNTING HOLE Ø8.3
(裝配孔尺寸僅供參考)


Part No.	Package
TF-461	1000

塞頭 HOLE PLUG

用途：可將多餘的機殼出線口遮蓋，亦可將M3螺絲孔塞住。



- Material: EPDM
- Color: Black
- Unit: mm



◆配合M3攻牙孔使用
(FOR M3 TAPPED)


Part No.	Package
TF-222	1000

塞頭 HOLE PLUG

用途：用於水管頭之塞頭。



- Material: PE
- Color: Black
- Unit: mm




MOUNTING HOLE Ø4.0

Part No.	Package
ACSRA-4.4	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
ACSRB-6	1000

- Material: PE
- Color: Black




Part No.	Package
ACSRC-4.1	1000

塞頭 HOLE PLUG

用途：用於水管頭之塞頭。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
ACSRA-4	1000

螺絲孔塞頭 SCREW HOLE PLUG

用途：用於內六角螺絲的孔塞。



- Material:PE
- Color: Black
- Unit: mm




Part No.	Package
ACSRD-6.2	1000

塞頭 HOLE PLUGS

用途：可將多餘的機殼出線口遮蓋裝配容易。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
KPS-36	1000

螺紋塞頭 THREADED PROTECTION PLUG

用途：可將多餘的機殼出線口遮蓋，裝配容易。



- Material:PE
- Color: Red
- Unit: mm




Part No.	Package
10459	250

螺絲孔塞頭 SCREW HOLE PLUG

用途：可將多餘的機殼出線口遮蓋，具防水功能，裝配容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
SPM-16	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	A	C	D	M	Package
SPMA-10	15.0	12.0	8.5	M10X1.5	500
SPMA-12	15.0	10.0	6.0	M12X1.5	
SPMA-16	20.2	11.5	8.0	M16X1.5	
SPMA-20	24.0	12.5	7.5	M20X1.5	
SPMA-25	30.0	15.0	11.0	M25X1.5	
SPMA-32	37.0	15.7	10.8	M32X1.5	
SPMA-40	46.0	17.5	12.0	M40X1.5	

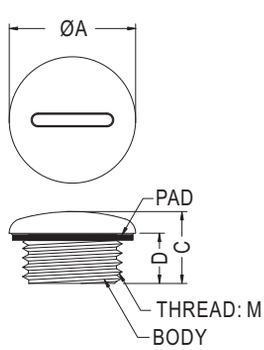


Part No.	A	C	D	M	Package
SPMB-10	15.0	12.0	8.5	M10X1.5	500
SPMB-12	15.0	10.0	6.0	M12X1.5	
SPMB-16	20.2	11.5	8.0	M16X1.5	
SPMB-20	24.0	12.5	7.5	M20X1.5	
SPMB-25	30.0	15.0	11.0	M25X1.5	
SPMB-32	37.0	15.7	10.8	M32X1.5	
SPMB-40	46.0	17.5	12.0	M40X1.5	

塑膠螺絲 SCREW

用途：用於螺絲孔之防水及遮蔽。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

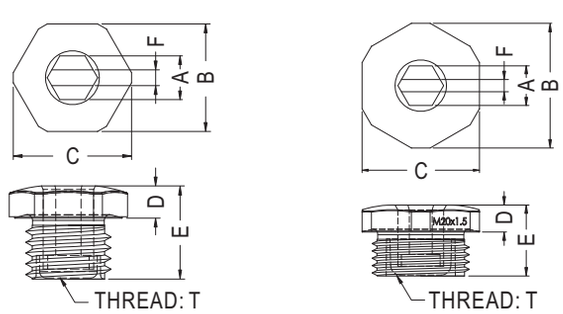


◆ **MOTA-20**


Part No.	A	B	C	D	E	F	T	Package
MOTA-12	6.1	15.0	16.5	4.5	13.0	2.2	M12X1.5P	500
MOTA-16	8.1	19.0	20.5	4.5	13.0	2.2	M16X1.5P	
MOTA-20	8.1	25.5	24.0	5.5	14.5	2.5	M20X1.5P	


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。

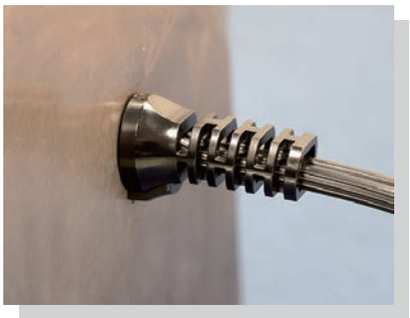

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.8~2.3


E127489

Part No.	Will Fit These Cable		適用線材斷面形狀 Section Shape	Package
	UL Type Designation	Size		
SB4F-9	SPT-2	4.6X8	扁線用 Flat Type	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE
THICKNESS: F


E127489

Part No.	Will Fit These Cable		Chassis Dimension		Chassis Thickness	適用線材斷面形狀 Section Shape	Package
	UL Type Designation	Size	A	B	F		
SB4L-6	SPT-2	3.3X6.6	10.9	12.7	1.5~2.0	扁線用 Flat Type	500
		3.6X7.2		13.2			



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm





MOUNTING HOLE
CHASSIS THICKNESS: F

E127489

Part No.	Will Fit These Cable		Chassis Dimension		Chassis Thickness	Dimension			Package	UL
	UL/CAS Designation	Size	A	B	F	C	D	E		
SB4F-2	SPT-2	4.1X 8.6	12.7	11.8	1.8~2.5	14.0	12.4	4.0	500	UL
SB5P-2	SJT2C#18	Ø6.8~7.8			0.8~2.6		12.5	4.4		UL
SB5R-2	SJT3C#16	Ø8.2~9.2		11.5	0.8~1.6		11.5	4.8		


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489




MOUNTING HOLE
CHASSIS THICKNESS: F

Part No.	Will Fit These Cable		Chassis Dimension		Chassis Thickness	Dimension			Package	UL
	UL/CAS Designation	Size	A	B	F	C	D	E		
SB5R-4	SJT3C#16	Ø8.2~9.2	13.1	11.5	0.8~1.6	13.4	10.9	4.2	500	UL
	SJT3C#18	Ø7.6	12.7							UL
SB5F-4	SPT-3	5.0 X10.0	14.3	13.4	0.8~1.6	15.5	15.4	6.2	250	UL
SB5F-6					1.8~3.2					UL
SB6R-6	SJT3C#16	Ø8.2~9.2	15.9	14.0	0.8~1.6	16.6	14.6	5.6		UL



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489



MOUNTING HOLE




圓線用
ROUND TYPE


Part No.	Will Fit These Cable			Chassis Dimension		Chassis Thickness	Dimension			適用線材斷面形狀 Section Shape	Package	UL
	UL Type Designation	AWG / Conductor	Size	A	B	F	C	D	E			
SB8R-2	SJT	14/3C	Ø13.5~15.2	22.0	21.7	1.8~2.5	22.6	20.4	8.4	圓線用 Round Type	100	UL
SB9R-2		10/3C	Ø15.2~16.3	28.0	25.4	1.2~7.0	27.5	25.2	10.6			UL
			Ø17.5	30.2								UL




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489







MOUNTING HOLE

Part No.	Will Fit These Cable			Chassis Dimension		Chassis Thickness	Package
	UL Type Designation	AWG / Conductor	Size	A	B	適用板厚	
SB6P4-4	SPT-2	18/3	3.0X7.6	15.9	14.0	2.0~2.5	500
		16/3	4.1X10.4				


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489

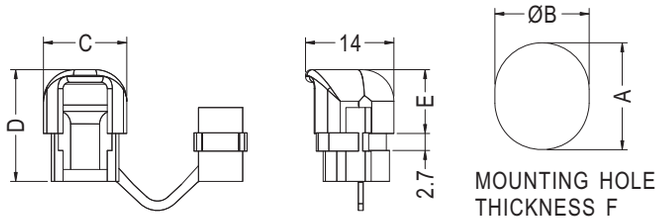


Part No.	Will Fit These Cable		Chassis Dimension		Chassis Thickness	Dimension			Package
	UL Type Designation	Size	A	B	F	C	D	E	
SB4L-4	SPT-2	3X6.6	12.7	11.2	2.5	13.2	17.7	10.1	500
SB5L-4	SVT	6.0							



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


E127489

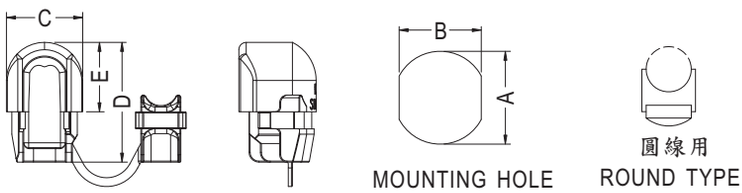

Part No.	Will Fit These Cable			Chassis Dimension		Chassis Thickness MAX.	Dimension			適用線材斷面形狀 Section Shape	Package
	UL Type Designation	AWG / Conductor	Size	A	B	適用板厚	C	D	E		
SB6L-6	SJT	18/3C	Ø7.4~8.2	15.9	14.0	3.2	15.4	24.5	14.2	圓線用 Round Type	100
SB7L-2	SJT	14/3C	Ø9.2~10.5	19.0	16.5	3.2	19.5	27.8	16.3		



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

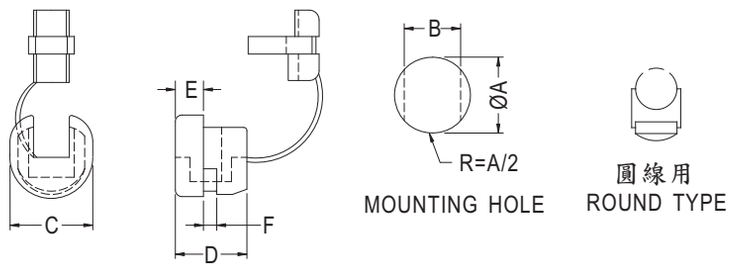

Part No.	Will Fit These Cable	Chassis Dimension		Chassis Thickness	Dimension			適用線材斷面形狀 Section Shape	Package
	Size	A	B	F	C	D	E		
2P-1	Ø3.0~4.7	9.5	8.4	0.8~1.6	10.4	10.4	4.0	圓線用 Round Type	500


電源線扣 STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489




Part No.	Will Fit These Cable			Chassis Dimension		Chassis Thickness MAX.	Chassis Dimension			適用線材斷面形狀 Section Shape	Package
	UL Type Designation	AWG / Conductor	Size	A	B	F	C	D	E		
2P-4	SPT-1	18/2C	3X5.6	9.5	8.7	1.6	10.4	10.4	4.0	扁線用 Flat Type	1000
3P-4				11.0	9.9		11.5				
3W-1						2.5					
4N-4	SPT-2		3.7	12.7	11.8	1.6	13.3				
		16/2C	3.8X7.6	13.1							
4K-4		18/2C	3.7	12.7		2.5		10.5			
		16/2C	3.8X7.6	13.1							
5N-4	SVT	18/3C	Ø6.4~7.4	12.7	11.5	1.6	13.5	10.9	4.2	圓線用 Round Type	
				13.1							
5P-4				12.7		2.5					
				13.1							
6N-4	SJT		Ø7.6	15.9	14.0	1.6	16.8	14.8	5.6		500
6P-4						3.2					
6N3-4		16/3C	Ø8.2~9.2			1.6	16.2	15.0			
6P3-4						3.2		14.8	5.7		
7N-2		14/3C	Ø9.2~10.5	19.0	16.5	1.6	19.5	19.1	7.8		100
			Ø11.0	19.8							
7P-2			Ø9.2~10.5	19.0		3.2		19.4			
			Ø11.0	19.8							

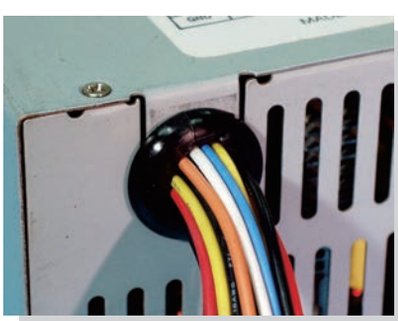

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

E127489

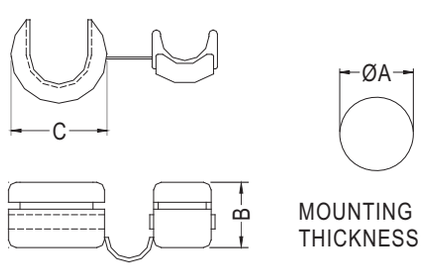

Part No.	Will Fit These Cable		Chassis Dimension	Dimension		Chassis Thickness	Package	UL
	UL/CSA Description	Size	A	B	C	F		
SB7R-7	SJT3C#10	14.0~17.0	19.0	17.0	25.0	0.8~1.6	100	UL
SB7R-7SP		12.0~15.2		17.8	25.3			


方形線扣 SQUARE STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路，安裝方便快速。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm


E127489




◆ SB4F-4




◆ SB5R-5



MOUNTING HOLE



◆ SB4F-6



MOUNTING HOLE
THICKNESS: F


Part No.	Will Fit These Cable		Chassis Thickness	Package
	UL/CSA Description	Size	F	
SB4F-4	SPT-1,SPT-2	3X5.6, 3.71X7.6	0.8~1.2	250
SB5R-5	SVT3C#18	Ø6.6~7.2		
SB4F-6	SPT-1,SPT-2	3X5.6, 3.71X7.6		200


方形線扣 SQUARE STRAIN RELIEF BUSHING

用途：用於電子電器電源出線口，固定扣牢和保護電源免於被機殼刮傷，造成短路，安裝方便快速。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm






MOUNTING HOLE


Part No.	Will Fit These Cable		Chassis Thickness(Max)	Package
	UL/CSA Description	Size	F	
SB4F-8	SPT-1,SPT-2	3X5.6, 3.71X7.6	1.5	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



組合後



組合前



組合前

Part No.	Package
SBU4-4	1000


Part No.	Package
SBU4-4-1	1000

電線線扣 STARAIN RELIEF BUSHING

用途：用於機殼的電線出線口，固定扣牢和保護電線免於被機殼刮傷，造成短路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø7.0
THICKNESS 0.6~1.1

Part No.	Package
SBU-1	1000

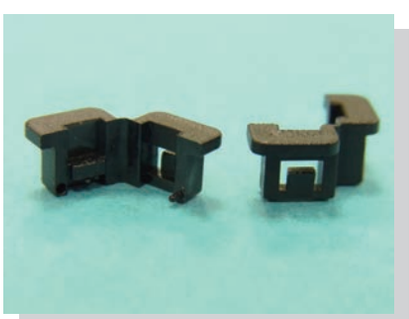

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

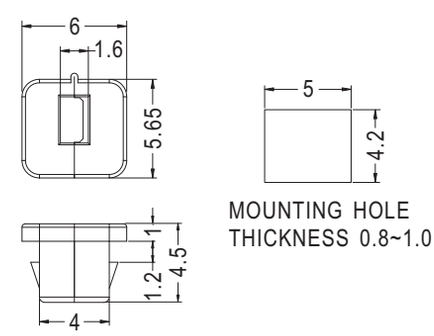


MOUNTING HOLE
THICKNESS 0.8~1.0

Part No.	Package
SBU-2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

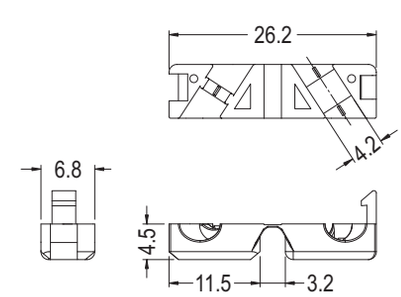

Part No.	Package
SBQC-1	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

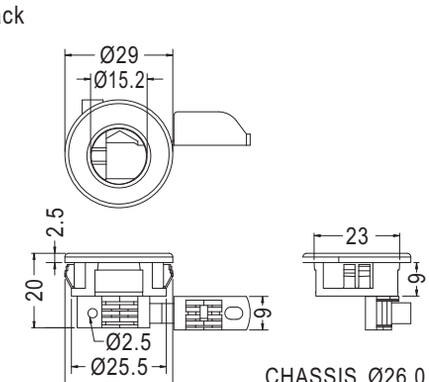


CHASSIS Ø26.0
THICKNESS 0.8~2.0

NEW


Part No.	Package
SBB-1	1000

電線固定夾 WIRE CLIP

用途：用於機殼的電線出線口，避免電源線被拉出。

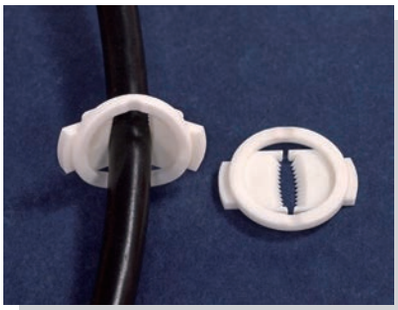

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Suggested Cable Diameter Range	Package
SBCR-7	17.7	20.8	3.75	Ø7.0	1000
SBCR-9	22.2	25.5	4.0	Ø9.0	


電纜固定頭 CABLE GLAND

用途：電纜防水接頭。

◆ 通過IP68防水測試



- Material: A,C,E=Nylon 66 (UL)
  B,D=EPDM
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

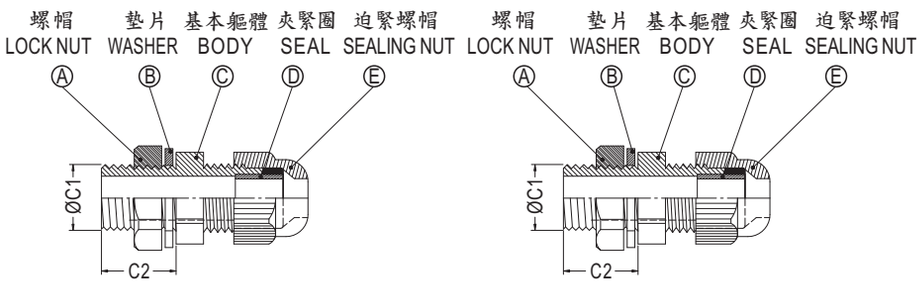

Part No.	標準螺牙 Threaded Entry Metric	適用電纜 Cable Range	螺紋外徑 Threaded O. D. C1	螺紋長度 Threaded Length C2	機板口徑 Panel Mounting Hole	板手徑 Spanner Size A & E	Package
KGB12-07	M12X1.5P	Ø6.8~Ø4.0	Ø11.8	15.0	Ø12.0~Ø12.3	18/15	100
KGB12-07-ST	M12X1.5P	Ø6.8~Ø4.0	Ø11.8	8.5	Ø12.0~Ø12.3	18/15	
KGB12-08	M12X1.5P	Ø8.5~Ø4.5	Ø11.8	8.5	Ø12.0~Ø12.3	18/15	
KGB16S-8.5-ST	M16X1.5P	Ø8.5~Ø5.0	Ø15.8	10.0	Ø16.0~Ø16.3	22/22	
KGB16-10	M16X1.5P	Ø10.4~Ø6.4	Ø15.8	15.0	Ø16.0~Ø16.3	22/22	
KGB16-10-ST	M16X1.5P	Ø10.4~Ø6.4	Ø15.8	10.0	Ø16.0~Ø16.3	22/22	
KGB20-14	M20X1.5P	Ø14.0~Ø8.5	Ø19.8	15.0	Ø20.0~Ø20.3	27/27	50
KGB20-14-ST	M20X1.5P	Ø14.0~Ø8.5	Ø19.8	10.0	Ø20.0~Ø20.3	27/27	
KGB25-16	M25X1.5P	Ø16.0~Ø12.0	Ø24.9	15.0	Ø25.0~Ø25.4	33/33	
KGB25-16-ST	M25X1.5P	Ø16.0~Ø12.0	Ø24.9	10.0	Ø25.0~Ø25.4	33/33	
KGB32-25	M32X1.5P	Ø25.0~Ø18.0	Ø31.8	15.0	Ø32.0~Ø32.4	41/42	
KGB32-25-ST	M32X1.5P	Ø25.0~Ø18.0	Ø31.8	10.0	Ø32.0~Ø32.4	41/42	
KPGB7-5	PG7	Ø5.5~Ø3.0	Ø12.3	8.0	Ø12.5~Ø12.8	17/15	100
KPGB7-5-1	PG7	Ø5.5~Ø3.0	Ø12.3	8.0	Ø12.5~Ø12.8	17/15	
KPGB9-9	PG9	Ø8.0~Ø4.5	Ø15.1	8.5	Ø15.2~Ø15.5	22/19	
KPGB11-7	PG11	Ø7.0~Ø4.0	Ø18.4	10.0	Ø18.6~Ø18.9	24/22	
KPGB13.5-8	PG13.5	Ø9.0~Ø5.0	Ø20.2	10.0	Ø20.4~Ø20.7	27/24	


透氣壓力平衡固定頭 PRESSURE BALANCE GLAND


用途：用於機器之透氣和防水。



- Material: A=Nylon 66 (UL)
  B=EPDM
  C,D=PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/ Black
- Unit: mm

◆ 通過IP68防水測試

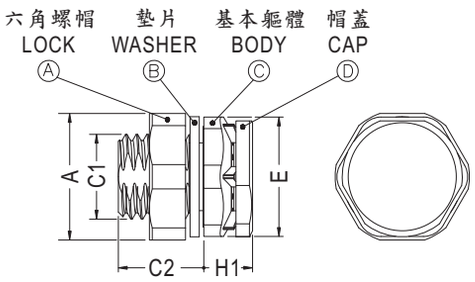



NEW

Part No.	標準螺牙 Threaded Entry Metric C1	螺紋長度 Threaded Length C2	高度 Height H1	板手徑 Spanner Size A & E	Package
MOR12-12	M12X1.5P	12.0	7.0	18/17	500


透氣壓力平衡固定扣 PRESSURE BALANCE FASTENER

用途：用於機器透氣和防水。



- Material: A,B=PC (UL)
  C=Silicon Rubber
- Flame Class: 94V-0
- Color: Black
- Unit: mm

◆ 通過IP68防水測試

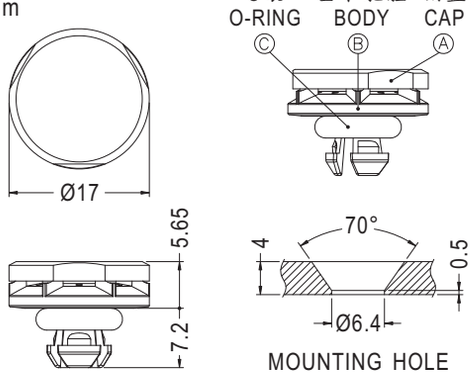


NEW


Part No.	Package
MOR-6.4	500

方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

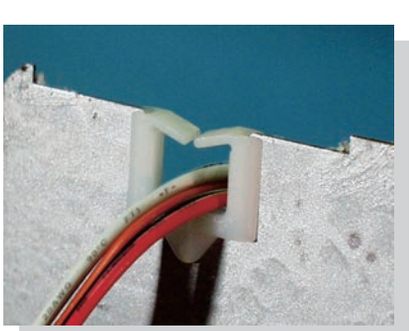


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

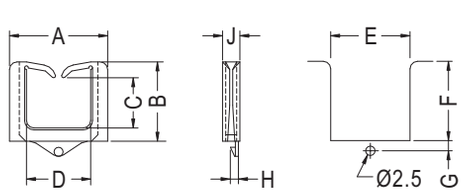


Part No.	A	B	C	D	E	F	G	H	J	T	Package
SQE-1	19.8	12.1	7.3	11.5	14.0	12.3	2.8	2.3	4.5	0.8~2.0	1000
SQE-2	26.0	21.0	14.0	17.0	21.0	21.0	2.7	2.3	4.6		500
SQE-2-1								1.87	4.6		
SQE-3	33.2	28.8	22.4	22.7	27.0	29.0	2.8	2.3	4.5		


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

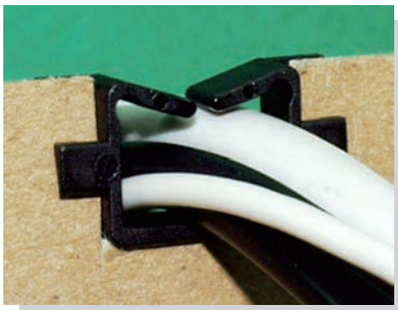


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS: T


Part No.	A	B	C	D	E	F	I	J	T	Package
SQF-1	20.0	10.0	6.2	11.6	14.0	10.0	16.0	4.8	0.8~1.2	500
SQF-2	22.0	8.0	4.2	14.6	17.0	8.0	19.0	6.0	1.2~2.8	
SQF-7	20.0	10.0	6.2	11.6	14.0	10.0	16.0	4.8	1.9~2.0	

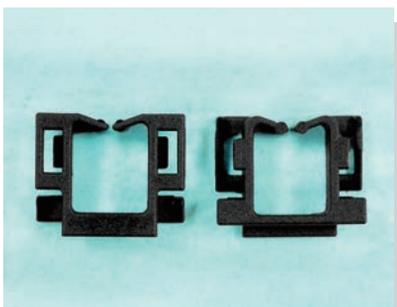

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE


Part No.	Package
SQF-4	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS: T


Part No.	A	B	C	D	E	F	I	T	Package
SQF-5	11.6	8.4	3.7	5.2	8.1	3.6	9.1	0.8~1.8	500
SQF-6	16.9	9.1	3.4	10.2	12.8	3.4	13.8	0.9~2.0	
SQF-8	16.9	9.0	3.2	10.2	13.0	3.4	14.0	0.9~2.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
SQE-5	500


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.6~1.0

Part No.	Package
SQK-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
SQD-1	1000

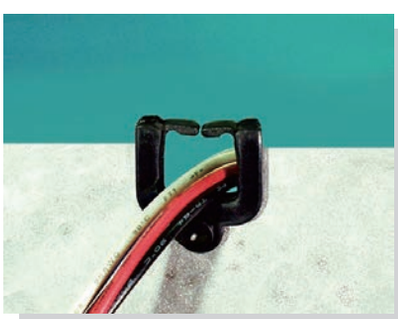


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.8~2.0

Part No.	A	B	C	D	E	F	G	H	Package
SQB-1	18.4	14.5	8.9	11.0	14.0	12.3	2.7	2.7	500
SQB-2	21.5	18.8	11.9	13.9	17.2	18.5	3.5	3.0	

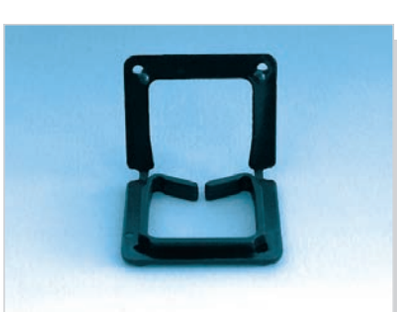

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 0.8~2.0


Part No.	Package
SQB-3	500


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

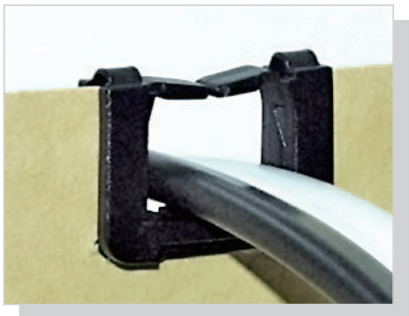


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE
THICKNESS 0.8~2.0





UNIT FOLDED VIEW


Part No.	A	B	C	D	E	F	I	Package
SQB-4	22.0	14.2	9.0	14.0	17.0	13.5	19.0	500
SQB-5	17.9	11.8	6.8	10.9	14.0	10.5	16.0	100



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS 0.8~2.0
(裝配孔尺寸僅供參考)


Part No.	Package
SQL-1	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm









MOUNTING HOLE
THICKNESS 0.8~3.0


Part No.	Package
SQA-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.8~1.8


Part No.	Package
SQI-1	1000


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便不佔空間之優點。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

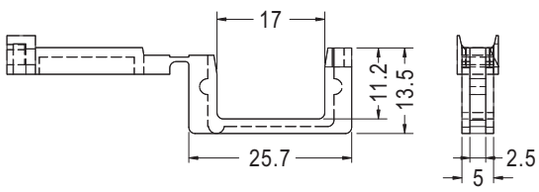





MOUNTING HOLE
THICKNESS 2.1

Part No.	Package
SQJ-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

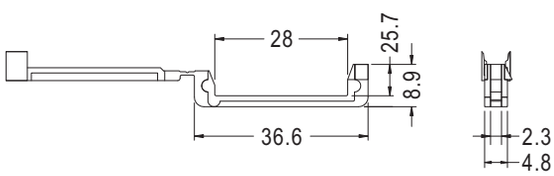




MOUNTING HOLE
THICKNESS 2.0

Part No.	Package
SQJ-2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


PANEL MOUNTING DETAILS




THICKNESS: 0.8~1.6

THROUGH HOLE INSTALLATION





EDGE INSTALLATION

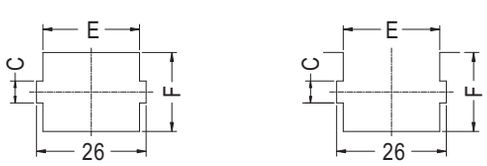


THICKNESS 2.0


Part No.	A	B	C	D	E	F	Package
SQJA-1	30.4	11.6	4.1	19.6	21.8	10.7	500
SQJA-2	31.0	18.6	5.0	19.6	22.0	18.0	


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便不佔空間之優點。

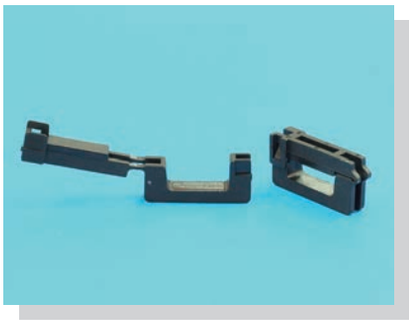


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

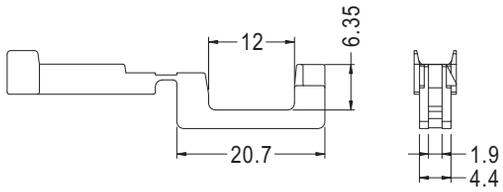





MOUNTING HOLE
THICKNESS 1.5

Part No.	Package
SQJ-3	1000

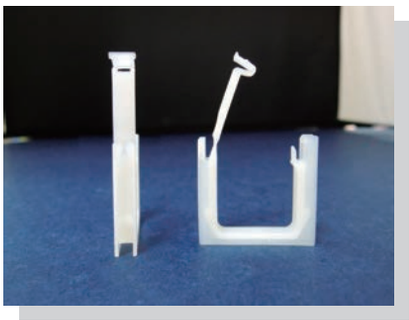


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 0.8~3.0
(裝配孔尺寸僅供參考)

Part No.	Package
SQA-2	1000

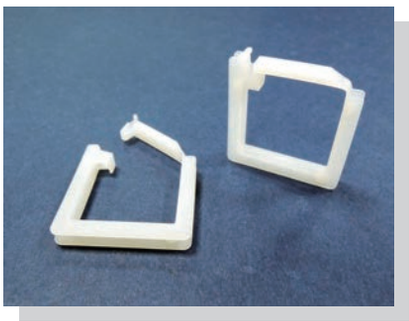

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 3.0

Part No.	Package
SQA-3	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE


Part No.	Package
SQR-1	500


方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便不佔空間之優點。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






CLOSE PART




MOUNTING HOLE
THICKNESS 0.8~1.0


Part No.	A	B	C	D	E	F	G	Package
SQG-1	12.0	10.6	4.8	4.2	6.0	9.5	1.2	1000
SQG-3	12.0	10.9	4.5	2.3	6.0	9.5	1.1	
SQG-4	12.0	10.7	4.6	4.6	6.0	9.5	1.1	
SQG-6	12.0	10.9	6.8	2.3	6.0	9.5	1.2	







CLOSE PART





MOUNTING HOLE
CHASSIS THICKNESS 0.6

Part No.	Package
SQG-9	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






CLOSE PART




MOUNTING HOLE
THICKNESS: 0.8~1.0 MAX


Part No.	Package
SQG-5	1000








CLOSE PART





MOUNTING HOLE
THICKNESS: 0.8~1.0

Part No.	Package
SQG-8	1000

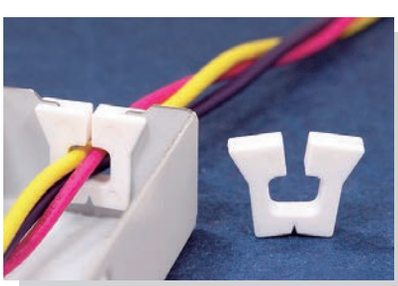


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





CLOSE PART



MOUNTING HOLE
THICKNESS 0.5~0.8


Part No.	Package
SQG-15	1000

方型護線環 SQUARE SNAP BUSHING


用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

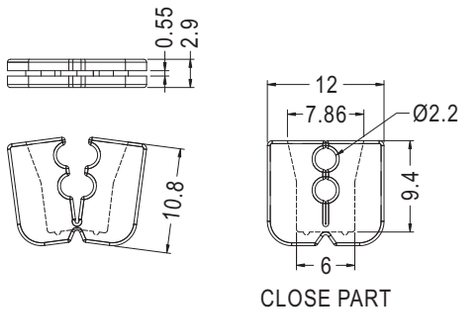

Part No.	Package
SQG-10	1000

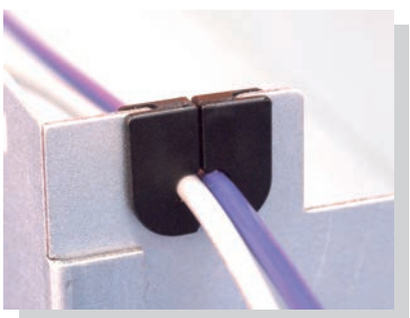


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

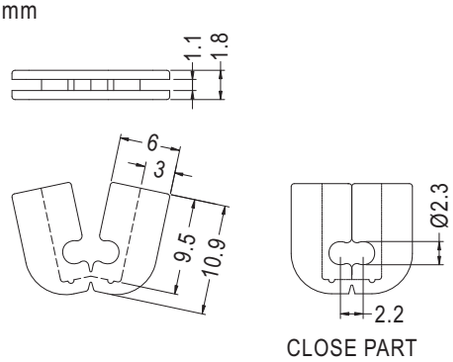


Part No.	Package
SQG-12	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

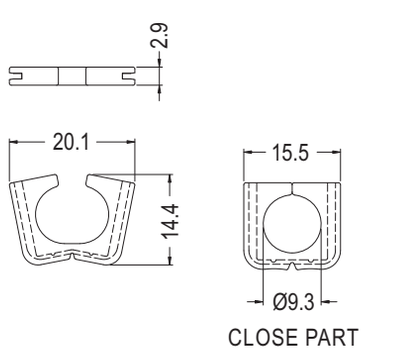

Part No.	Package
SQG-13	1000

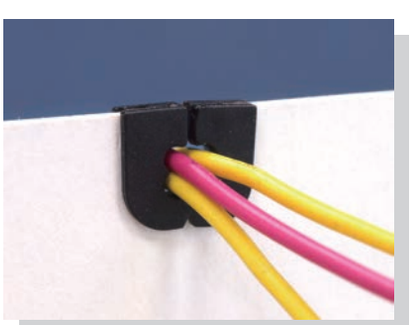

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

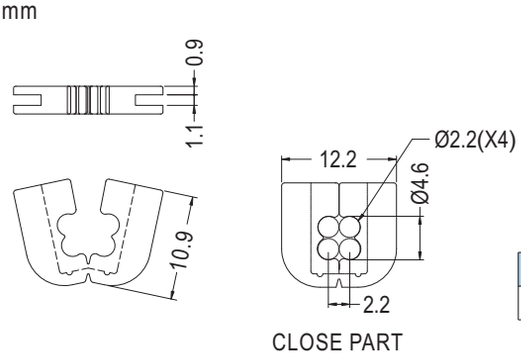


Part No.	Package
SQG-14	1000

方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

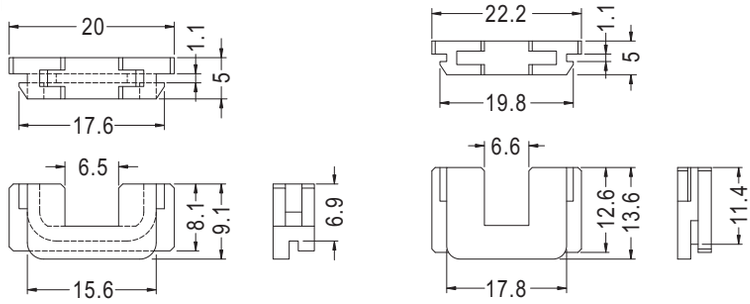

Part No.	Package
SQN-1	1000


Part No.	Package
SQN-2	1000

護線環 SNAP BUSHING

用途：用於電線、電纜之固定及保護。




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

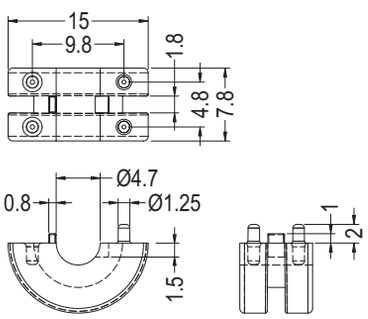


Part No.	Package
SBUT-1	1000

U 型護線環 U TYPE SNAP BUSHING

用途：用於機殼的電線出線口，保護電線不受機殼刮傷，裝配容易。

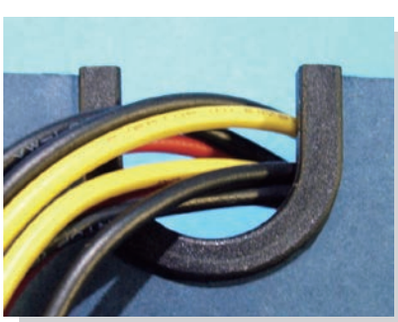


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

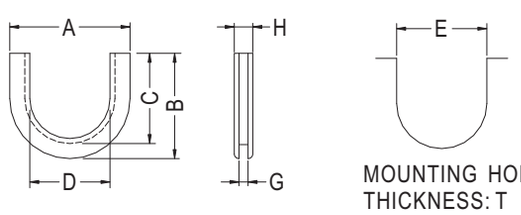


Part No.	A	B	C	D	E	G	H	T	Package
SQH-1	24.0	21.0	18.0	16.0	18.0	1.8	3.7	1.7~1.8	1000
SQH-2	24.3	27.0	24.5	17.5	19.3	1.9	3.9		
SQH-2L	24.3	27.0	24.5	17.5	19.3	2.1	4.1	2.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	G	H	T	Package
SQM-1	1.3	5.0	0.8~1.2	1000
SQM-1L	2.1	5.8	2.0	


U型護線環 U TYPE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。

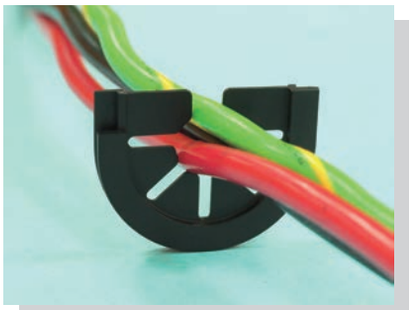


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

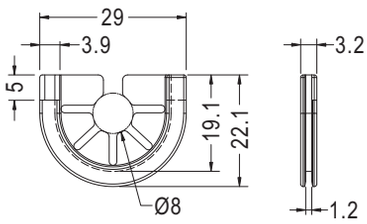





MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
SQHB-1	1000

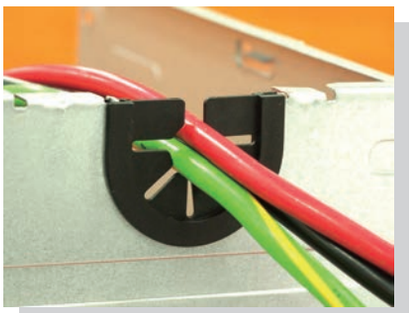







MOUNTING HOLE
THICKNESS 1.0

Part No.	Package
SQHB-7	1000

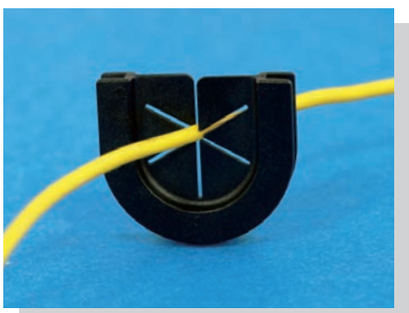

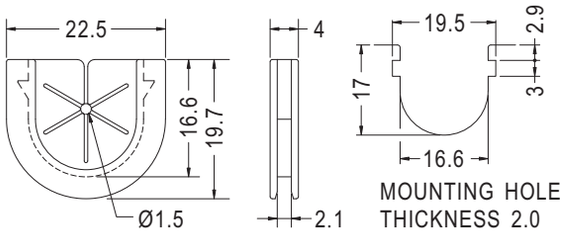



MOUNTING HOLE
THICKNESS 2.0

NEW

Part No.	Package
SQHB-14	1000









MOUNTING HOLE
THICKNESS 1.6

Part No.	Package
SQHB-3	1000







MOUNTING HOLE
THICKNESS 1.5


Part No.	Package
SQHB-5	1000

U型護線環 U TYPE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

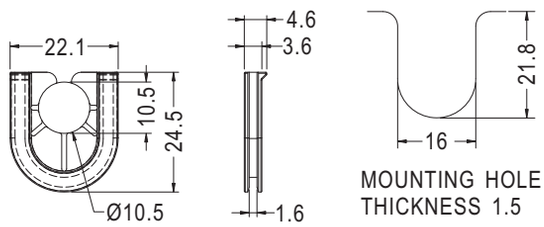

Part No.	Package
SQHB-6	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

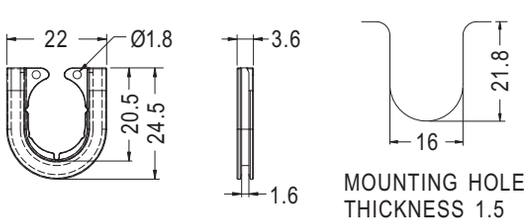

Part No.	Package
SQHB-8	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

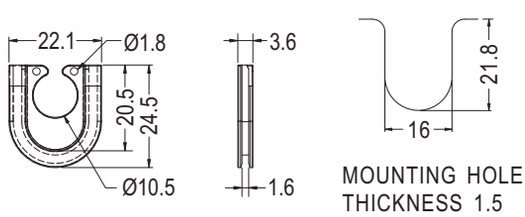


Part No.	Package
SQHB-9	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

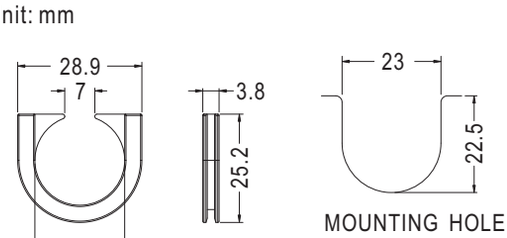

Part No.	Package
SQHB-13	1000

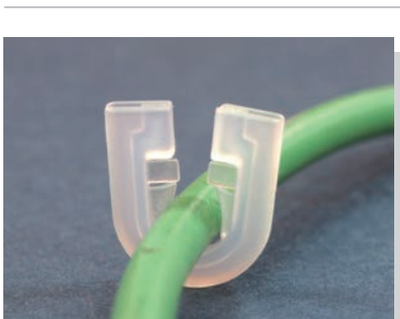

- Material:PE
- Color: Natural
- Unit: mm

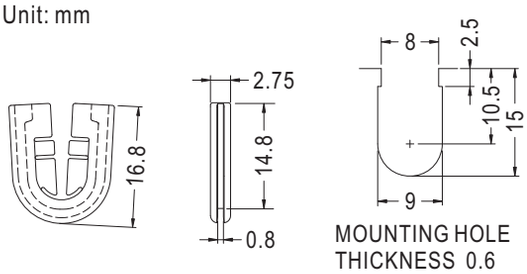


Part No.	Package
SQHB-10	1000

方型護線環 SQUARE SNAP BUSHING

用途：用於鐵板間電線出入刮傷之保護，不易脫落，使用方便，不佔空間之優點。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
SQS-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
SQS-2	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

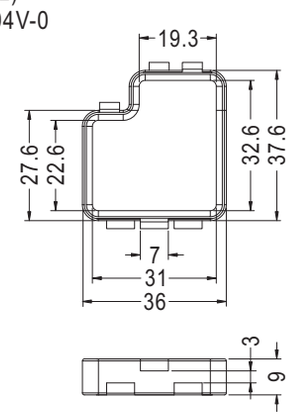


Part No.	Package
SQS-3	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
SQS-4	1000


電線束線帶 CABLE TIE

用途：捆紮電線，物品。

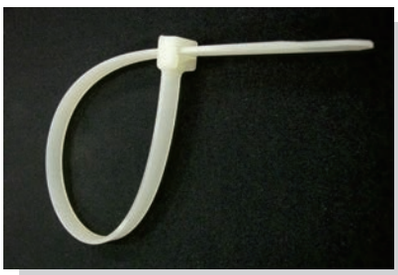

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm
- UL Recognized

◆ 本產品有UL安規。

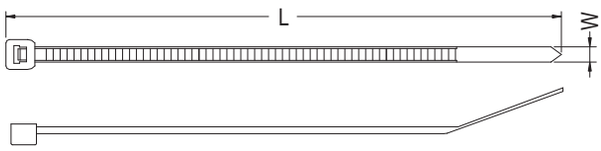


◆ SELF-LOCKING TIE:


New Part No.	Part No.	Approx Length mm(in) L	Approx Width mm(in) W	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
GT-80M	YJ-80	80(3.15")	2.5(0.10")	17(0.67")	8(18)	1000
GT-100M	YJ-100	100(4.00")		23(0.91")		
GT-120M	YJ-120	120(4.72")		30(1.18")		
GT-140M	YJ-142S	142(5.59")		36(1.42")		
GT-160M	YJ-160	160(6.30")		42(1.66")		
--------	YJ-181	181(7.13")		49(1.92")		
GT-200M	YJ-203S	203(8.00")		56(2.21")		
--------	YJ-102	102(4.00")	3.6(0.14")	22(0.87")	18(40)	500
GT-120I	YJ-122	122(4.80")		29(1.14")		
GT-140I	YJ-142	142(5.59")		34(1.34")		1000
--------	YJ-163	163(6.41")		40(1.57")		500
GT-180I	YJ-185	185(7.28")		47(1.85")		
GT-200I	YJ-203	203(8.00")		55(2.17")		
GT-250I	YJ-232	232(9.13")		63(2.48")		
--------	YJ-263	263(10.35")		73(2.87")		
GT-300I	YJ-295	295(11.61")		83(3.27")		
--------	YJ-331	331(13.00")		96(3.78")		
GT-370I	YJ-370	370(14.57")		108(4.25")		
GT-120ST	YJ-115	115(4.53")	4.8(0.19")	29(1.15")	23(50)	
GT-150ST	YJ-140	140(5.50")		34(1.34")		
GT-160ST	YJ-162	162(6.38")		42(1.66")		
GT-190ST	YJ-188	188(7.40")		49(1.93")		
GT-200ST	YJ-201	201(8.00")		53(2.08")		
GT-216ST	YJ-216	216(8.50")		58(2.28")		
GT-250ST	YJ-242	242(9.53")		66(2.60")		
GT-266ST	YJ-266	266(10.47")		72(2.84")		
GT-300ST	YJ-292	292(11.50")		82(3.23")		
--------	YJ-330	330(13.00")		93(3.66")		
GT-370ST	YJ-368	368(14.49")		106(4.17")		
--------	YJ-410	410(16.14")		122(4.80")		
GT-430ST	------	430(16.93")		126(4.96")		
GT-450ST	YJ-450	450(17.72")		135(5.31")		100
GT-150HD	YJ-148	148(5.83")	7.6(0.30")	36(1.42")	54(120)	
GT-200HD	YJ-182	182(7.17")		46(1.81")		
--------	YJ-215	215(8.46")		59(2.32")		
GT-250HD	YJ-254	254(10.00")		71(2.80")		
GT-300HD	YJ-293	293(11.54")		84(3.30")		
--------	YJ-332	332(13.00")		95(3.74")		
GT-370HD	YJ-368L	368(14.49")		109(4.29")		
--------	YJ-420	420(16.54")		124(4.88")		
--------	YJ-470	470(18.50")		140(5.51")		
--------	YJ-520	520(20.47")		156(6.14")		
--------	YJ-178	178(7.00")	9.0(0.35")	45(1.76")	80(175)	
--------	YJ-229	229(9.00")		61(2.40")		
--------	YJ-280	280(11.00")		77(3.03")		
--------	YJ-329	329(13.00")		93(3.66")		
--------	YJ-382	382(15.00")		110(4.33")		
--------	YJ-458	458(18.00")		135(5.32")		
GT-530HD	YJ-530	530(20.87")		155(6.10")		
--------	YJ-655	655(25.79")		194(7.64")		
GT-780HD	YJ-780	780(30.71")		234(9.21")		
GT-830HD	YJ-815	815(32.00")		247(9.72")		

電線束線帶 CABLE TIE

用途：捆紮電線、物品。

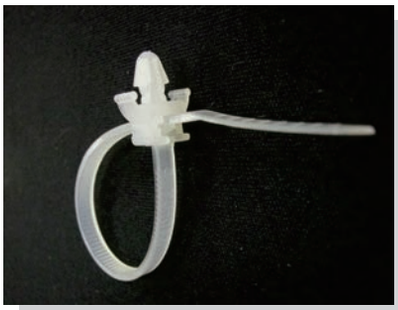

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

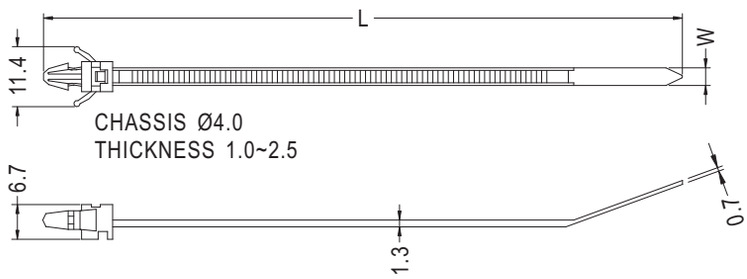

◆ PUSH SELF-LOCKING TIE:


Part No.	Approx Length mm(in)	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-123	123(4.84")	3.4(0.13")	25.4(1.00")	18.(40)	1000

電線束線帶 CABLE TIE

用途：捆紮電線、物品，此系列為可重複性使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

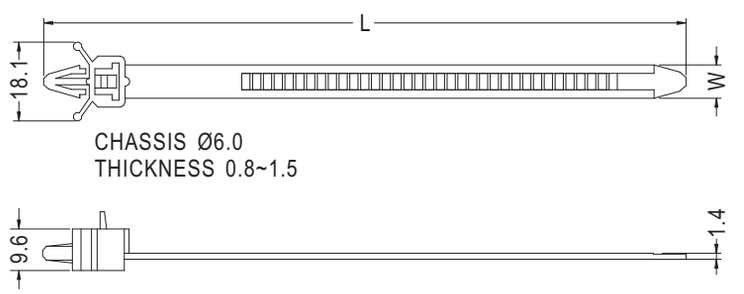


◆ PUSH RELEASABLE TIE:

Part No.	Approx Length mm(in)	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R151	151(6.00")	7.8(0.30")	37(1.45")	40(88)	100
YJ-R191	191(7.50")		49(1.92")		
YJ-R231	231(9.00")		62(2.44")		

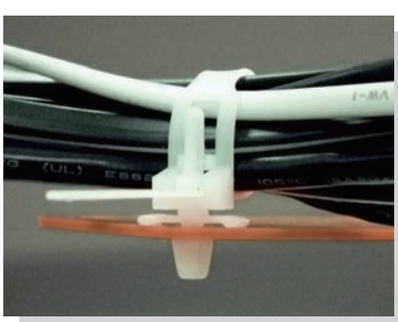

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

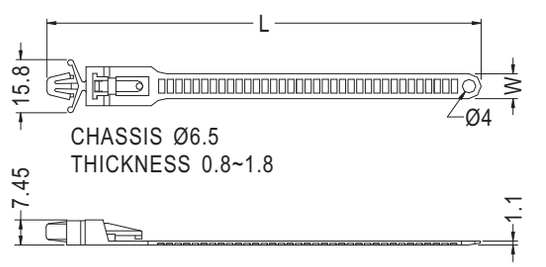


Part No.	Approx Length mm(in)	Approx Width mm(in)	Package
	L	W	
KYCB-129	129.1	7.4	250

電線束線帶 CABLE TIE

用途：捆紮電線、物品。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

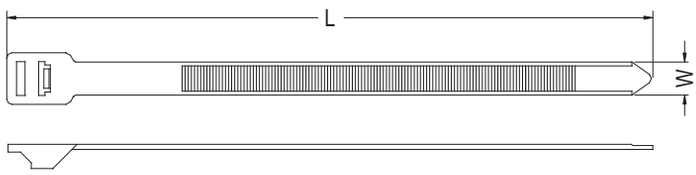


◆ SELF-LOCKING TIE:

Part No.	Approx Length mm(in)	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-228	228(9.00")	12.7(0.50")	54(2.12")	114(250)	100
YJ-256	256(10.00")		62(2.44")		
YJ-279	279(11.00")		70(2.75")		
YJ-305	305(12.00")		78(3.07")		
YJ-328	328(13.00")		86(3.38")		
YJ-355	355(14.00")		94(3.70")		
YJ-380	380(15.00")		102(4.00")		
YJ-405	405(16.00")		110(4.33")		
YJ-430	430(17.00")		118(4.64")		
YJ-455	455(18.00")		127(5.00")		
YJ-485	485(19.00")		135(5.31")		
YJ-510	510(20.00")		143(5.62")		
YJ-534	534(21.00")		151(5.94")		
YJ-560	560(22.00")		159(6.25")		
YJ-585	585(23.00")		167(6.57")		
YJ-610	610(24.00")		175(6.88")		
YJ-635	635(25.00")		183(7.20")		
YJ-660	660(26.00")		191(7.51")		
YJ-685	685(27.00")		199(7.83")		
YJ-710	710(28.00")		207(8.14")		
YJ-735	735(29.00")		215(8.46")		
YJ-760	760(30.00")		224(8.81")		
YJ-790	790(31.00")		232(9.13")		
YJ-813	813(32.00")		243(9.57")		
YJ-915	915(36.00")		274(10.79")		
YJ-1042	1042(41.00")		314(12.36")		

電線束線帶 CABLE TIE

用途：捆紮電線、物品，此系列為可重複性使用。



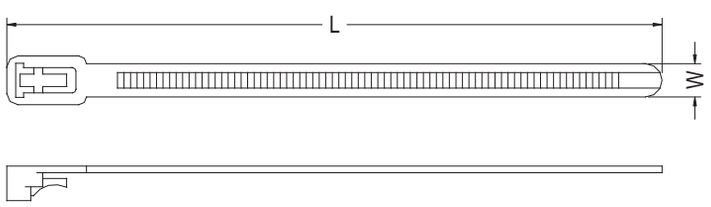


◆ RELEASABLE TIE:

Part No.	Approx Length mm(in)	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R150	150(5.90")	7.5(0.295")	39(1.54")	23(50)	100
YJ-R200	200(7.87")		56(2.21")		
YJ-R250	250(9.84")		72(2.83")		

用途：捆紮電線、物品，此系列為可重複性使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

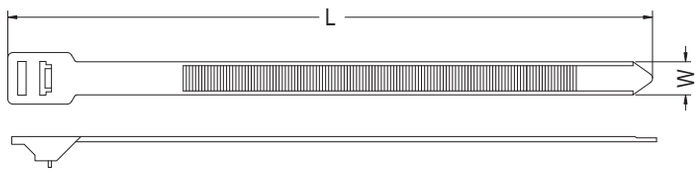

◆ RELEASABLE TIE:

Part No.	Approx Length mm(in)	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R228	228(9.00")	12.7(0.50")	54(2.12")	114(250)	100
YJ-R256	256(10.00")		62(2.44")		
YJ-R279	279(11.00")		70(2.75")		
YJ-R305	305(12.00")		78(3.07")		
YJ-R328	328(13.00")		86(3.38")		
YJ-R355	355(14.00")		94(3.70")		
YJ-R380	380(15.00")		102(4.00")		
YJ-R405	405(16.00")		110(4.33")		
YJ-R430	430(17.00")		118(4.64")		
YJ-R455	455(18.00")		127(5.00")		
YJ-R485	485(19.00")		135(5.31")		
YJ-R510	510(20.00")		143(5.62")		
YJ-R534	534(21.00")		151(5.94")		
YJ-R560	560(22.00")		159(6.25")		
YJ-R585	585(23.00")		167(6.57")		
YJ-R610	610(24.00")		175(6.88")		
YJ-R635	635(25.00")		183(7.20")		
YJ-R660	660(26.00")		191(7.51")		
YJ-R685	685(27.00")		199(7.83")		
YJ-R710	710(28.00")		207(8.14")		
YJ-R735	735(29.00")		215(8.46")		
YJ-R760	760(30.00")		224(8.81")		
YJ-R790	790(31.00")		232(9.13")		
YJ-R813	813(32.00")		243(9.57")		
YJ-R915	915(36.00")		274(10.79")		
YJ-R1042	1042(41.00")		314(12.36")		



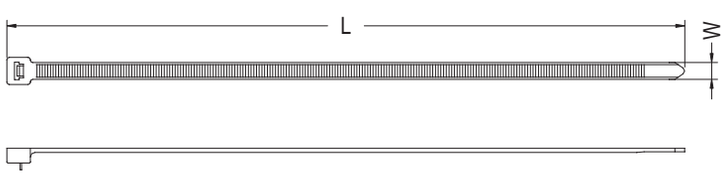


◆ RELEASABLE TIE:

Part No.	Approx Length mm(in)	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-R300	300(11.81")	7.6(0.30")	86(3.38")	23(50)	100
YJ-R350	350(13.87")		102(4.02")		
YJ-R400	400(15.75")		118(4.65")		
YJ-R655	655(25.79")	9.0(0.35")	194(7.64")	80(175)	
YJ-R780	780(30.71")		234(9.21")		
YJ-R815	815(32.00")		247(9.72")		


電線束線帶 CABLE TIE

用途：捆紮電線、物品。

◆ 本產品有UL安規。

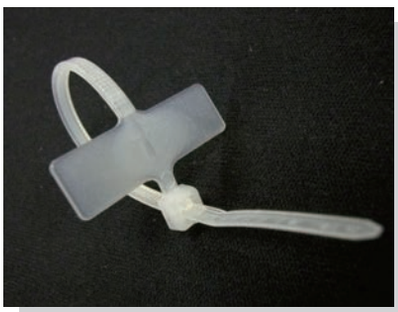


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm
- UL Recognized

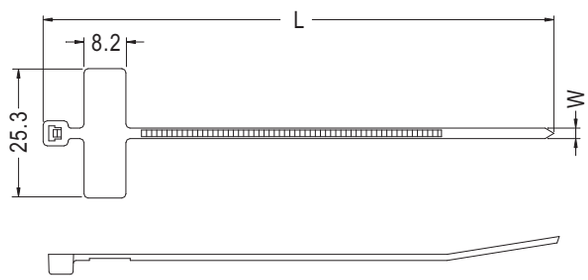

◆ MARKER TIE:

Part No.	Approx Length mm(in)	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L	W			
YJ-98X	100(4.00")	2.5(0.10")	22.(0.87")	8(18)	500



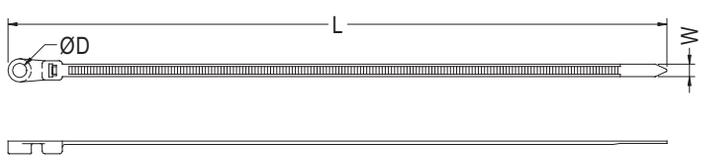


◆ CLAMP MOUNTING TIE:

Part No.	Approx Length mm(in)	D	Approx Width mm(in)	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
	L		W			
YJ-110	110(4.33")	3.2	2.8(0.11")	23(0.91")	10(22)	500
YJ-156	156(6.14")	4.2	3.6(0.14")	35(1.38")	18(40)	1000
YJ-205	205(8.00")	5.4	4.8(0.19")	51(2.01")	23(50)	
YJ-255	255(10.00")			67(2.64")		
YJ-304	304(12.00")			83(3.27")		500
YJ-356	356(14.00")			101(3.98")		
YJ-406	406(16.00")			118(4.64")		
YJ-230	230(9.00")	6.4	7.6(0.30")	58(2.28")	54(120)	100
YJ-306	306(12.00")			84(3.31")		
YJ-381	381(15.00")			108(4.25")		
YJ-460	460(18.00")			133(5.24")		
YJ-535	535(21.00")			155(6.10")		


電線束線帶 CABLE TIE

用途：捆紮電線、物品。


◆ 本產品有UL安規。

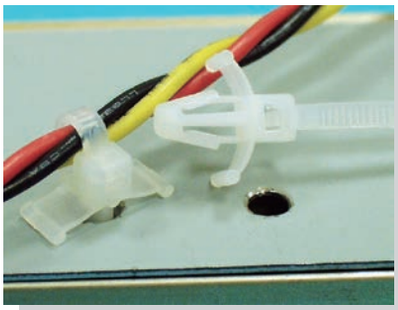


- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm
- UL Recognized

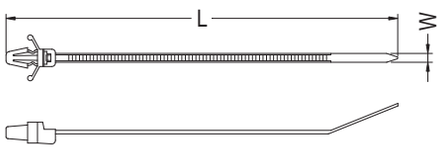


◆ GTP-130ST,GTP-170ST,
GTP-190ST,GP-110M

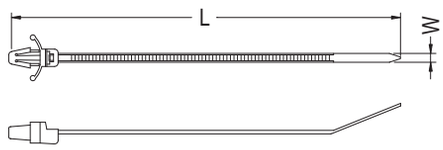

◆ GTP-110MA

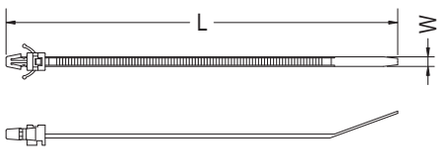

◆ GTP-130I

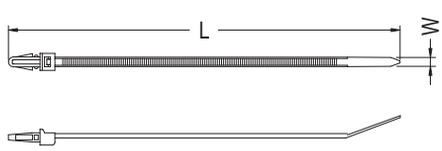


◆ GTP-150I,GTP-200ST

Part No.	Approx Length mm(in) L	Approx Width mm(in) W	Max Bundle mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Hole Diameter Chassis	Max. Panel Thickness	Package
GTP-130ST	132(5.12)	4.8(0.19)	25(0.98)	22.2(50)	6.4(0.252)	3.2(0.126)	1000
GTP-170ST	175(6.69)		38(1.50)				
GTP-190ST	200(7.68)		45(1.77)				
GTP-110M	110(4.33)	2.5(0.10)	22(0.87)	8.1(18)	4.8~5.0 (0.189)~(0.197)	0.8~2.4 (0.03)~(0.09)	
GTP-110MA							
GTP-130I	130(5.12)	3.2(0.13)	28(1.10)	13.6(30)	4.0(0.157)	1.0~2.0	
GTP-150I	150(5.91)	3.6(0.14)	32(1.26)		5.2(0.205)	1.0~2.8	
GTP-200ST	200(7.87)	4.8(0.19)	46(1.81)	22.2(50)	6.3(0.248)	3.6(0.141)	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

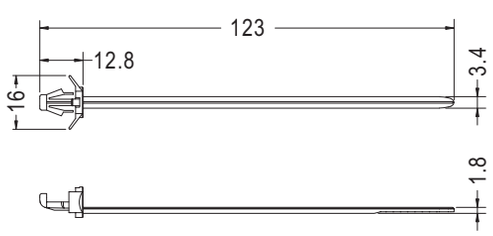

MOUNTING HOLES Ø5.4
THICKNESS: 2.0~3.2

NEW


Part No.	Package
STCC-123	500


電源線收線帶 STRAP TIE

用途：捆紮機器電線，美觀不佔空間。



- Material: Nylon 66 (UL)/PE
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm

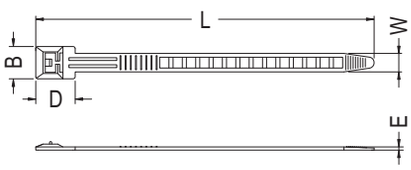

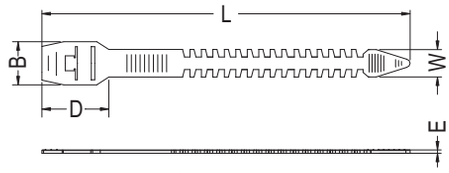


◆ ST-2,ST-3




Part No.	B	D	E	L	W	Package
ST-1SN	15.0	18.3	1.0	157.0	8.6	500
ST-1			1.5			
ST-2	15.8	21.4	1.2	135.0	10.0	
ST-3	15.4	24.5		140.0		
ST-4	15.0	18.3	1.7	205.0	8.6	
ST-5	13.0	16.0	1.45	125.0	7.5	
ST-5NS			1.0			
ST-11N	15.0	18.3	1.7	300.0	8.6	

電源線收線帶 STRAP TIE


用途：捆紮電線、物品。

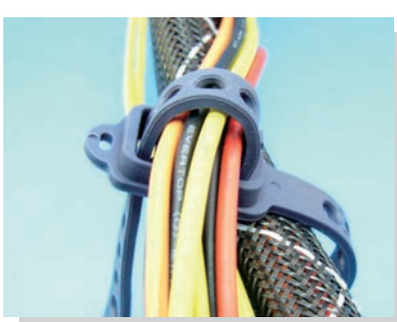


- Material: TPE
- Color: Black/Blue
- Unit: mm

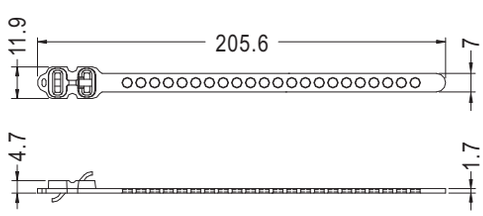

Part No.	Package
ST-6	250

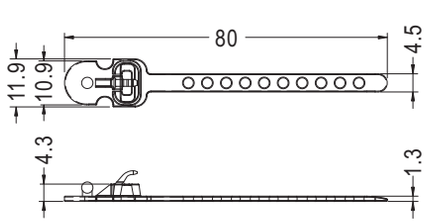


Part No.	Package
ST-13	500

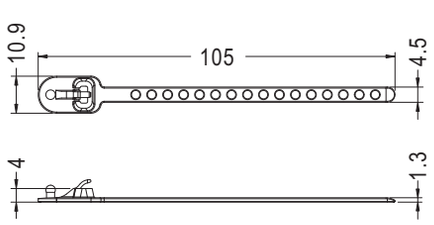

Part No.	Package
ST-15	500



- Material: PE
- Color: Natural
- Unit: mm

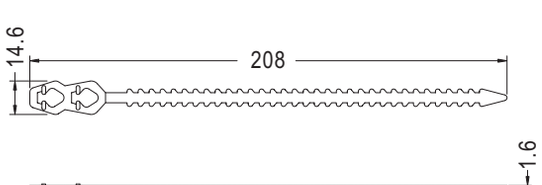


Part No.	Package
ST-7	500

電源線收線帶 STRAP TIE

用途：捆紮電線、物品。



- Material: PE
- Color: Black
- Unit: mm

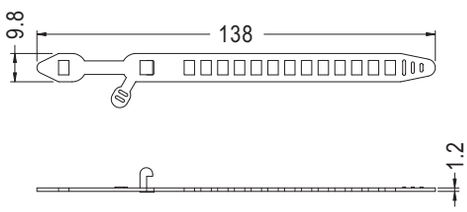


Part No.	Package
ST-8	500

珠型束線帶 STRAP TIE

用途：捆紮電線、物品。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

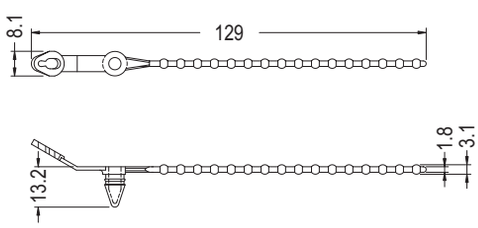


MOUNTING HOLE Ø6.4
THICKNESS 0.8~1.6

Part No.	Package
ST-9	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

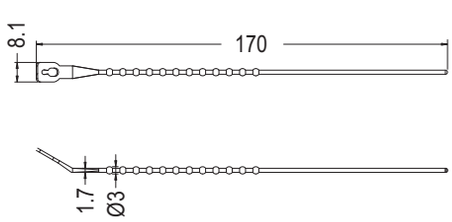

Part No.	Package
ST-19	500



- Material: PET
- Color: Natural
- Unit: mm

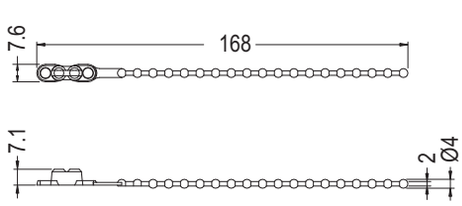


Part No.	Package
STO-166	500

用途：捆紮電線、物品。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

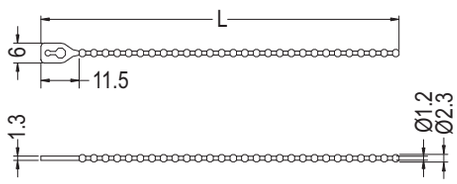

Part No.	L	Package
GTB-70	70.0	1000
GTB-100	112.0	




- Material: PP
- Color: Natural
- Unit: mm

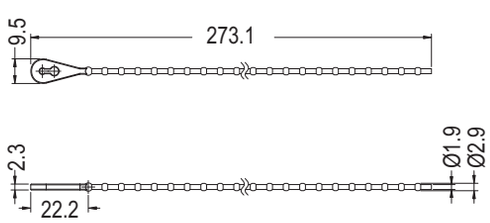

Part No.	Package
GTBA-273	500




- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

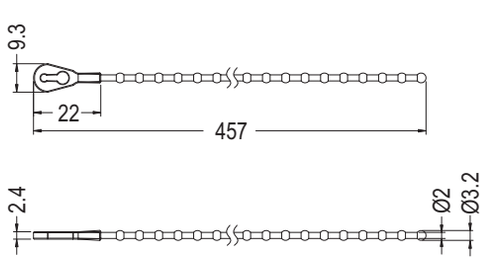

Part No.	Package
GTBA-457	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

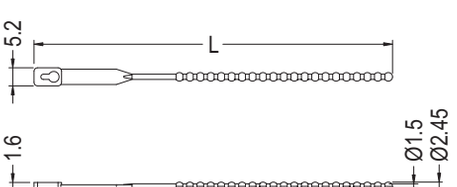


CHASSIS Ø3.0
THICKNESS: 0.6~1.8

Part No.	L	Package
GTB-85	85.0	1000
GTB-103	103.0	

用途：捆紮電線、物品。

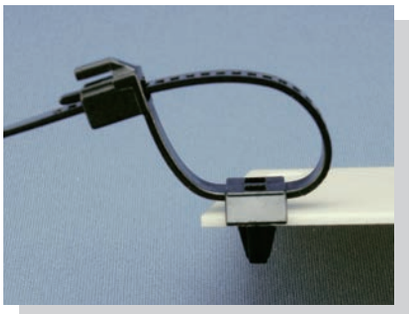

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

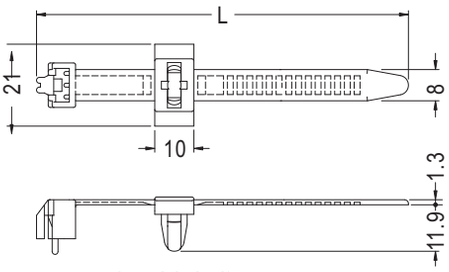


CHASSIS Ø7.0
THICKNESS 4.0


Part No.	L	Package
STC-115	115.3	200
STC-175	175.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

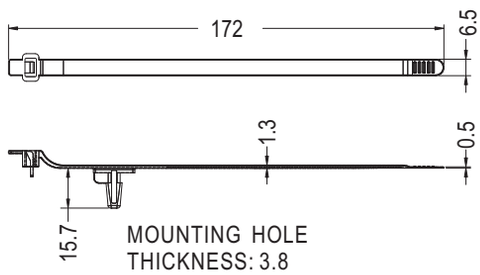


MOUNTING HOLE
THICKNESS: 3.8



Part No.	Package
STC-173	200



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

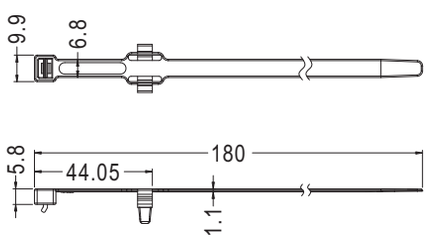

MOUNTING HOLE Ø5.5
THICKNESS: T


Part No.	T	Package
STC-180	0.8~2.0	200
STC-180L	2.3~2.5	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø7.0
THICKNESS 3.0



◆ **STC-171B**




◆ **STC-171A**

Part No.	組合件(ASSY)	Package
STC-171	STC-171A+STC-171B	250


用途：捆紮電線、物品。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

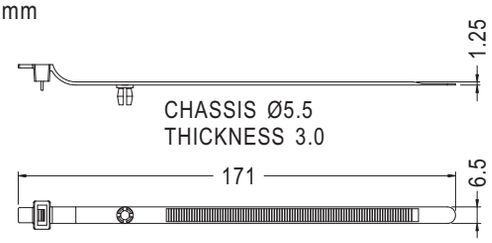


◆ **STC-172A**




◆ **STC-172B**

Part No.	Part No.	Package
STC-172	STC-172A	100
	STC-172B	
	此為子母包:內容物包含右方零件	

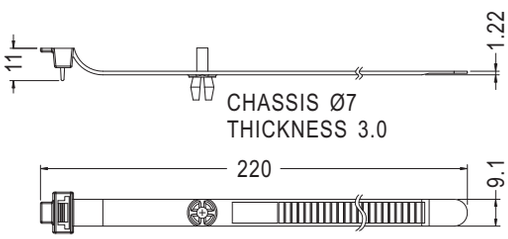


◆ **STC-174A**




◆ **STC-171B**

Part No.	Part No.	Package
STC-174	STC-174A	100
	STC-171B	
	此為子母包:內容物包含右方零件	

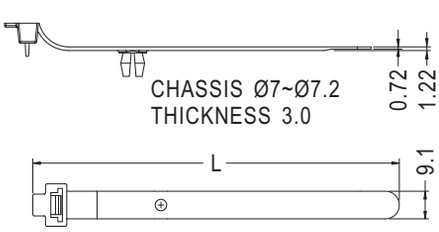

◆ **STC-121A, STC-176A**




◆ **STC-121B, STC-176B**

Part No.	Part No.	L	Package
STC-121	STC-121A	121.0	100
	STC-121B		
STC-176	STC-176A	171.2	
	STC-176B		
此為子母包:內容物包含右方零件			




- Material:PE
- Color: Black
- Unit: mm

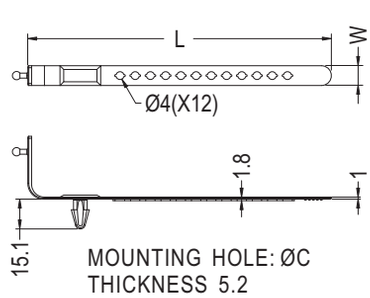

Part No.	C	L	W	Package
STCA-161	7.0	153.5	10.0	500



- Material:PE
- Color: Black
- Unit: mm

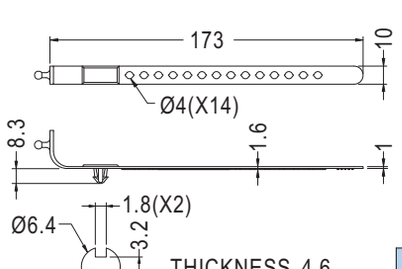



Part No.	Package
STCA-172	500

用途：捆紮電線、物品。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm

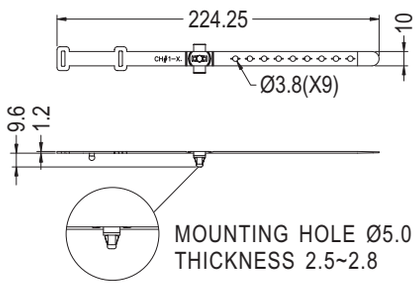

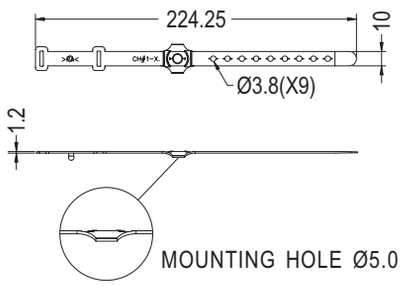



Part No.	Package
STCA-224	500

Part No.	Package
STCA-225	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

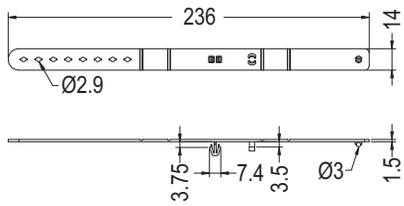




Part No.	Package
STCA-235	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

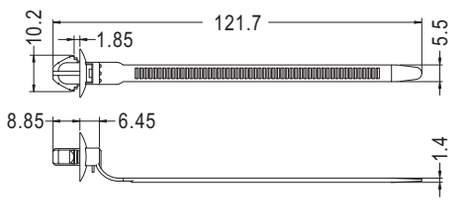


HOLE IN P.C.B Ø8.0 THICKNESS 1.0
HOLE IN P.C.B Ø10.0 THICKNESS 2.0


Part No.	Package
STCB-110	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

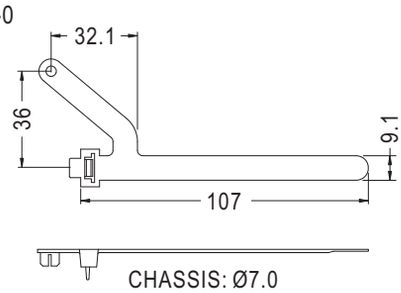

◆ STCL-100A




◆ STCL-100B


Part No.	組合件(ASSY)	Package
STCL-100	STCL-100A+STCL-100B	100

電源線束線帶 STRAP TIE


用途：捆紮電線、物品。

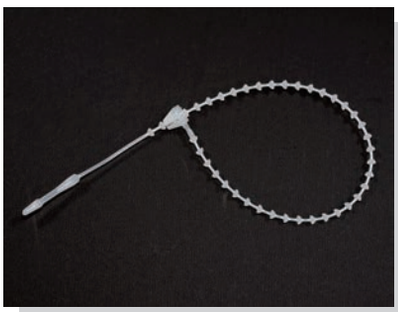


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

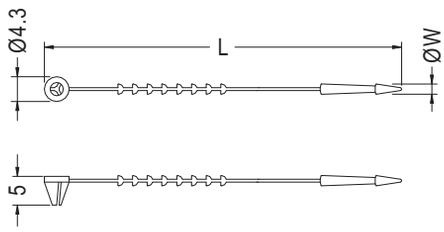

Part No.	L	W	Package
LOCK-145	145.0	1.8	1000
LOCK-200	200.0	2.0	

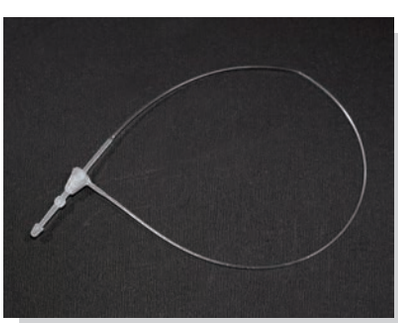

- Material: PP
- Color: Natural
- Unit: mm

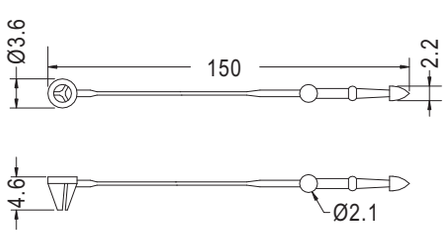

Part No.	Package
LOCK-150	1000


水管座 PIPE MOUNT

用途：車用管材之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



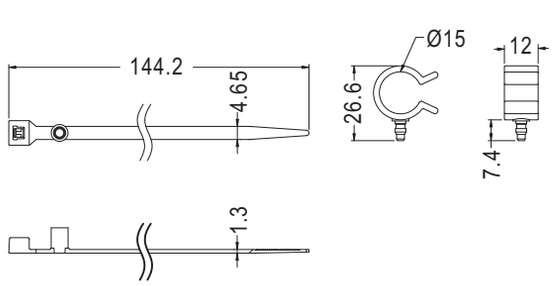


Part No.	Package
SWPK-15F	250

吊勾 HANDLE GRIP

用途：用於電線之固定。




- Material:PE
- Color: White/Black
- Unit: mm

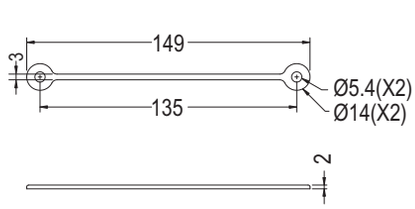


Part No.	Package
SFA-1	1000

束線座 CABLE MOUNT

用途：配合束線帶可固定電線於機板上。

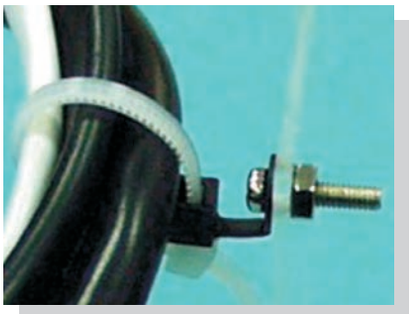

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
ASUS-1	2.8	2000
ASUS-3	3.1	

打包扣 PACKING FASTENER

用途：用於打包繩束線用，整齊美觀方便拆卸。



- Material: PP
- Color: Natural
- Unit: mm




Part No.	Package
CTBX-1	250

外箱護腳墊 BOX PLASTIC FOOT

用途：用於外箱打包機，避免外箱打凹變形。




- Material: PP
- Color: Black
- Unit: mm

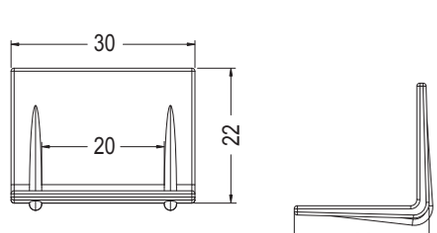


Part No.	Package
CTBXA-1	1000

束線帶扣 CABLE TIE BUCKLE

用途：用於束線帶定位與固定用。

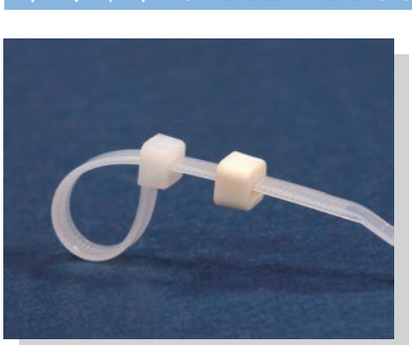

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

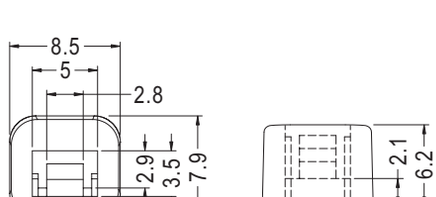



Part No.	Package
YJHH-4.8	1000

用途：捆紮電線、物品。


依不同尺寸，可接受訂製。
Different Size available per request.


- Material: Nylon
- Color: Black
- Unit: mm

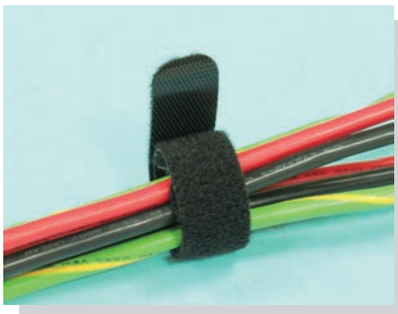

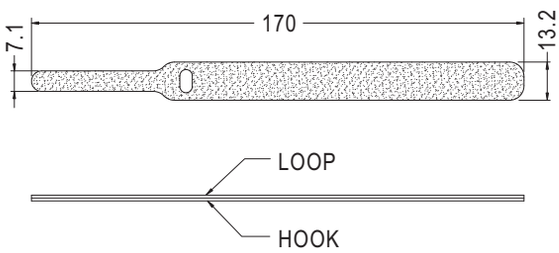


Part No.	Package
VCO-7NL	500

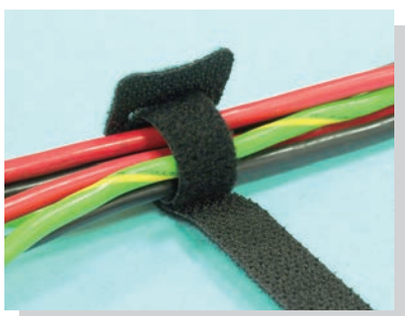

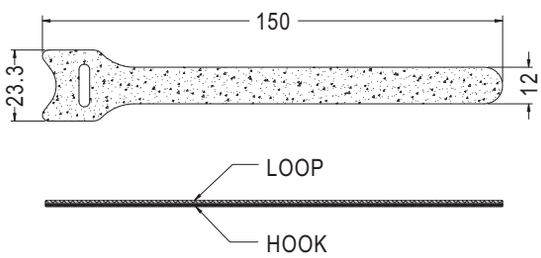


Part No.	Package
VCO15023	500



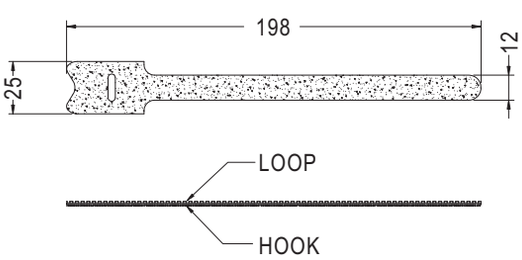


Part No.	Package
VCO19812	500



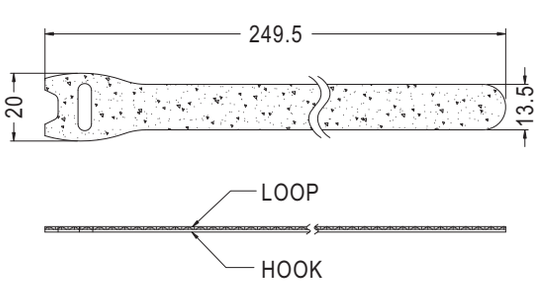


Part No.	Package
VCO25020	500



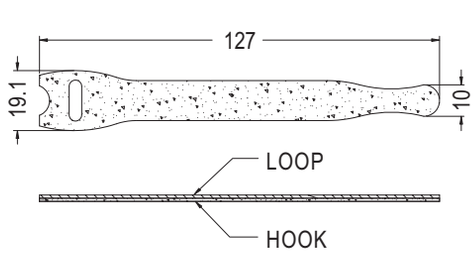


Part No.	Package
VCO-888	500

用途：捆紮電線、物品。

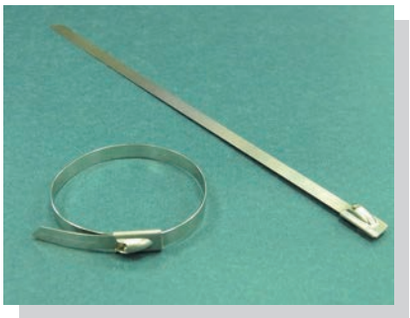

- Material: SUS
- Unit: mm

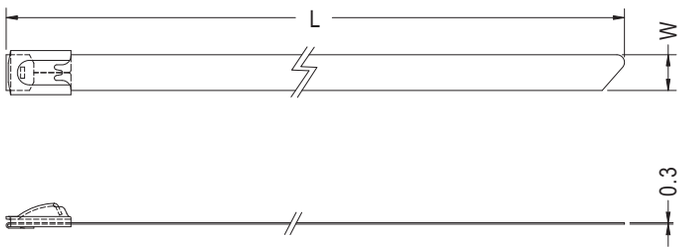

◆ **SELF-LOCKING TIES:**

Part No.	Max Bundle mm(in)	Approx Length mm(in)	Approx Width mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
STB-152S	25(1.00")	152(6.00")	4.5(0.177")	45.3(100)	100
STB-200S	50(2.00")	200(8.00")	4.5(0.177")	45.3(100)	100
STB-360S	102(4.00")	360(14.0")	4.5(0.177")	45.3(100)	100
STB-520S	152(6.00")	520(20.0")	4.5(0.177")	45.3(100)	100
STB-680S	203(8.00")	680(27.0")	4.5(0.177")	45.3(100)	100
STB-840S	254(10.0")	840(33.0")	4.5(0.177")	45.3(100)	100
STB-1050S	318(12.5")	1050(41.0")	4.5(0.177")	45.3(100)	50


Part No.	Max Bundle mm(in)	Approx Length mm(in)	Approx Width mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
STB-152M	25(1.00")	152(6.00")	8.0(0.315")	113.3(250)	100
STB-200M	50(2.00")	200(8.00")	8.0(0.315")	113.3(250)	100
STB-360M	102(4.00")	360(14.0")	8.0(0.315")	113.3(250)	100
STB-520M	152(6.00")	520(20.0")	8.0(0.315")	113.3(250)	100
STB-680M	203(8.00")	680(27.0")	8.0(0.315")	113.3(250)	100
STB-840M	254(10.0")	840(33.0")	8.0(0.315")	113.3(250)	100
STB-1050M	318(12.5")	1050(41.0")	8.0(0.315")	113.3(250)	50

Part No.	Max Bundle mm(in)	Approx Length mm(in)	Approx Width mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
STB-290L	80(3.10")	290(11.0")	12.0(0.472")	272.0(600)	50
STB-360L	102(4.00")	360(14.0")	12.0(0.472")	272.0(600)	50
STB-430L	121(4.70")	430(17.0")	12.0(0.472")	272.0(600)	50
STB-520L	152(6.00")	520(20.0")	12.0(0.472")	272.0(600)	50
STB-600L	175(6.80")	600(24.0")	12.0(0.472")	272.0(600)	50
STB-680L	203(8.00")	680(27.0")	12.0(0.472")	272.0(600)	50
STB-750L	230(8.70")	750(30.0")	12.0(0.472")	272.0(600)	50
STB-840L	254(10.0")	840(33.0")	12.0(0.472")	272.0(600)	50
STB-910L	273(10.7")	910(36.0")	12.0(0.472")	272.0(600)	25
STB-1000L	302(11.9")	1000(39.0")	12.0(0.472")	272.0(600)	25
STB-1070L	325(12.8")	1070(42.0")	12.0(0.472")	272.0(600)	25
STB-1200L	351(13.8")	1200(47.0")	12.0(0.472")	272.0(600)	25

用途：捆紮電線、物品。



- Material: SUS
- Unit: mm

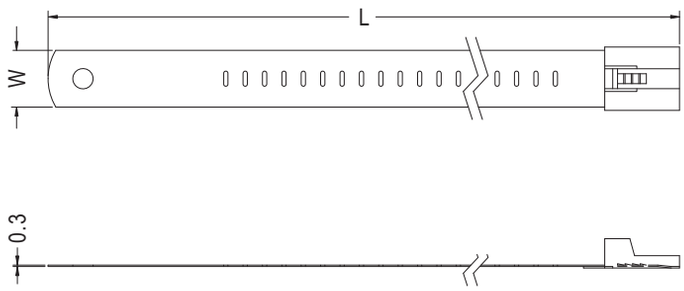


◆ **SELF-LOCKING TIES:**


Part No.	Max Bundle mm(in)	Approx Length mm(in)	Approx Width mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
STL-150S	22(0.86")	150(5.90")	7.0(0.28")	113.4(250)	100
STL-195S	45(1.70")	195(8.00")	7.0(0.28")	113.4(250)	100
STL-255S	64(2.50")	255(10.0")	7.0(0.28")	113.4(250)	100
STL-335S	89(3.50")	335(13.0")	7.0(0.28")	113.4(250)	100
STL-490S	139(5.40")	490(19.0")	7.0(0.28")	113.4(250)	100
STL-635S	185(7.20")	635(25.0")	7.0(0.28")	113.4(250)	100

Part No.	Max Bundle mm(in)	Approx Length mm(in)	Approx Width mm(in)	Min. Loop Tensile Strength kgs.(lbs.)	Package
STL-150M	22(0.86")	150(5.90")	12.0(0.472")	113.4(250)	100
STL-195M	45(1.70")	195(8.00")	12.0(0.472")	113.4(250)	100
STL-255M	64(2.50")	255(10.0")	12.0(0.472")	113.4(250)	100
STL-335M	89(3.50")	335(13.0")	12.0(0.472")	113.4(250)	100
STL-490M	139(5.40")	490(19.0")	12.0(0.472")	113.4(250)	100
STL-635M	185(7.20")	635(25.0")	12.0(0.472")	113.4(250)	100

用途：用於電線、零件接頭之絕緣。

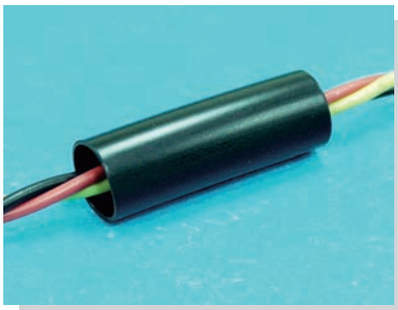

- Material: P.V.C
- Color: Black/Transparent
- Unit: mm

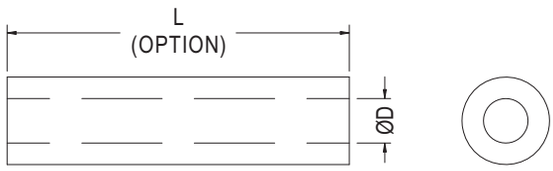

Package			
Part No.	Feet	(M)	(mm)
P0.864~P5.94	1000	(304.8)	(304800)
P6.68~P11.1B P12.7B	500	(152.4)	(152400)
P11.1 P12.7	250	(76.2)	(76200)


Part No.	Size Awg	Inside Diameter	Cat.No. DEV-300(300V.105℃)			Cat.No. DEV-600 (600V.105℃)		
			Outside Diameter	Avg Thickness	Min Thickness At Any Point	Outside Diameter	Avg Thickness	Min Thickness At Any Point
P0.864	20	0.864	1.70	0.40	0.330	2.10	0.60	0.431
P0.965	19	0.965	1.80			2.20		
P1.067	18	1.067	1.90			2.30		
P1.19	17	1.19	2.00			2.60	0.70	0.559
P1.34	16	1.34	2.15			2.75		
P1.50	15	1.5	2.30			2.90		
P1.68	14	1.68	2.50			3.10		
P1.93	13	1.93	2.70			3.35		
P2.16	12	2.16	3.00			3.60		
P2.41	11	2.41	3.20			3.80		
P2.69	10	2.69	3.50			4.10		
P3.00	9	3.00	4.10	0.55	0.431	4.40		
P3.38	8	3.38	4.50			4.80		
P3.76	7	3.76	4.90			5.20		
P4.22	6	4.22	5.35			5.65		
P4.72	5	4.72	5.85			6.15		
P5.28	4	5.28	6.40			6.70		
P5.94	3	5.94	7.05			7.35		
P6.68	2	6.68	7.80			8.10		
P7.47	1	7.47	8.60			8.90		
P8.38	0	8.38	9.50			9.80		
P7.92	5/16"	7.92				9.35		
P9.53	3/8"	9.53				10.95		
P11.1	7/16"	11.10				12.50		
P12.7	1/2"	12.70				14.10		

熱縮套管 HEAT SHRINK TUBING

用途：用於電線、零件接頭之絕緣。




- Material: Polyolefin
- Color: Black
- Unit: mm




Part No.	收縮前狀態 Dimensions Before Shrinkage		收縮後狀態 Dimensions After Shrinkage		Package	
	內徑(D) Inside Dia.	管壁厚度(t) Thickness	內徑 Inside Dia.	管壁厚度(t) Thickness	M/1 Roll	mm/1 Roll
Ø1.0	1.3	0.2	0.5	0.33	200	200000
Ø1.5	2.0		0.75	0.36		
Ø2.0	2.5		1.0	0.44		
Ø2.5	3.0	0.25	1.25			
Ø3.0	3.5		1.5			
Ø3.5	4.0		1.75			
Ø4.0	4.5		2.0			
Ø5.0	5.4		2.5	0.56	100	100000
Ø6.0	6.4		3.0			
Ø7.0	7.4	0.25	3.5	0.56	50	50000
Ø8.0	8.4		4.0			
Ø9.0	9.4		4.5			
Ø10.0	10.4		5.0			
Ø11.0	11.4		5.5			
Ø12.0	12.4		6.0			
Ø13.0	13.5	0.3	6.5	0.69		
Ø14.0	14.5		7.0			
Ø15.0	15.5		7.5			
Ø16.0	16.8		8.0			
Ø18.0	18.7	0.35	9.0	0.77		
Ø20.0	21.2		10.0			
Ø22.0	23.2	0.4	11.0			
Ø25.0	26.1		12.5	0.87		
Ø28.0	29.0	0.5	14.0			
Ø30.0	32.0		14.8			
Ø35.0	37.0		17.5			
Ø40.0	43.0		20.0	0.97		
Ø50.0	53.0		24.7			

織布管 SILICON FIBERGLASS SLEEVING

用途：用於電線之絕緣。

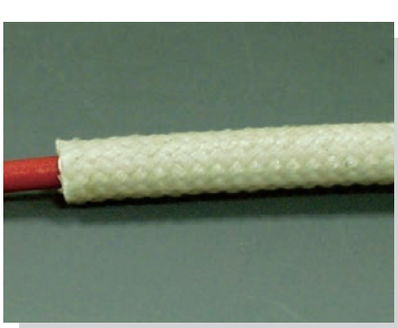

- Material: Glass-Fiber
- Color: White
- Unit: mm




Part No.	內徑 (D) Inside Diameter	管壁厚度 (t) Thickness	Package
T1	1.0	0.28	200M
T2	2.0		
T3	3.0		100M
T4	4.0	0.30	
T5	5.0		
T6	6.0		
T7	7.0		
T8	8.0	0.35	50M
T9	9.0		
T10	10.0		
T12	12.0	0.36	
T14	14.0		
T16	16.0		


把手 HANDLE

用途：用於包裝盒上，HAND-1配合HAND-2或HAND-65使用，組裝方便。





- Material: PE
- Color: White/Black
- Unit: mm

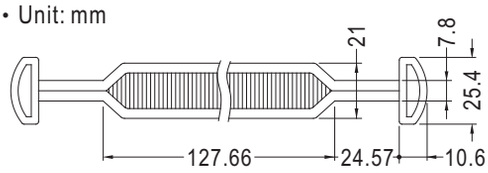




Part No.	Package
HAND-1	100

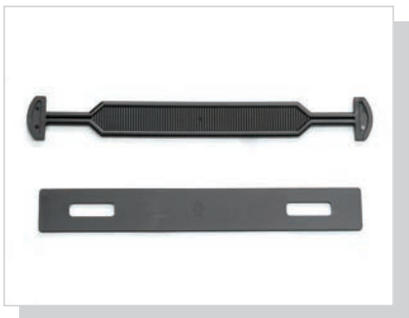







Part No.	B	C	Package
HAND-2	38.5	9.0	100
HAND-65	26.2	8.4	


把手 HANDLE

用途：用於PC板之拉拔。

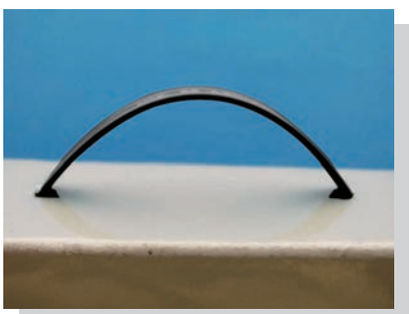

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

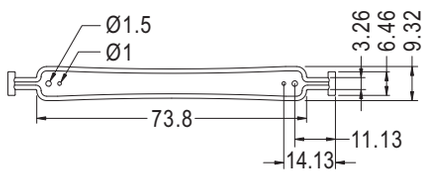






Part No.	Package
HAND-7	500


把手 HANDLE

用途：用於包裝盒上，HAND-12配合HAND-13使用，組裝方便。





- Material: PE
- Color: Black
- Unit: mm

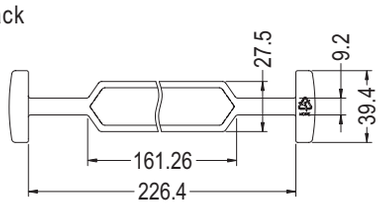



Part No.	Package
HAND-12	100







Part No.	Package
HAND-13	100

把手 HANDLE

用途：用於包裝盒上，HAND-23A配合HAND-23B使用，組裝方便。

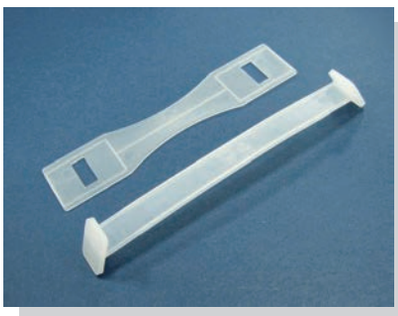

- Material: PE/PP
- Color: Natural
- Unit: mm

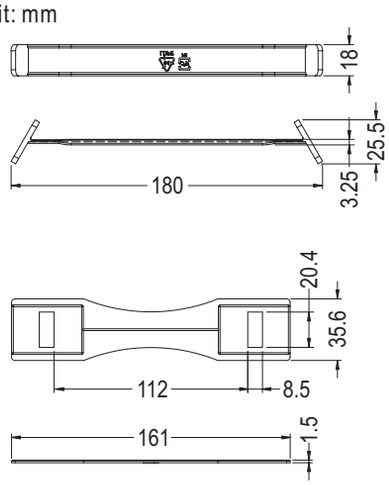

Part No.	Package
HAND-23A	100


Part No.	Package
HAND-23B	100

把手 HANDLE

用途：用於包裝盒上，HAND-14A配合HAND-14B使用，組裝方便。




- Material: PE
- Color: Natural
- Unit: mm

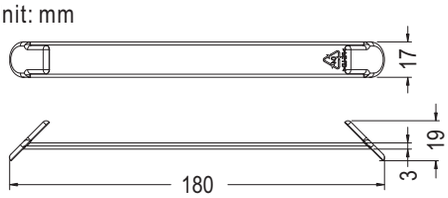

Part No.	Package
HAND-14A	100



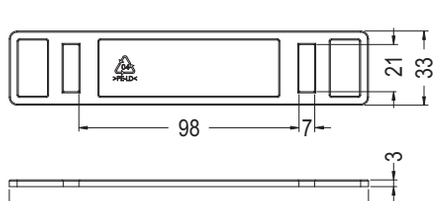


Part No.	Package
HAND-14B	100

把手 HANDLE

用途：用於包裝盒上，HAND-75A配合HAND-75B使用，組裝方便。




- Material: PE
- Color: Natural
- Unit: mm

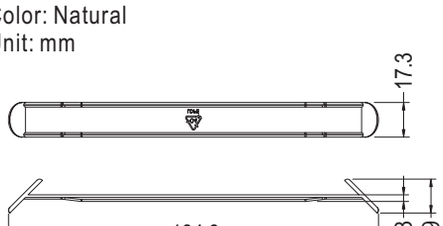

Part No.	Package
HAND-75A	100

- Material: PP
- Color: Natural
- Unit: mm

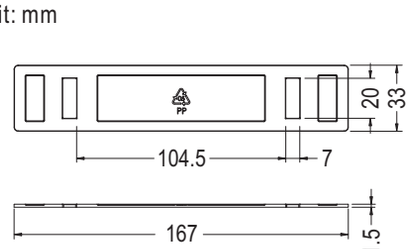


Part No.	Package
HAND-75B	100


把手 HANDLE


用途：用於包裝盒上，HANDN26A配合HAND-26B使用，組裝方便。



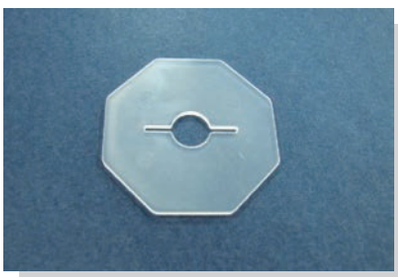

- Material:PE
- Color: Natural
- Unit: mm

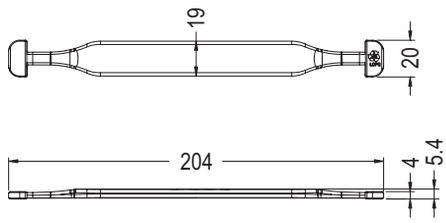



Part No.	Package
HANDN26A	100


Part No.	Package
HAND-26B	100

把手 HANDLE

用途：做為把手使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

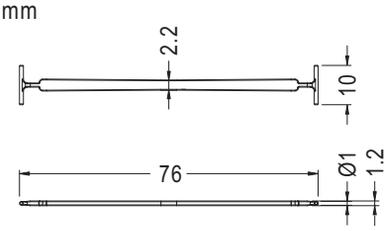


Part No.	Package
HAND-40	500

把手 HANDLE

用途：用於大型機殼之拉拔，耐負重。



- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

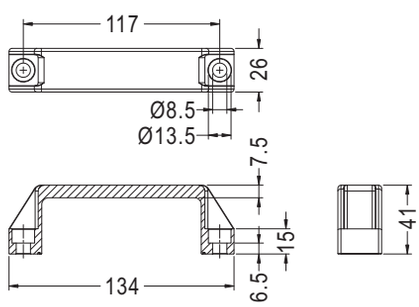


Part No.	Package
HAND-70	100

把手 HANDLE

用途：用於機殼之拉拔。



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

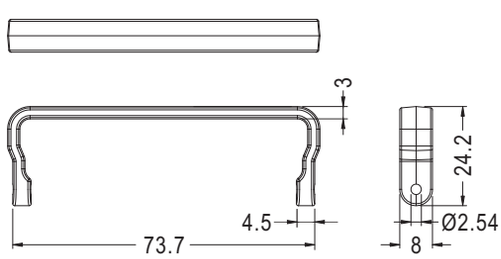


Part No.	Package
HAND-73	100

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	A	B	C	Package
HAND-25	3.2	32.0	40.0	250
HAND-25-1	4.1	32.0	40.0	
HAND-38	3.2	30.0	38.0	
HAND-41	4.0	30.0	38.0	
HAND-47	4.2	32.0	40.0	




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

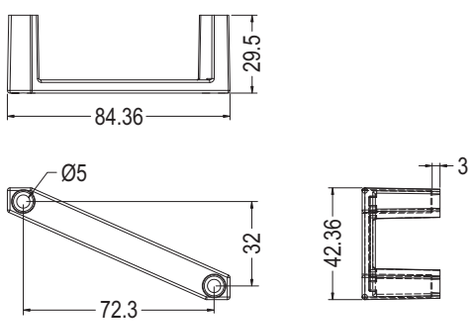

Part No.	Package
HAND-27	100




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

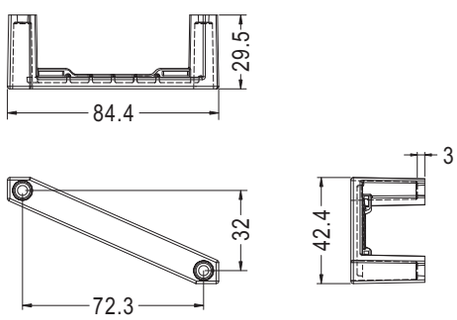

Part No.	Package
HAND-34	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Blue
- Unit: mm




Part No.	Package
HAND-87	1000

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



Part No.	Package
HAND-53	100




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

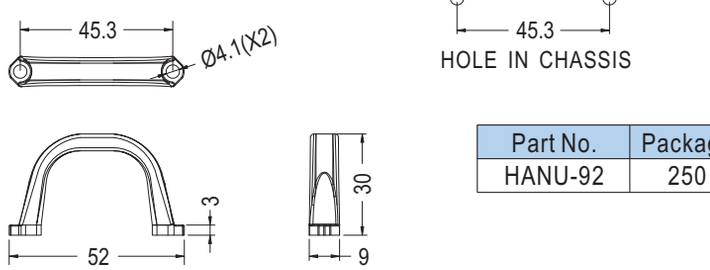

Part No.	Package
HANU-92	250




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

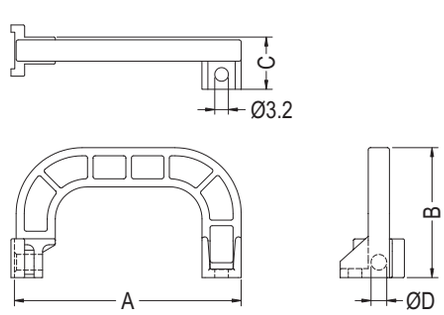

Part No.	A	B	C	D	Package
HAND-10	53.4	30.5	12.5	3.7	250
HAND-74	50.2	30.5	11.6	3.6	



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

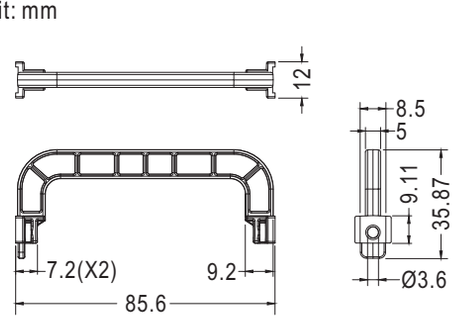


Part No.	Package
HAND-82	100


用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

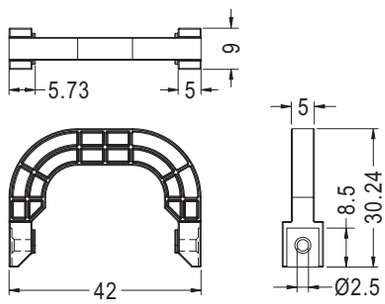

Part No.	Package
HAND-50	250

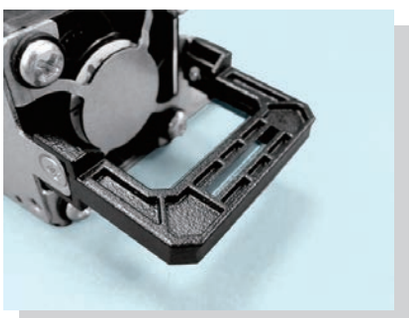


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

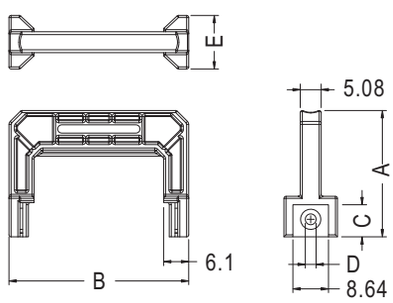

Part No.	A	B	C	D	E	Package
HAND-51	29.97	43.63	7.4	2.62	11.68	250
HAND-51L	30.67	43.63	7.8	2.62	13.0	
HAND-54	29.98	41.63	7.4	2.62	11.68	
HAND-55	29.98	34.59	7.1	2.6	11.68	



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Juniper Blue/Juniper Orange
- Unit: mm

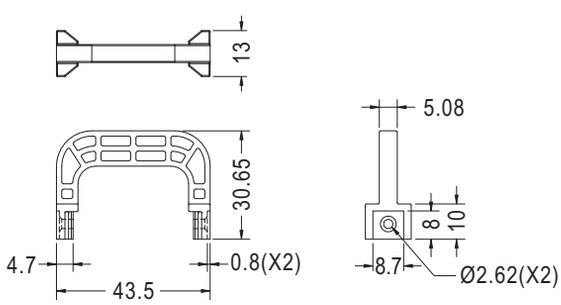


NEW


Part No.	Package
HAND-99	100



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

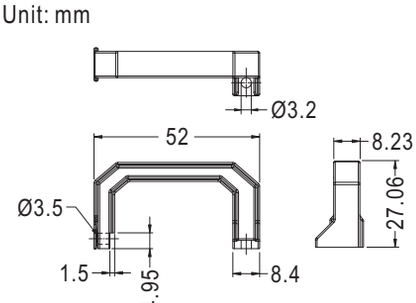


Part No.	Package
HAND-79	250




Part No.	Package
HAND-80-1	250

把手 HANDLE


用途：用於機殼之拉拔。

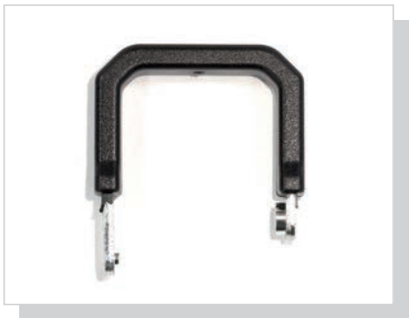

- Body Material: PC+ABS (UL)
- Metal Material: Zinc Plated Spcc
- Body Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

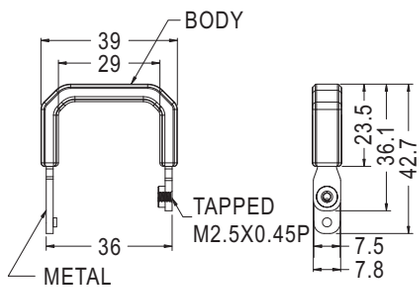


Part No.	Package
HAND-29	250

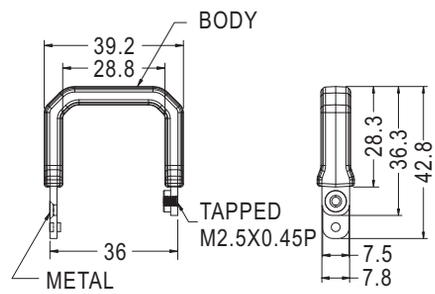

Part No.	Package
HAND-84	250




- Body Material: Silicon Rubber
- Metal Material: Zinc Plated SPCC
- Color: Black
- Unit: mm

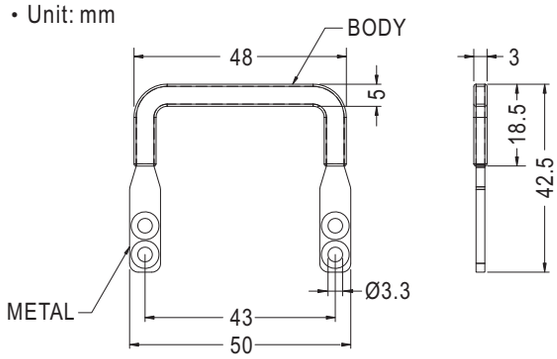


Part No.	Package
HAND-71	500




- Body Material: PC+ABS (UL)
- Metal Material: Zinc Plated SPCC
- Body Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

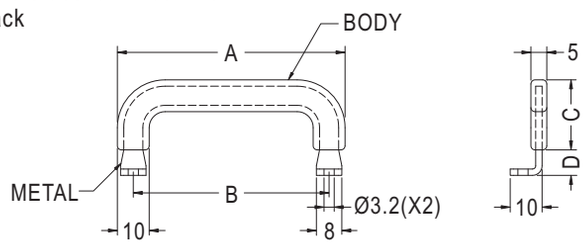

Part No.	A	B	C	D	Package
HAND-30	71.5	61.5	22.0	8.0	250
HAND-31	51.6	41.6	21.0	9.0	

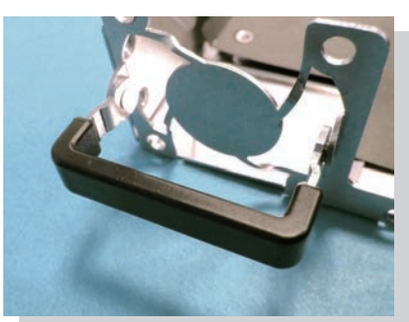

- Body Material: PC+ABS (UL)
- Metal Material: SGCC
- Body Flame Class: 94V-2
- Color: Black
- Unit: mm

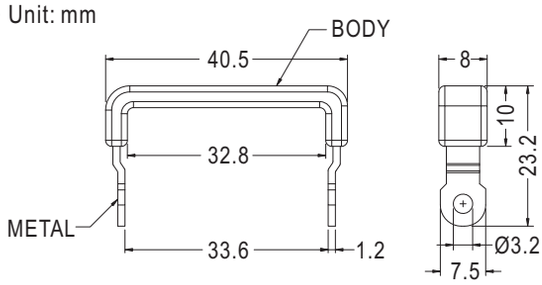


Part No.	Package
HANU-83	1000

把手 HANDLE

用途：用於機殼之拉拔。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

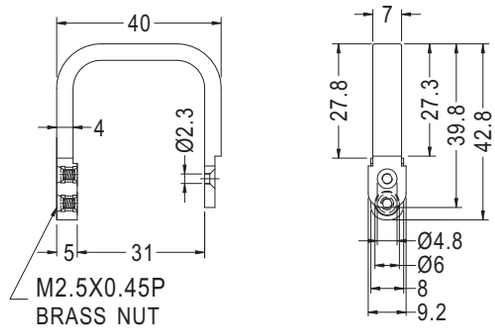

Part No.	Package
HANU-34	100



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

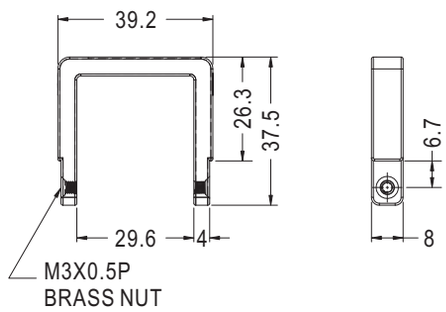


NEW

Part No.	Package
HANU-139	250




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

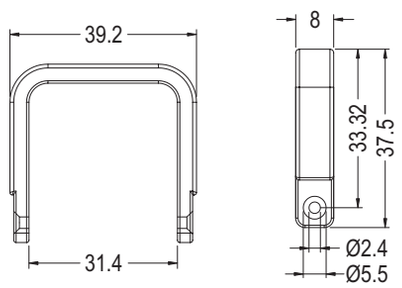

Part No.	Package
HANU-71	250



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

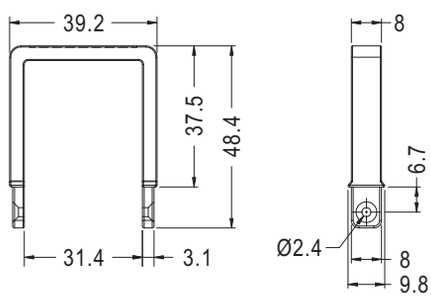

NEW


Part No.	Package
HANU-138	250

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

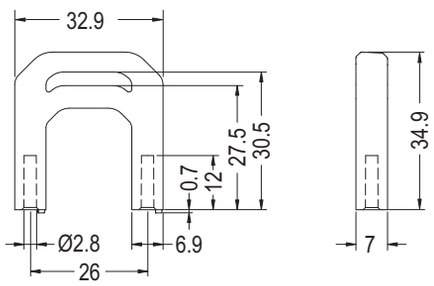

Part No.	Package
HANU-27U	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

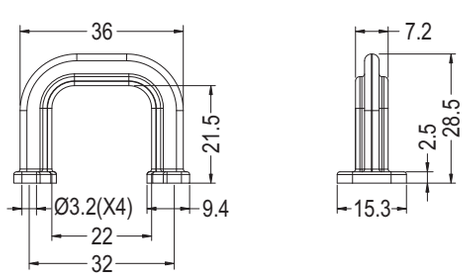

Part No.	Package
HANU-73	250



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

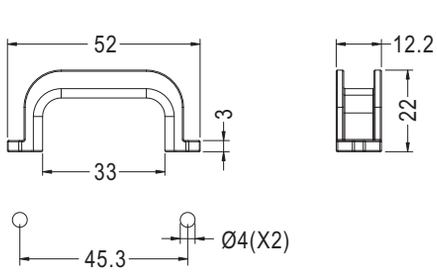


Part No.	Package
HANU-91	250


把手 HANDLE

用途：用於機殼之拉拔。



- Material: Nylon 66 (UL)/
  PC+ABS (UL)/PC (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Black
- Unit: mm

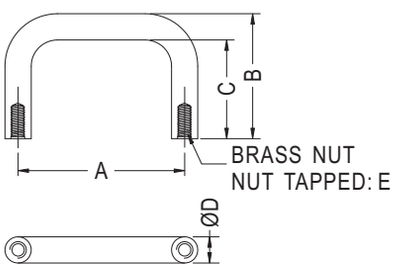

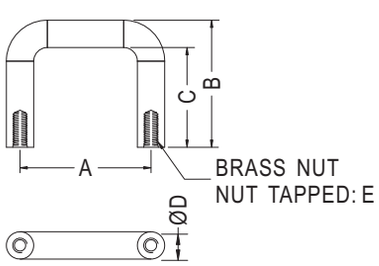



◆ **HANU-130**

Part No.	A	B	C	D	E	Package
HANU-40	40.0	30.0	23.7	6.3	M3X0.5P	250
HANU-48	48.0	32.0	25.7			
HANU-51	51.0					
HANU-70-1		38.7	31.7	7.0		
HANU-77	32.0	29.3	23.0	6.3		
HANU-70	51.0	38.7	31.7	7.0	6-32 UNC	
HANU-72	51.5	45.0	38.0	7.3		
HANU-76-632	32.0	22.5	15.5	7.0		
HANU-76					M3X0.5P	
HANU-97		23.3	17.0	6.3		
HANU-107		40.0	33.0	7.0		
HANU-109	29.0					
HANU-111	40.0	30.0	24.0	6.0		
HANU-115	54.0	29.9	23.0	6.9		100
HANU-123	48.0	26.0	19.7	6.3		250
HANU-125	26.0	25.0	19.5	5.5		
HANU-126	45.3	22.5	17.0			
HANU-128	25.0	28.5	22.2	6.3		
HANU-130	30.2	29.3	23.0			



- Material: PC+ABS (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



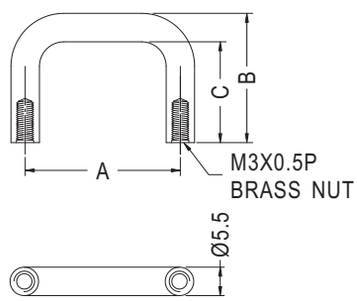


Part No.	A	B	C	Package
HANU-30PN	30.0	25.0	19.5	250
HANU-32VB	32.0	28.4	22.9	

Part No.	A	B	C	Package
HANU-30PVB	30.0	25.0	19.5	250
HANU-32PVB	32.0	28.4	22.9	

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm
- 專利品 (P.A.T.)

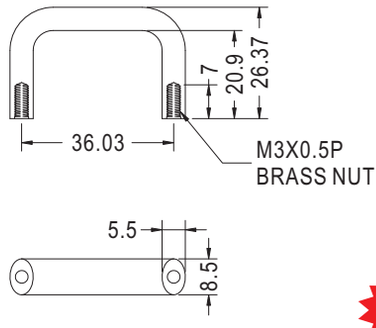


NEW

Part No.	Package
HANU-142	250

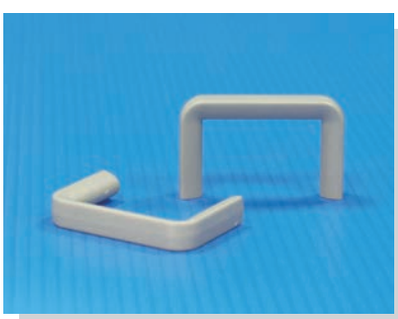

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm

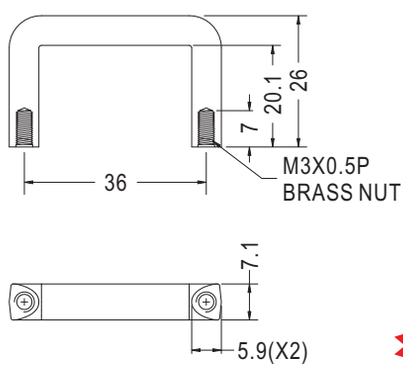


NEW

Part No.	Package
HANU-137	250



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

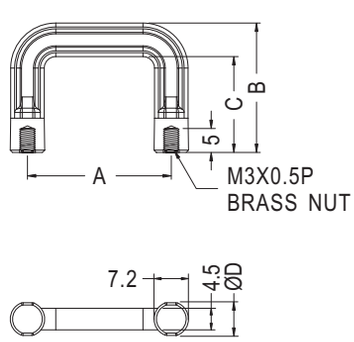


Part No.	A	B	C	D	Package
HANU-108	30.0	27.0	20.0	6.8	250
HANU-114	30.0	34.0	27.0	6.8	

把手 HANDLE

用途：用於機殼之拉拔。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



Part No.	B	E	Package
HANU-102	34.9	32.9	250
HANU-102-1	35.0	33.0	







Part No.	Package
HANU-103	250



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm







Part No.	Package
HANU-80	250





- Material: PC (UL)
- Flame Class: 94V-0
- Color: Transparent
- Unit: mm





Part No.	Package
HANU-113	100






Part No.	Package
HANU-117	100

把手 HANDLE

用途：用於機殼之拉拔。




- Body Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Screw Material: Steel
- Color: Black
- Unit: mm

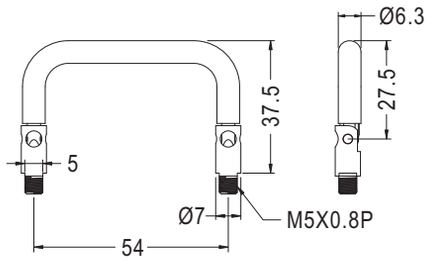

Part No.	Package
HANUL-2F	100




- Body Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Screw Material: Steel
- Color: Black
- Unit: mm

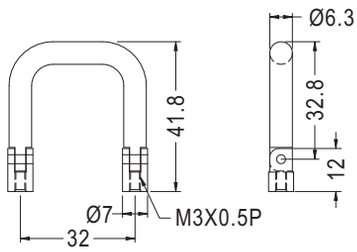

Part No.	Package
HANUL-3NF	100




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

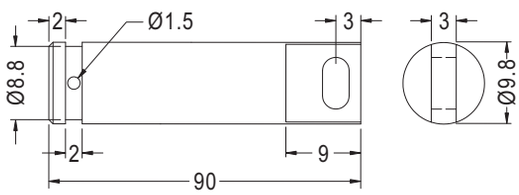

Part No.	Package
HANI-90	100



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

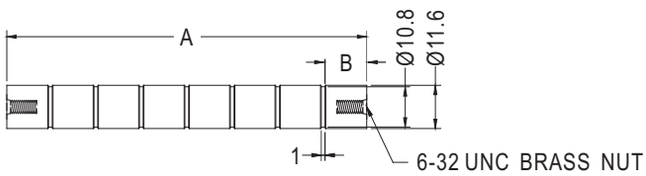


Part No.	A	B	Package
HANI-96	97.0	11.4	100
HANI-119	118.7	10.05	50

用途：用於機殼之拉拔。



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black/Blue/Purple/Green
- Unit: mm

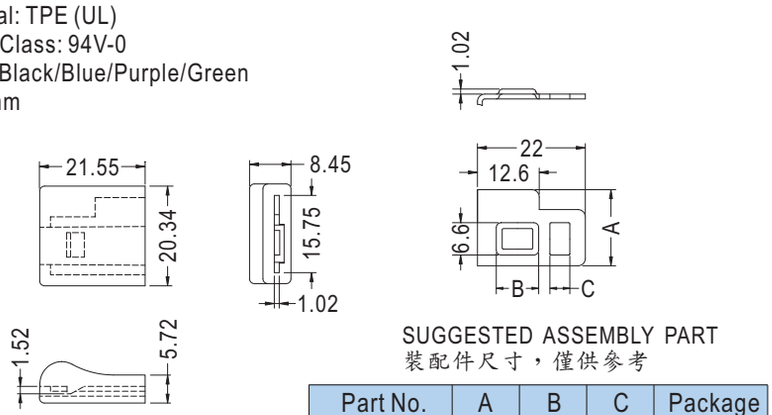


SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	A	B	C	Package
HANE-21	15.52	8.64	4.06	250
HANE-21L	15.2	9.2	3.9	




- Material: Santoprenr
- Color: Black
- Unit: mm

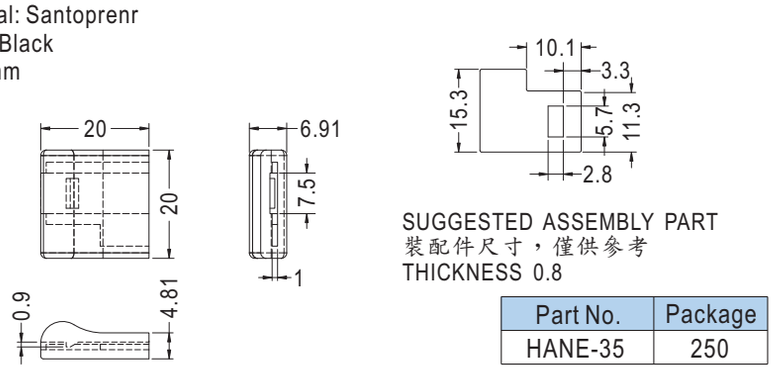


SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考
THICKNESS 0.8

Part No.	Package
HANE-35	250

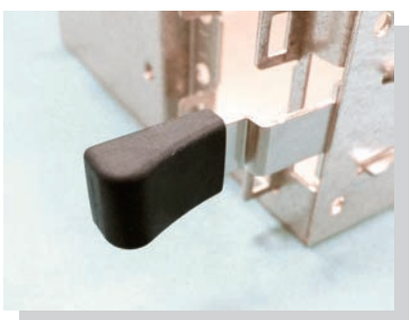

- Material: TPR
- Color: Black
- Unit: mm

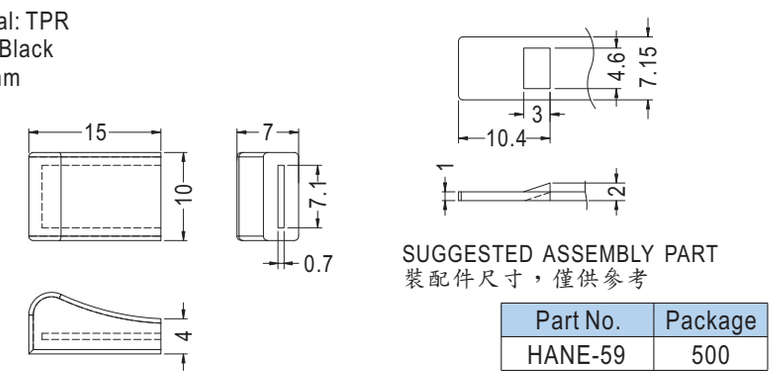


SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-59	500



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Purple
- Unit: mm

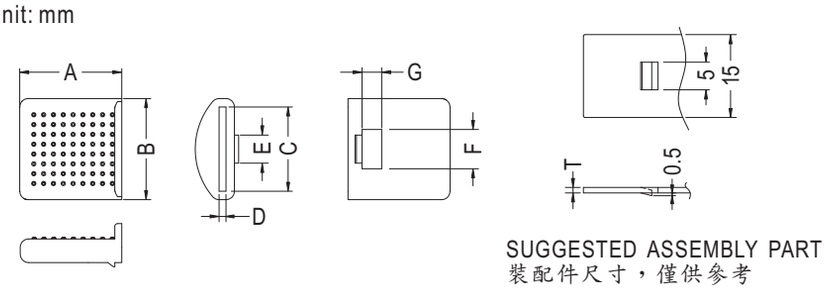

SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考


Part No.	A	B	C	D	E	F	G	T	Package
HANE18	18.47	18.29	15.24	1.24	5.08	7.11	3.56	1.0	250
HANE18LV				1.4				1.2	
HANE29	18.5	18.3	15.1	1.2	5.1	7.0	3.2	1.0	


把手 HANDLE

用途：用於機殼之拉拔。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-77	1000



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Purple
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-24	250



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

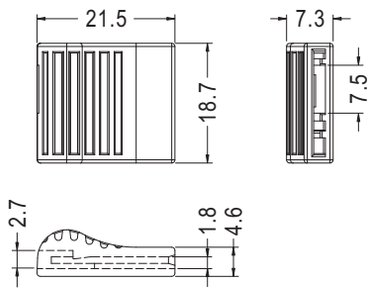





SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-40	1000



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考


Part No.	Package
HANE-32	1000

用途：用於機殼之拉拔。

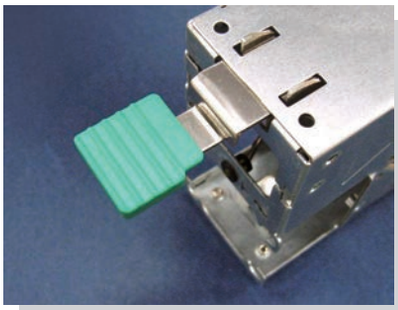


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Green
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-33	1000

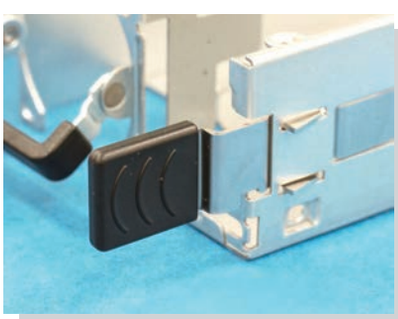

- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	A	B	C	D	T	Package
HANE-36	20.5	18.0	4.0	1.0	0.8~1.0	1000
HANE-48				1.2	1.2	
HANE-55			3.7	1.0	0.8~1.0	
HANE-69	20.7	18.2	4.0		1.0	



- Material: TPE
- Color: Black/Orange
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-23	1000



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black/Orange
- Unit: mm





SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考
THICKNESS 0.8


Part No.	Package
HANE-37	1000

把手 HANDLE

用途：用於機殼之拉拔。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

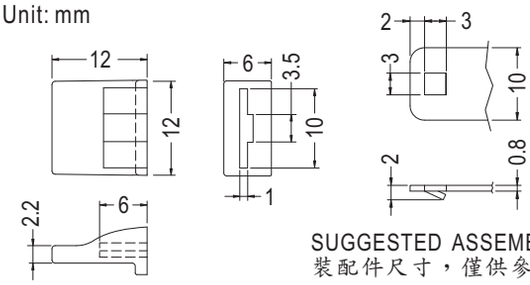

Part No.	Package
HANE-26	1000

SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

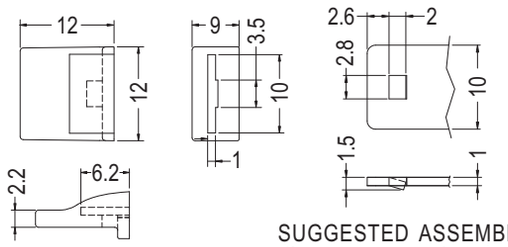


Part No.	Package
HANE-38	1000

SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考



- Material: PC +ABS(UL)
- Flame Class: 94V-0
- Color: Blue
- Unit: mm

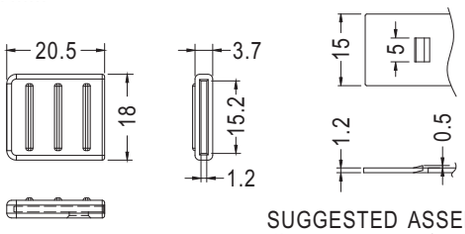


Part No.	Package
HANE-74	1000

SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考



- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Orange
- Unit: mm

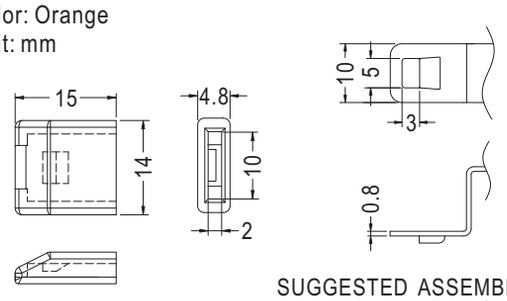


Part No.	Package
HANE-75	1000

SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考




- Material: PC+ABS (UL)
- Flame Class : 94V-0
- Color: Cisco Medium Grey
- Unit: mm

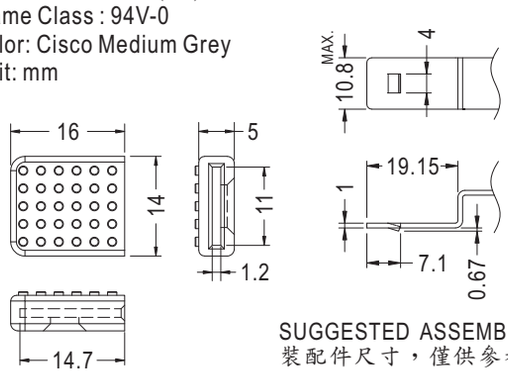


Part No.	Package
HANE-97	1000

SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

用途：用於機殼之拉拔。

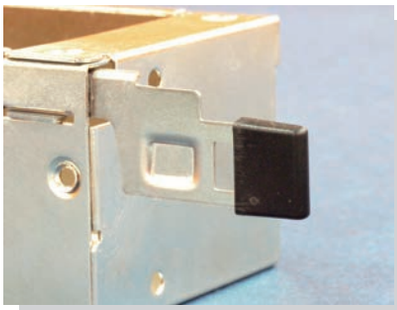


- Material: PC+ABS
- Color: Black
- Unit: mm

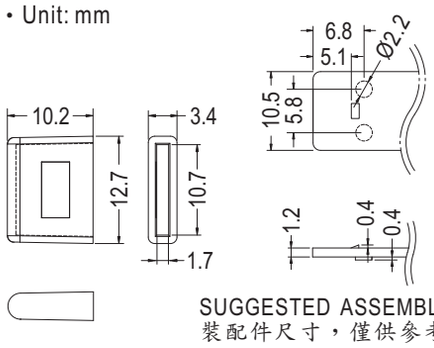

SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-27	1000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
HANE-72	1000



- Material: PC+ABS (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-58	1000



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-98	1000



- Material: PC (UL)/ABS
- Flame Class: 94HB/94V-2
- Color: Black/Red
- Unit: mm





SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考
THICKNESS: T


Part No.	A	B	C	D	E	F	T	Package
HANE-46	7.8	4.84	3.2	6.6	2.6	3.4	0.6	1000
HANE-76	5.0	5.0	4.0	7.0	3.0	3.5	0.7	


把手 HANDLE

用途：用於機殼之拉拔。



- Material:TPV
- Color:Orange
- Unit: mm

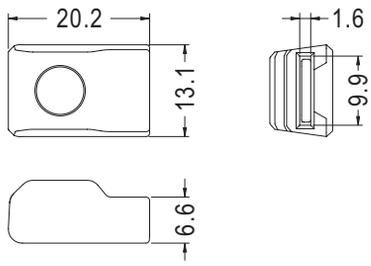





SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-22	250



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black/Blue
- Unit: mm

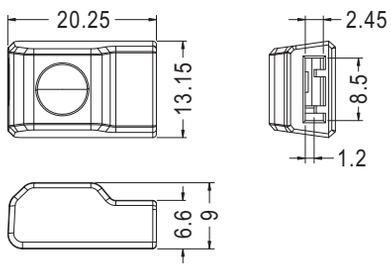





SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-41	250



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Orange
- Unit: mm







SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-34	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

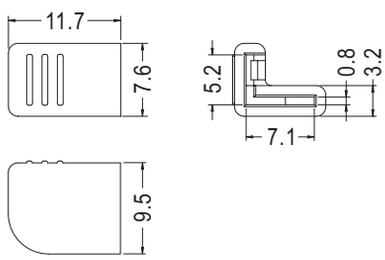



SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考


Part No.	Package
HANE-30	1000


把手 HANDLE

用途：用於機殼之拉拔。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (P.A.T.)

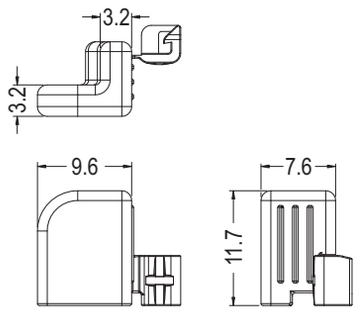




SUGGESTED ASSEMBLY PART
裝配件尺寸，僅供參考

Part No.	Package
HANE-86	1000

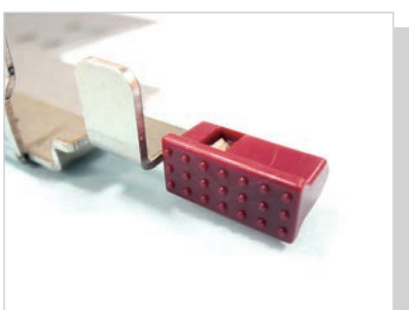


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Hot Plug Red
- Unit: mm

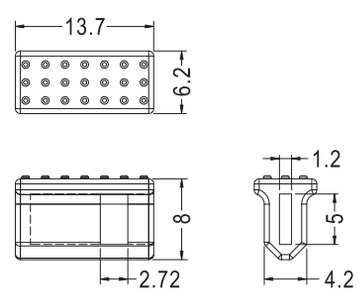

Part No.	Package
HANE-53	500




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

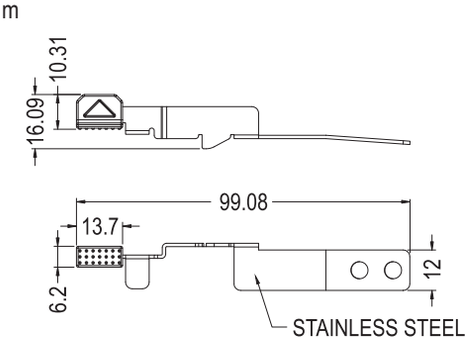

Part No.	Package
HANE-64	250




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Red
- Unit: mm

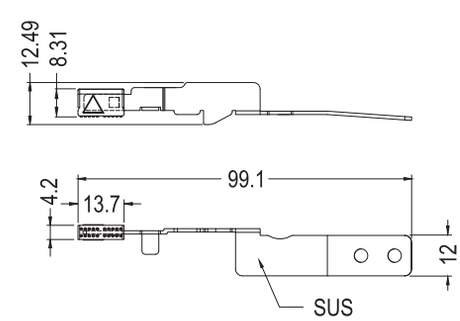


Part No.	Package
HANE-67	250

把手 HANDLE

用途：用於PC板或機殼之拉拔。

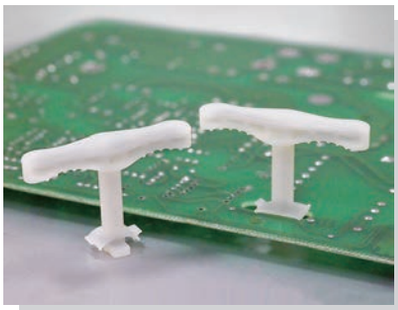

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品(PAT.)

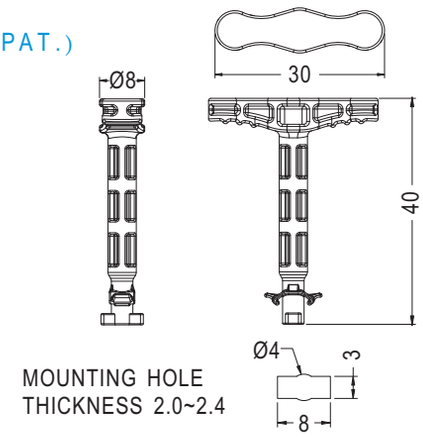

Part No.	Package
HANT-1	1000


外箱扣 BOX HANDLE


用途：用於包裝盒上，組裝方便。






- Material: PP
- Color: Natural/Black
- Unit: mm

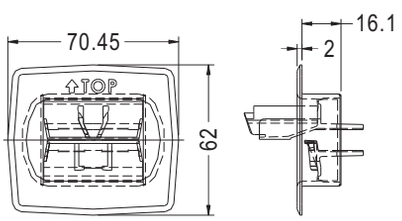

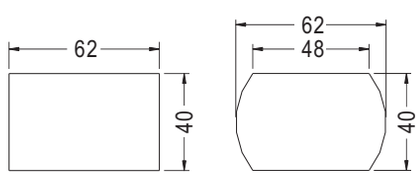


裝配孔以上兩者皆可

Part No.	Package
CABOX-1	50

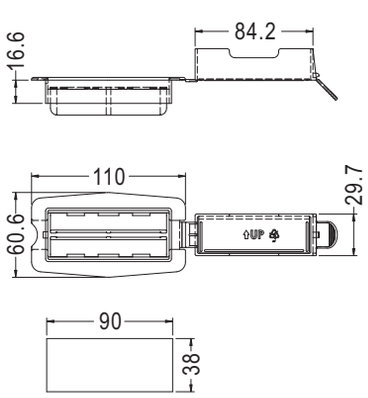


Part No.	Package
CABOX-2	25

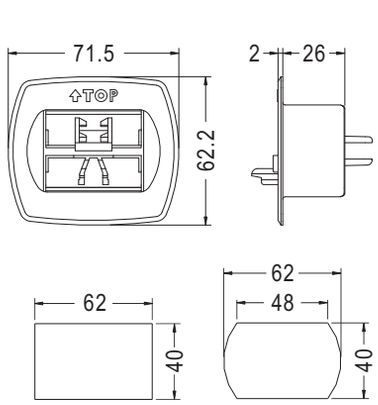

裝配孔以上兩者皆可

Part No.	Package
CABOX-3	50

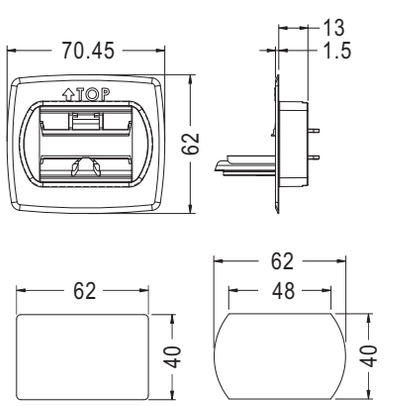

裝配孔以上兩者皆可


Part No.	Package
CABOX-5	50


外箱扣 BOX HANDLE


用途：用於包裝盒上，組裝方便。



- Material: PP
- Color: Natural/Black
- Unit: mm











MOUNTING HOLE

Part No.	Package
CABOX-7	50










MOUNTING HOLE　MOUNTING HOLE

裝配孔以上兩者皆可


Part No.	Package
CABOX-6	40


護線套 MOVEABLE BUSHING

用途：用於電線出線口，防止電線機殼刮傷。

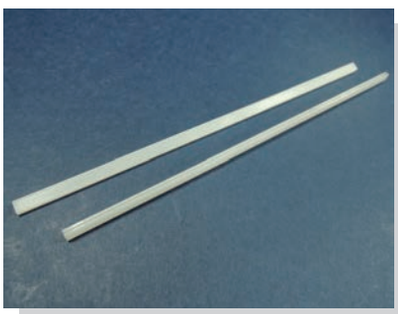


- Material: Nylon 6
- Color: Natural
- Unit: mm







CHASSIS THICKNESS: T

Part No.	A	B	L	T	Package
KGA13-185	1.3	5.0	185	0.8~1.2	500
KGA13-260			260		

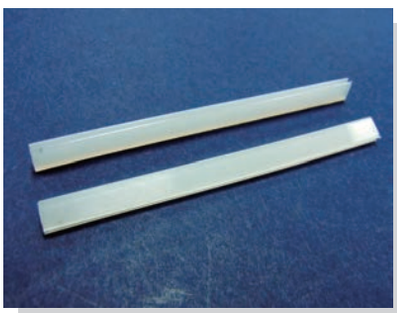

- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm






CHASSIS THICKNESS: T


Part No.	A	B	L	T	Package
KGC-013-45	1.3	5.0	45.0	1.0~1.2	500
KGC-013-70			70.0		


護線套 MOVEABLE BUSHING

用途：用於電線出線口，防止電線機殼刮傷。

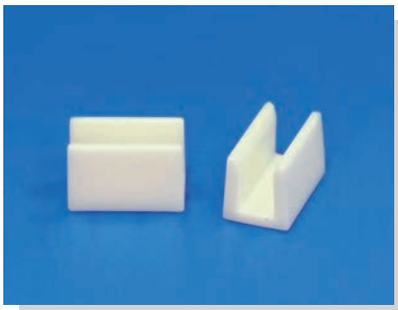

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm





NEW


Part No.	Package
KGC-025-8	500

活用護線套 MOVEABLE BUSHING


用途：用於電線出線口，防止電線機殼刮傷。




- Material: PE
- Color: Natural
- Unit: mm



(切型)
KG-16S




(平面型)
KG-016C





THICKESS: T

Part No.	A	B	T	Package
KG-010	1.1	5.2	0.9~1.1	10M
KG-012	1.3	5.4	1.1~1.3	
KG-016	1.7	5.4	1.45~1.75	
KG-016S	1.6	5.3	1.45~1.75	
KG-016C	1.7	5.4	1.45~1.75	
KG-020	2.2	5.4	1.8~2.2	
KG-024	2.7	5.7	2.25~2.6	
KG-030	3.3	6.1	2.85~3.25	
KG-040	4.3	6.5	3.85~4.25	

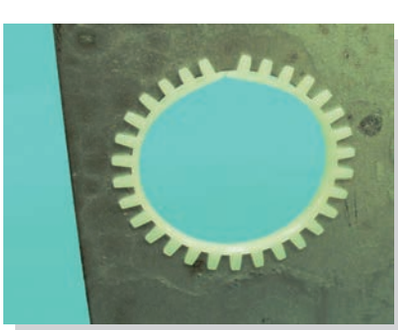

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm






CHASSIS THICKNESS: T


Part No.	A	B	C	L	T	Package
KG-006N	0.6	3.8	3.1	260	0.5~0.7	500
KG-008N	0.8	3.8	3.1		0.7~0.9	
KG-010N	1.0	3.8	3.3		0.9~1.1	
KG-012N	1.2	3.8	3.5		1.1~1.3	
KG-014N	1.4	3.8	3.65		1.3~1.5	
KG-014N-290	1.4	3.8	3.65		1.3~1.5	
KG-016N	1.6	3.8	3.9		1.4~1.7	
KG-016LN	1.6	5.3	4.5	256	1.0~1.5	
KG-020N	2.0	3.8	4.3	260	1.8~2.0	
KG-025N	2.5	3.8	4.8		2.0~2.5	
KG-030N	3.0	4.8	6.2		2.5~3.0	

黏貼標誌貼紙 WIRE LABEL

用途：軟式背膠，上印有文字，數字及符號可貼於不同規格電線電纜上，做為電線之標示。

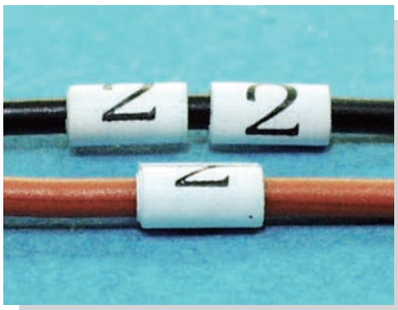


- Material: Vinyl Chloride
- Idenical Mark: 0~9 A~Z
- Unit: mm
- 100 pcs of 1 digit on one sheet.

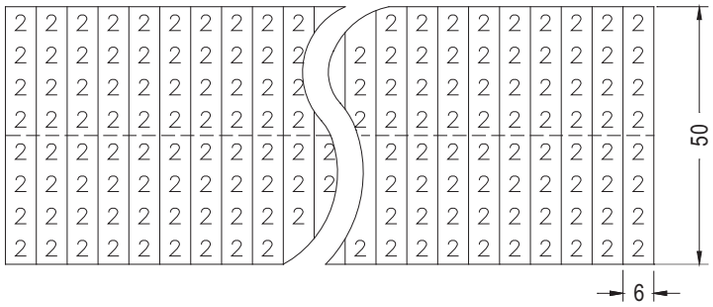


捲式保護帶 SPIRAL WRAPPING BAND

用途：電線不易磨損，引導電線彎曲使外觀整齊美觀。

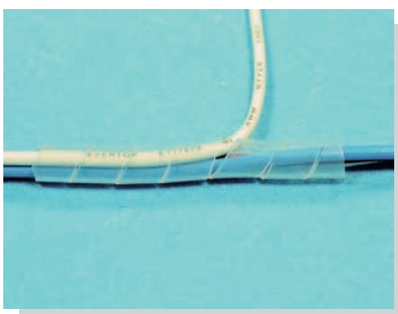


- Material:PE
- Color: Natural
- Unit: mm




Part No.	A	C	T	Package
SWB-2	3.0	4.6	0.4	10M
SWB-3	4.0	7.6	0.5	
SWB-4S	5.0	8.5	0.5	
SWB-4	6.0	8.5	0.6	
SWB-6	8.0	13.0	0.7	
SWB-7.5	10.0	13.0	0.8	
SWB-9	12.0	15.0	0.85	
SWB-12	15.0	17.0	1.0	
SWB-16	19.0	19.0	1.2	
SWB-20	24.0	21.0	1.5	

快速捲束帶 FAST SPIRAL WRAPPING BAND AND CLAMP


用途：快速引導包覆電線，電線不易磨損，外觀整齊美觀。

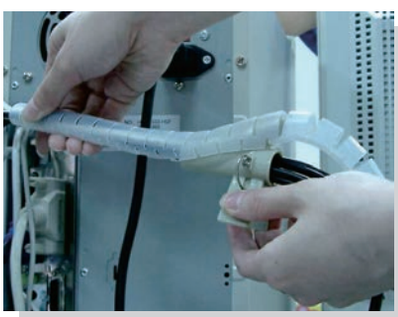


- Spiral Wrap Material: PE
- Spiral Wrap Color: Natural
- Clamp Material: ABS
- Unit: mm

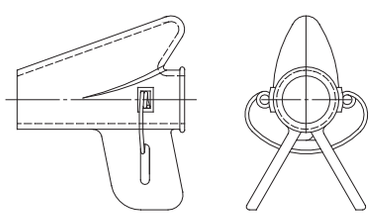

Part No.	The Suitable For Fast Spiral Wrapping Band
KST-08	KYST-8
KST-15	KYST-15
KST-20	KYST-20
KST-25	KYST-25

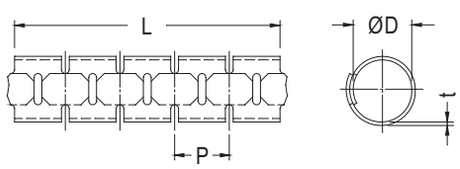


Part No.	Internal QD(mm)	MAX DIA (mm)	Pitch P(mm)	Thickness t(mm)	Length L(M)
KYST-08	8.0	10.0	10.0	0.8	5
KYST-15	15.0	16.0	14.0	0.8	5
KYST-20	20.0	23.0	17.0	0.9	5
KYST-25	25.0	29.0	20.0	1.0	5

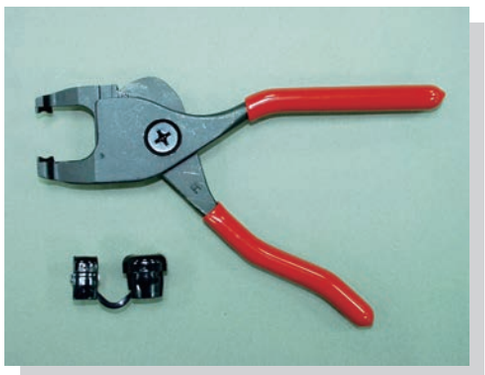

線扣工具 Bushing Tool	Part No.
	HT-205-1




進口束線槍 Cable Tie Gun	Part No.
	TGN-1

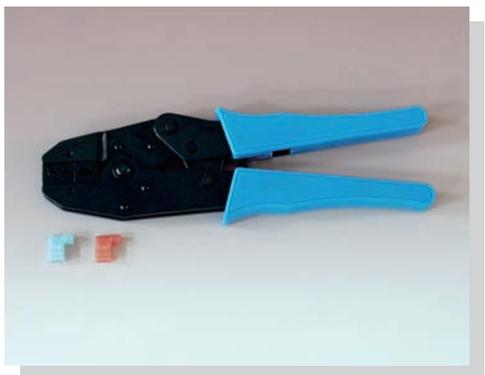

旗型端子工具 Crimp Tool for flag terminal	Part No.
	KY-1




國產束線槍 Cable Tie Gun	Part No.
	TGN-2

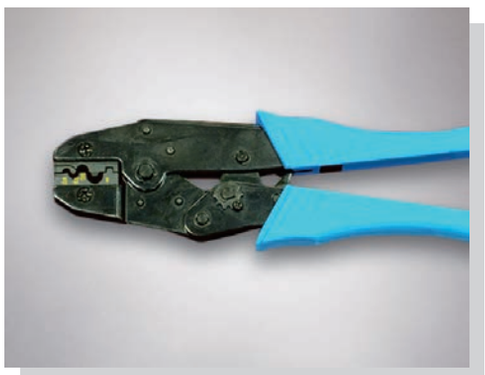

非絕緣端子工具 Non-Isolating Terminal Tool	Part No.
	KY-2



絕緣端子工具 Isolating Terminal Tool	Part No.
	HT-301H

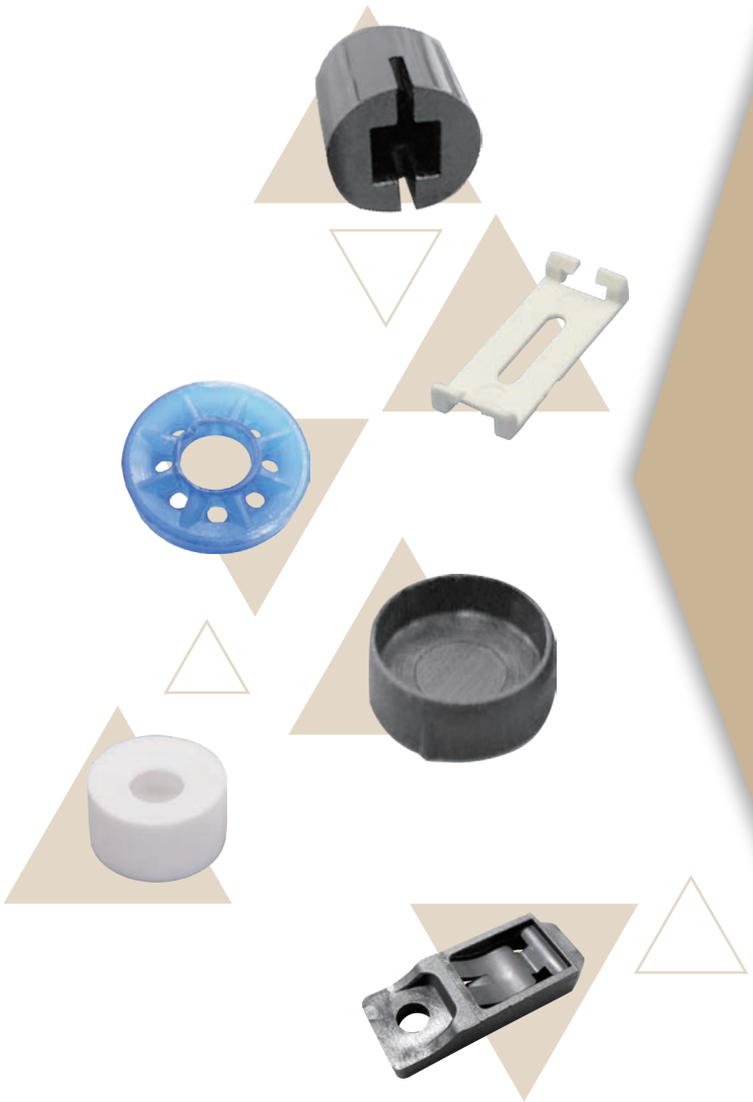


6


- ▶ 電晶體墊片
  Parts Washer
- ▶ 電晶體座
  Holder
- ▶ 零件墊座
  Parts Housing
- ▶ 矽膠帽套 / 矽膠片
  Silicon Insulator
- ▶ PVC軟質保護套
  Soft PVC Sleeves
- ▶ 末端套管
  VCP Cap
- ▶ 開關蓋
  Tact Switch Cap
- ▶ 麥克風套
  Mic Holder
- ▶ 連接器座
  Connector Holder

電晶體蓋 TRANSISTOR COVER


用途：鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

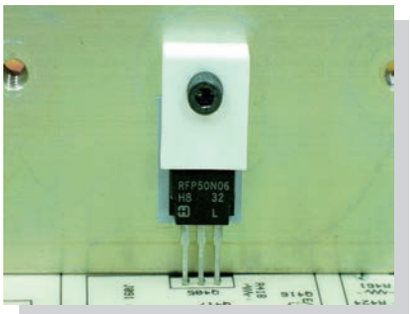


- Material: PBT (UL)/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




◆ TC-1,TC-1A,TC-1C,TC-2, TC-16,TC-18,TC-19




◆ TC-3




◆ TC-4



◆ TC-5A




◆ TC-6




◆ TC-7


Part No.	A	B	C	D	E	F	G	H	適用晶體包裝	Package
TC-1	16.0	13.0	6.2	10.7	8.0	3.5	3.4	0.8	TO-220	500
TC-1A	19.3				10.0	3.6	3.2			
TC-1C	17.8		6.3		9.3	3.5	3.3	0.7		
TC-2	19.0	18.0	8.0	16.0	10.5		3.5	1.0	TO-218	
TC-3	28.0	19.0	8.8	16.5	12.8	3.9	2.9	4.0	TO-3P	200
TC-4	16.0	13.0	6.2	10.7	8.0	3.5	3.5	0.8	TO-220	1000
TC-5A				10.5						500
TC-6	13.0	13.2	7.0	10.7	6.8	3.3	3.3			
TC-7							3.0	2.1		
TC-8	20.0	25.4		22.5	12.7			2.6	整流器	
TC-9	23.0	12.9	8.3	10.8	9.3	3.5	2.8	1.0	TO-220	
TC-10	14.3	13.2	6.2	10.5	8.2	3.3	3.2			
TC-11			7.0	10.7			2.7	2.1		
TC-13		10.0	4.2		8.1		3.5	0.8		
TC-16	22.5	13.0	6.3	10.5	15.0	3.5			TO-220	
TC-18	16.0		6.2	10.7	8.0			0.5		
TC-19	30.0	18.0	8.0	15.7	17.0	3.6	2.8	2.0	TO-3P	200
TC-20	17.7	12.1	5.6		10.0	3.8	3.5	0.7		500
TC-22	13.0	13.2	6.7	10.7	7.1	3.3	2.8	2.0	TO-220	
TC-23	19.1	15.2	6.1	12.0	11.8	3.6	3.5	0.8	TO-218	
TC-35	20.0	13.2	8.3		14.0	3.2	3.0	2.5		
TC-38	13.0	11.5	4.0	10.3	6.0		3.5	0.9		
TC-40	21.55	10.8	5.4	8.3	14.1	3.1		0.75		
TC-45	22.2	15.2	6.1	12.0	14.9	3.6		0.8	TO-218	
TC-46	13.0	11.5	6.0	10.3	6.0	3.2		0.9	TO-220	
TC-56	14.3	13.2	6.2	10.5	8.2	3.3	3.2	0.5		




◆ TC-8




◆ TC-9




◆ TC-10,TC-56




◆ TC-11




◆ TC-13




◆ TC-20




◆ TC-22




◆ TC-23,TC-45




◆ TC-35



◆ TC-38




◆ TC-40




◆ TC-46

電晶體蓋 TRANSISTOR COVER

用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

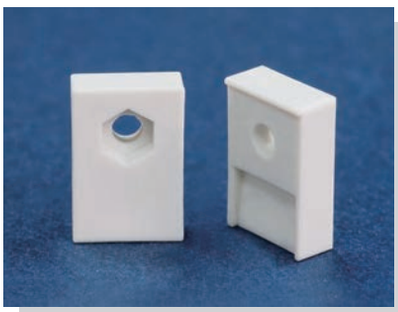


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	D	F	H	I	J	Package
TC-21	19.3	13.0	5.9	10.7	3.6	0.9	13.3	5.8	1000

電晶體蓋 TRANSISTOR COVER

用途：鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

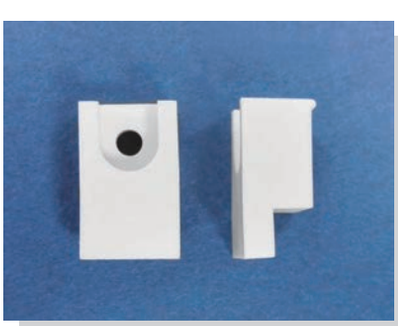


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



Part No.	A	B	C	F	H	I	K	Package
TC-39	15.7	10.0	7.5	2.6	4.0	7.0	6.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	F	H	I	K	Package
TC-41	14.0	12.2	4.35	3.2	2.0	8.0	8.0	1000

電晶體蓋 TRANSISTOR COVER

用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

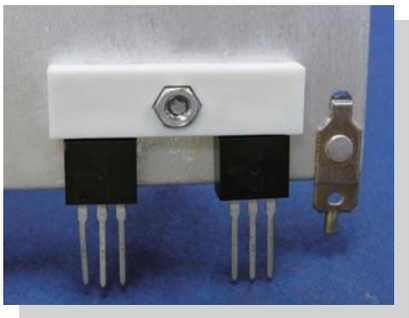


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

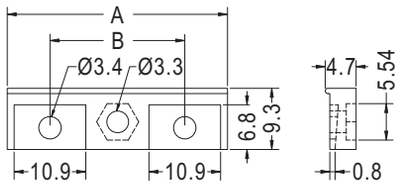


Part No.	A	B	Package
TC-29	33.5	20.5	1000
TC-53	34.3	21.7	

橋式整流蓋 BRIDGE RECTIFIER COVER

用途：鎖於散熱片上之橋式整流器外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

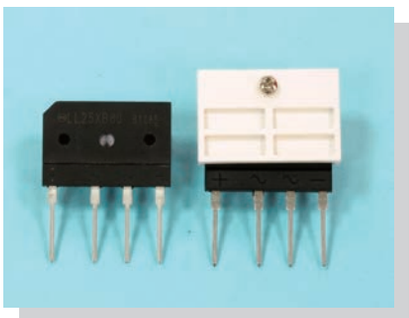

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

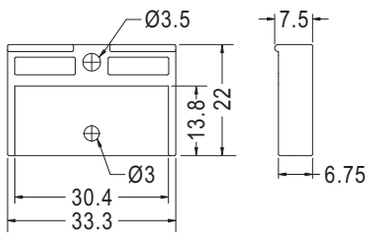


Part No.	Package
TC-59	500

電晶體蓋 TRANSISTOR COVER


用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。




- Material: PBT
- Color: Natural
- Unit: mm

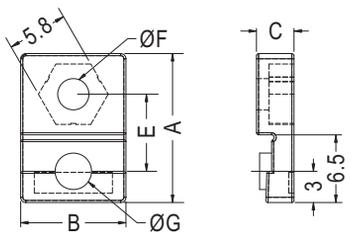

Part No.	A	B	C	E	F	G	Package
TC-50	14.3	10.1	3.6	7.4	3.1	3.5	1000

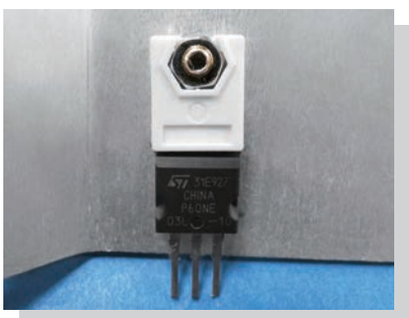


- Material: PBT
- Color: Natural
- Unit: mm




Part No.	A	B	C	E	F	G	Package
TC-51	12.65	10.1	3.6	6.85	3.2	3.5	1000

電晶體蓋 TRANSISTOR COVER

用途：用於TO-3P功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

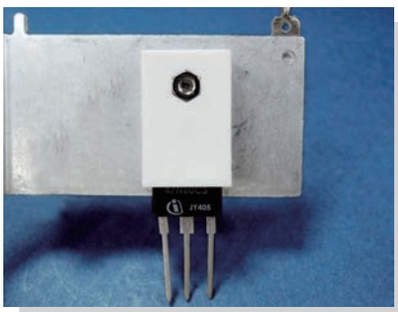

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	D	E	F	Package
TC-48	28.0	18.5	8.75	16.5	12.8	3.6~3.9	250

電晶體蓋 TRANSISTOR COVER

用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	E	Package
TC-49	15.3	10.1	3.6	8.35	1000

電晶體蓋 TRANSISTOR COVER

用途：鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

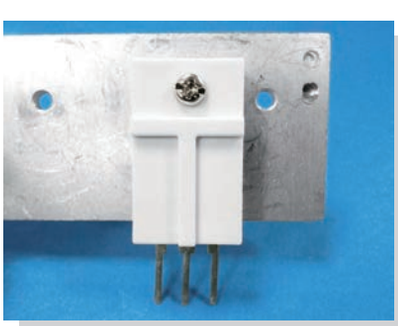

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-52	1000

電晶體蓋 TRANSISTOR COVER

用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-58	1000

電晶體蓋 TRANSISTOR COVER

用途：用於TO-247功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

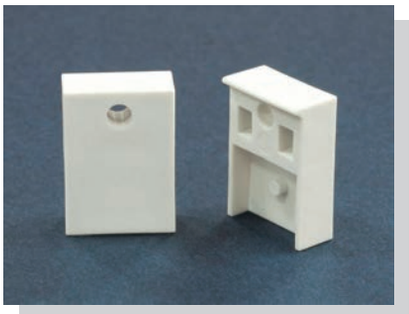


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	G	Package
TC-60	1.8	1000
TC-67	3.3	

電晶體蓋 TRANSISTOR COVER

用途：用於TO-264功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

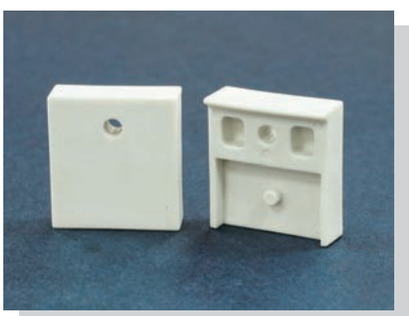


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

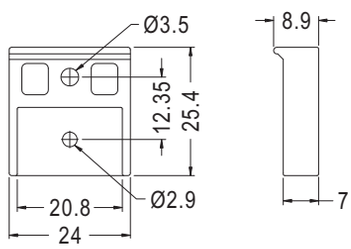


Part No.	Package
TC-61	1000

電晶體蓋 TRANSISTOR COVER

用途：用於TO-3P功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

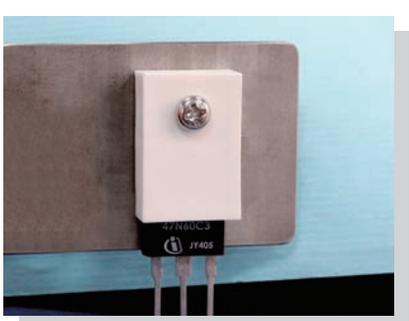


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TC-68	1000

電晶體蓋 TRANSISTOR COVER

用途：鎖於散熱片上之功率IC外殼絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

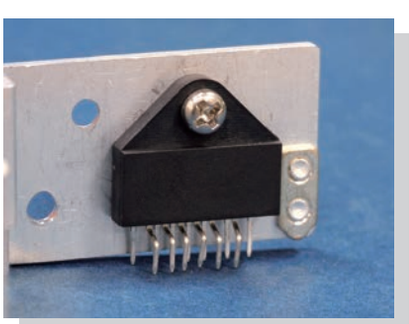


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

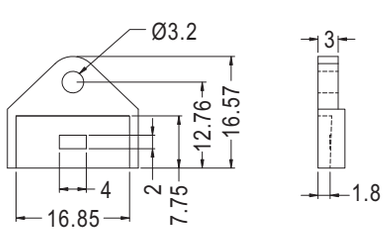


Part No.	Package
TC-62	1000

功率IC蓋 POWER IC COVER


用途：鎖於散熱片上之功率IC外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

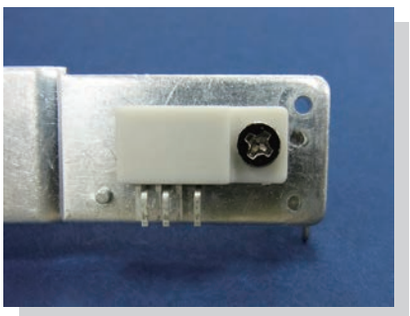


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

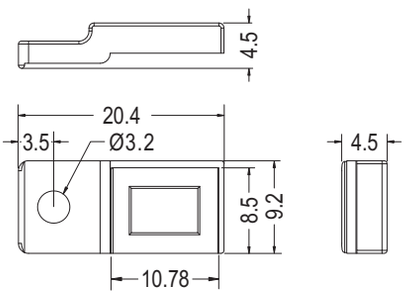


Part No.	Package
TC-26	1000

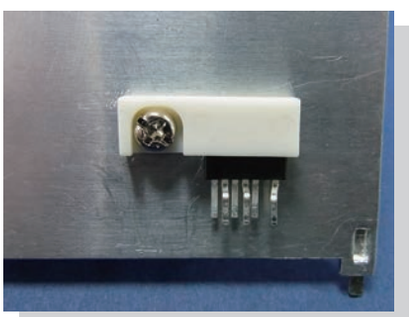


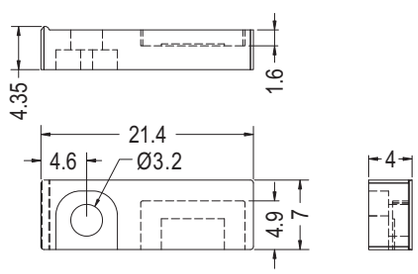

Part No.	Package
TC-31	1000




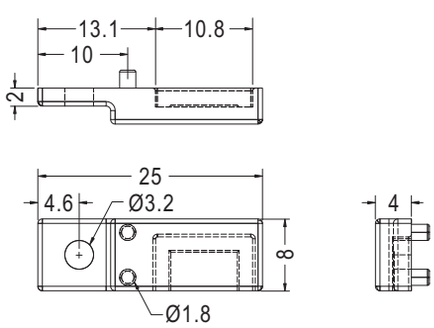





MOUNTING HOLES

Part No.	Package
PH-44	1000

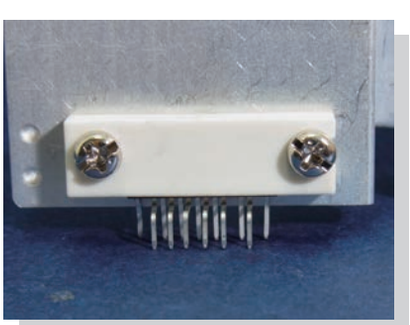


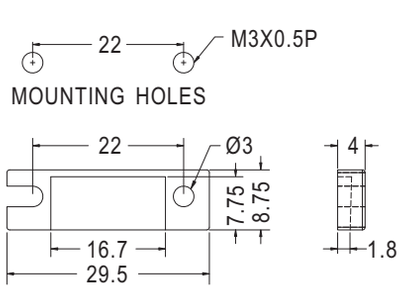

Part No.	Package
TC-42	1000

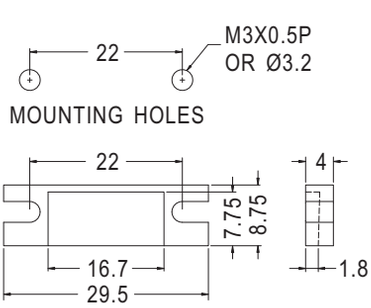


Part No.	Package
TC-47	1000

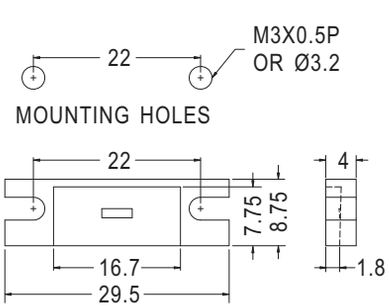


Part No.	Package
TC-63	1000


功率IC蓋 POWER IC COVER

用途：鎖於散熱片上之功率IC外殼絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。

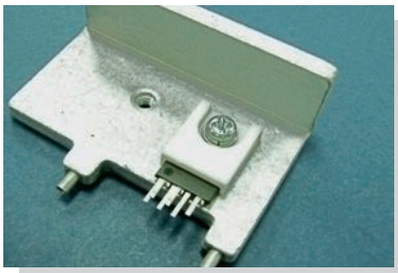


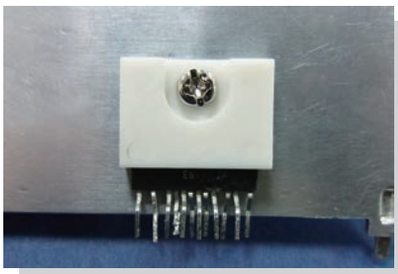

- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




◆ TC-24,TC-30




◆ TC-25

Part No.	A	B	C	D	F	H	I	K	Package
TC-24	14.0	12.2	4.4	10.5	3.2	2.0	8.0	8.0	500
TC-25			4.35						1000
TC-30		19.0		17.0		1.6			

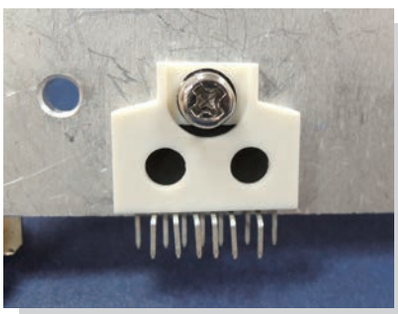


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

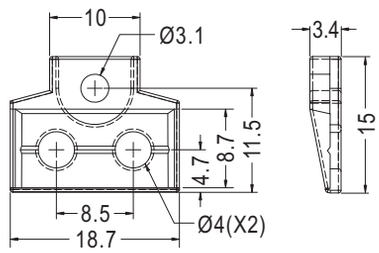


Part No.	Package
TC-54	1000

電晶體蓋 TRANSISTOR COVER

用途：用於功率晶體之外殼絕緣。

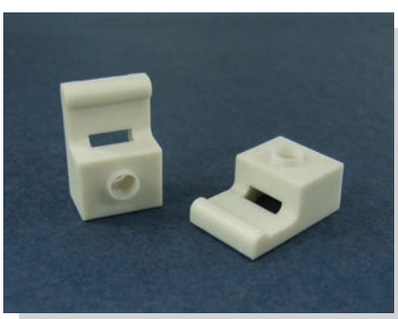

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

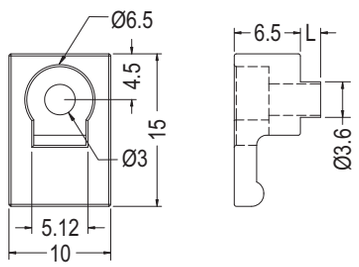


Part No.	L	Package
TC-28-1	1.0	2000
TC-28-2	2.0	

電晶體蓋 TRANSISTOR COVER

用途：鎖於散熱片上之功率IC外殼絕緣性特佳，防止高壓跳火耐高溫，提高可靠度，增進美觀。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

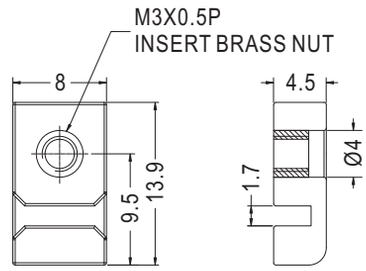


Part No.	Package
TC-65	1000

電晶體座 TRANSISTOR COVER

用途：鎖於散熱片之晶體外殼，絕緣性特性，防止高壓跳火，耐高溫，提高可靠度，增進美觀。

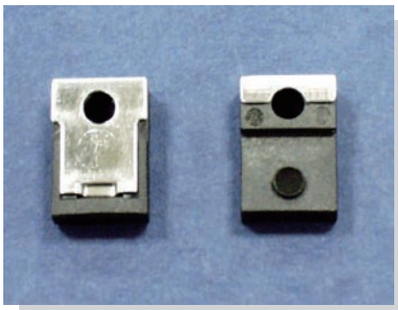

- Body Material: Nylon 66 (UL)/PPS (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: SUS
- Color: Black
- Unit: mm

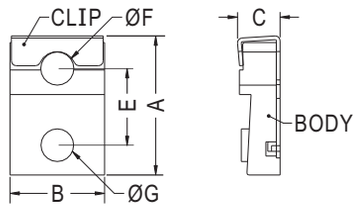


Part No.	A	B	C	E	F	G	Package
TCSE-1	14.5	10.0	4.5	8.1	3.5	3.45	1000
TCSE-7	14.7						

電晶體座 TRANSISTOR COVER

用途：用於TO-220功率晶體，鎖於散熱片上之晶體外殼，絕緣性特佳，防止高壓跳火，耐高溫，提高可靠度，增進美觀。



- Body Material: PPS (UL)
- Flame Class: 94V-0
- Clip Material: SUS
- Color: Black
- Unit: mm

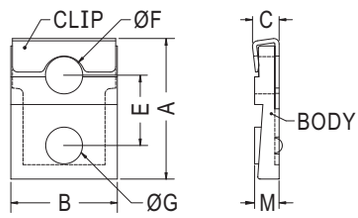


Part No.	A	B	C	E	F	G	M	Package
TCSE-2F	13.2	10.0	2.5	6.6	3.5	3.45	2.1	1000
TCSE-3F							2.2	

電晶體座 TRANSISTOR COVER

用途：用於TO-3P功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: Nickel Plated Steel
- Color: Black
- Unit: mm

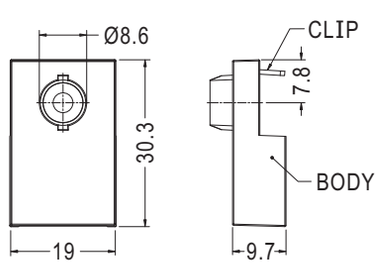


Part No.	Package
TCSE-8F	1000

功率晶體壓板 POWER TRANSISTOR CLAMP DEPRESSOR

用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
TRK-35	500


用途：用於熱敏電阻接腳之固定與保護。

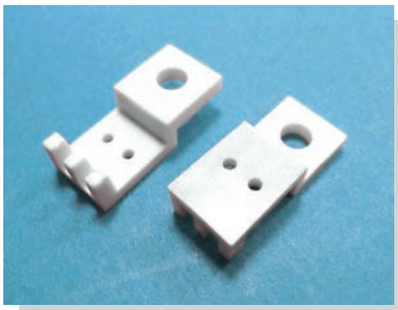


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	D	Package
PH-1A	16.6	11.5	5.1	6.1	1000
PH-11	17.15	11.8	4.6	6.7	

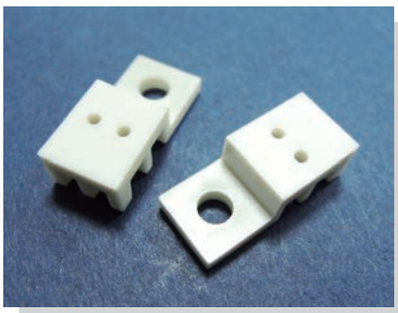





Part No.	A	B	C	D	Package
PH-24	16.6	11.5	5.1	6.1	1000

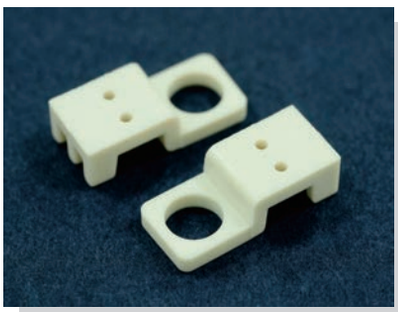

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

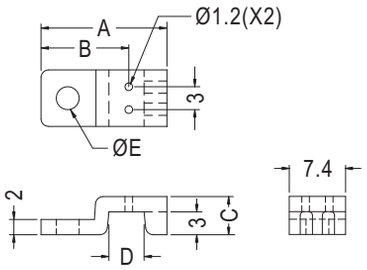


Part No.	A	B	C	D	E	Package
PH-1	16.5	11.5	5.0	4.7	3.2	1000
PH-47	16.5	11.5	5.0	4.7	5.15	




Part No.	A	C	Package
PH-2	14.5	3.5	1000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
PHK-1	1000

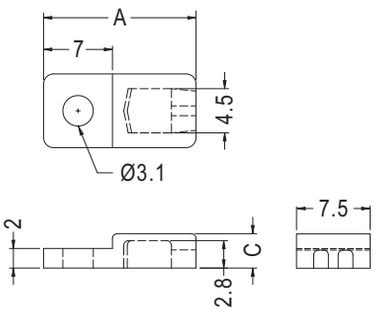


Part No.	A	C	Package
PH-2A	15.5	3.5	1000

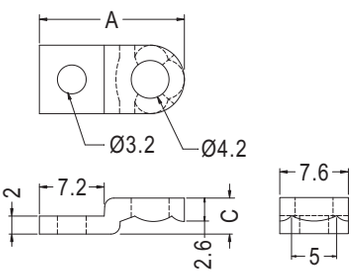


Part No.	A	C	Package
PH-3	16.1	4.0	1000


用途：用於熱敏電阻接腳之固定與保護。

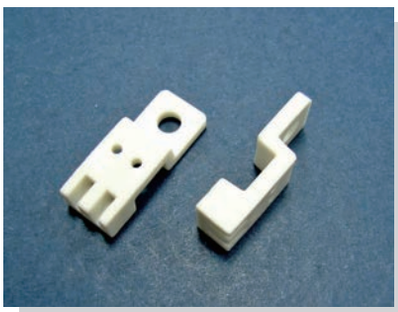


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
PH-5	1000

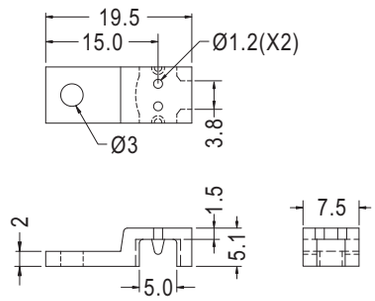


Part No.	Package
PH-7	1000



Part No.	Package
PH-12	1000

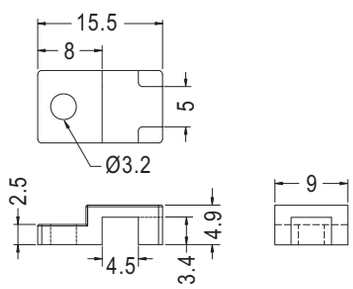


Part No.	Package
PH-14	1000

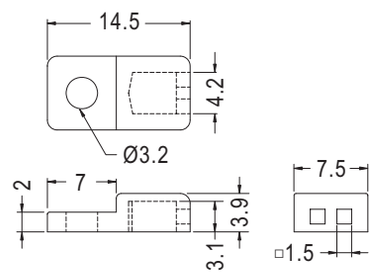

Part No.	Package
PH-16	1000




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

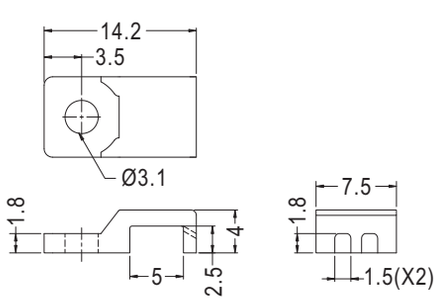

Part No.	Package
PH-46	1000




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

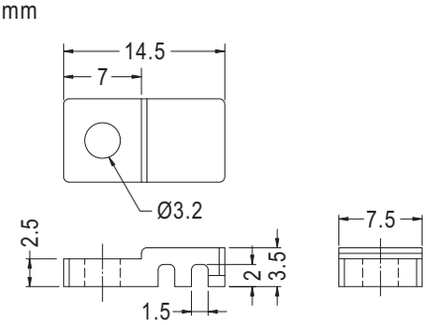


Part No.	Package
PH-50	1000


用途：用於熱敏電阻接腳之固定與保護。

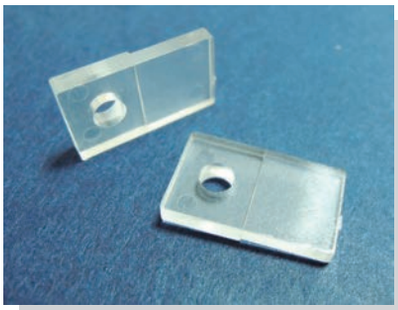


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	A	C	Package
PH-13	17.0	2.5	1000

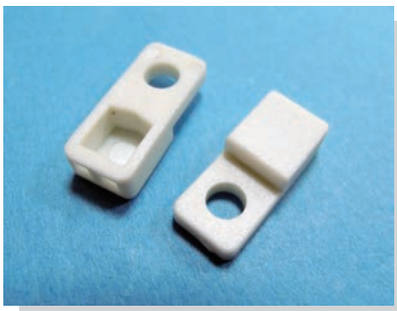


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

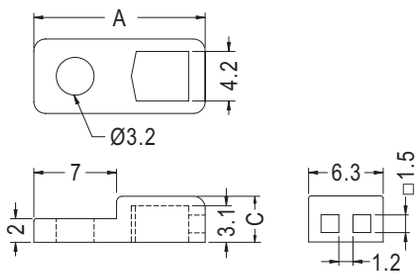


Part No.	A	C	Package
PH-18	14.5	3.9	1000

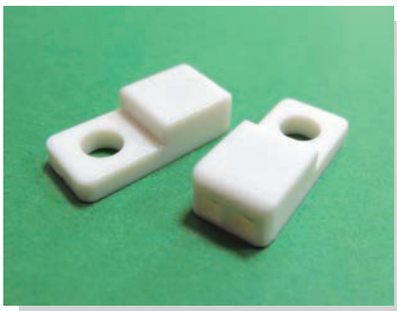


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

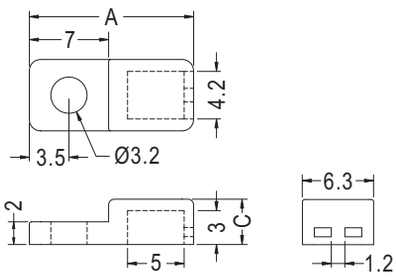

Part No.	A	C	Package
PH-20	14.5	4.0	1000

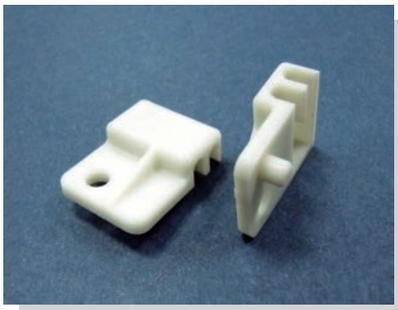

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

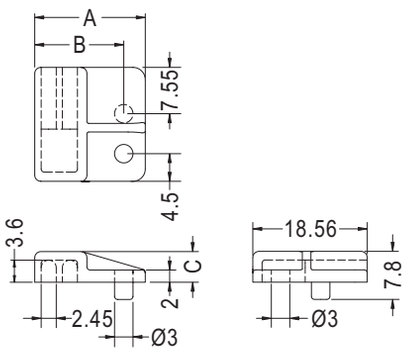



Part No.	A	B	C	Package
PH-21	18.0	14.5	5.0	1000


用途：用於熱敏電阻接腳之固定與保護。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm










Part No.	Package
PH-49	1000

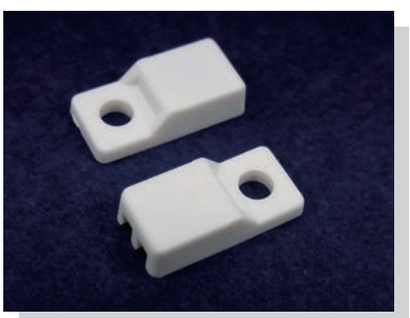


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm







◆ **PH-22**





◆ **PH-40**


Part No.	Package
PH-22	1000
PH-40	




- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm











◆ **PH-27**


Part No.	C	E	F	Package
PH-23	3.8	5.0	3.0	1000
PH-23L		5.4	3.4	
PH-27	4.3	5.0	3.5	



- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm








Part No.	Package
PH-31	1000


用途：用於熱敏電阻接腳之固定與保護。




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

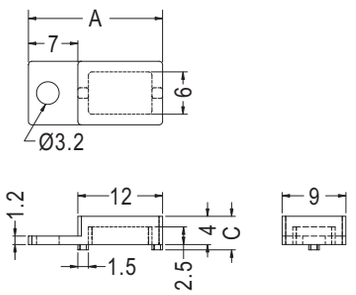

Part No.	A	C	Package
PH-30	19.0	4.75	1000

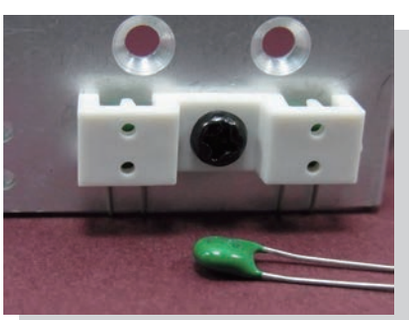


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

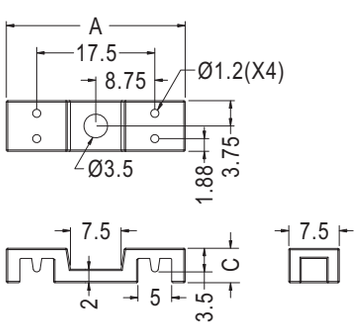

Part No.	A	C	Package
PH-37	26.5	5.1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

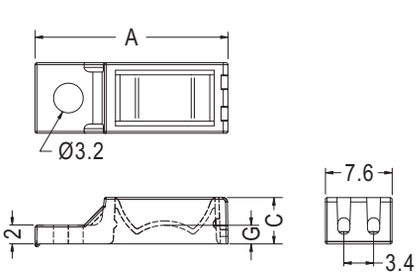

Part No.	A	C	G	Package
PHG-2	20.8	5.0	2.0	1000
PHG-3	20.8	5.0	0.71	




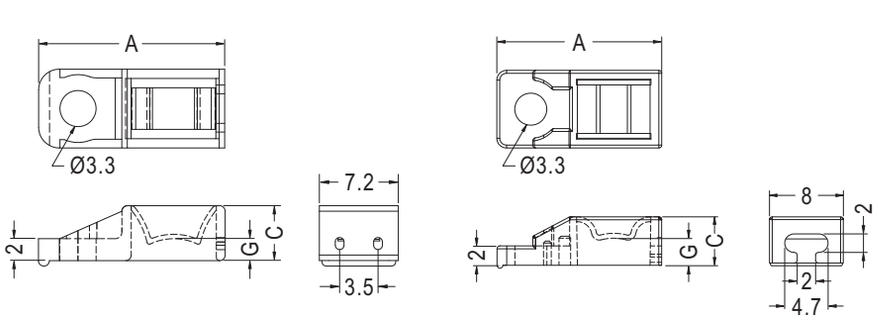


Part No.	A	C	G	Package
PHG-4	17.0	5.0	2.0	1000

Part No.	A	C	G	Package
PHG-11	17.0	5.0	2.8	1000


用途：用於熱敏電阻接腳之固定與保護。

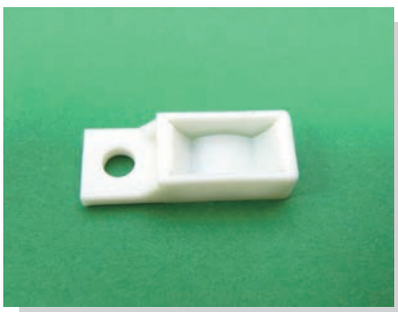


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P.A.T.)

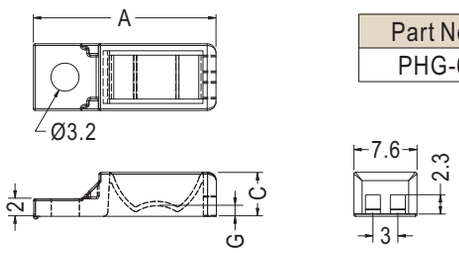

Part No.	A	C	G	Package
PHG-6	20.8	5.0	1.1	1000

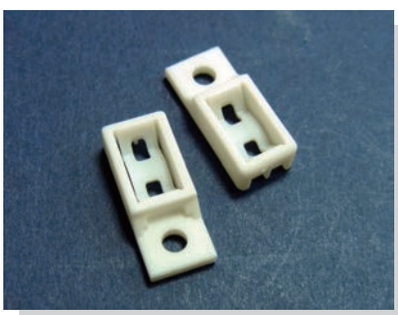


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P.A.T.)

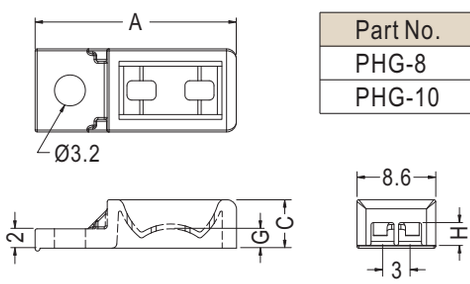

Part No.	A	C	G	H	Package
PHG-8	20.8	5.0	2.0	1.2	1000
PHG-10	20.8	5.0	2.0	2.5	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P.A.T.)

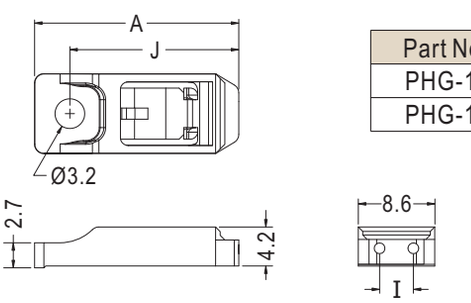

Part No.	A	I	J	Package
PHG-12	22.0	3.8	18.2	1000
PHG-14	21.5	3.5	17.7	




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

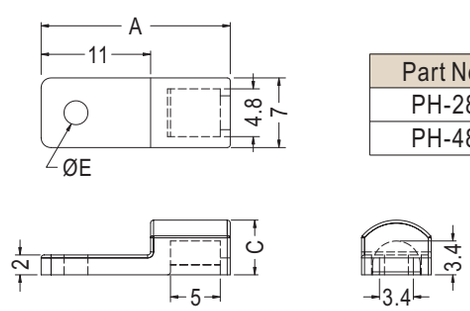


Part No.	A	C	E	Package
PH-28	19.0	5.5	2.4	1000
PH-48	19.0	3.4	3.2	

熱敏電阻座 NTC THERMISTOR SENSOR HOUSING

用途：用於熱敏電阻接腳之固定與保護。

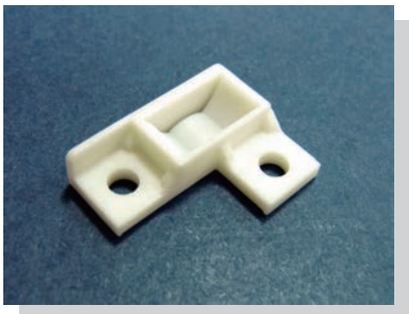


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P.A.T.)

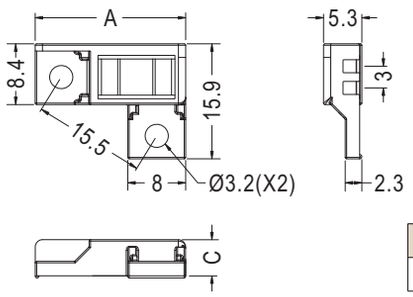

Part No.	A	C	Package
PHG-7	20.8	5.0	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P.A.T.)

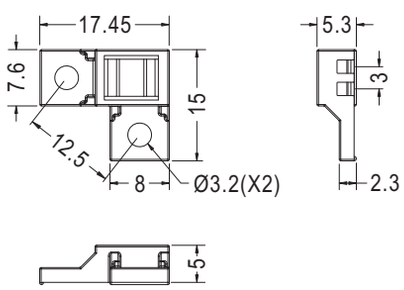


Part No.	Package
PHG-15	1000

保護蓋 INSULATED CAP


用途：用於零件之防塵與保護。

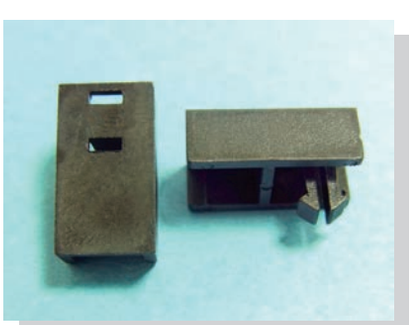

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	Package
PH-25	16.0	8.0	1000



Part No.	A	C	Package
PH-41	13.0	7.5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COVER-5	1000


熱敏電阻座 NTC THERMISTOR SENSOR HOUSING

用途：用於熱敏電阻接腳之固定與保護。

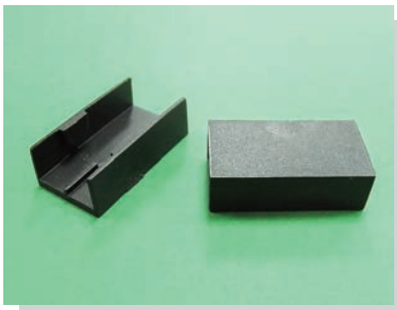


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
PH-34	1000

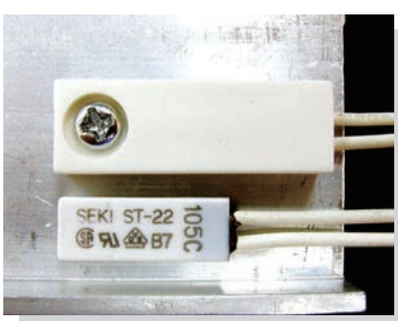

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

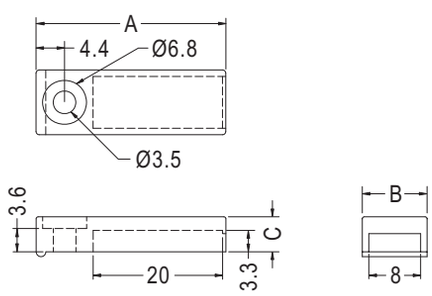

Part No.	A	B	C	Package
PH-15	29.3	10.0	5.4	1000

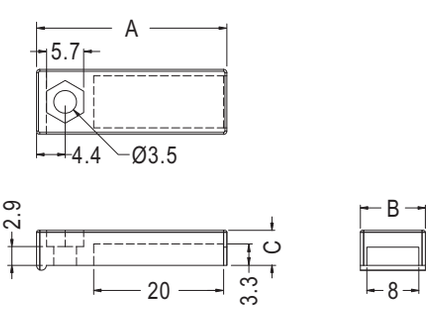


Part No.	A	B	C	Package
PH-43	29.3	10.0	5.4	1000

電晶體墊片 TRANSISTOR WASHER

用途：用於功率晶體之固定。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TCP-1	1000


電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

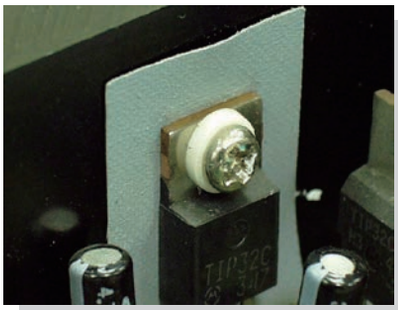


- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm





◆ TW-6A

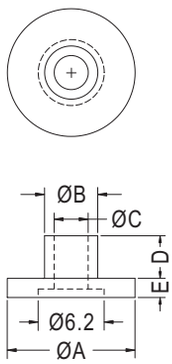


◆ TW-66


Part No.	A	B	C	D	E	Package
TW-1	6.0	3.6	3.0	1.5	1.5	2000
TW-2	6.2	3.5		3.0		
TW-3		3.55		2.5	2.0	
TW-4	6.0	3.5		2.0		
TW-5	6.2		2.9	1.2	1.0	
TW-6				1.4	1.2	
TW-6A		3.55	3.0			
TW-7	8.0	3.8	3.1	2.8		
TW-8				1.2		
TW-9	10.0	6.0	5.0	5.0	1.0	
TW-10		5.0	4.0	4.0		
TW-11	9.5	6.3	4.5	1.2	1.2	1000
TW-12			4.1	0.8	1.7	
TW-14	9.9	8.3	6.5	1.5	1.0	
TW-15	6.2	3.6	3.0	2.4	1.9	2000
TW-16	6.1	3.5	2.9	1.6	1.4	
TW-17		3.55	3.0	1.5	2.0	
TW-18	6.35	5.15	3.5	1.6	0.6	
TW-20	6.5	3.5	2.95	4.0	0.9	
TW-21	7.0	5.0	3.0	5.8	2.0	
TW-22	11.9	7.9	4.0	3.0	2.6	
TW-23	7.1	5.0	3.0	2.3	2.0	
TW-24	6.4	3.55	2.95	2.0	1.3	
TW-25	7.92	4.83	3.05	0.8	1.14	
TW-26	6.0	3.6	3.0	5.2	1.0	
TW-27		3.55	2.95	1.4	1.4	
TW-29	14.0	7.5	6.0	1.8	1.2	
TW-30		9.8	6.6	1.7	0.9	
TW-31	16.0	11.4	10.0	0.8	0.7	
TW-33	6.0	3.5	2.5	7.2	5.0	
TW-34				11.0		
TW-35		3.55	2.95	1.2	1.3	
TW-36	15.7	9.7	4.5	6.5	5.0	
TW-37	6.0	3.55	2.95	3.2	2.0	
TW-38	6.1	3.5		1.5	1.1	
TW-39	5.46	3.43		0.81	1.02	
TW-41	6.6	4.95	2.6	6.0	1.5	
TW-42	6.35	4.78	3.94	1.57	3.18	
TW-43	25.4	11.0	8.3	2.29	1.58	1000
TW-48	11.0	8.0	5.5	8.0	1.3	2000
TW-49	6.4	3.53	3.0	2.0	1.2	
TW-53	11.8	6.0	4.0	1.9	0.5	
TW-57	10.0	4.3	3.45	3.0	1.0	
TW-58	6.2	3.5	3.0	2.5	2.7	
TW-59					2.0	
TW-60	6.4			2.0	1.3	
TW-61	6.0			3.2	2.0	
TW-62	6.1			1.5	1.1	
TW-63	10.0	5.0	3.95	4.0	0.5	
TW-64	4.0	2.7	2.1	0.8	0.8	
TW-65	6.0	3.55	3.0	4.6	2.0	
TW-66	12.0	5.0	3.2	4.0	1.8	
TW-70	6.2	3.6	2.95	2.9	1.9	
TW-73	9.0	6.0	4.5	8.0	2.0	
TW-75	7.0	4.4	3.2	7.5	0.5	
TW-77	5.0	4.1	2.2	1.2	1.2	
TW-78	21.0	17.4	16.2	2.8	0.8	
TW-79	6.0	3.6	2.95	2.4	1.2	
TW-80				4.8		


電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

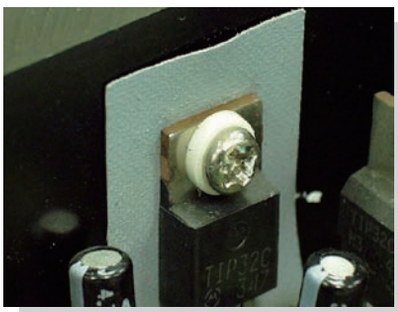


- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm







◆ TW-105




◆ TW-109




◆ TW-131,TW-148,TW-179




◆ TW-149,TW-192



◆ TW-182



◆ TW-164




◆ TW-185,TW-186


Part No.	A	B	C	D	E	Package
TW-84	6.2	3.6	2.95	12.0	1.9	
TW-85	6.1		2.9	1.85	1.4	
TW-88	6.0	3.5		2.3	1.8	
TW-90	6.3		3.0	2.6	1.2	
TW-97	9.0			3.5	1.0	
TW-99	6.0	3.8	3.1	6.5	1.2	
TW-100	6.1	3.5	3.0	2.1	1.4	
TW-101				2.7		
TW-102	12.7	6.7	4.3	1.5	1.46	
TW-104	15.0	7.9	6.2	4.0	1.5	
TW-105	11.5	7.3	3.1	2.6	0.6	
TW-106	9.5	6.5	5.1	10.7	1.5	
TW-107	6.2	3.5	3.0	2.9	1.9	
TW-108	6.4			2.0	1.2	
TW-109	17.0	9.3	6.7	3.3	2.5	
TW-110	9.5	6.0	3.7	1.5	1.0	
TW-111	6.0	3.4	2.7	2.5		
TW-113		3.55	3.0	1.6	1.3	
TW-115	6.3	3.5		2.6	2.0	2000
TW-123	8.2	4.65	4.05	3.6	0.5	
TW-127	6.2	3.5	3.0	4.1	2.0	
TW-131	12.0	6.6	4.2	1.9	3.8	
TW-135	13.0	7.9	6.6	2.4	1.7	
TW-136	6.2	3.55	3.0	0.6	1.2	
TW-143	6.3	3.9	3.2	1.5	2.5	
TW-145	12.0	8.0	3.0	3.0	1.4	
TW-146	14.0	8.1	3.1	1.8	2.5	
TW-148	7.6	3.9		4.0	2.0	
TW-149	6.2	4.1	3.2	2.0	1.0	
TW-150	7.6	3.5	3.1	4.0	2.0	
TW-151	6.1		3.0	2.25		
TW-153				0.8		
TW-156	6.0			0.9	1.3	
TW-157	6.2			4.6	2.0	
TW-159	25.0	10.0	8.2	12.0	4.5	
TW-160	4.0	2.7	2.1	0.7	0.8	
TW-161	6.5	4.25	3.2	4.0	3.0	
TW-162	13.0	6.5	4.5	8.0	5.0	500
TW-163	12.0	11.2	9.0	3.0	1.1	
TW-164	6.6	3.5	2.5	11.0	5.0	
TW-165	12.0	7.6	6.1	16.5	2.0	
TW-168	6.2	3.5	3.0	2.0	1.9	
TW-169	14.0	8.6	7.95	5.0	2.0	
TW-171	13.0	7.9	6.6	6.4	1.7	
TW-172	10.36	6.1	5.59	4.75	1.57	
TW-173	6.0	4.2	3.2	3.5	0.6	
TW-175	10.0	6.3	4.2	10.5	7.0	
TW-176				15.5		
TW-177	11.0	8.2	5.5	15.0	2.0	2000
TW-179	14.0	7.6	5.2	2.0	3.0	
TW-182	6.0	3.8	3.2	1.1	2.9	
TW-185		3.5	2.5	5.2	3.1	
TW-186				8.6		
TW-188	15.75	10.0	6.5	19.0	3.0	
TW-189				39.0		
TW-192	6.2	4.3	3.1	2.0	1.0	
TW-194	5.0	3.6	2.95	4.8	1.2	
TW-198	8.7	5.4	4.6	6.5	2.0	
TW-199	8.1	3.6	2.95	2.5	1.3	

電晶體墊片 TRANSISTOR WASHER


用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

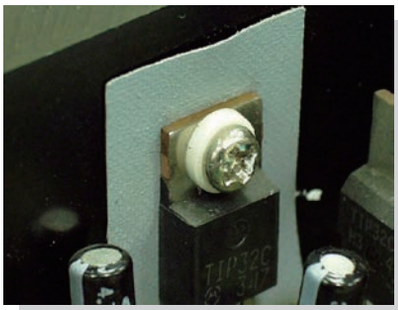

- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm

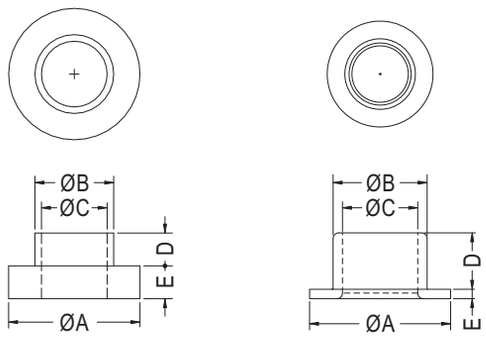


◆ TW-211,TW-212

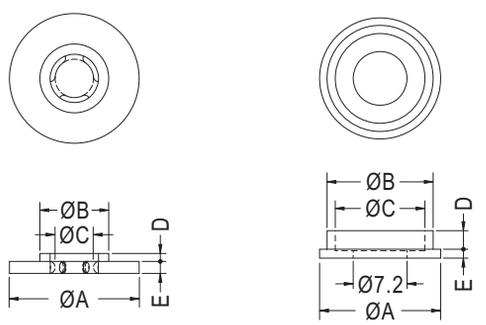


◆ TW-214

◆ TW-238

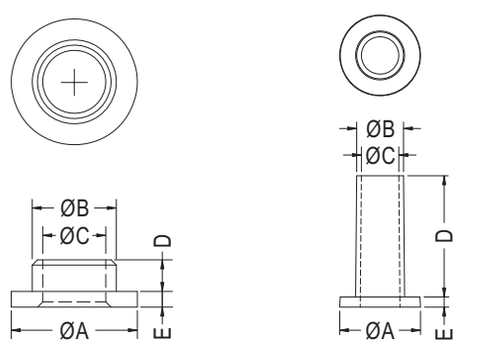

◆ TW-239

◆ TW-240

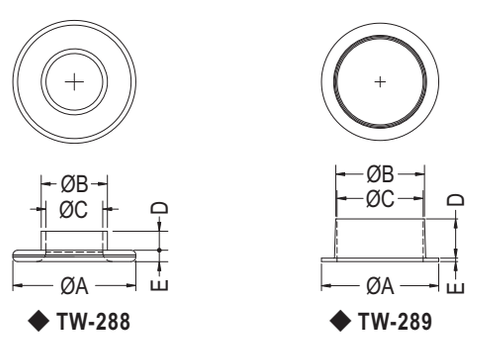


◆ TW-288

◆ TW-289


Part No.	A	B	C	D	E	Package
TW-202	4.8	3.0	2.6	3.5	1.2	2000
TW-203	3.0	2.0	0.9	3.5	0.5	
TW-204	6.2	3.55	2.95	8.0	2.2	
TW-207	11.0	6.2	5.0	4.9	1.0	
TW-208	11.1	6.35	5.1	6.35	7.9	
TW-209	8.0	4.25	3.2	3.0	2.0	
TW-211	15.0	10.0	8.0	6.0	1.0	
TW-212	9.0	5.0	4.2	3.0		
TW-213	6.5	5.4	5.1	2.5		
TW-214	13.0	6.0	3.85	0.8	1.2	1000
TW-215	9.0		4.0	6.3	2.0	2000
TW-219	4.6	3.0	2.3	1.6	1.2	
TW-222	3.0	1.8	0.9	1.0	0.5	
TW-223	6.0	3.1	2.6	1.5	1.0	
TW-224	20.0	11.9	6.5	2.5	3.0	
TW-225	11.0	8.0	5.5	8.0		
TW-226	4.2	3.0	2.6	1.0	2.25	
TW-227	23.7	13.0	10.0	13.0	2.0	
TW-228				23.0		
TW-229	20.0	11.0	8.1	8.0		
TW-230				13.0		
TW-234	8.0	4.4	3.2	0.9		
TW-235	13.0	7.9	6.6	1.6	1.7	
TW-237		9.8	4.5	10.3	2.0	
TW-238	16.2	14.2	12.0	2.49	1.19	
TW-239	2.4	1.6	1.2	0.6	0.3	
TW-240	8.0	4.65	3.7	12.0	1.0	
TW-242	6.1	3.55	3.0	1.5	0.9	
TW-243	10.5	9.5	8.0	0.7	1.0	
TW-245	11.5	7.5	6.7	2.0		
TW-246	15.0	7.9	4.2		1.5	
TW-249	8.5	5.75	5.2	3.0	1.2	
TW-250	8.7	5.2	4.4	0.8	1.6	
TW-252	16.0	8.0	5.0	1.55	0.85	
TW-253	22.0	16.0	10.5	4.5	1.5	
TW-256	8.7	5.2	4.4	4.7	1.6	
TW-257	12.0	9.0	6.0	6.0	2.0	
TW-258	20.0	12.0	8.0	10.0	3.0	
TW-259				7.0	2.0	
TW-260	10.0	7.0	5.0	10.0	1.0	
TW-261	20.0	10.0	8.0	3.0	3.0	
TW-262		12.0	10.0	2.0		
TW-263	25.0			5.0	1.0	
TW-264	18.0	16.0	12.0	9.0		
TW-266	15.0	7.9	6.2	2.0	2.0	
TW-268		9.9	8.2		1.5	
TW-270	20.0	10.0	8.0	12.0	3.0	
TW-273	15.0	8.9	6.2	3.0	1.5	
TW-274	16.0	12.0	10.0	4.0	2.0	
TW-275	10.0	7.0	5.0	2.0	1.0	
TW-276	26.0	16.0	14.0	5.0	5.0	
TW-278	12.0	8.0	5.0	7.0	2.0	
TW-279		6.0	4.0	15.0		
TW-282		8.0	6.0	3.0	1.0	
TW-283	14.0				3.0	
TW-284	16.0	12.0	10.0		1.0	
TW-287		8.0	6.0	6.0	5.0	
TW-288	13.0	7.0		2.0	1.2	
TW-289	27.5	20.8	20.2	9.2	0.8	1000

電晶體墊片 TRANSISTOR WASHER


用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

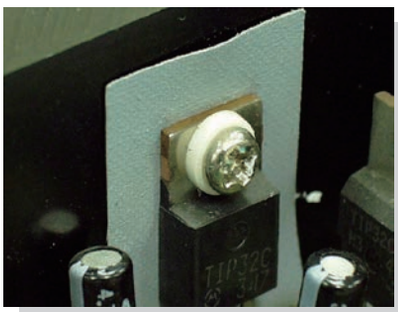


- Material: PBT/PC V-2/PC V-0/POM/ PPS/N46 V-0/N6 V-2/ N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
TW-291	12.0	7.0	5.0	6.0	2.0	2000
TW-292	5.5	3.5	3.0	2.6	0.6	
TW-300	10.0	5.8	3.2	1.6	6.0	
TW-301	19.0	9.4	8.2	1.7	0.8	
TW-302	20.0	9.0	6.9	6.0	2.5	
TW-304	7.4	4.3	3.6	1.6	1.2	
TW-308	6.0	3.7	2.9	6.4		
TW-311	7.9	4.5	3.65	6.0		
★TW-313	20.0	11.0	8.0	4.0	2.0	
★TW-317	6.3	3.5	3.0	6.3	1.6	
★TW-319	12.0	9.0	6.0	9.0	2.0	
★TW-321		7.9	4.2	6.0	2.2	

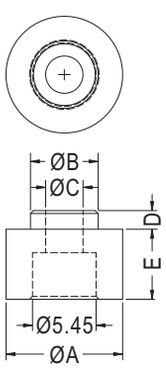


◆ TW-300

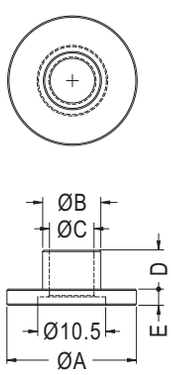


◆ TW-302

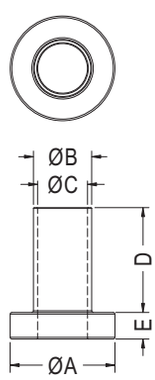


◆ TW-317



◆ TW-319




◆ TW-19




◆ TW-68,TW-247
TW-320


Part No.	A	B	C	D	E	Package
TW-19	6.22	3.56	3.02	1.02	1.02	2000
TW-68	13.0	8.75	5.8	2.4	1.0	
TW-181	13.0	8.1	6.3	0.8	1.0	
TW-195	9.53	8.26	5.72	1.27	1.91	
TW-201	7.0	3.5	3.0	3.2	5.0	
TW-233	20.0	11.9	6.5	1.8	3.0	
TW-247	13.0	8.75	5.8	1.9	1.0	
TW-309	7.0	3.5	3.0	2.8	4.2	
★TW-314	6.4	3.55	3.0	2.0	1.3	
★TW-320	10.4	8.4	6.4	0.5	1.0	




◆ TW-181




◆ TW-195



◆ TW-201,TW-309

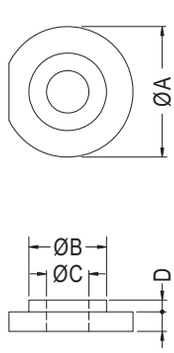

◆ TW-233




◆ TW-314

電晶體墊片 TRANSISTOR WASHER


用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。




- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Natural(Brown)/Black
- Unit: mm

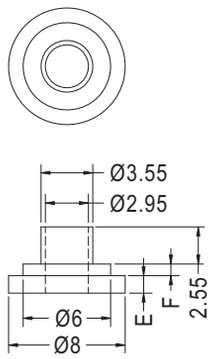


Part No.	E	F	Package
TW-147	1.2	0.8	2000
TW-297	1.0	1.6	

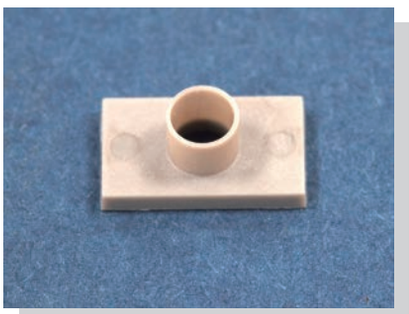


- Material: PET
- Color: Gray
- Unit: mm



Part No.	Package
TW-241	1000

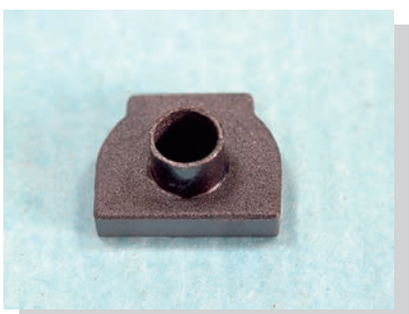

- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

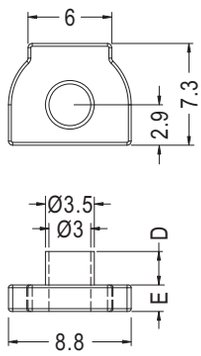


Part No.	D	E	Package
TW-298	2.4	1.9	1000
TW-299	1.6	1.3	

絕緣柱 ROUND SPACER

用途：用於零件之絕緣使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TW-133	2000


絕緣柱 ROUND SPACER

用途：用於零件之絕緣使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





NEW


Part No.	Package
TW-125	1000


電晶體墊片 TRANSISTOR WASHER

用途：用於零件之絕緣使用。



- Material: PC
- Color: Black
- Unit: mm







Part No.	Package
TW-210	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
TW-178	1000


零件墊片 WASHER

用途：做為零件之墊片。



- Material: PC+ABS/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





Part No.	A	B	C	D	E	Package
TWC-3	13.0	8.5	5.5	1.0	2.0	2000
TWC-5	13.0	8.5	5.5	1.0	7.0	
TWC-6	14.6	10.1	4.5	0.4	1.9	
TWC-7	7.6	5.84	3.25	1.27	0.38	
TWC-12	19.2	9.4	6.5	0.8	1.2	
TWC-13	15.0	10.0	5.5	1.2	2.5	
TWC-16	15.0	9.9	4.2	2.0	1.5	


零件墊片 WASHER


用途：做為零件之墊片。





- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





Part No.	A	B	C	D	E	Package
FUG-1	16.8	12.5	9.5	2.0	2.0	1000
FUG-3	11.1	7.9	6.4	0.81	0.81	


電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。



- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm







Part No.	A	B	C	D	E	F	Package
TW-71	7.0	3.5	3.0	2.4	6.5	4.6	2000
TW-92				1.6	3.5	2.7	
TW-93				2.2	3.8	3.0	
TW-98				1.6	3.5	2.1	
TW-103				2.4	3.9	2.0	
TW-114				1.6	5.0	4.2	
TW-118				2.4	4.9	3.0	
TW-119				1.6	3.8	3.0	
TW-120				1.6	2.8	2.0	



- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm






Part No.	Package
TW-124	2000

電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。




- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Brown
- Unit: mm



Part No.	Package
TW-180	2000

- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	Package
TW-236	3.6	2000
TW-277	4.2	

電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。



- Material: POM
- Color: Black
- Unit: mm

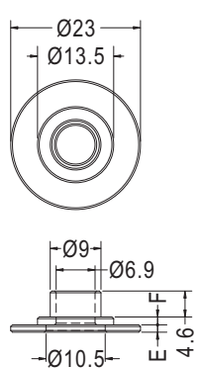


NEW


Part No.	E	F	Package
TW-312	1.3	1.4	2000

絕緣柱 ROUND SPACER

用途：用於螺絲之絕緣使用。

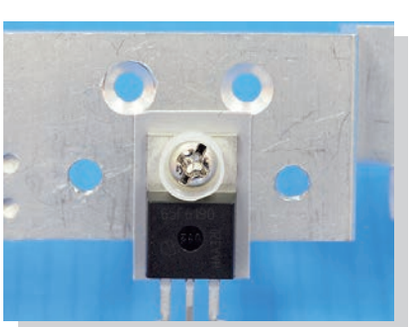


- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

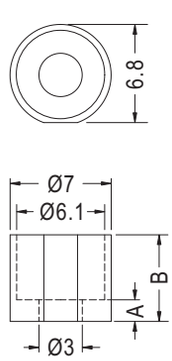


Part No.	A	B	Package
UT-1	1.5	6.0	2000
UT-3	1.4	3.5	
UT-5	0.8	3.8	
UT-6	0.3	2.3	
UT-12	0.3	2.3	
UT-13	0.3	1.9	

絕緣柱 ROUND SPACER

用途：用於M3螺絲或螺母之絕緣使用。

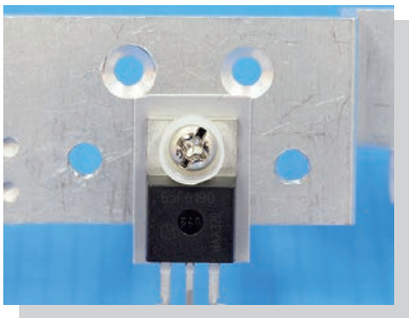


- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
UT-17	1000

絕緣柱 ROUND SPACER

用途：用於 M3 螺母之絕緣使用。

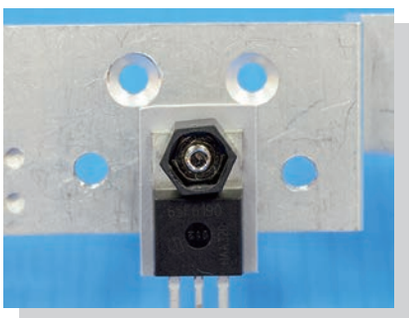


- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	Package
UT-2	1.5	6.4	2000
UT-8	0.8	5.2	


電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

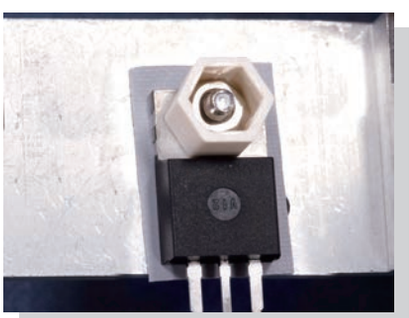


- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm





◆ **TW-285**

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black




◆ **TW-290**


Part No.	A	B	C	D	E	F	Package
TW-72	7.5	3.5	3.0	1.6	6.4	5.0	2000
TW-94					5.0	4.2	
TW-95				2.2	5.2	4.4	
TW-112				1.6	4.0	3.2	
TW-121				2.4	6.3	4.4	
TW-122				1.6	5.2		
TW-248				1.6	3.4	2.6	
TW-285				2.2	3.8	3.0	
TW-290	6.3	3.0	2.5	1.6	3.0	2.2	

電晶體墊片 TRANSISTOR WASHER

用途：鎖於電晶體上，避免晶體外殼與散熱片間造成短路。

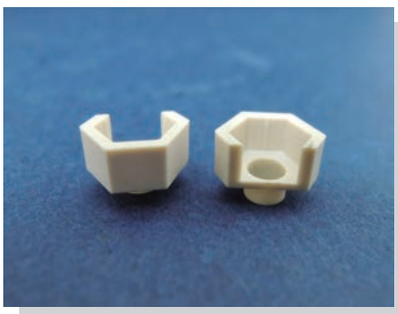


- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	D	E	F	Package
TW-190	5.8	3.5	3.0	1.6	4.0	3.2	2000
TW-191					5.0	4.2	

絕緣柱 ROUND SPACER

用途：用於M3螺母之絕緣使用。

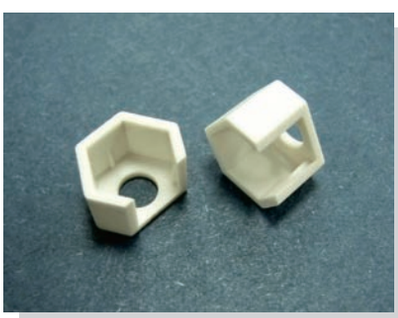

- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	B	C	Package
UT-4	5.2	6.25	2000
UT-7	4.0	5.8	
UT-11	4.0	6.25	

絕緣柱 ROUND SPACER

用途：用於零件之絕緣使用。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm




Part No.	Package
UPD-1	1000

零件墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-1	2000

零件墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



NEW


Part No.	Package
TWC-19	1000

絕緣柱 ROUND SPACER

用途：用於零件之絕緣使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-2	2000

零件墊片 WASHER

用途：做為零件之墊片。




- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Natural(Brown)/Black
- Unit: mm



Part No.	Package
TWC-15	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-8	1000

華司 WASHER

用途：做為螺絲之墊片。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	Package
WSF-3	2000

零件墊片 WASHER

用途：做為零件之墊片。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TWC-14	1000




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-4	2000

零件墊片 WASHER

用途：螺絲墊片，耐熱性良好。

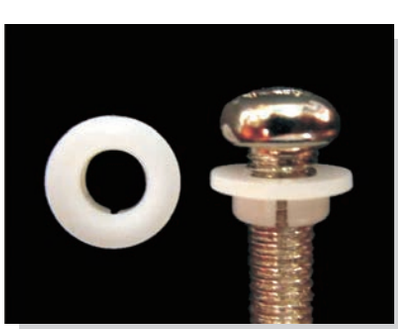


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	B	C	D	E	Package
TWU-1	5.0	4.2	1.0	5.0	2000
TWU-3	6.0	5.0	1.0	6.0	

- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural/Black




◆ 可配合M4 螺絲


Part No.	Package
TWU-2	2000

絕緣柱 ROUND SPACER

用途：用於零件之絕緣使用。

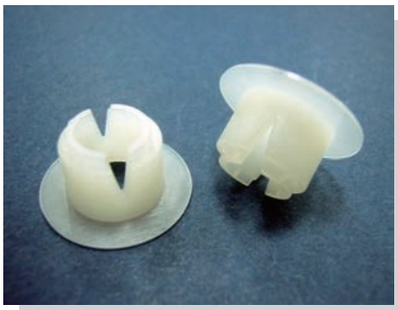

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
GLIN-10	1000

圓體間隔柱 ROUND SPACER




- Material: POM (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

◆ RSUA-1A與RSUA-1B需配合使用。



Part No.	Package
RSUA-1A	1000




Part No.	Package
RSUA-1B	1000

滾輪 ROLLER


用途：用於機櫃當滾輪使用。




- Material: PC (UL)/PBT (UL)/POM/
  Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



◆ UPC-1,UPC-3



◆ UPC-4



◆ UPC-5




Part No.	Material	A	B	C	D	E	F	Package
UPC-1	PC	25.4	17.67	4.3	11.07	9.36	1.79	1000
UPC-3			17.7		11.0	9.4	1.95	
UPC-4	PBT	25.0	15.0		11.8	6.9	2.4	
	POM	24.2	14.7	4.1	11.4	6.6		
UPC-5	NYLON 66	25.0	15.0	4.2	11.8	6.45	2.45	


用途：做為PC板與機板之絕緣用。




- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
U-4	4.9	3.8	3.2	5.7	7.0	2000
U-5	4.6	3.2	4.1	6.5	8.0	
U-6	10.0	7.0	3.0	8.5	11.0	1000
U-7	3.1	2.1	3.0	5.5	7.5	2000
U-8	3.0	1.5	3.7	7.4	9.4	
U-10	4.6	3.6	3.6	7.6	9.1	
U-11	4.0	3.0	2.9	6.3	7.8	
U-12	4.2	2.7	3.2	5.3	8.74	
U-14	6.5	6.0	6.0	8.0	9.0	
U-15	7.1	5.1	4.8	8.9	15.7	
U-16	5.1	4.0	7.0	10.0	12.0	
U-17	3.8	3.05	3.2	5.4	7.0	
U-18	6.4	3.4		5.0		
U-19	6.0	3.0	2.8	5.1	7.5	
U-23	3.8	2.25	3.4	5.95	8.0	
U-25	4.8	2.5	6.8	4.5	12.5	
U-27	4.5	3.75	3.1	4.2	6.0	
U-28	4.8	3.3	3.4	6.5	9.5	
U-29	6.5	6.0	3.5	6.0	8.0	
U-30	3.75	2.65	3.2	5.4	7.0	
U-31	2.3	1.7	3.25	5.5	6.7	
U-33	5.0	4.6		4.4	5.2	
U-37	2.5	2.0	3.5	6.0	7.0	
U-39	5.1	4.0	3.2	10.0	12.0	
★U-40	3.5	3.0		7.0	8.7	

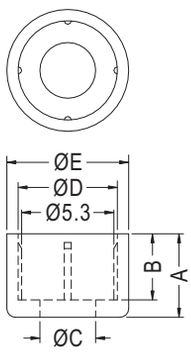


◆ U-4




◆ U-8,U-12,U-23




◆ U-17,U-18,U-19




◆ U-25




◆ U-27




◆ U-29




◆ U-30




◆ U-31



◆ U-33




◆ U-37



◆ U-40




- Material: Nylon 46 (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural/Black




Part No.	A	B	C	D	E	Package
UT-14	3.5	2.7	3.0	6.1	7.0	2000

絕緣柱 ROUND SPACER


用途：用於零件之絕緣使用。

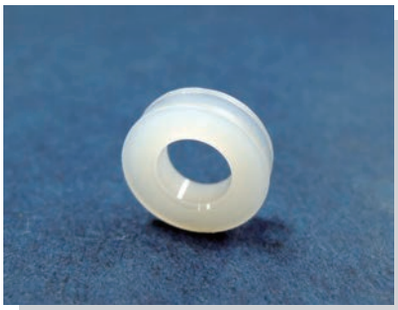

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
UPA-1	1000




Part No.	Package
UPA-2	1000

圓體間隔柱 ROUND SUPPORT

用途：做為螺絲或機板之絕緣用。



- Material: Nylon 6T
- Color: Black
- Unit: mm




Part No.	Package
R7-13	1000

零件墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TWC-17	2000

插銷 PIN

用途：散熱片上插梢使用。




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
EM-579	1000

絕緣柱 SUPPORT


用途：做為PC板與機板之絕緣用。

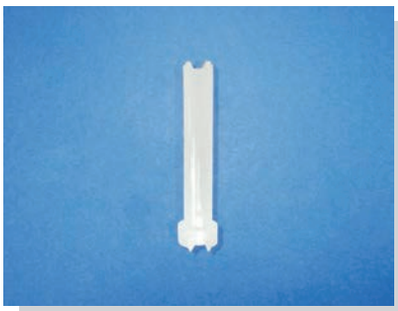

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	Package
EM-580	3.5	1000
EM-582	3.0	




Part No.	A	Package
EM-581	3.5	1000
EM-583	3.0	

電晶體墊片 TRANSISTOR WASHER


用途：保護TO-05晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致，增加可靠度。

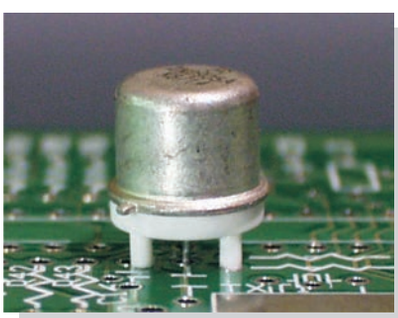


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



Part No.	Package
TO-05	1000

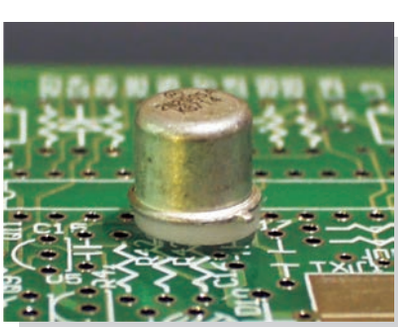

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TO-05S	2000

電晶體墊片 TRANSISTOR WASHER

用途：保護TO-05晶體立於PC板上，且高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm




Part No.	Package
TO-05-1	1000

電晶體墊片 TRANSISTOR WASHER

用途：保護TO-08晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致，增加可靠度。

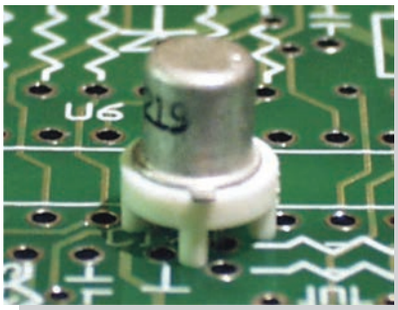


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

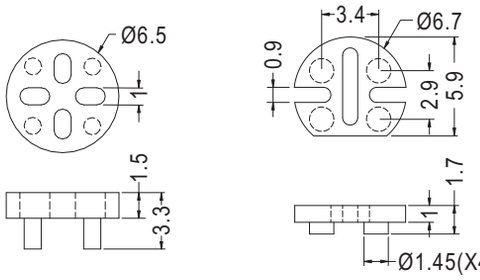

Part No.	Package
TO-18	1000


Part No.	Package
TO-18S	1000




Part No.	Package
TO-18M	2000

電晶體墊片 TRANSISTOR WASHER


用途：保護TO-92功率晶體立於PC板上，高度一致，不斷腳。

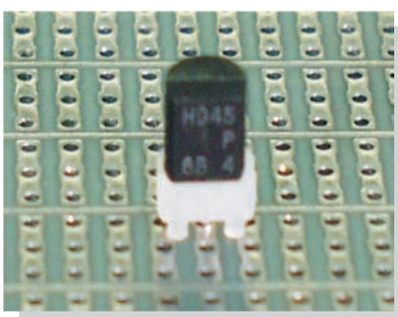

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TO-92	2000



Part No.	Package
TO-92-4	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TO-92-9	1000


電晶體座 TRANSISTOR HOUSING

用途：保護TO-92功率晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
TOA-92-9.5	1000

電晶體墊片 TRANSISTOR WASHER

用途：保護晶體立於PC板上，使接腳不彎曲、不折斷、不短路且高度一致，增加可靠度。

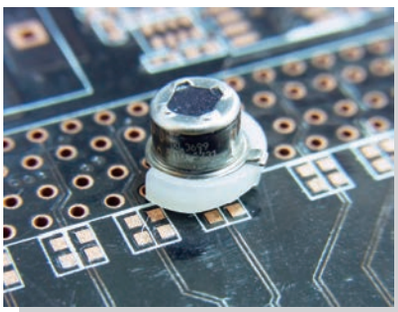


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

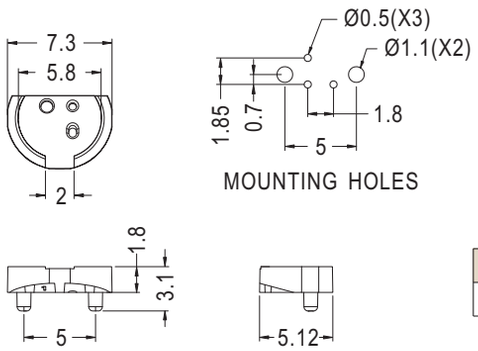


Part No.	Package
TRB-2	2000

電晶體墊片 TRANSISTOR WASHER

用途：用於橋式整流器或電晶體之墊高。

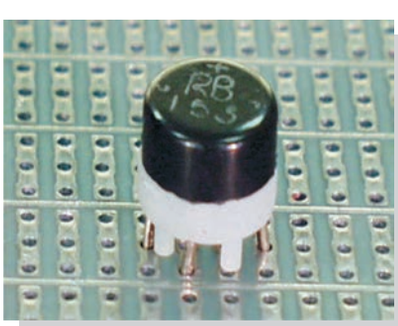

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
BW-1	9.0	2.0	4.2	2000
BW-2	14.0	1.0	2.1	

電晶體墊片 TRANSISTOR WASHER

用途：保護晶體立於PC板上，使接腳不彎曲、不折斷、不短路且高度一致，增加可靠度。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRB-1	2000

電晶體墊片 TRANSISTOR WASHER

用途：保護晶體立於PC板上，高度一致，不斷腳。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TO-5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm




Part No.	Package
TO-5-1	1000

IC座 IC HOUSING

用途：8 PIN鐵殼IC之架高與絕緣。

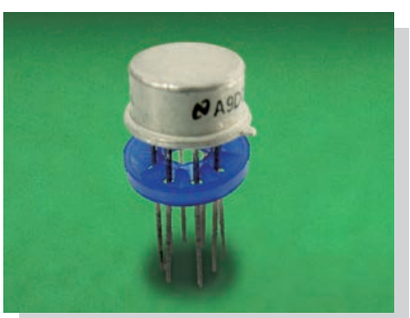

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm




Part No.	A	B	Package
ICV-1	2.0	2.2	1000
ICV-2	4.8	5.0	

TO-3電晶體座 TRANSISTOR HOUSING

用途：鎖於TO-3功率晶體與散熱片之間，作為絕緣與保護之用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-4	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
TR-6	1000




- Material: Bakelite
- Color: Black
- Unit: mm





MOUNTING HOLE

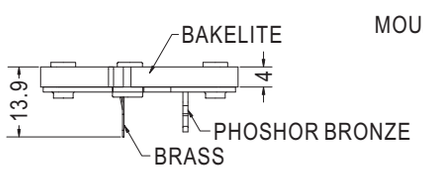


Part No.	Package
TO-3APF	1000


電晶體蓋 TRANSISTOR COVER

用途：用於TO-3功率晶體之外殼絕緣。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
TRC-1	200

用途：用於零件之墊片。




- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

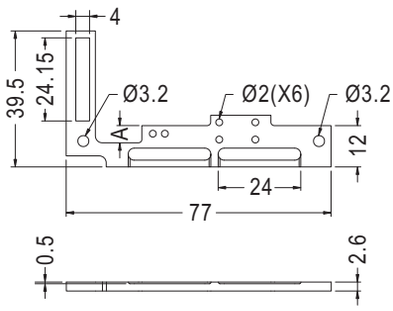

Part No.	A	Package
EM-51	5.0	500
EM-63	5.5	




- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

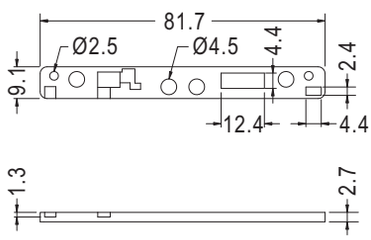

Part No.	Package
EMD-106	500




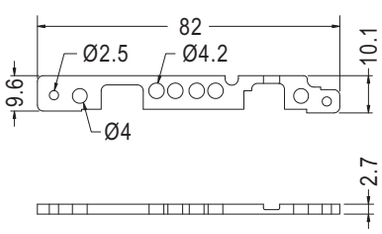


Part No.	Package
EMD-42	500



- Material: Nylon 6T (UL)
- Flame Class: 94V-0
- Color: Natural/White/Black
- Unit: mm




Part No.	Package
EMD-142	500



Part No.	A	Package
EMD-108	2.9	500
EMD-109	3.4	





Part No.	Package
EMD-260	1000

用途：用於零件之墊片。

- Material: Nylon 46 (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm














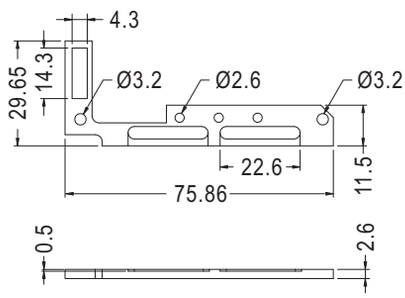


Part No.	Package
EML-7	200

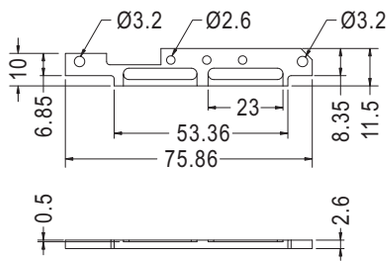


Part No.	Package
EML-10	500

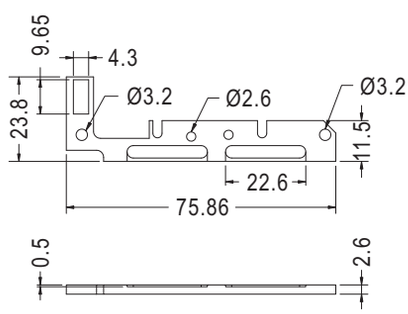


Part No.	Package
EML-13	200

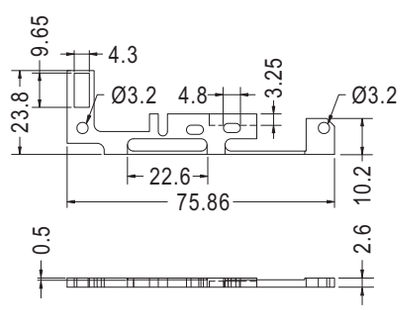

Part No.	Package
EML-23	200

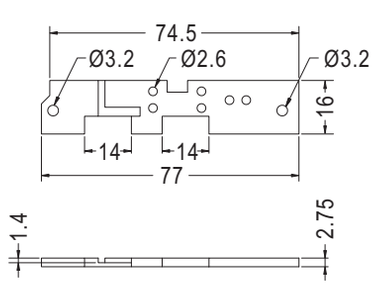


Part No.	Package
EML-22	500




Part No.	Package
EML-52	500

用途：用於電源供應器，球擊測試的保護。

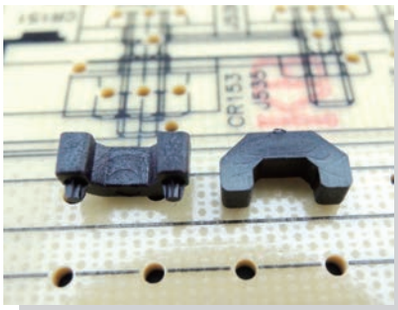

- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

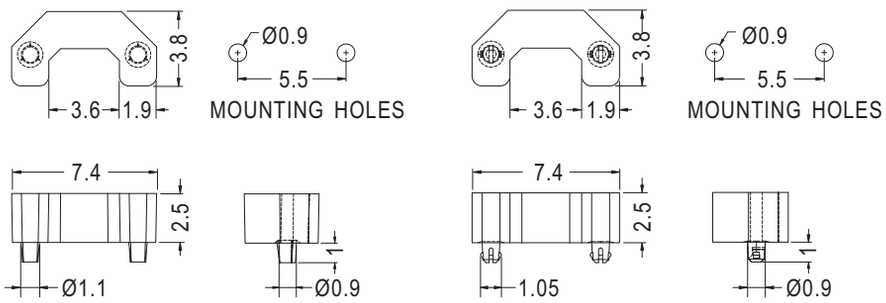


Part No.	Package
EMD-25	2000


Part No.	Package
EMD-118	2000




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

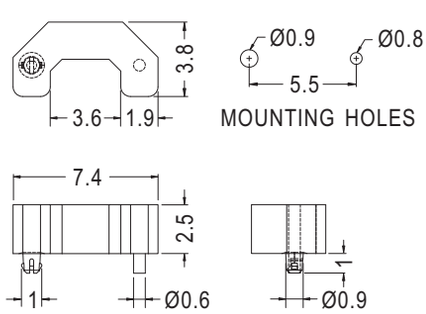

Part No.	Package
EMD-203	2000

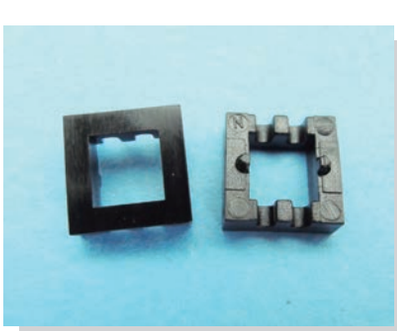

- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

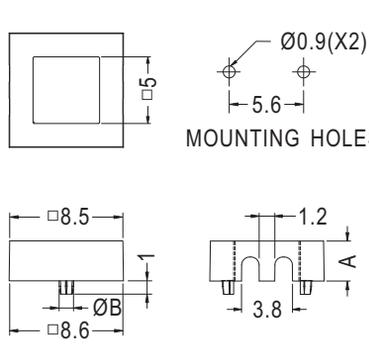


Part No.	A	B	Package
EMD-14	2.5	0.9	2000
EMD-136	3.0	1.08	


用途：用於電源供應器，球擊測試的保護。




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

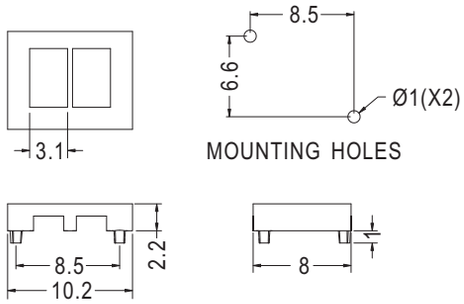


Part No.	Package
EMD-29	2000

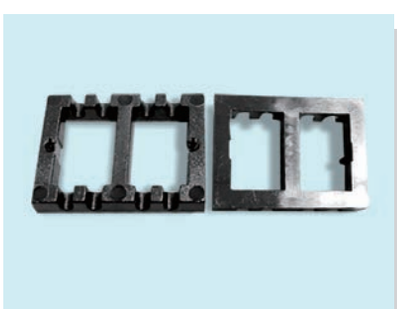


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

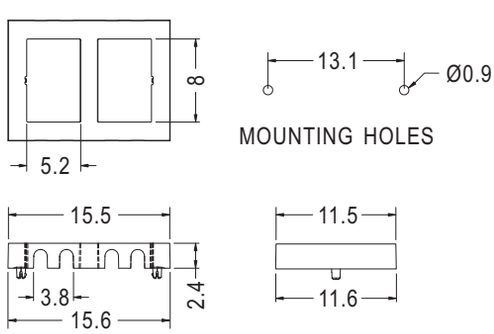

Part No.	Package
EMD-147	1000

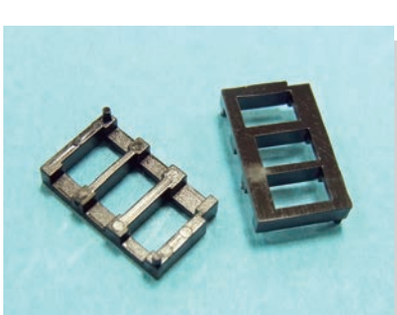


- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

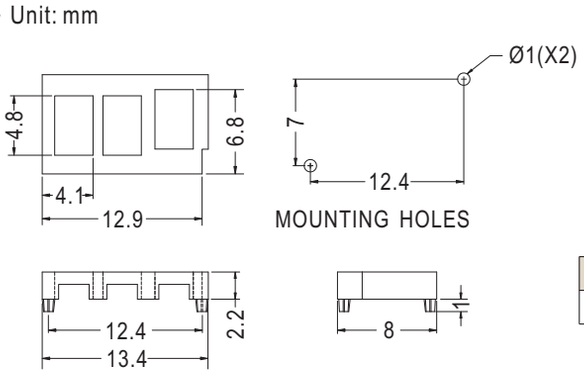

Part No.	Package
EMD-131	1000




- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

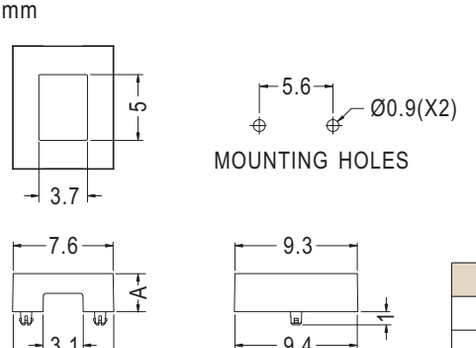


Part No.	A	Package
EMD-129	2.4	2000
EMD-140	2.9	


用途：做為球擊測試之緩衝墊片。

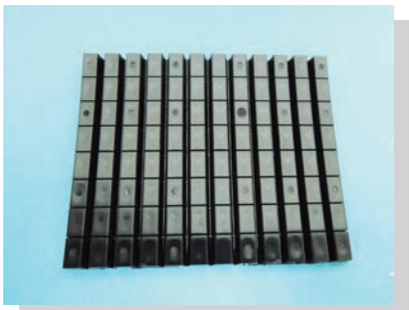

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

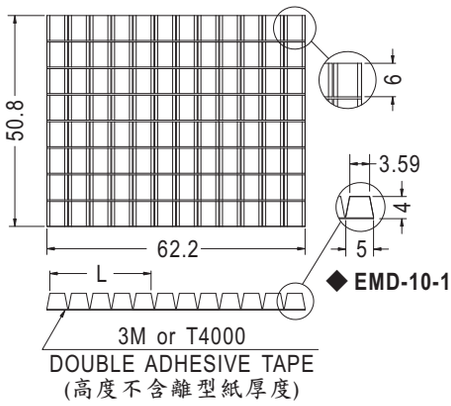


Part No.	L	Package
EMD-10-1	3.59	96PCS
EMD-10-2	8.79	
EMD-10-3	13.99	
EMD-10-4	19.19	
EMD-10-5	24.39	
EMD-10-6	29.59	

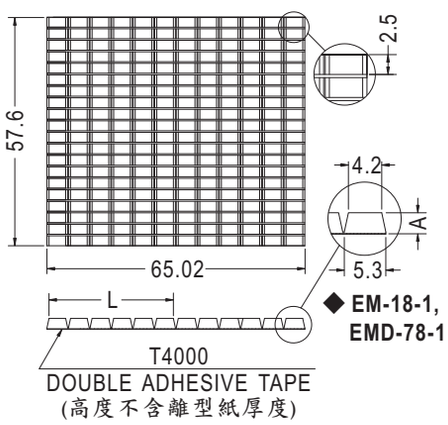


Part No.	A	L	Package
EM-18-1	2.5	4.2	240PCS
EM-18-2		9.65	
EM-18-3		15.1	
EM-18-4		20.5	
EM-18-5		25.95	
EM-18-6		31.4	

Part No.	A	L	Package
EMD-78-1	2.7	4.2	240PCS
EMD-78-2		9.65	
EMD-78-3		15.1	
EMD-78-4		20.5	
EMD-78-5		25.95	
EMD-78-6		31.4	

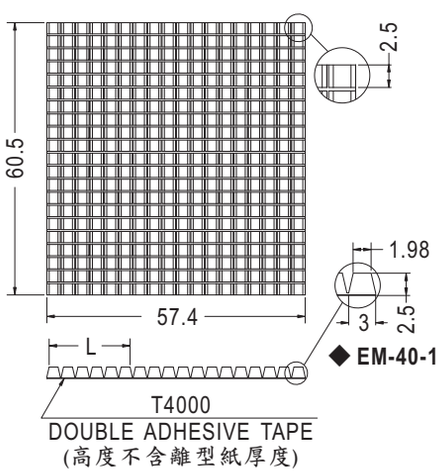


Part No.	L	Package
EM-40-1	1.98	378PCS
EM-40-2	5.18	
EM-40-3	8.38	
EM-40-4	11.58	
EM-40-5	14.78	
EM-40-6	17.98	

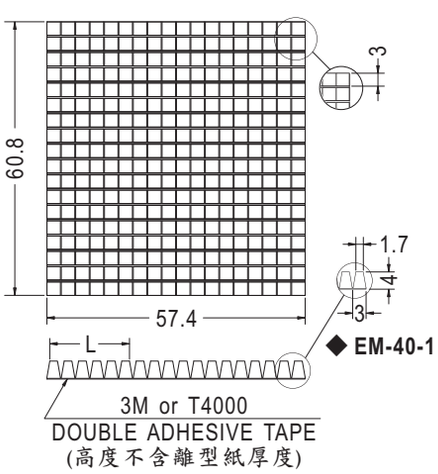


Part No.	L	Package
EM-535-1	1.7	324PCS
EM-535-2	4.9	
EM-535-3	8.1	
EM-535-4	11.3	
EM-535-5	14.5	
EM-535-6	17.7	

TO-220電晶體座 TRANSISTOR HOUSING


用途：保護 TO-220 包裝之晶體立於 PC 板上，使接腳不彎曲、折斷、短路、且高度一致，增加可靠度。

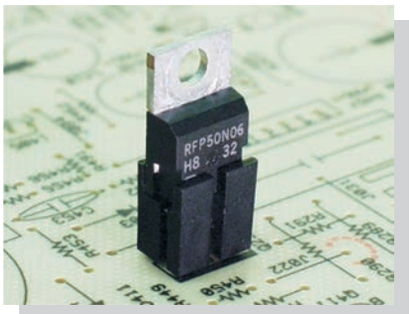


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-1	1000

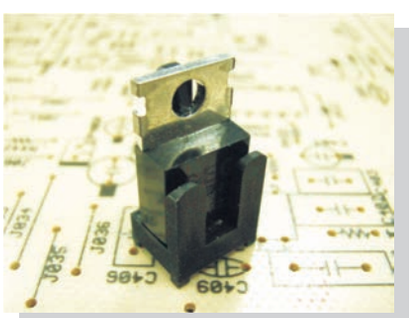


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TR-2	1000

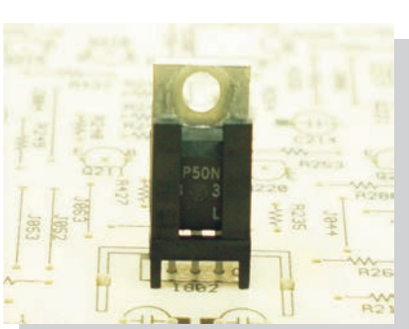


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-5	1000

電晶體座 TRANSISTOR HOUSING

用途：保護晶體立於 PC 板上，使接腳不彎曲、折斷、短路、且高度一致。

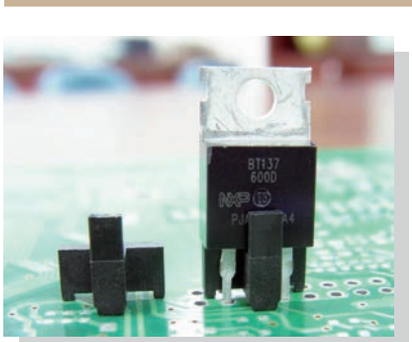


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

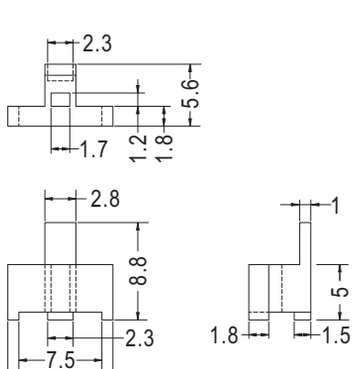


Part No.	Package
TR-30	1000

電晶體座 TRANSISTOR HOUSING


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。

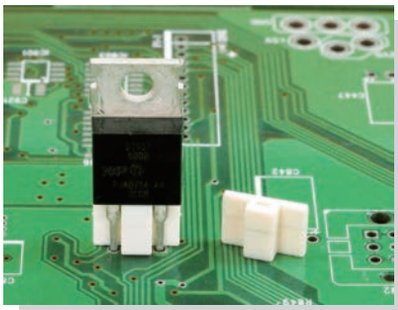


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm





Part No.	Package
TR-7	1000




Part No.	Package
TR-8	1000

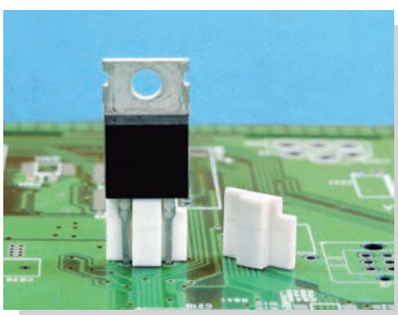








Part No.	Package
TR-10	1000






Part No.	A	B	Package
TR-10A	5.5	0.5~0.6	1000
TR-10S	5.5	0.4	
TR-17	7.5	0.5~0.6	

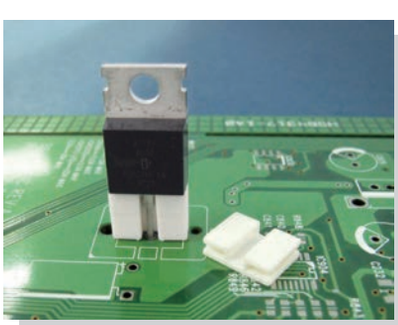




Part No.	A	C	Package
TR-11	4.5	2.8	1000
TR-13	6.5	3.25	




Part No.	Package
TR-14	1000

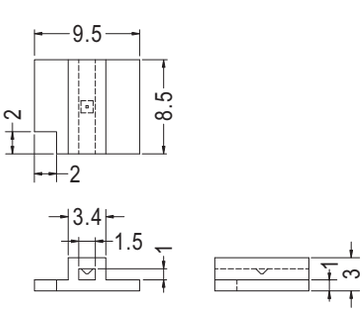

Part No.	Package
TR-16	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black

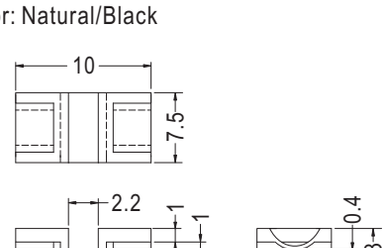


Part No.	Package
TR-18	1000

電晶體座 TRANSISTOR HOUSING


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。




- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-21	1000




Part No.	Package
TR-22	1000

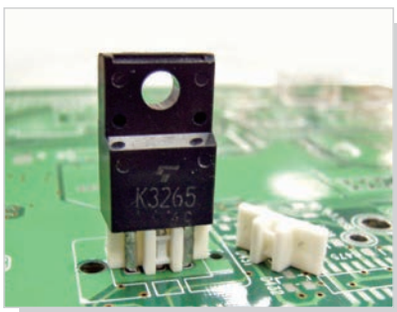





Part No.	Package
TR-23	1000





Part No.	D	Package
TR-23S	0.3	1000
TR-26	0.5	

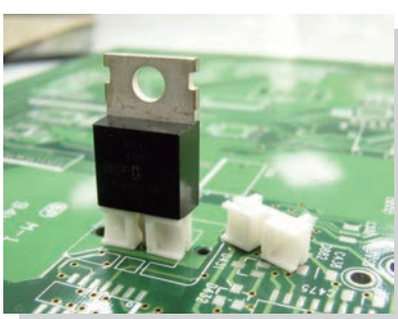





Part No.	Package
TR-24	1000

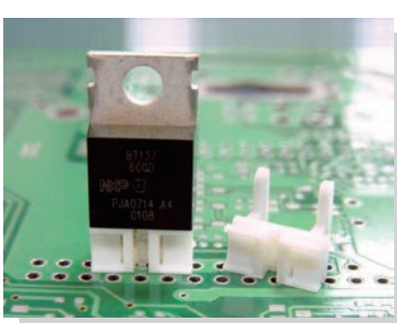

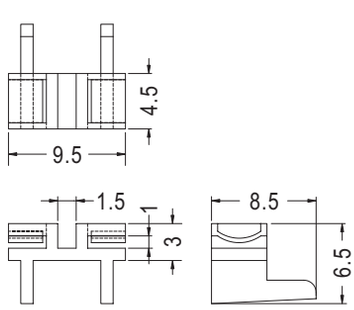

Part No.	Package
TR-25	1000

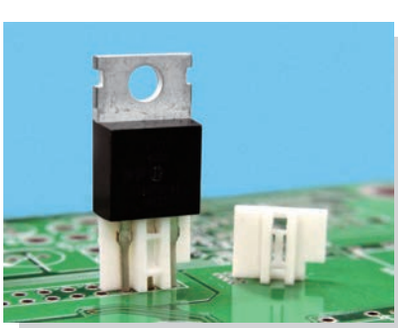


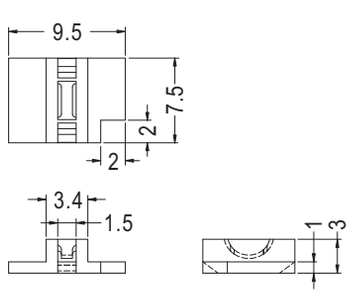


Part No.	Package
TR-29	1000

電晶體座 TRANSISTOR HOUSING


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。

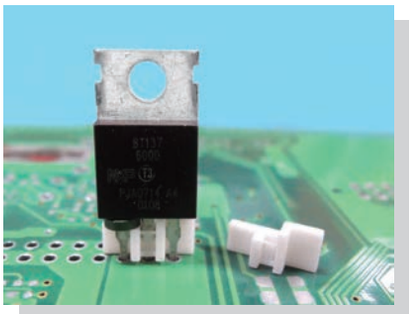


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

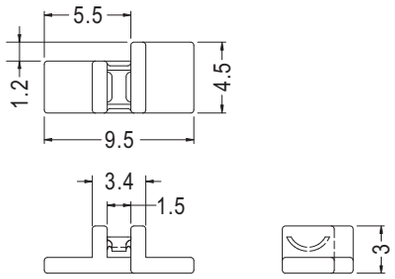


Part No.	Package
TR-35	1000

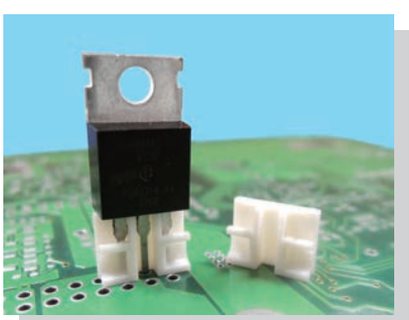


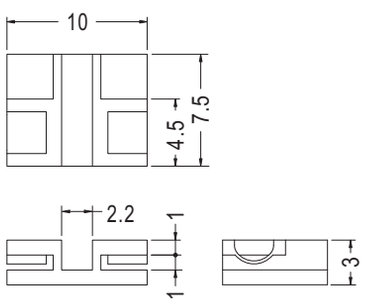

Part No.	Package
TR-37	1000

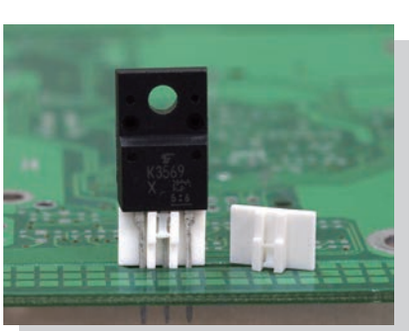


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
TR-45	1000

TO-3電晶體座 TRANSISTOR HOUSING

用途：保護 TO-3P 功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。

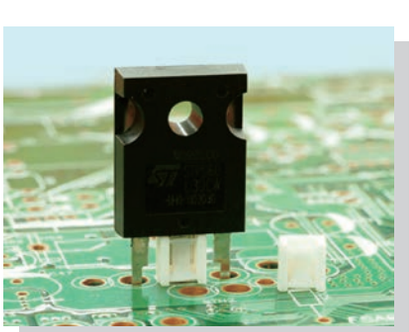


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
TR-34	4.2	1000
TR-36	6.0	
TR-38	4.6	


電晶體座 TRANSISTOR HOUSING

用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。

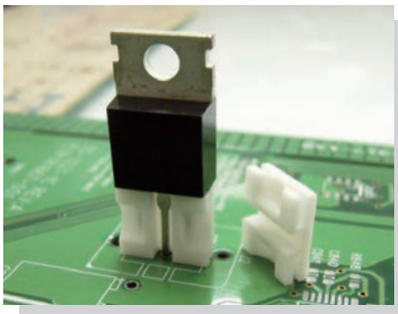


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P.A.T.)


Part No.	A	B	C	D	Package
TRG-3.5	3.5	10.0	3.0	1.0	1000
TRG-4	4.0				
TRG-4.5	4.5				
TRG-4.5L	4.5	9.0			
TRG-5	5.0	10.0			
TRG-5.5	5.5				
TRG-6	6.0				
TRG-6.5	6.5				
TRG-6.5L	6.5		3.3	1.3	
TRG-7	7.0		3.0	1.0	
TRG-7.5	7.5				
TRG-8	8.0				
TRG-8.5	8.5				
TRG-9	9.0				
TRG-9.5	9.5				
TRG-10	10.0				




◆ TRG-4.5L






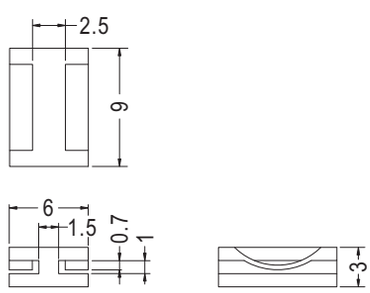


Part No.	Package
TRGS-9	1000

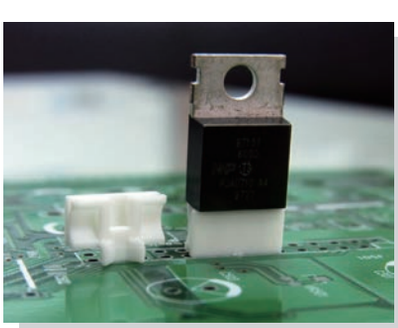

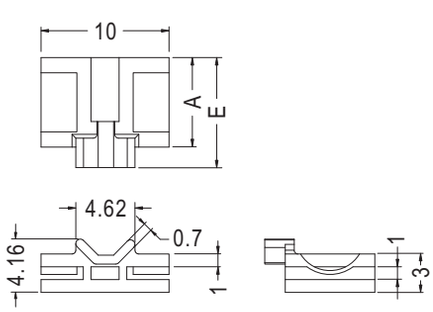

Part No.	A	E	Package
TRGV-5	5.0	6.6	1000
TRGV-6.7	6.7	8.3	
TRGV-7	7.0	8.6	




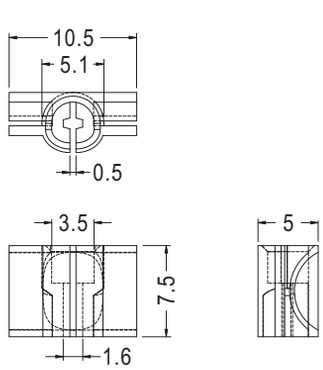


Part No.	Package
TRO-7.5	1000

電晶體座 TRANSISTOR HOUSING


用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

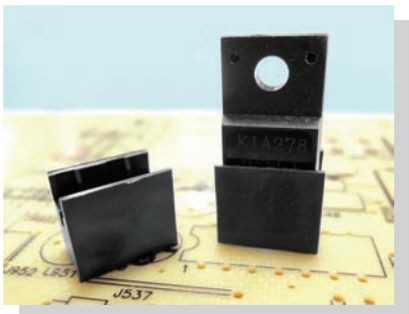


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

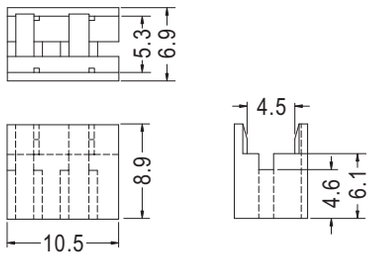


Part No.	Package
TRD-1	1000

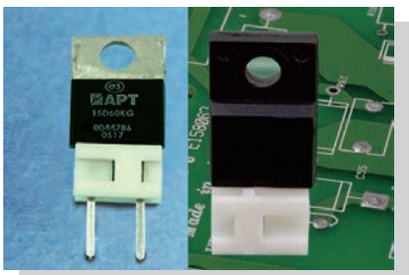


- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)





Part No.	Package
TRS-5	500

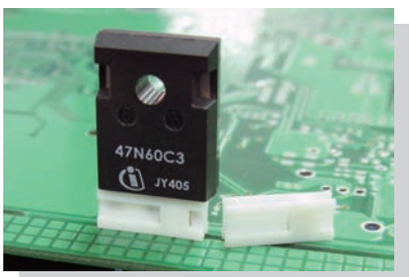

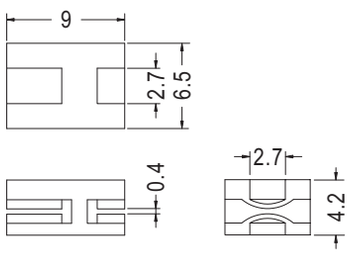

Part No.	Package
TRS-6.5	500

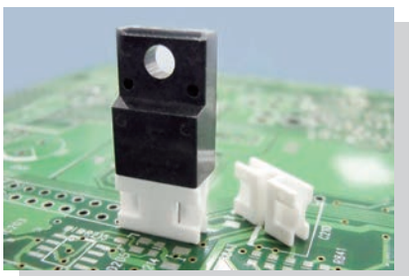

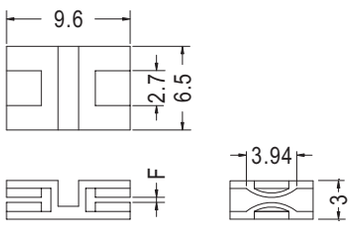


Part No.	F	Package
TRU-6.5	0.4	1000
TRU-6.5PV05	0.5	

電晶體座 TRANSISTOR HOUSING

用途：保護電晶體接腳間之絕緣，不使接腳短路。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm

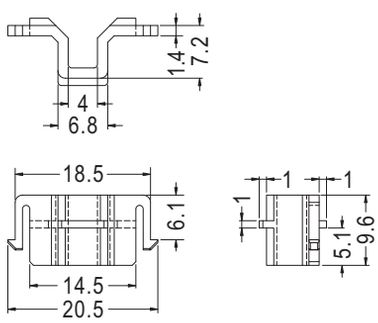


Part No.	Package
TRGL-1	1000

TO-220電晶體座 TRANSISTOR HOUSING

用途：用於TO-220功率晶體組裝。

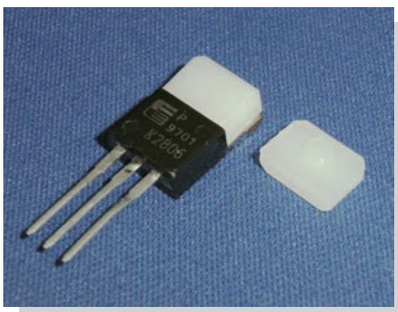


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRF-1	2000

電晶體座 TRANSISTOR HOUSING

用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。

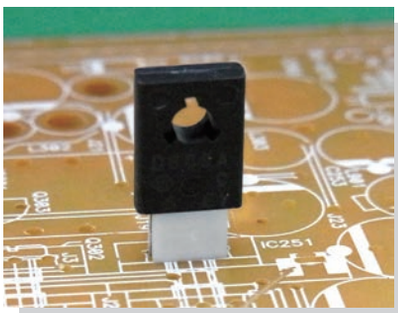

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

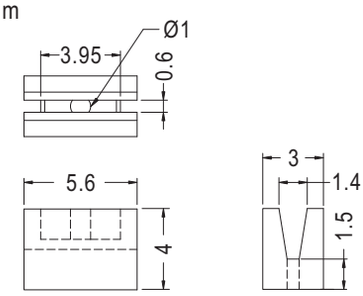


Part No.	Package
TR-9	1000

TO-3電晶體座 TRANSISTOR HOUSING

用途：保護 TO-3P 功率晶體，保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
TRW-8	8.0	1000
TRW-10	10.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	L	Package
TRWF-8	8.0	1000
TRWF-10	10.0	

電晶體座 TRANSISTOR HOUSING

用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致。

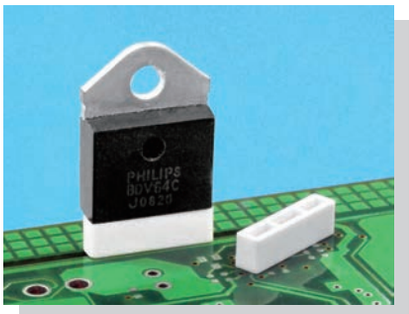


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm




Part No.	Package
TRW3-2	1000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRW3-3	1000

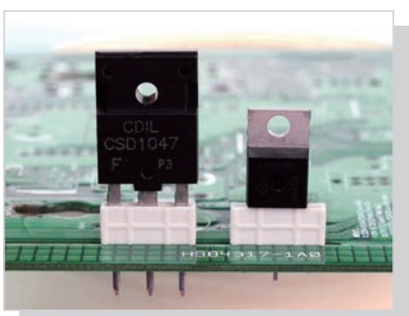

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/ White
- Unit: mm




Part No.	Package
TRW3-4	1000




Part No.	Package
TRW3-5	1000

TO-220電晶體座 TRANSISTOR HOUSING


用途：保護TO-220晶體立於PC板上，使接腳不彎曲、折斷、短路，且高度一致，增加可靠度。

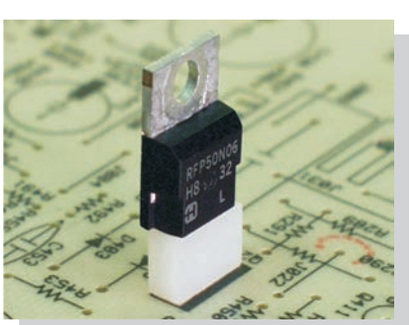


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	G	Package
TR3-3S	3.0	9.8	1000
TR3-3	3.7		
TR3-4	4.0		
TR3-5	5.0	10.0	
TR-3	6.0	9.8	
TR3-7	7.0		
TR3-8.5	8.5		
TR3-9	9.0		
TR3-9.5	9.5		



Part No.	Package
TR-19	2000



◆ TR-50


Part No.	A	B	H	I	Package
TR-12	5.0	4.0	1.5	0.75	1000
TR-31	3.0	3.0			
TR-50	5.0	4.3	1.7	1.0	

電晶體座 TRANSISTOR HOUSING

用途：保護晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR3-11-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

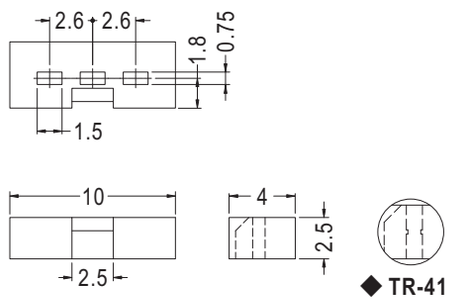

Part No.	Package
TR-32	1000
TR-41	

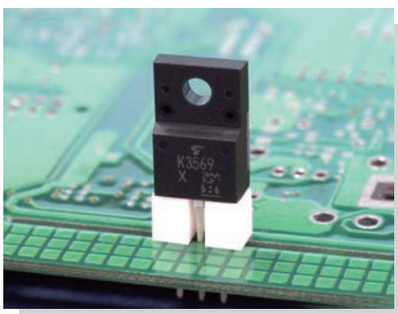

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm




Part No.	Package
TR-43	1000

電晶體座 TRANSISTOR HOUSING

用途：用於電晶體或零件之墊高與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-33	1000

電晶體座 TRANSISTOR HOUSING


用途：用於電晶體或零件之墊高與保護。

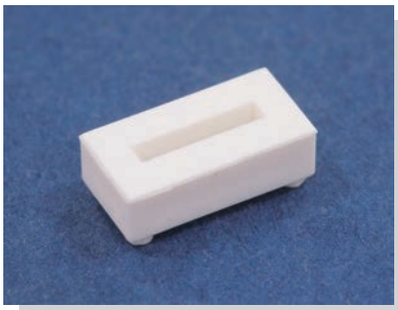


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TR-42	1000

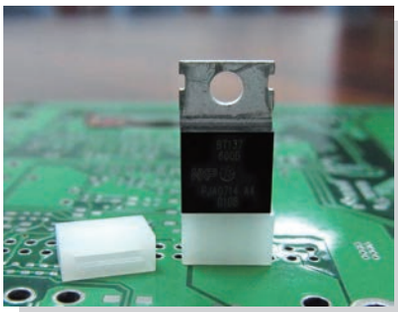

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SUMA-6	1000




Part No.	Package
SUM-6	1000

電晶體座 TRANSISTOR HOUSING

用途：用於功率晶體之絕緣與防塵。

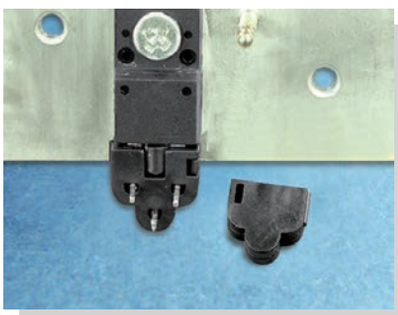


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)




Part No.	Package
TRGB-1	1000

橋式整流座 BRIDGE RECTIFIER HOUSING


用途：保護橋式整流器立於PC板上使接腳不彎曲、折斷、短路且高度一致。

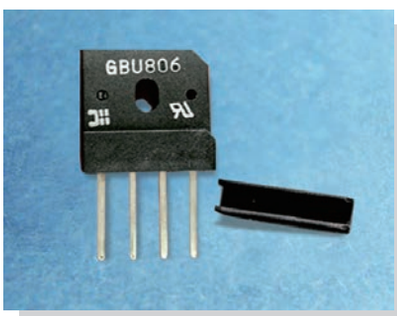


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/ Black
- Unit: mm



Part No.	Package
BGCV-15	500



◆ BGCV-22




◆ BGCV-30


Part No.	A	B	C	D	Package
BGCV-22	22.0	7.0	3.5	5.5	500
BGCV-30	30.5	8.5	5.0	7.0	

橋式整流座 BRIDGE RECTIFIER HOUSING


用途：保護橋式整流器立於PC板上使接腳不彎曲、折斷、短路且高度一致。

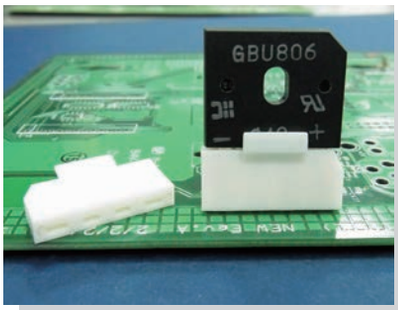


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

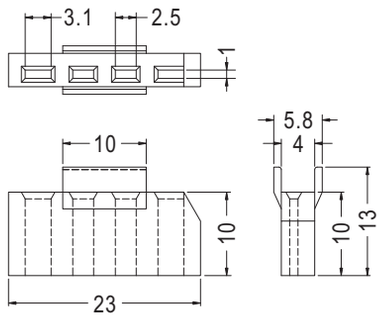


Part No.	Package
BGCV-23	500

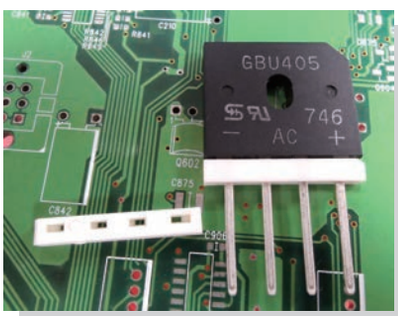


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

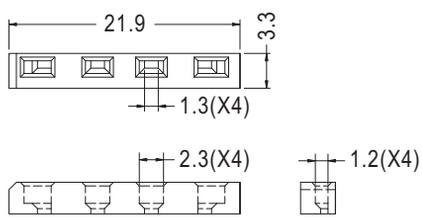

Part No.	Package
BGCA-22	1000

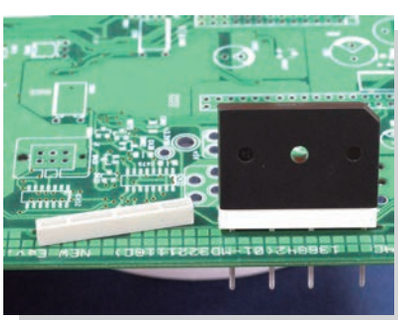


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm



Part No.	Package
BGCB-30	1000




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	B	Package
BWC-1	9.0	1000
BWC-2	18.0	


霍爾晶體座 HALL SENSOR HOUSING

用途：保護霍爾晶體立於PC板上，使接腳不彎曲、折斷、短路且高度一致。

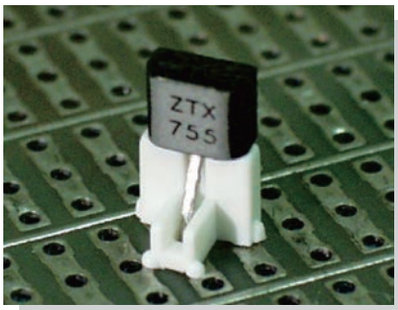

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm






MOUNTING HOLES


Part No.	A	B	C	D	Package
HLS-1	4.6	2.5	1.5	1.5	2000
HLS-2	10.5	2.4	1.7	1.4	

可變電阻蓋 VR. COVER

用途：可變電阻調整好，避免誤觸。

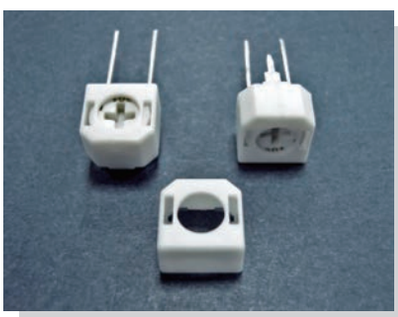


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

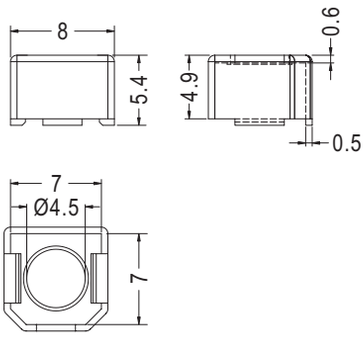


Part No.	Package
VRCV-1	2000

熱敏電阻座 ELECTRIC RESISTANCE HOLDER

用途：用於熱敏電阻接腳之固定與保護。

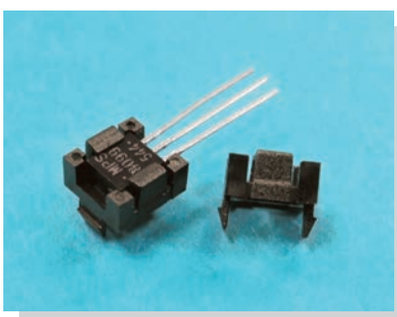

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

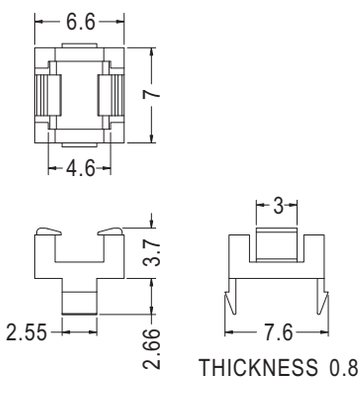


THICKNESS 0.8


Part No.	Package
TRE-1-1	2000


IR晶體座 IR RECEIVER HOLDER

用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路且高度一致。

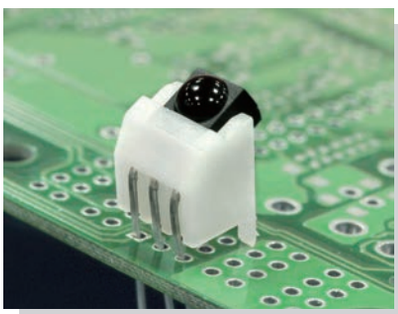


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES
THICKNESS 1.6

Part No.	Package
RECD-3	1000

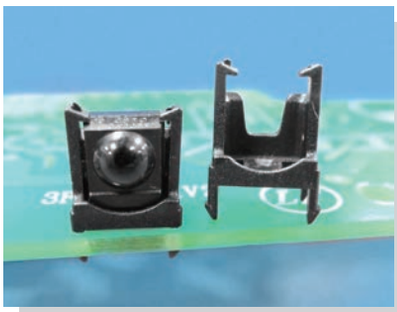


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)

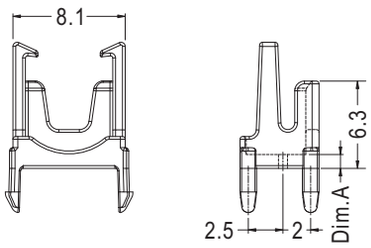





MOUNTING HOLES
THICKNESS 1.6

Part No.	Dim.A	Package
RECA-1	1.0	1000
RECA-1.5	1.5	
RECA-2	2.0	
RECA-2.5	2.5	
RECA-3	3.0	
RECA-3.5	3.5	
RECA-4	4.0	
RECA-4.5	4.5	
RECA-5	5.0	
RECA-5.5	5.5	
RECA-6	6.0	

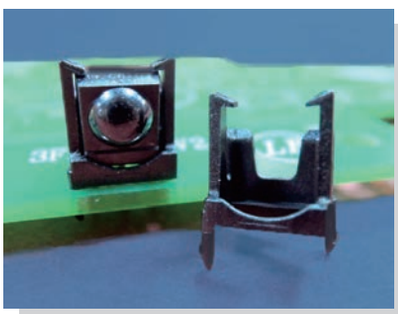

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

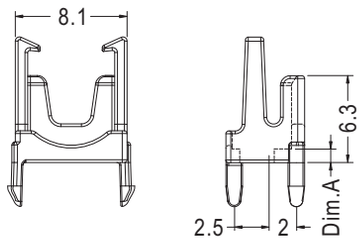




MOUNTING HOLES
THICKNESS 1.6


Part No.	Dim.A	Package
RECG-1	1.0	1000
RECG-1.5	1.5	
RECG-2	2.0	
RECG-2.5	2.5	
RECG-3	3.0	
RECG-3.5	3.5	
RECG-4	4.0	
RECG-4.5	4.5	
RECG-5	5.0	
RECG-5.5	5.5	
RECG-6	6.0	

IR晶體座 IR RECEIVER HOLDER


用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。

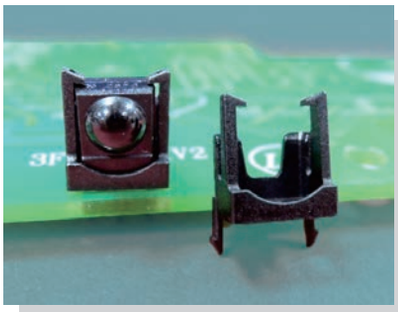


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

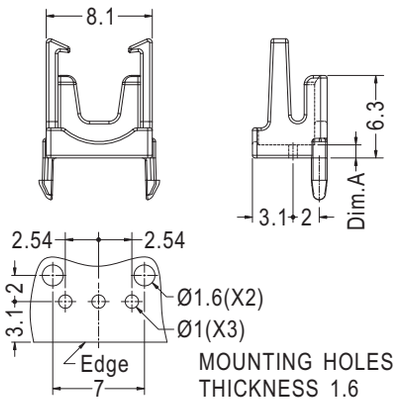

Part No.	Dim.A	Package
RECC-1	1.0	1000
RECC-1.5	1.5	
RECC-2	2.0	
RECC-2.5	2.5	
RECC-3	3.0	
RECC-3.5	3.5	
RECC-4	4.0	
RECC-4.5	4.5	
RECC-5	5.0	
RECC-5.5	5.5	
RECC-6	6.0	

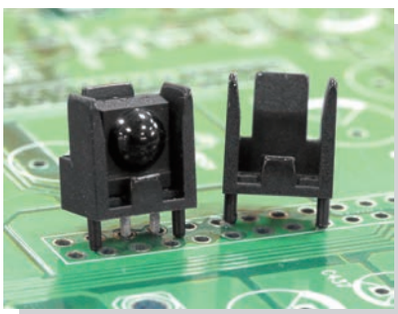


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

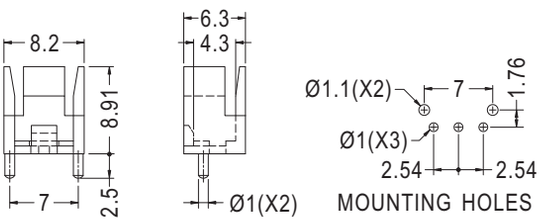

Part No.	Package
RECI-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

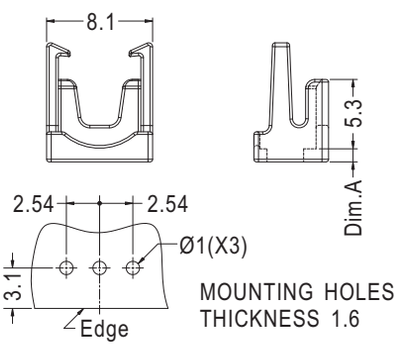


Part No.	Dim.A	Package
RECE-1	1.0	1000
RECE-1.5	1.5	
RECE-2	2.0	
RECE-2.5	2.5	
RECE-3	3.0	
RECE-3.5	3.5	
RECE-4	4.0	
RECE-4.5	4.5	
RECE-5	5.0	
RECE-5.5	5.5	
RECE-6	6.0	
★RECE-7	7.0	

電晶體座 IR TRANSISTOR HOUSING

用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRA-1	1000

電晶體座 IR TRANSISTOR HOUSING

用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路、且高度一致。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
TRAC-1.2	5.2	1.2	2.6	1000
TRAC-2	6.0	2.0	3.4	
TRAC-5.3	9.3	5.3	6.7	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TRAD-0.9	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
TRAE-2.35	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

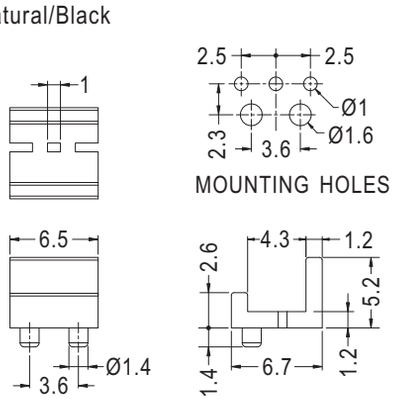


Part No.	Package
TRAB-1	1000


電晶體座 IR TRANSISTOR HOUSING


用途：保護IR晶體立於PC板上，使接腳不彎曲、折斷、短路且高度一致。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm










MOUNTING HOLES


Part No.	A	B	C	D	E	Package
TRAC-9	13.0	9.0	10.4	1.5	1.6	1000
★TRAC-10.8L	14.8	10.8	12.2	0.9	2.4	

光電晶體座 IR RECEIVER HOLDER


用途：用於光晶體腳座，固定高度可過錫爐，美觀整齊。

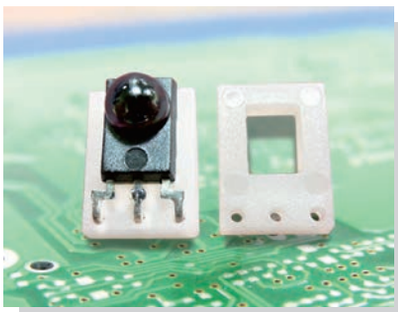


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
RCEA-2	1000

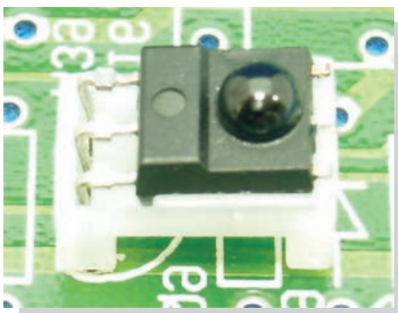


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
RCEA-4	1000


用途：用於光晶體腳座，固定高度可過錫爐，美觀整齊。

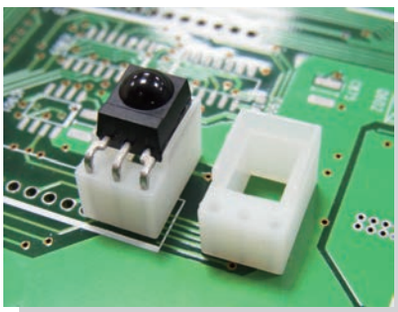

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
RCEA-3	3.0	1000
RCEA-5	5.0	
RCEA-6	6.0	
RCEA-12.6	12.6	




Part No.	Package
RCEA-10	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

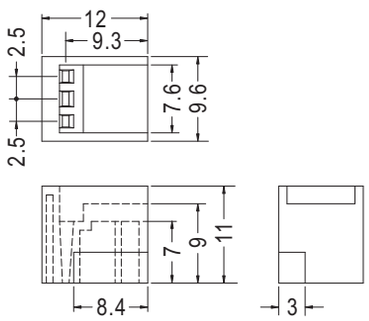


Part No.	Package
RCEA-9	1000

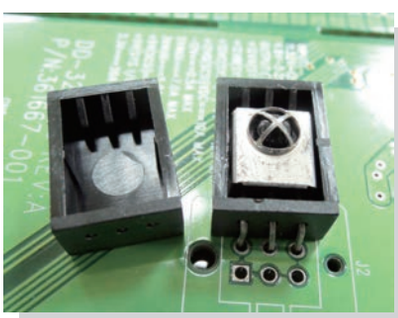


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

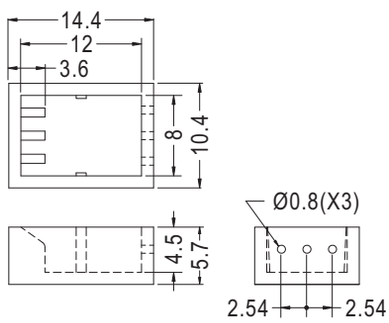

Part No.	Package
RCEC-2	1000

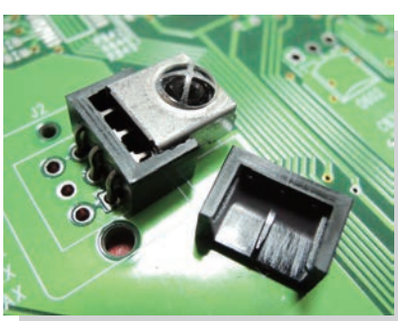


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

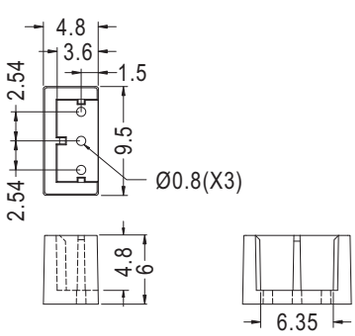


Part No.	Package
RCEF-1	1000


光電晶體座 IR RECEIVER HOLDER

用途：用於光晶體腳座，固定高度可過錫爐，美觀整齊。

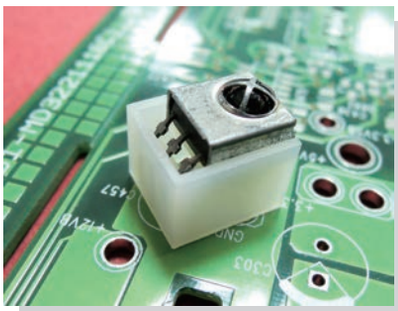

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

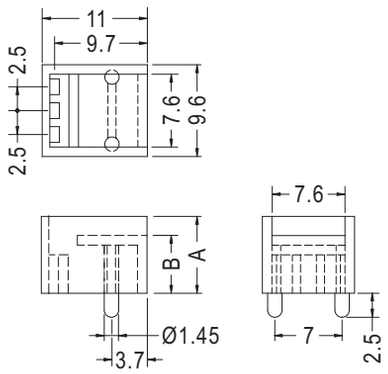





MOUNTING HOLES

Part No.	A	B	Package
RCEB-4.5	6.5	4.5	1000
RCEB-6	8.0	6.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES






◆ RCEB-3.5





◆ RCEB-3.5D

Part No.	A	B	C	Package
RCEB-3.5	5.5	3.5	12.0	1000
RCEB-3.5D				
RCEB-8	10.0	8.0	11.0	
RCEB-9	11.0	9.0		
RCEB-10.5	12.5	10.5		

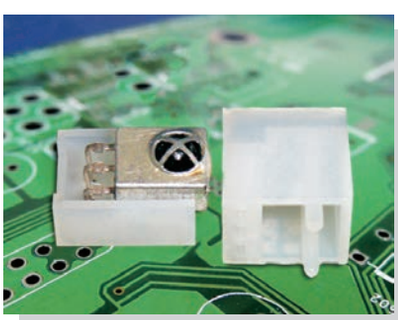


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLES

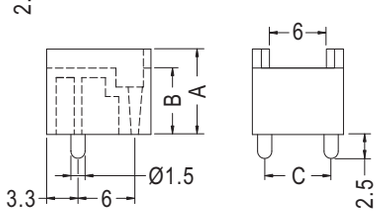



Part No.	A	B	C	Package
RCEB-7	9.0	7.0	7.0	1000
RCEB-15	17.0	15.0	6.0	

用途：用於光晶體腳座，固定高度可過錫爐，美觀整齊。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

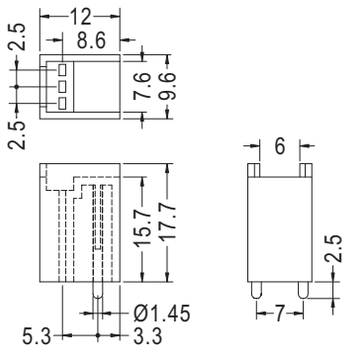




MOUNTING HOLES


Part No.	Package
RCEB-15.7	1000

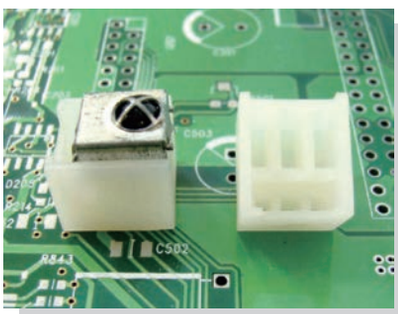

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

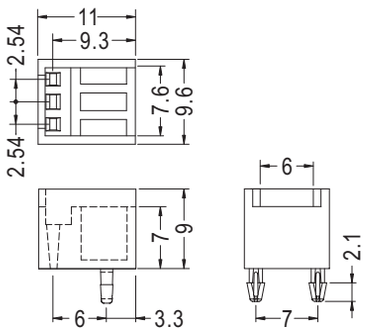

P.C.B Ø1.5
THICKNESS 1.6~1.8





MOUNTING HOLES

Part No.	Package
RCEE-7	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

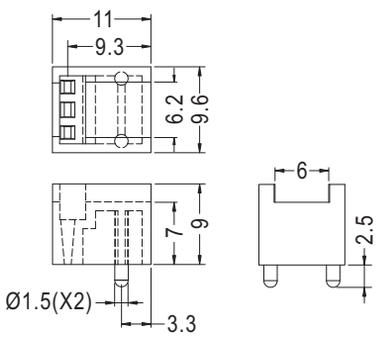





MOUNTING HOLES

Part No.	Package
RCEH-1	1000

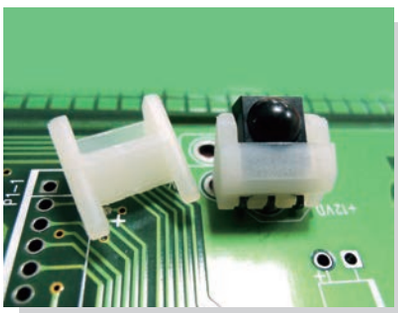

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES

Part No.	Package
RECD-1	1000


尼龍華司 WASHER

用途：做為零件之墊片。

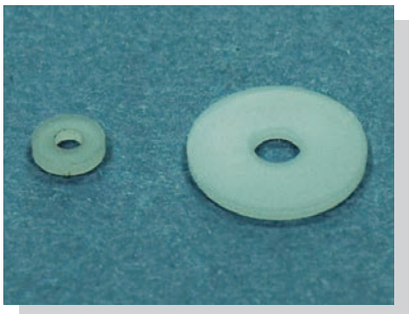

- Material: Nylon 66/Nylon 6 (UL)/PE/ PBT (UL)/PP(UL)/POM (UL)
- Color: Natural/Black
- Unit: mm

可依客戶需求訂製不同材質。
Different materials available per request.

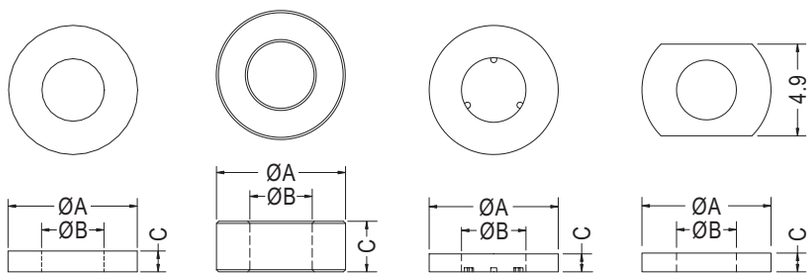


◆ WS6-31-2, WS063614　◆ WS3.25-0.9　◆ WSRA3.2-1

Part No.	A	B	C
★WS1.7-0.5	3.5	1.7	0.5
WS3.5-1810		1.8	1.0
WS3-2-1	3.7	2.2	
WS2.2-12			1.2
WS2.5-0.5S	4.0	2.5	0.5
WS2.6-2		2.6	2.0
WS4-3.1-1		3.1	1.0
WS4-3-12	4.1		1.2
WS42-19-05	4.2	1.9	0.5
WS45-2-08	4.5	2.0	0.8
WS2.1-0.8		2.1	
WS4.5-2.1-09			0.9
WS4.5-2.1-1.1			1.1
WS4.5-2.1-1.15			
WS4.5-2.1-1.2			1.2
WS4.5-2.1-1.3			1.3
WS452117			1.7
WS4.5-2.1-1.8			1.8
WS2.5-0.5		2.5	0.5
WS-4529		2.9	1.2
WS4.9-3715	4.9	3.7	1.5
WS2.1-2	5.0	2.1	2.0
WS5-2.1-1			1.0
WS2.5-10		2.5	1.1
WS2.5-13			1.3
WS5-3-2.5		3.0	2.5
WS5-3.1-1		3.1	1.0
WS3.1-1.8			1.8
★WS3.1-2			2.0
WS53205		3.2	0.5
WS5-2-0.5	5.5	2.3	
WS3.2-2.8		3.2	2.8
WS3-5-1.5	5.6	3.1	1.5
WS3.7-0.3		3.73	0.3
WS6-23-08	6.0	2.3	0.8
WS2-0.5		2.5	0.5
WS6-2.7-3		2.7	3.0
WS6-31-2		2.9	2.35
WS6-3008		3.0	0.8
WS6-31-05		3.1	0.5
WS3-1.5			1.5
WS3-2			2.0

Part No.	A	B	C
WS3-3.4	6.0	3.1	3.4
WS6-3.2-0.5		3.2	0.5
WS6-3.2-1			1.0
WS063214			1.4
WS063614		3.6	
WS6-3.8-1		3.8	1.0
WS6-38-15			1.5
WS4-0.6		4.0	0.6
WS-6451N		4.5	1.0
WS6.1-1.2	6.1	3.7	1.2
WS63-42-15	6.3	4.2	1.55
WS6352125	6.35	2.3	2.5
WS63530512		3.05	1.27
WS6.3-3.1-1.5		3.18	1.58
WS6.5-3.1-20	6.5	3.1	2.0
WS3.25-0.9		3.25	0.9
WS3.8-0.5		3.8	0.5
WS4-1.6		4.0	1.65
WS4-2.2			2.2
WS4-2.5			2.5
WS4-1	6.8	4.2	1.0
WSRA3.2-1	6.9	3.2	
WS2.2-0.5	7.0	2.2	0.5
WS3-1		3.0	1.0
WS7-3-0.8			0.8
WS7-3.1-0.5N		3.1	0.5
WS7-3.2-0.5		3.2	
WS7-3.3-2		3.3	2.0
WS7-3.6-3.2		3.6	3.2
WS4.3-2		4.3	2.0
WS4.3-2.3			2.3
WS4.6-0.6		4.6	0.6
WS7-5-1.6		5.0	1.6
WS3.7-0.5	7.1	3.7	0.5
WS71316	7.11	3.05	1.57
WS7.1-55158	7.13	5.53	1.58
WS7.4-4.5-0.5	7.4	4.5	0.5
WS4.7-0.8	7.5	4.7	0.8
WS3.5-0.5		3.5	0.5
WS-7543		4.3	0.65
WS5.3-0.7	7.7	5.3	0.7
WS8-2-2	8.0	2.0	2.0


尼龍華司 WASHER

用途：做為零件之墊片。

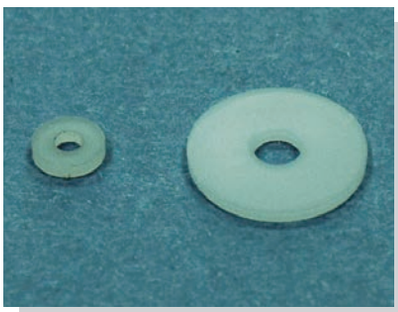

- Material: Nylon 66/Nylon 6 (UL)/PE/ PBT (UL)/PP(UL)/POM (UL)
- Color: Natural/Black
- Unit: mm

可依客戶需求訂製不同材質。
Different materials available per request.

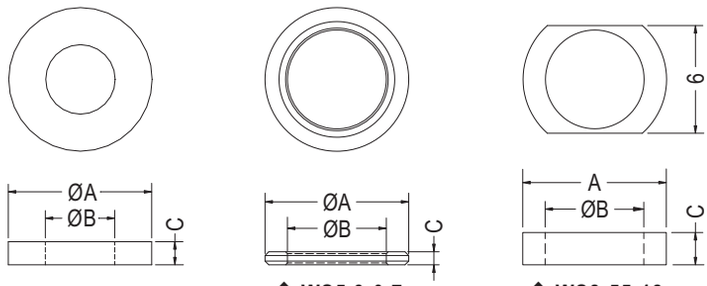

◆ WS5.3-0.7　　◆ WS8-55-18

Part No.	A	B	C
WS3-5	8.0	3.1	0.5
WS3-8			0.8
WS3-10			1.0
WS3-15			1.5
WS3-20			2.0
WS8-3.6-08		3.6	0.8
WS8-3.6-25		3.6	2.5
WS8-4-2		4.0	2.0
WS4-5		4.1	0.5
WS4-8			0.8
WS4-10			1.0
WS4-15			1.5
WS4-20			2.0
WS8-4.2-2.8		4.2	2.85
WS4-3		4.6	0.3
WS8-5-1		5.0	1.0
WS5-5			5.0
WS8-5.1-2		5.1	2.0
WS5-0.5		5.2	0.5
★WS5.2-0.5			
WS855075		5.5	0.75
WS-855			1.5
WS8-55-18			1.8
WS5.6-1	8.3	5.65	1.0
WS6.1-1		6.1	
WS8.6-4.1-1	8.65	4.1	
WS2-1.5	8.8	2.0	1.5
WS2.5-1	9.0	2.5	1.0
WS3.2-0.5		3.2	0.5
WS9-4.3-1		4.3	1.0
WS4.5-0.5		4.5	0.5
WS9-55-075		5.5	0.75
WS9-6.2-1.2		6.2	1.2
WS9-6.7-2		6.7	2.0
WS96-44-08	9.6	4.4	0.8
WS3.1-10-1	10.0	3.1	1.0
WS10-4.3-4		4.3	4.0
WS4.5-1.5N		4.5	1.5
WS10-5124		5.1	2.4
WS10-5.2-0.8		5.2	0.8
WS5-1			1.0
WS5-2			2.0

Part No.	A	B	C
WS5.5-0.8	10.0	5.5	0.8
WS10-5710		5.7	1.0
WS10-5720			2.0
WS6.1-1.6		6.1	1.6
WS-1064		6.4	0.8
WS106428			2.8
WS8-1.6		8.0	1.6
WS6.35-1.6	10.15	6.35	1.6
WS1015PC	10.2	5.2	1.5
WS5.2111.5	11.0		
WS11785		7.0	0.8
WS7.2-1.2		7.2	1.2
WS7.2-2.5			2.5
WS11-5-1.3	11.3	5.4	1.3
WS7.6-0.5		7.6	0.5
WS115-35-4	11.5	3.5	4.0
WS3.2-1	11.6	3.2	1.0
WS7.6-1		7.6	
WS4.3-1	12.0	4.3	
WS12-5-2		5.0	2.0
WS5.2-0.8		5.2	0.8
WS5.3-2		5.3	2.0
WS12-64-1.4		6.4	1.4
WS1276415	12.7	6.48	1.52
WS1276420			2.0
WS1276565		6.5	6.5
WS12779215		7.9	1.57
WS6-0.8	12.8	6.4	0.8
WS6-2			2.0
WS6.48-3		6.48	3.0
WS8.1-1.6	13.0	8.1	1.6
WS12.5-1	13.4	12.5	1.0
WS-148	14.0	8.0	1.2
WS-1482			2.0
WS8.1-0.8		8.1	0.8
WS14-11-1	14.7	11.5	1.0
WS4.3-1.5	15.0	4.3	1.5
WS7-1		7.1	1.0
WS10-5		10.3	5.0
★WS6.7-0.65	15.5	6.7	0.65
WS7.1-1.5	15.8	7.1	1.5


尼龍華司 WASHER

用途：做為零件之墊片。



- Material: Nylon 66/Nylon 6 (UL)/PE/ PBT (UL)/PP(UL)/POM (UL)
- Color: Natural/Black
- Unit: mm

可依客戶需求訂製不同材質。
Different materials available per request.



Part No.	A	B	C
WS15.8-9.1-1.7	15.8	9.1	1.65
WS6-1.6	16.0	6.0	1.6
WS8.4-1.6		8.4	
WS16-96-15		9.6	1.5
WS10-0.8		10.0	0.8
WS10-1.5			1.5
WS16-11-32		11.4	3.2
WS10.3-1	16.2	10.3	1.0
WS10.3-1.5			1.5
WS10.1-2	17.0	10.1	2.0
WS18-6.4-1.6	18.0	6.4	1.6
WS8-1		8.2	1.0
WS8.4-1		8.4	
WS8.4-1.5			1.5
WS19-11-1.6	19.0	11.0	1.6
WS12.1-2.5		12.1	2.5
WS19-14-3.2	19.05	14.35	3.18
WS5-1.2	19.5	5.0	1.2
WS20-6.5-2	20.0	6.5	2.0
WS17-1.3	20.2	17.8	1.3
WS14-3.6	20.3	14.5	3.65
WS14-4			4.0


Part No.	A	B	C
WS10-3	20.7	10.0	3.0
WS21-10-2	21.0	10.5	2.0
WS19.1-0.5	21.8	19.1	0.5
WS13-2	23.0	13.0	2.0
WS8-3	24.0	8.05	3.0
★WS16.1-2.5		16.1	2.5
WS16.1-3			3.0
WS25-10	25.0	14.5	10.0
WS29-17-3	29.5	17.2	3.0
WS30-6-1.5	30.0	6.0	1.5
WS20.1-3.5		20.1	3.5
WS33-28-15	33.5	28.5	1.5
WS22.1-4	34.75	22.1	4.0
WS34-26-1	34.8	26.2	1.0
WS24.1-4	36.0	24.1	4.0
WS2905U	38.0	29.0	0.5
WS27.1-4.5	39.0	27.1	4.5
WS421905	42.0	19.0	0.5
WS40-1.5	45.5	40.0	1.5

墊片 WASHER

用途：做為零件之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
WSA6-1.5	12.7	6.35	1.58	1000
WSA6-6.3			6.35	

用途：可配合螺絲使用之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




RECOMMENDED
MATING SCREW: M2

Part No.	A	B	C	D	Package
KWS2-05	4.8	2.5	0.5	1.8	2000
KWS2-08			0.8		
KWS2-10			1.0		
KWS2-15			1.5		
KWS2-20			2.0		
KWS2-25			2.5		



- Material: PE/LDPE
- Color: Natural/Blue/Green
- Unit: mm




RECOMMENDED
MATING SCREW: G

Part No.	A	B	C	D	G	Package
KWSP-2.5	5.0	2.7	1.0	2.0	M2.6	2000
KWSP-2.6	6.0	3.2	1.0	2.4	M3	
KWSP-9	18.0	10.5	1.5	8.7	M9	1000




- Material: Nylon 66 (UL)/LDPE
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Red
- Unit: mm




RECOMMENDED
MATING SCREW: M2.6

Part No.	A	B	C	D	Package
KWSP2-1	5.0	2.7	1.0	2.2	2000
KWSP2-1.1	6.5		1.1		
KWSP2-1.5	5.0		1.5		

用途：可配合螺絲使用之墊片。

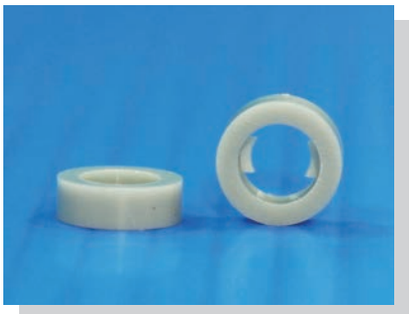

- Material: PE/Nylon 6(UL)
- Natural: 94HB
- Color: Natural/Gray
- Unit: mm




RECOMMENDED
MATING SCREW: M4

NEW

Part No.	A	B	C	D	Package
KWSP4-1.4	12.0	4.3	1.4	3.3	1000
KWSP4-2.3	7.0	4.3	2.3		



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




RECOMMENDED
MATING SCREW: M5

Part No.	A	B	C	D	Package
★KWSP5-1	10.0	5.3	1.0	4.1	1000
KWSP5-15	15.0	5.3	1.5	4.3	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




NEW

Part No.	Package
KWSP6-2	1000

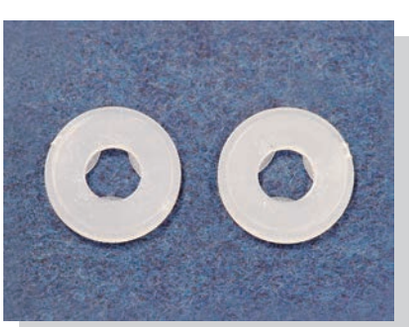


- Material:PE
- Color: Natural
- Unit: mm




Part No.	Package
KWS3-0.8	1000

螺絲墊片 SCREW WASHER

用途：可配合螺絲使用之墊片。

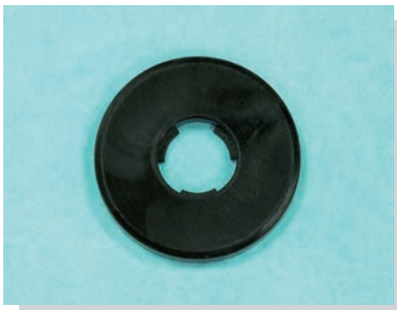

- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




RECOMMENDED
MATING SCREW: M6

Part No.	Package
KWS5-1.6	1000



- Material:PE
- Color: Natural
- Unit: mm



RECOMMENDED
MATING SCREW: M8


Part No.	Package
KWS8-1.6	1000

墊片 WASHER


用途：做為零件之墊片。



- Material: POM
- Color: Natural
- Unit: mm



Part No.	Package
WSH-1	1000




Part No.	Package
WSR9.1-8.6-1	1000

螺絲墊片 SCREW WASHER

用途：可配合M3螺絲使用之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural /Black/Orange
- Unit: mm



MATING SCREW: M3


Part No.	Package
KWA3-0.7	1000

螺絲墊片 SCREW WASHER


用途：可配合螺絲使用之墊片。




- Material:Nylon 6 (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm



Part No.	A	B	C	Package
KWS-2.6	4.8	2.2	0.5	2000
KWS-2.6-08			0.8	
KWS-2.6-1			1.0	
KYWS-3	8.0	2.5	0.5	

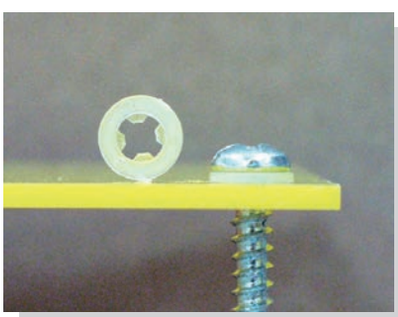


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




RECOMMENDED
MATING SCREW: G

Part No.	A	B	C	F	G	Package
KWS-3S	5.0	2.5	0.6	4.0	M3	2000
KWS-3	6.7	2.5	0.8	4.0	M3	
KWS-3-1.2	6.7	2.5	1.2	3.5	M3	
KWS-4	8.0	3.3	1.0	5.0	M4	
KWS-4.6	15.0	4.6	0.9	9.5	M4	
KWS-5	15.0	5.0	0.9	9.5	M5	
KWS-6	15.0	5.8	0.9	9.5	M6	
KWS-632	8.3	3.2	0.8	5.0	6-32 UNC	
KWS-632-1.6	8.35	3.15	1.64	9.46	6-32 UNC	

用途：可配合螺絲使用，墊片不脫落。

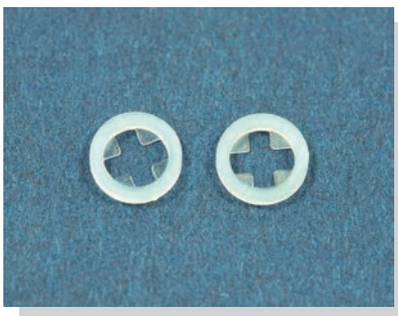



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



RECOMMENDED
MATING SCREW: G

Part No.	A	B	C	F	G	Package
KWS-2	5.15	1.8	0.8	3.6	M2	2000

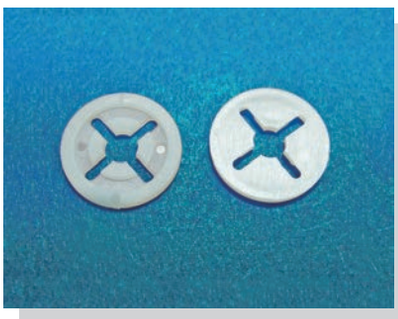




RECOMMENDED
MATING SCREW: G


Part No.	A	B	C	F	G	Package
KWS-3.6	12.5	3.6	1.05	9.5	M4	2000






RECOMMENDED
MATING SCREW: G

Part No.	A	B	C	F	G	Package
KWS-3.8	9.92	3.86	0.81	5.97	M4	2000
KWS-5S	11.45	4.6	0.85	7.1	M5	
★KWS-8	8.5	4.4	0.9	5.8		

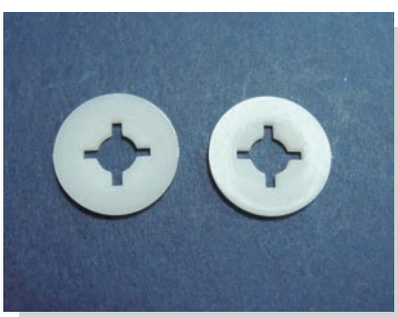




RECOMMENDED
MATING SCREW: G

Part No.	A	B	C	F	G	Package
KWS-6L	17.5	5.8	1.6	9.5	M5	2000






RECOMMENDED
MATING SCREW: G


Part No.	A	B	C	F	G	Package
KWS-6-1	18.0	5.6	1.6	9.5	M5	2000

華司 WASHER

用途：做為零件之墊片。

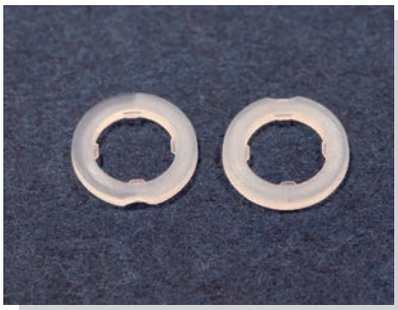


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
KWSA-5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
WSW8-3.4-0.5	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COCF-1	1000


用途：做為零件之墊片。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COCA3-0.6	1000



Part No.	Package
COCA4-0.6	1000

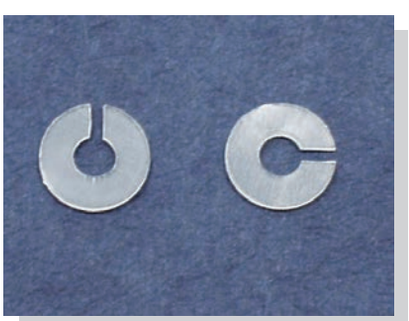


- Material: Nylon 66 (UL)/Nylon 6 (UL)/ PC (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	E	Package
COC2-0.5	4.0	2.3	0.5	1.0	2000
COC3-1	6.0	3.0	1.0	1.0	
COC5-4	8.0	5.0	4.0	2.5	1000




- Material: POM
- Color: Black
- Unit: mm



Part No.	Package
COCE-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COCA3.5-2.3	1000

華司 WASHER


用途：可配合螺絲使用之墊片。



- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm



- Material: PE
- Color: Black/Red
- Unit: mm



◆ **WSUA-2**


Part No.	A	B	C	D	Package
WSUA-1	9.1	5.4	1.8	7.7	2000
★WSUA-2	12.7	8.1	2.54	10.4	

螺絲墊片 SCREW WASHER

用途：可配合螺絲使用之墊片。



- Material: Nylon 6 (UL)/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



RECOMMENDED
MATING SCREW: G


Part No.	A	B	C	D	E	G	Package
WSUB-1	12.0	4.4	3.2	3.8	8.6	M4	1000
WSUB-4	22.0	6.4	4.5	5.2	13.0	M6	500

螺絲墊片 SCREW WASHER

用途：可配合M3.5螺絲使用之墊片。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
KWS4-4	1000

墊片 WASHERS

用途：做為零件之墊片。



- Material: Nylon 66(UL)/PE
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

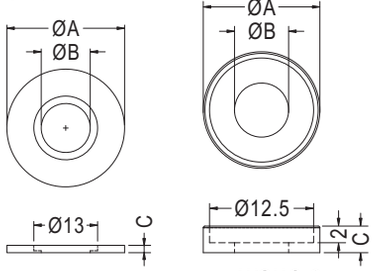

◆ **WSUC-2**


Part No.	A	B	C	Package
WSUC-1	24.0	10.0	1.5	1000
★WSUC-2	14.0	6.5	3.2	

華司 WASHER

用途：可配合螺絲使用之墊片。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
WSU-515	14.7	5.0	3.85	2000



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/White
- Unit: mm




Part No.	A	B	C	Package
WSU-1	28.0	8.0	4.5	1000

墊片 WASHER

用途：螺絲墊片耐熱性良好。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	Package
WSC-1	11.5	6.2	0.5	2.3	2000

墊片 WASHER

用途：做為零件之墊片。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	C	D	Package
WSG-1	12.1	1.5	3.5	2000

墊片 WASHER

用途：風扇螺絲墊片抗震性良好。




- Material: TPE
- Color: Black/Red
- Unit: mm




Part No.	A	B	C	Package
WSQ4-2	8.6	3.3	2.3	2000

墊片 WASHER

用途：用於電源插座接點間之絕緣。

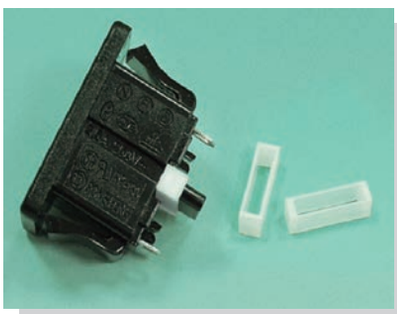

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SQCP-3.4	2000

零件墊座 PARTS HOUSING

用途：做為零件之蓋片。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
WPBT-1	1000

墊片 WASHER

用途：用於零件，如高瓦特數電阻接腳之墊高，避免熱氣積存於PC板上。

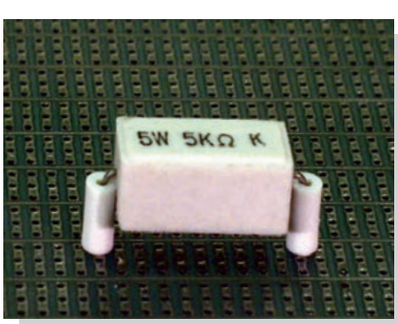


- Material: PBT (UL)/Nylon 6 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White
- Unit: mm




Part No.	A	B	C	Package
PW-1	4.0	1.4	4.2	2000
PW-1A	4.5	1.8	4.2	
PW-2	4.0	1.4	8.0	1000
PW-3	4.0	1.3	3.0	2000
PW-4	3.5	1.3	3.6	
PW-5	5.0	2.0	2.0	
PW-6	3.2	1.4	2.5	
PW-7	3.2	1.4	1.0	
PW-8	2.4	1.3	3.1	
PW-9	4.4	1.6	7.0	1000
PW-10	2.5	1.25	5.0	2000
PW-11	2.2	0.8	5.0	
PW-12	2.8	1.3	1.8	
PW-13	2.5	1.1	2.5	
PW-14	3.2	0.8	7.9	1000
PW-15	2.2	0.9	10.5	
PW-16	3.2	0.8	1.5	2000

陶瓷零件墊片 CERAMIC PARTS WASHER

用途：用於零件，如高瓦特數電阻接腳之墊高，避免熱氣積存於PC板上。

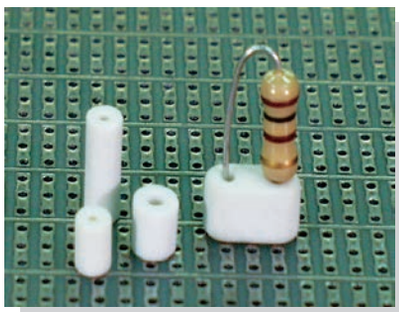

- Material: Ceramic
- Color: Natural/White
- Unit: mm




◆ CHS-6


Part No.	A	B	C	Package
CHS-1	3.8	1.0	4.5	2000
CHS-2			9.0	
CHS-3	4.5	1.8	3.0	
CHS-4			4.5	
CHS-5			9.0	
CHS-6	10.0	1.3	5.0	
CHS-7	2.6	0.9	6.9	
CHS-8	2.5	1.1	3.1	
CHS-9	4.1	1.9	15.4	
CHS-10			13.0	1000
CHS-18	4.0	1.6	15.0	
CHS-19	4.5	1.8	2.0	2000

電阻保護座 ELECTRIC RESISTANCE HOLDER


用途：用於電阻接腳之固定與保護。

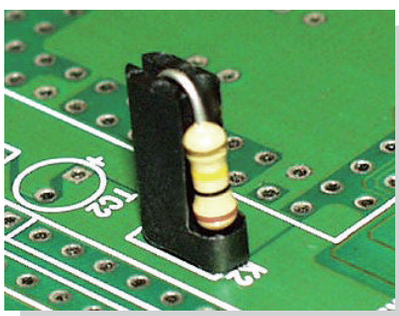

- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
RPCL-9	2000




Part No.	Package
RPCL-11	2000

零件墊座 PARTS HOUSING

用途：用於零件之墊高。

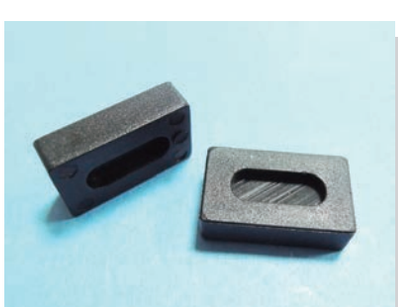


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
DVT-1	16.5	10.0	4.5	1000

跳線座 JUMPER HOUSING

用途：立於PC板上，將兩跳線做隔離與保護固定用。

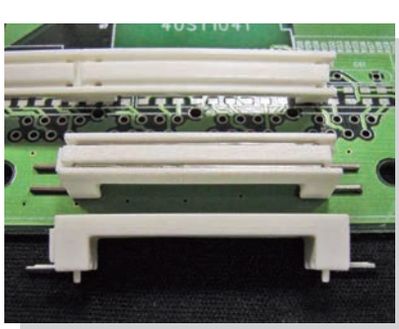


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

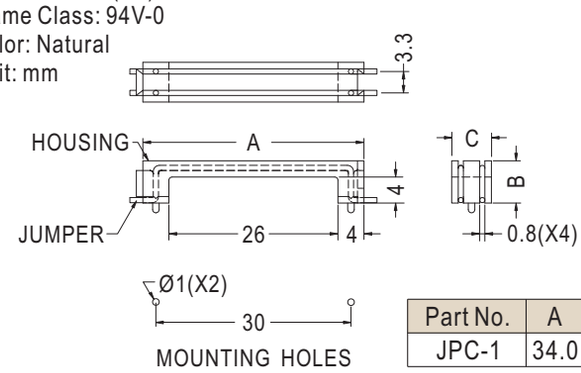


Part No.	A	B	C	Package
JPC-1	34.0	6.5	6.1	1000


零件墊座 PARTS HOUSING

用途：用於電感器絕緣並保護。

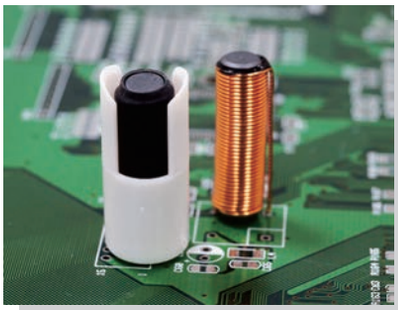


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 1.6




Part No.	Package
PHC-14	500

零件墊座 PARTS HOUSING

用途：用於零件之墊座。

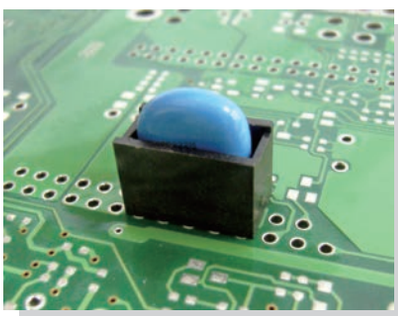


- Material: PPS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

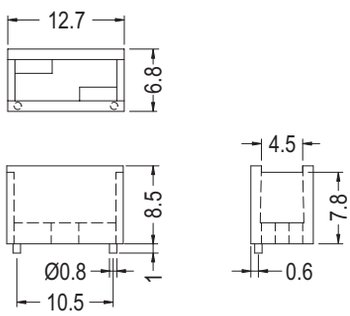


Part No.	Package
PH-26	1000

零件墊座 PARTS HOUSING

用途：用於零件接腳之墊高與保護。

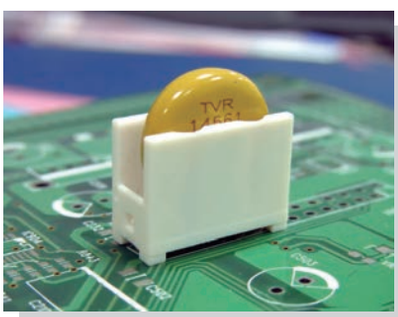


- Material: PBT (UL)/PPS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
PHC-2	7.5	13.1		500
PHC-11	7.2	14.5		
PHC-12	7.5	13.1	1.7	

零件墊座 PARTS HOUSING


用途：用於零件接腳之墊高與保護。

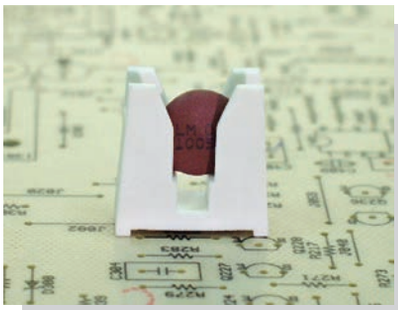


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	Package
PHC-1	9.5	20.0	500

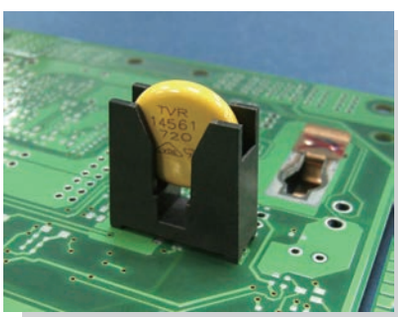


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	Package
PHC8NNHA	9.5	20.0	1000

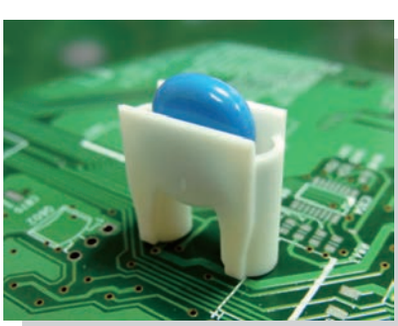


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
PHC-13	10.0	15.0	500

線圈座 PARTS HOUSING

用途：用於零件接腳之墊高與保護。

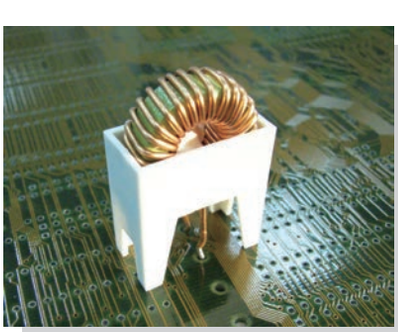


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

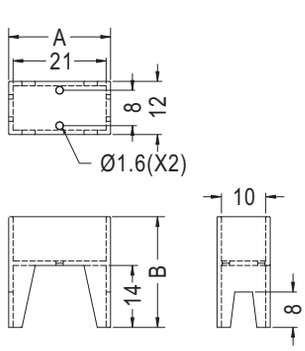


Part No.	A	B	Package
COILC-21	23.0	25.0	500


濾波器墊片ELECTRIC FILTER WASHER

用途：用於濾波器絕緣，立於PC板上，且高度一致增加可靠度。

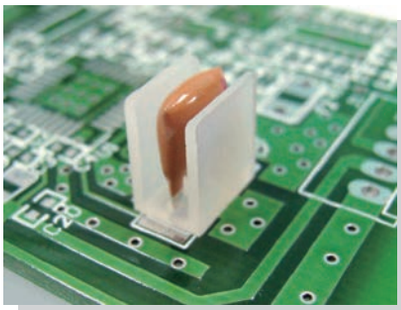

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES

Part No.	A	B	C	Package
QCL-3	7.0	8.3	5.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES


Part No.	Package
QCL-1	1000

電容器墊片 CAPACITOR WASHER


用途：用於電容器接腳保護。

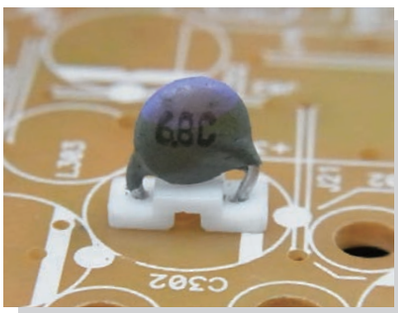


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	C	D	F	Package
CWT-11	2.0	4.8	3.4	2000

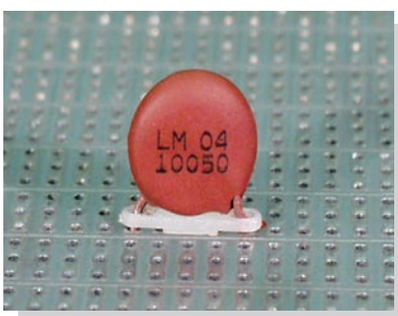


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	C	D	F	Package
CWT-5	1.5	5.08	3.2	2000
CWT-8	1.2	7.6	4.0	
CWT-10		10.1	5.0	

石英晶體墊片 CRYSTAL OSCILLATOR WASHER


用途：保護石英震盪晶體立於PC板上外殼不會與PC板短路，且高度一致增加可靠度。

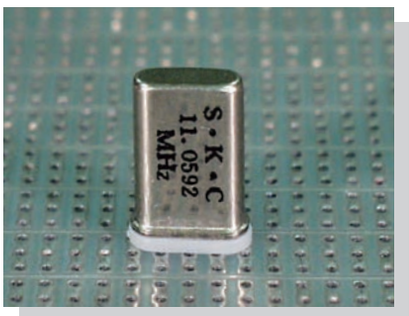


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
QW-1	10.6	4.3	1.0	2000
QW-5	10.6	4.3	0.5	




Part No.	A	B	C	Package
QW-3	11.2	5.0	1.0	2000




Part No.	A	B	C	Package
QW-6	7.8	3.0	1.0	2000




Part No.	A	B	C	Package
QW-8	12.8	5.1	0.8	2000

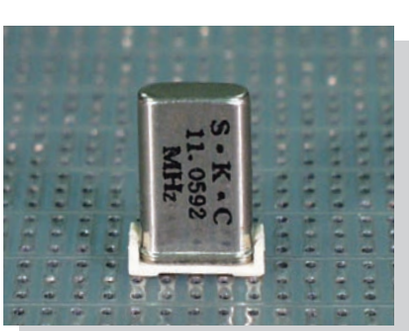


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
QW-2	11.8	4.6	2.4	2000




Part No.	A	B	C	Package
QW-7	6.0	4.0	1.1	2000




Part No.	A	B	C	Package
SWS311030	31.1	10.0	3.0	1000

石英晶體墊片 CRYSTAL OSCILLATOR WASHER


用途：保護石英震盪晶體立於PC板上外殼不會與PC板短路，且高度一致增加可靠度。

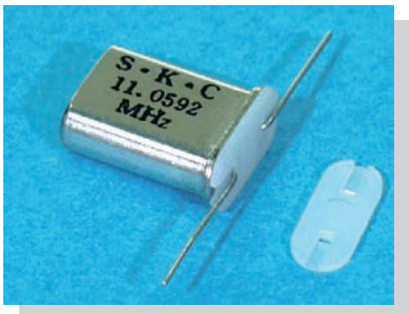


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
QW-4	11.0	4.5	0.7	2000

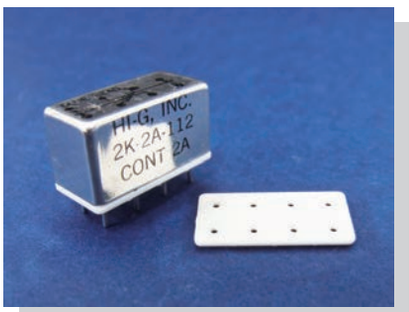

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	Package
PAD-1	20.2	10.0	1.25	500

電容器墊片 CAPACITOR WASHER

用途：用於電容器接腳保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	D	E	Package
CWL-15	17.8	3.7	15.5	12.4	1000
CWL-22	25.0	7.0	22.5	17.0	


電容器座 CAPACITOR HOUSING

用途：用於電容器接腳保護。

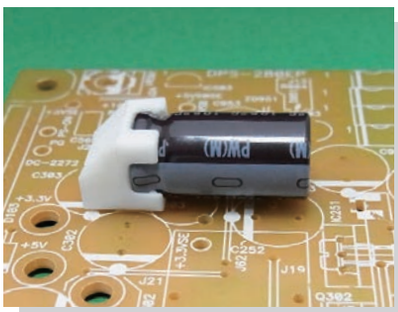


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)







MOUNTING HOLES

Part No.	A	B	C	Package
CAPH-10	10.0	10.0	7.5	1000

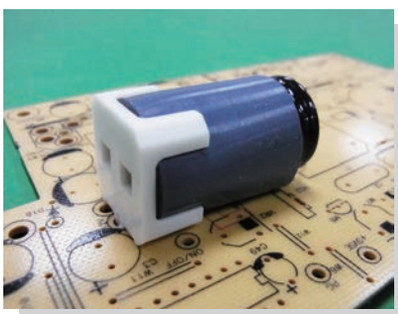






MOUNTING HOLE
THICKNESS 1.6

Part No.	A	B	C	Package
CAPI-18	18.0	18.5	10.0	500









MOUNTING HOLE
THICKNESS 1.6

Part No.	A	B	C	Package
CAPJ-18	18.0	18.5	10.0	1000

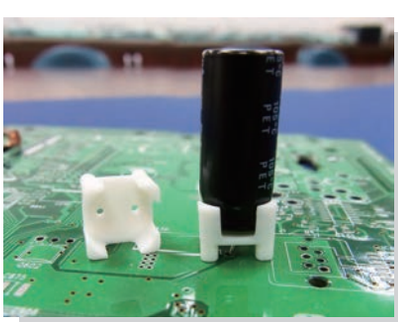




適用於Ø10的電容

Part No.	A	B	C	Package
CAPL-3.5	10.0	10.0	8.0	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRB-12	1000

防塵蓋 CONNECTOR COVER

用途：用於塑膠機殼螺絲孔之塞頭。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CAPX-6	2000

電容器固定座 CAPACITOR MOUNT

用途：固定電容器於機板上，維修方便，不佔空間。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CWCK-10	1000

電容器座 CAPACITOR HOUSING

用途：用於電容器接腳保護。

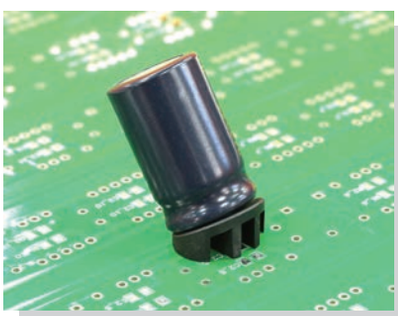


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

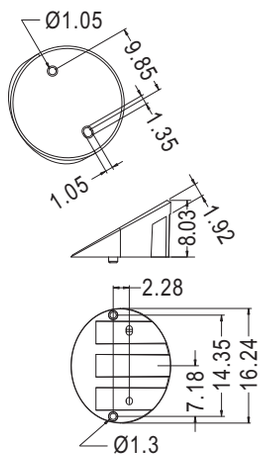

Part No.	Package
TRB-3	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TRB-4	1000


電容器座 CAPACITOR HOUSING

用途：用於電容器接腳保護，配合束線帶固定使用。




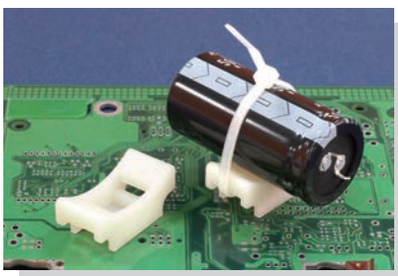


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

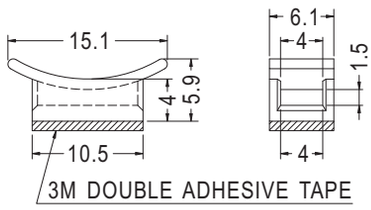


Part No.	Package
THMB-1	1000




Part No.	Package
THMB-2	1000



Part No.	Package
THMB-3	1000

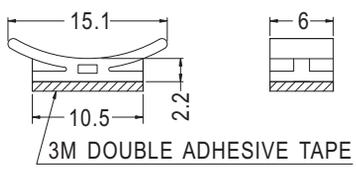

Part No.	Package
THMC-1	1000

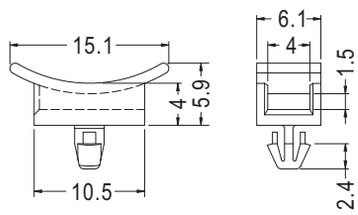


HOLE Ø3.0 THICKNESS 1.6


Part No.	Package
THMK-1	1000

電容器座 CAPACITOR HOUSING

用途：用於電容器固定。

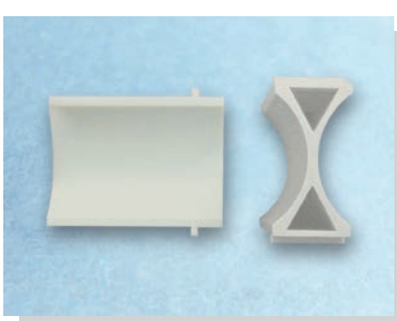

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Gray
- Unit: mm

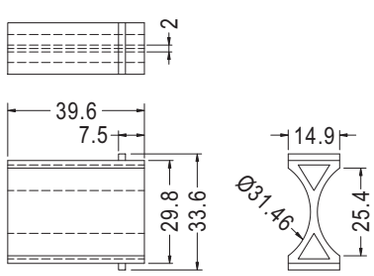


Part No.	Package
KYPC-40	250

電容器固定座 CAPACITOR MOUNT

用途：固定電容器於機板上，維修方便，不佔空間。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




WALL THICKNESS 1.7


Part No.	Package
WLLC-1	500

電容器座 CAPACITOR HOUSING


用途：配合束線固定用。

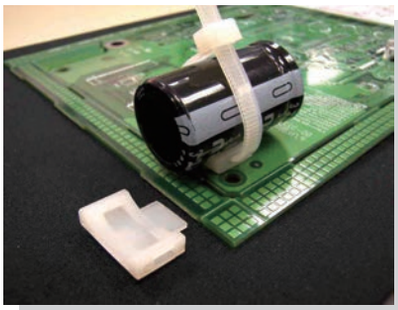


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

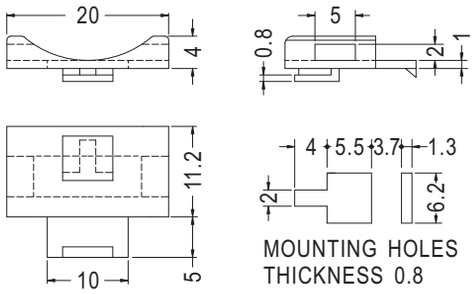

Part No.	Package
MTAC-1	500

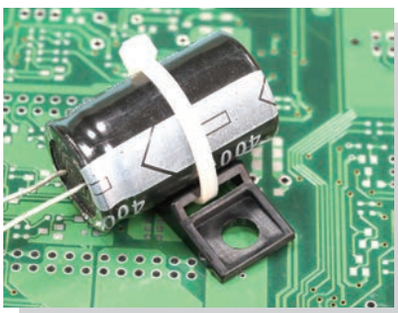

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

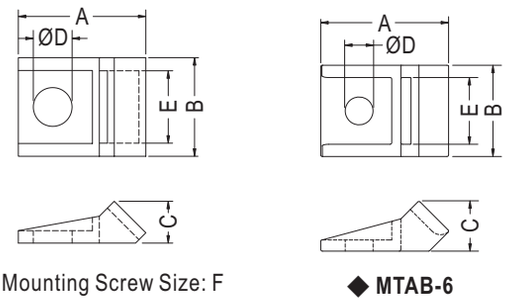


Part No.	A	B	C	D	E	F	Package
MTAB-5	17.4	13.5	5.7	5.3	10.1	#10	1000
★MTAB-6	23.0	16.4	9.04	5.2	12.0	M5	500
MTAB-10	27.4	21.4	10.3	8.4	16.7	5/16	

電容器座 CAPACITOR HOUSING

用途：用於電容器固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
DELT-20	100

電容器固定座 CAPACITOR MOUNT

用途：用於電容器固定。

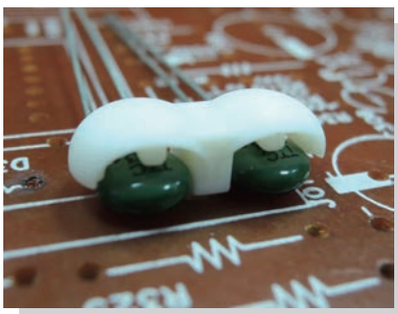

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

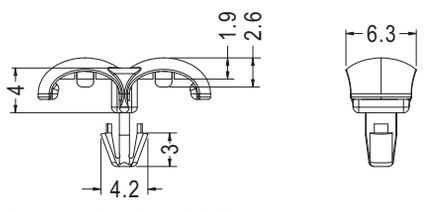


Part No.	Package
CLDK-1	1000

電容器座 CAPACITOR HOUSING

用途：用於電容器接腳保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
CWCD-2	27.3	13.9	25.6	6.9	3.5	500
CWCD-3	32.3	16.4	30.5			
CWCD-5	18.3	8.9	16.6		2.7	1000
CWCD-6	20.3		18.6			
★CWCD-7	12.3	6.4	10.6		2.5	

電容器墊片 CAPACITOR WASHER


用途：用於大電容器之墊座。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
CW-1	22.8	19.8	2.7	10.4	0.9	500
CW-10S	10.5		1.0	5.0		1000
CW-12	12.0		1.2	5.5		
CW-16	16.2	14.6	1.5	7.5	0.5	
CW-18	18.2	16.4				
CW-22	22.2	20.0		10.0		500
CW-25	25.7	23.0				
CW-25S			0.8			
CW-30	30.3	27.2	1.5		0.5	
CW-35	35.3	31.8				
CW-35L			2.0		1.0	




◆ CW-1



◆ CW-10S




◆ CW-12




◆ CW-25S



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
CW-2	1000




Part No.	Package
CW-3	1000


電容器墊片 CAPACITOR WASHER

用途：用於電容器接腳保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (P.A.T.)






Part No.	A	B	C	D	Package
CWCA-10	24.5	11.2	5.0	5.0	1000
CWCA-16	31.8	16.5	7.4	7.4	


電容器蓋 CAPACITOR COVER

用途：用於電容器之絕緣與保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

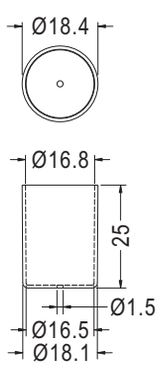



Part No.	Package
BCB-16	500


Part No.	Package
BCB-30	500

電容器帽套 CAPACITOR COVER

用途：用於大電容器之絕緣與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
★BCC-16S	16.5	17.5	1.5	12.4	20.0	500
BCC-16	16.7	18.2	1.75	13.7	10.2	
BCC-18	18.7	20.2		15.7		
BCC-22	22.0	23.4	1.05	18.0	8.0	2000
BCC-25	26.0	27.2	0.75	22.0		
★BCC-27	27.0	28.2	1.05	23.0	15.0	

陶瓷零件墊片 CERAMIC PAD


用途：用於零件之絕緣散熱，散熱性佳。

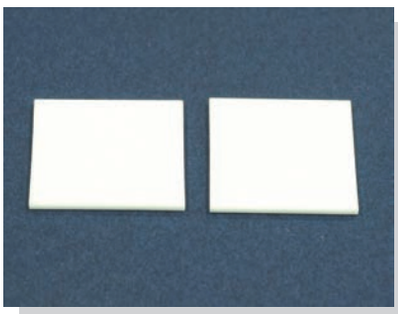


- Material: Ceramic
- Color: Natural
- Unit: mm



Part No.	Package
CHSA-1	100

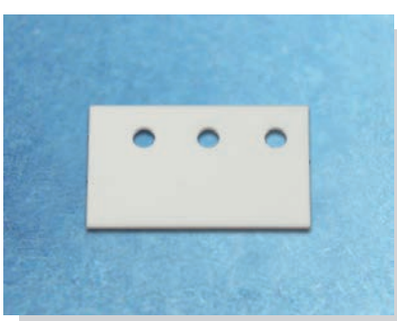

- Material: Ceramic
- Color: Natural
- Unit: mm




Part No.	A	B	C	D	E	F	G	H	Package
CHSA-2	37.7	22.0	32.0	20.5	9.5	6.0	1.55	3.7	50
CHSA-4	34.8	20.0	28.8	17.3	5.8	4.0	1.0	3.7	100
CHSA-5	42.0	20.0	33.8	20.2	6.0	4.0	1.0	3.7	50
CHSA-6	30.0	13.6		15.0		4.5	1.0	3.5	100
CHSA-7	16.0	21.0		8.0		5.9	2.5	3.5	

散熱陶瓷墊片 CERAMIC HEAT SINK

用途：用於零件之絕緣散熱，散熱性佳。




- Material: Ceramic
- Color: White
- Unit: mm




Part No.	A	B	D	F	G	H	Package
TO-3PAWO	15.0	21.9	7.5	6.0	1.6	3.5	200
TO-220AWO	13.7	19.0	6.85	5.0	2.0	3.8	100

矽膠片 SILICON INSULATOR

用途：鎖於功率晶體與散熱片之間導熱、絕緣性特佳。

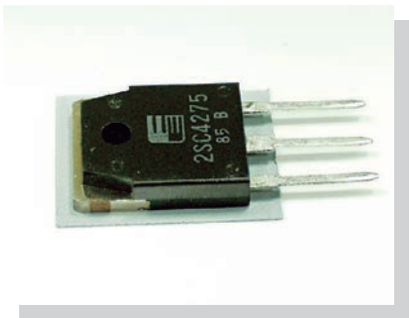


- Material: Silicon (UL)
- Flame Class: 94V-0/94HB
- Color: Gray
- Unit: mm



Part No.	A	B	D	Package
TO-3P	25.0	19.0	7.2	1000
TO-220	19.0	13.2	5.0	



- Material: Silicon (UL)
- Flame Class: 94V-0/94HB
- Color: Gray
- Unit: mm



Part No.	A	B	C	Package
TO-3	43.5	31.0	0.3	1000


CPU散熱矽膠片 CPU THERMAL TRANSFER SILICON PAD

用途：CPU或手提電腦散熱用，可用背膠 (單面或雙面)，尺寸可依客戶要求。

Different size available per request.




- Material: Silicon (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm
- Thickness:0.5~4.0mm




Part No.	A	B	C
CPU140920A	14.0	9.0	2.0

矽膠帽套 SILICON INSULATOR COVER

用途：固定於功率晶體與散熱片之間，絕緣性特佳。

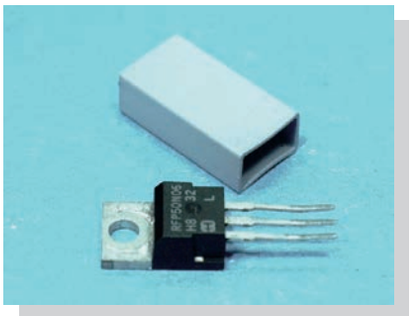


- Material: Silicon (UL)
- Flame Class: 94V-0/94HB
- Color: Gray
- Unit: mm

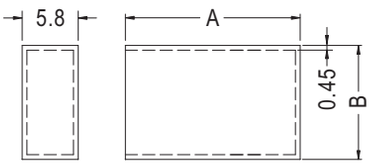

Part No.	A	B	Package
TO-3PCV	28.5	17.5	1000
TO-3PCV-C	25.0		
TO-220CV	21.7	11.5	



- Material: Silicon (UL)
- Flame Class: 94V-0/94HB
- Color: Gray
- Unit: mm




Part No.	A	B	C	T	Package
SRT-111758	16.0	11.4	5.5	0.45	1000
SRT-182864	28.5	18.0	6.4	0.75	
SRT-203464	35.0	20.0	6.4	0.75	

矽膠帽套 SILICON INSULATOR COVER

用途：用於大電解電容之外殼絕緣絕緣性特佳。




- Material: Silicon (UL)
- Flame Class: 94V-0/94HB
- Color: Gray
- Unit: mm




Part No.	D	L	Package
SCT-0726	7.8	26.0	500
SCT-1615	16.7	15.0	
SCT-1825	18.5	25.0	

矽膠帽套 SILICON INSULATOR TUBE

用途：固定於功率晶體與散熱片之間，絕緣性特佳。

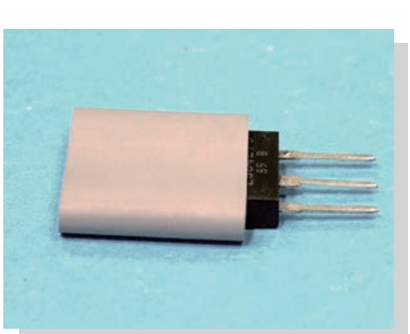

- Material: Silicon (UL)
- Flame Class: 94V-0/94HB
- Color: Gray
- Unit: mm

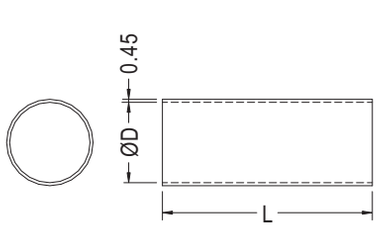

(OPTION)


Part No.	D
SRT6	6.0
SRT8	8.0
SRT10	10.0
SRT12	12.0
SRT14	14.0
SRT16	16.0
SRT18	18.0
SRT20	20.0

保險絲蓋 FUSE COVER

用途：用於保險絲之絕緣與防塵。




- Material: Soft P.V.C
- Color: Blue/Black
- Unit: mm




◆ 如需UL認可材質，請在料號尾碼加UL下單.
◆ Please add UL after Part Number for UL purpose.

Part No.	A	B	C	D	T	Package
FH-1	20.0	6.0	11.0	1.0	1.2	1000
FH-1L	22.0	6.0	11.0	1.0	1.5	
FH-1S	18.0	5.3	9.0	1.0	1.0	
FH-3A	31.8	9.1	12.0	1.5	1.2	
FH-3	31.8	9.5	13.0	1.5	1.3	
FH-4UL	41.0	12.8	19.0	2.0	1.2	
FHC-5	19.0	3.3	10.0	1.0	1.2	

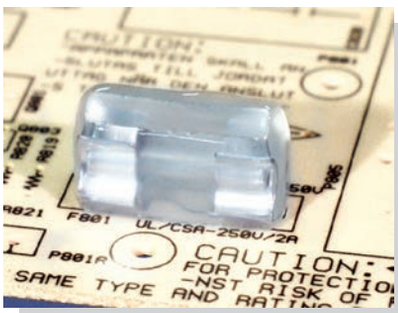


- Material: Soft P.V.C
- Color: Natural
- Unit: mm




Part No.	A	B	C	D	Package
FUSE-1	20.0	6.0	11.0	1.0	1000
FUSE-2	31.8	9.5	13.0	1.5	500
FUSE-3	36.1	8.1	9.9	1.0	1000

保險絲蓋 FUSE COVER

用途：用於 SMT 保險絲蓋之防塵與保護。

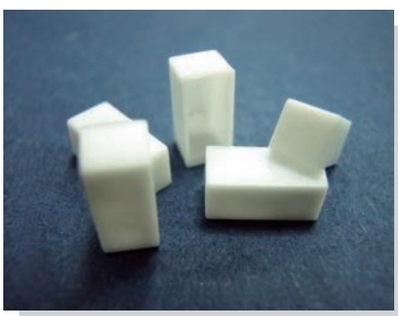

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FUSEA-1	1000

保險絲蓋 FUSE COVER

用途：用於保險絲之絕緣與防塵。



- Material: Soft P.V.C
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
FH-13	12.2	4.7	9.0	1000

電容器護套 CAPACITOR COVER

用途：用於電容器之絕緣與防塵。




- Material: Soft P.V.C
- Color: Natural
- Unit: mm




◆ 如需UL認可材質，請在料號尾碼加UL下單.
◆ Please add UL after Part Number for UL purpose.

Part No.	A	B	C	D	E	Package
HU-8	8.5	7.5	10.0	3.0	3.0	1000
HU-10	10.5	9.0	12.3	3.0	4.0	
HU-12	12.0	10.0	15.0	3.8	4.8	

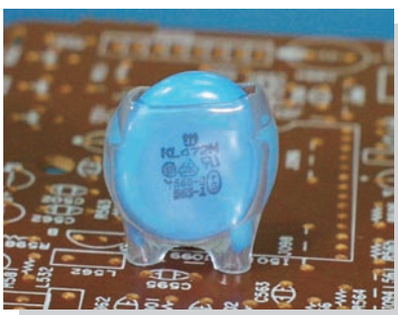

- Material: Soft P.V.C
- Color: Natural
- Unit: mm

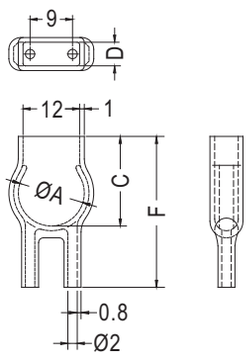

◆ 如需UL認可材質，請在料號尾碼加UL下單.
◆ Please add UL after Part Number for UL purpose.


Part No.	A	C	D	F	Package
HU-14	14.0	16.0	4.0	22.0	1000
HU-16	16.0	19.0	5.0	32.0	

保險絲蓋 FUSE COVER

用途：用於連接器之絕緣與防塵。



- Material: Soft P.V.C
- Color: Blue
- Unit: mm




Part No.	A	B	C	Package
FH-17	16.2	10.6	12.7	1000

末端套管 VCP CAP


用途：用於連接器之絕緣與防塵。



- Material: Soft P.V.C
- Color: Black
- Unit: mm

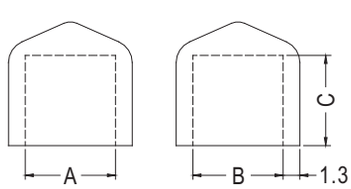

Part No.	A	B	C	Package
VC0707008	7.0	7.0	8.0	1000

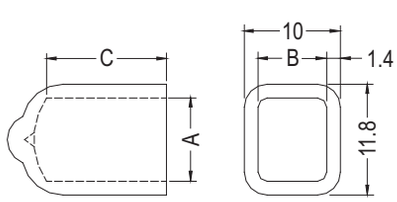


Part No.	A	B	C	Package
VC907413	9.0	7.2	12.8	500

末端套管 VCP CAP

用途：特殊管末端切開時之保護套及各種電線，電纜運送途中防濕防塵用。



- Material: Soft P.V.C
- Color: Natural/Red/Black/Yellow/ Green/Blue/White
- Unit: mm



Part No.	A	C	T	Package
VCP02012	2.0	12.0	0.8	2000
VCP02607	2.6	7.0		
VCP02608		8.0		
VCP02609		9.0		
VCP02655		5.5		
VCP03206	3.2	6.0		
VCP03210		10.0		
VCP03213		13.0		
VCP04006	4.0	6.0		1000
VCP04008		8.0		
VCP04809	4.8	9.0	1.0	
VCP04813		13.0	0.8	
VCP05708	5.7	8.0	1.0	
VCP05710		10.0		
VCP05713		13.0		
VCP06008	6.0	8.0		
VCP06012		12.0		


Part No.	A	C	T	Package
VCP06513	6.5	13.0	1.0	1000
VCP07013	7.0			
VCP07020		20.0		
VCP07608	7.6	8.0		
VCP07613		13.0		
VCP08008	8.0	8.0		
VCP08010		10.0		
VCP08509	8.5	9.0		
VCP08515		15.0		
VCP09516	9.5	16.0		
VCP10020	10.0	20.0	1.2	
VCP11420	11.4			
VCP12016	12.0	16.0		500
VCP14035	14.0	35.0		
VCP15014	15.0	14.0		
VCP17813	17.8	13.0		
VCP22016	22.0	16.0		200

軟質端子保護套 TERMINAL SOFT SLEEVES

用途：用於端子壓著後端子與外界間之絕緣，可作為線材之分色標記，安全美觀。



- Material: Soft P.V.C
- Color: Red/White/Black/Blue/ Yellow/Green
- Unit: mm

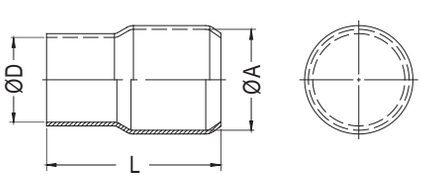


Part No.	Wire mm²	A	D	L	Package
V-1.25	1.25	3.3	3.1	15.0	100
V-2	2.0	4.5	3.7	16.0	
V-3.5	3.5	5.7	4.1	18.0	
V-5.5	5.5	5.7	5.2	20.0	
V-8	8.0	7.2	6.2	21.0	
V-14	14.0	10.0	8.0	28.0	
V-22	22.0	12.0	9.5	29.0	
V-38	38.0	14.0	11.8	34.0	
V-60	60.0	17.0	13.9	42.0	
V-70	70.0	17.9	15.1	45.0	
V-80	80.0	19.5	16.0	46.0	50
V-100	100.0	22.0	18.0	55.0	
V-125	125.0	24.4	20.0	60.0	
V-150	150.0	26.0	22.0	65.0	
V-185	185.0	29.0	24.0	66.7	
V-200	200.0	32.2	24.0	69.0	
V-250	250.0	37.5	26.5	75.0	
V-325	325.0	37.5	30.0	75.0	25
V-400	400.0	45.1	37.5	83.0	
V-500	500.0	48.2	40.2	85.0	
V-630	630.0	53.8	45.2	93.0	

末端套管 VCP CAP

用途：特殊管末端切開時之保護套，及各種電線，電纜運送途中防濕防塵用。



- Material: TPE (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	A	B	C	Package
★KSK040130	4.0	5.5	13.0	1000
KSK070105	7.0	11.0	10.5	
KSK070130		9.8	13.0	
★KSK070180			18.0	

軟質端子保護套 TERMINAL SOFT SLEEVES

用途：用於端子壓著後端子與外界間之絕緣。



- Material: Soft P.V.C
- Color: Natural/Blue
- Unit: mm


◆如需UL認可材質，請在料號尾碼加UL下單.
◆ Please add UL after Part Number for UL purpose.

SERIES-110					
Part No.	W	D	L	Wire Size(O.D)	Package
S4020	4.0	2.0	22.0	2.0	1000
S4025		2.5		2.5	
S4028		2.8		2.8	
S4030		3.0		3.0	
S4035		3.5			

SERIES-187					
Part No.	W	D	L	Wire Size(O.D)	Package
S5825	5.8	2.5	22.0	2.5	1000
S5830		3.0		3.0	
S5835		3.5		3.5	
S5840		4.0			

SERIES-205					
Part No.	W	D	L	Wire Size(O.D)	Package
S6525	6.5	2.5	24.0	2.5	1000
S6530		3.0		3.0	
S6530/37			37.0		
S6535		3.5	24.0	3.5	
S6540		4.0		4.0	


SERIES-250					
Part No.	W	D	L	Wire Size(O.D)	Package
S8030	7.8	3.0	26.0	3.0	1000
S8035		3.5	27.0	3.5	
S8040	8.0	4.0		4.0	
S8045		4.5		4.5	
S8050	7.8	5.0		5.0	
S9535	9.5	3.5	26.0	3.5	

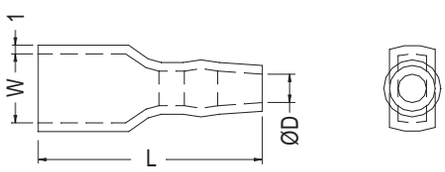

FLAT INSULATING SLEEVES




- Material: Soft P.V.C
- Color: Natural/Blue
- Unit: mm

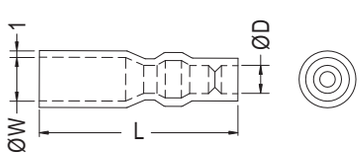


Part No.	W	D	L	Package
R4028/38	5.0	2.8	32.0	1000
R5025		2.5	33.0	
R5028		2.8		
R5030		3.1		
R5035	5.2	3.5		
R5040	5.5	4.0		

PC端子保護套 TERMINAL HOUSING


用途：用於電池端子之絕緣與保護。

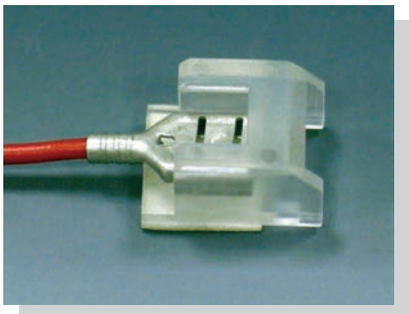

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

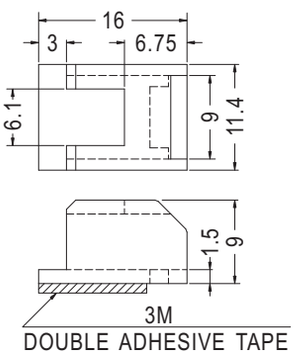

Part No.	Package
PCTT-1	1000

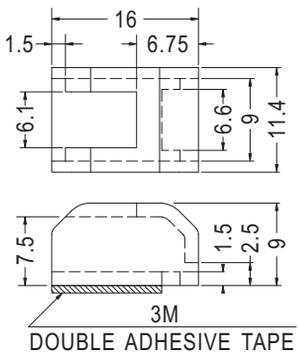


Part No.	Package
PCTT-2	1000

軟質端子保護套 TERMINAL SOFT SLEEVES

用途：用於端子壓著後端子與外界間之絕緣。



- Material: Soft P.V.C
- Color: Natural
- Unit: mm

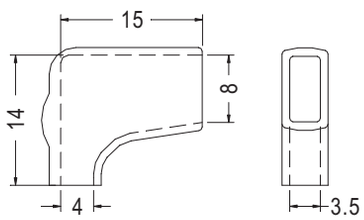

WIRE SIZE(O.D) Ø4.0


Part No.	Package
F8040	1000

PC端子保護套 TERMINAL HOUSING

用途：用於電池端子之絕緣與保護。




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm



Part No.	Package
PCTT-3	1000



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm

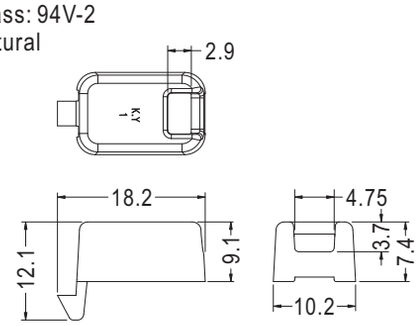


Part No.	Package
CVER-1	1000

保護蓋 INSULATED CAP


用途：用於HUB掛載孔之防塵與絕緣。




- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	A	B	C	Package
SCD-1	24.0	15.0	2.0	1000
SCD-2	31.5	18.0	2.4	
SCD-3	32.0	22.0	2.2	500
SCD-4	37.0	22.0	2.5	
SCD-8	26.0	18.6	2.3	2000
SCD-13	55.0	40.0	3.5	500
SCD-14	32.0	22.4	3.7	1000

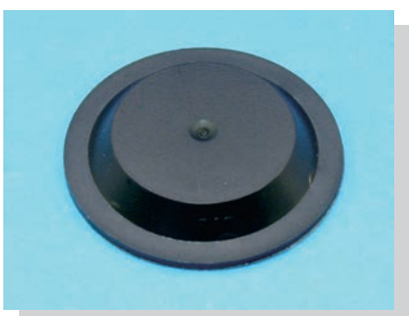


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
SCD-6	24.0	15.8	3.25	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm





Part No.	A	B	C	D	Package
SCD-5	33.3	26.2	2.5	19.0	1000


Part No.	A	B	C	D	Package
SCD-7	51.7	39.23	3.0	28.0	2000

保護蓋 INSULATED CAP

用途：用於維修用孔之防塵與絕緣可用螺絲固定。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	D	Package
SCD-9	38.1	29.5	4.81	38.1	2000

保護蓋 INSULATED CAP

用途：用於HUB掛載孔之防塵與絕緣。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	A	B	C	D	Package
SCD-10	43.0	24.6	4.0	24.0	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	C	D	Package
SCD-12	33.9	24.4	3.0	19.0	2000

保護蓋 INSULATED CAP

用途：用於機器之可調電阻，灌膠之保護，可配合MHD系列使用。

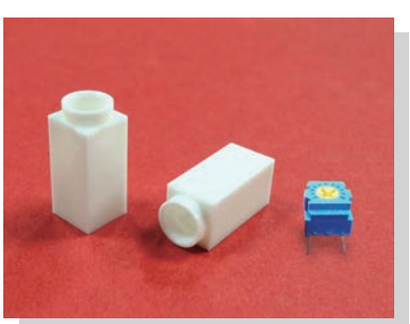


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	Package
VRCVA-18	8.95	8.95	20.5	6.9	100
VRCVA-21.4			23.9		
VRCVA-27.5			30.0		
VRCVA-33	8.9	8.6	35.5	6.6	

開關蓋 TACT SWITCH CAP

用途：用於開關之加長與保護。

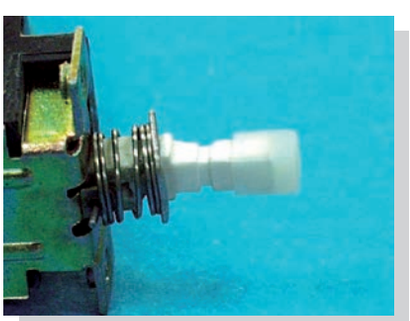


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
SWC-1	5.6	2000
SWC-2	4.7	

開關蓋 TACT SWITCH CAP


用途：用於TACT開關之帽蓋。

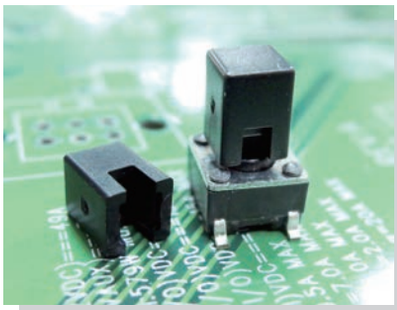

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
TSC-1	1000




Part No.	A	Package
TSC-2	3.3	2000
TSC-2A	4.0	

開關蓋 SWITCH COVER

用途：用於開關之帽蓋。

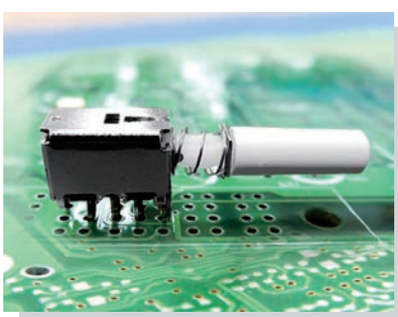


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: White
- Unit: mm

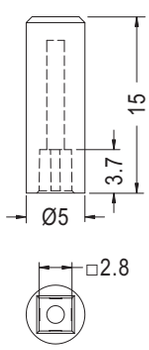

Part No.	Package
TSC-22	1000



- Material: PC +ABS(UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

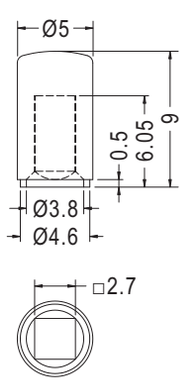


Part No.	Package
TSC-23	1000

用途：用於TACT開關之帽蓋。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	Package
TSC-8	6.0	2.5	2.45	1000
TSC-46	8.0	2.8		




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm






Part No.	A	B	C	Package
TSC-10	7.0	3.0	3.25	1000

Part No.	A	C	Package
TSC-11	7.0	3.3	1000

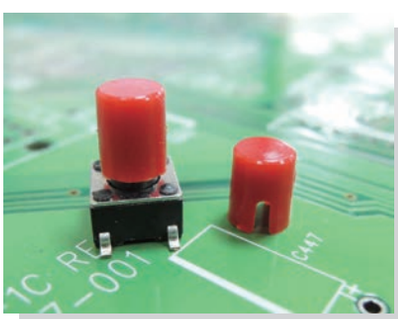


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Red/Gray
- Unit: mm




Part No.	Package
TSC-19	1000

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black/White
- Unit: mm



Part No.	Package
TSC-33	1000




Part No.	Package
TSC-32	1000

用途：將TACT開關固定於機板上。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
TSC-40	1000


- Material: ABS
- Color: White
- Unit: mm



Part No.	Package
TSC-45	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	Package
TSC-26	12.0	3.0	1000



- Material: Nylon 66 (UL)/ABS (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
TSC-4	12.7	3.0	2.0	1000
TSC-5		4.2	3.0	
TSC-25	11.6	3.0	2.0	




Part No.	A	C	Package
TSC-6	9.9	2.7	1000


端子蓋 CONNECTOR COVER

用途：用於端子之絕緣。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
TSC-28	1000


測試針遮蓋 TEST PIN CAP

用途：把多餘 PIN 腳遮蓋，避免刺傷工作人員。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
TSC-42	1000


開關蓋 SWITCH COVER

用途：用於TACT開關之帽蓋。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
PENCOMC-1	1000


開關蓋 SWITCH COVER

用途：用於開關之按鍵。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
TSC-20	1000


開關蓋 SWITCH COVER

用途：用於開關之帽蓋。



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black/Gray
- Unit: mm






Part No.	Package
TSC-9	1000

開關蓋 TACT SWITCH CAP


用途：用於TACT開關之帽蓋。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	A	B	C	D	Package
TSC-3	12.0	3.8	12.0	3.1	1000
TSC-18	9.0		9.0	2.8	

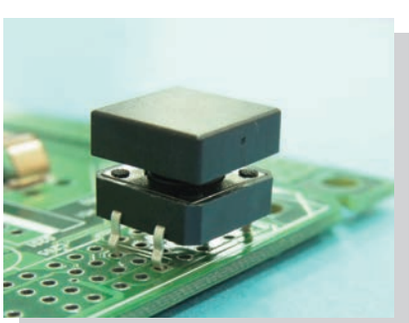


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
TSC-36	1000


開關蓋 SWITCH COVER

用途：用於開關之帽蓋。

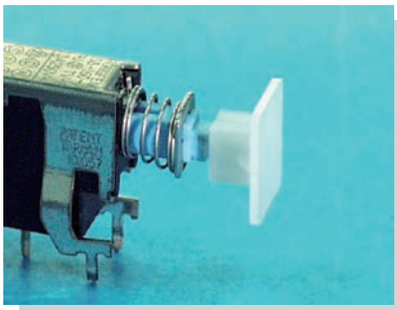


- Material: Nylon 66 (UL)/PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm





Part No.	Package
SWCL-7	1000




Part No.	Package
SWCL-10	1000

LED 按鍵蓋 LED PUSHBUTTON CAP

用途：用於LED按鍵蓋。




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm




Part No.	Package
LEM-72	1000


開關蓋 TACT SWITCH CAP

用途：防止TACT開關之誤觸。

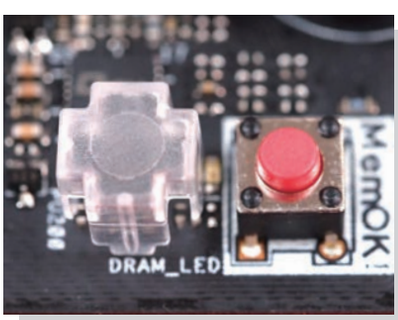

- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm






Part No.	Package
TSC-38	1000

開關蓋 SWITCH COVER

用途：用於電源插座防塵與保護。




- Material: PC
- Color: Transparent
- Unit: mm




Part No.	Package
ABSC-2318	1000

用途：將TACT開關固定於機板上。

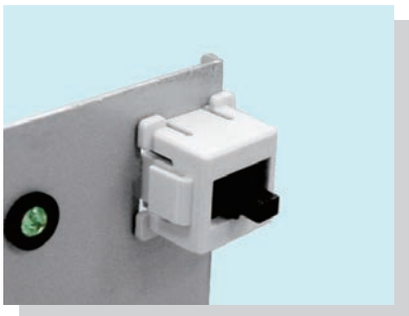


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm

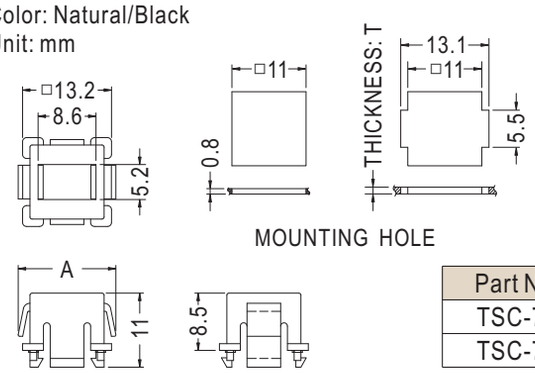


Part No.	A	T	Package
TSC-7	14.5	1.0	1000
TSC-7L	14.3	1.4	

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/Computer
- Unit: mm

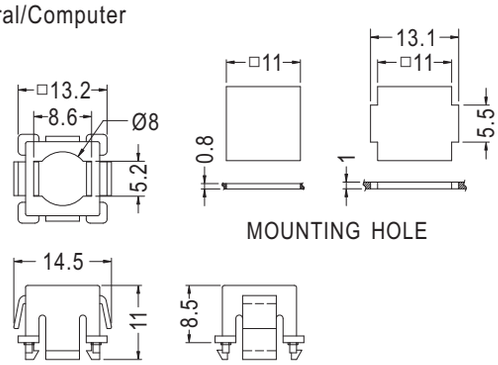


Part No.	Package
TSC-7T	1000


- Material: ABS (UL)
- Flame Class: 94HB/94V-0
- Color: Natural/Black/Computer
- Unit: mm




Part No.	Package
TSC-7Y	1000

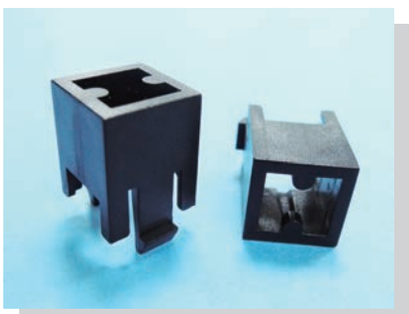


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
TSC-24	1000

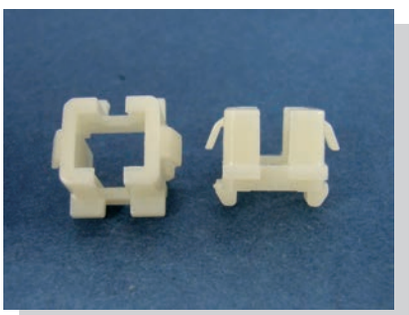


- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

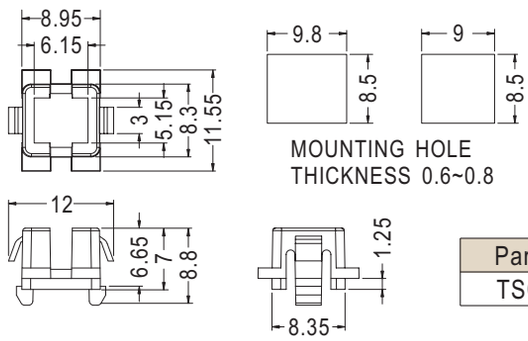


Part No.	Package
TSC-27	1000

用途：用於麥克風之帽套，防止共振。

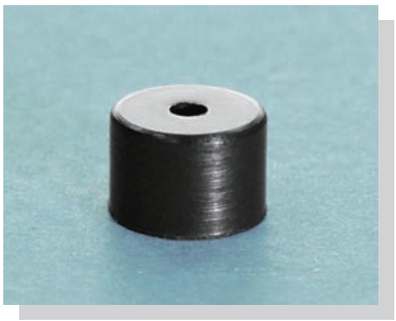


- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm



Part No.	A	B	C	D	E	Package
MIC-1	12.0	8.6	7.0	9.5	3.0	1000
MIC-1A	12.5	9.0				
MIC-4	8.0	6.0	5.0	5.8		2000
MIC-9	7.1	3.3	2.5	6.0	4.0	
MIC-32		4.7	4.0			
MIC-36	10.5	6.8	6.0	10.0		1000
MIC-38	25.1	12.0	10.9	22.8	16.1	




- Material: NBR
- Color: Black
- Unit: mm



Part No.	A	B	C	D	Package
MIC-3	10.8	9.2	7.0	7.5	1000




- Material: NBR/Silicon Rubber(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



Part No.	A	B	C	D	E	Package
MIC-5	8.0	4.0	3.0	6.0	2.8	2000
★TF-1556	8.6	6.8	6.5	8.0	5.6	




- Material: Rubber
- Color: Black
- Unit: mm



Part No.	A	B	C	D	E	Package
MIC-6	6.5	3.2	2.6	5.8	4.1	2000



- Material: Silicon Rubber
- Color: Black
- Unit: mm

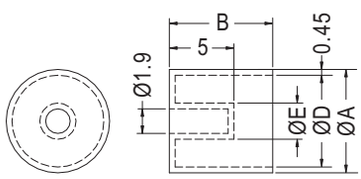


Part No.	A	B	D	E	Package
MIC-10	8.0	8.0	7.1	2.9	2000

用途：用於零件之保護，防塵美觀。




- Material: Silicon Rubber(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

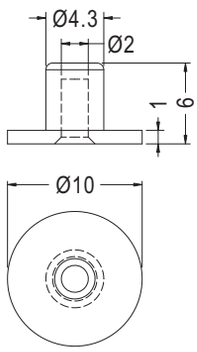


Part No.	Package
TF-1198	1000




- Material: Silicon Rubber
- Color: Black
- Unit: mm



Part No.	Package
TF-1639	1000

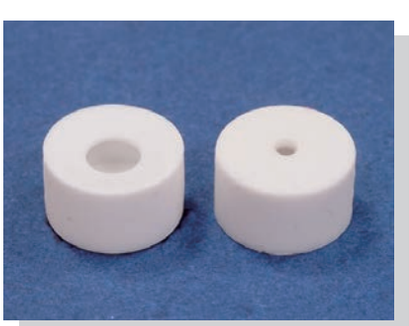


- Material: Silicon Rubber
- Color: White
- Unit: mm

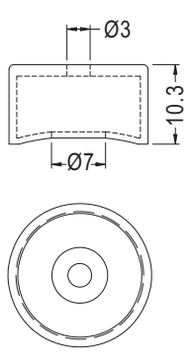

Part No.	Package
TF-1575	1000




- Material: Silicon Rubber
- Color: Black
- Unit: mm

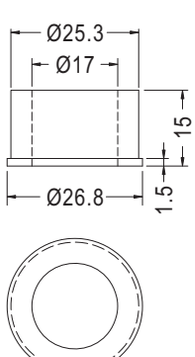


Part No.	Package
MIC-39	1000

耳機護座 MIC HOLDER

用途：用於IP PHONE話筒麥克風座，可降低雜音、噪音。

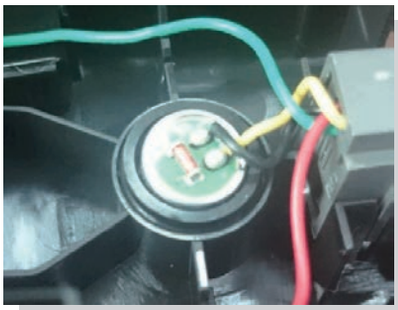


- Material:PE
- Color: Black
- Unit: mm

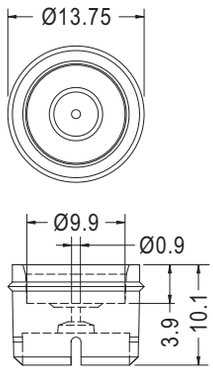


Part No.	Package
MIC-31	1000


開關蓋 TACT SWITCH CAP

用途：開關之絕緣。

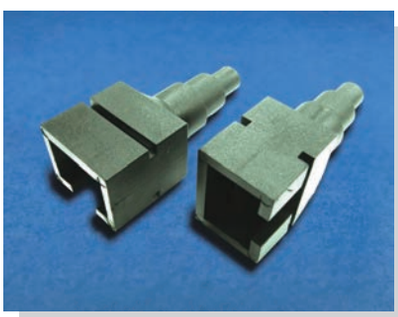

- Material:PE
- Color: Black
- Unit: mm



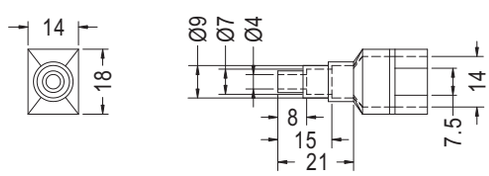


Part No.	Package
EM-19	500

絕緣蓋 INSULATOR COVER


用途：用於波段開關旋扭。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

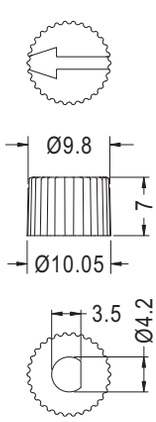

Part No.	Package
EMAC-463	1000

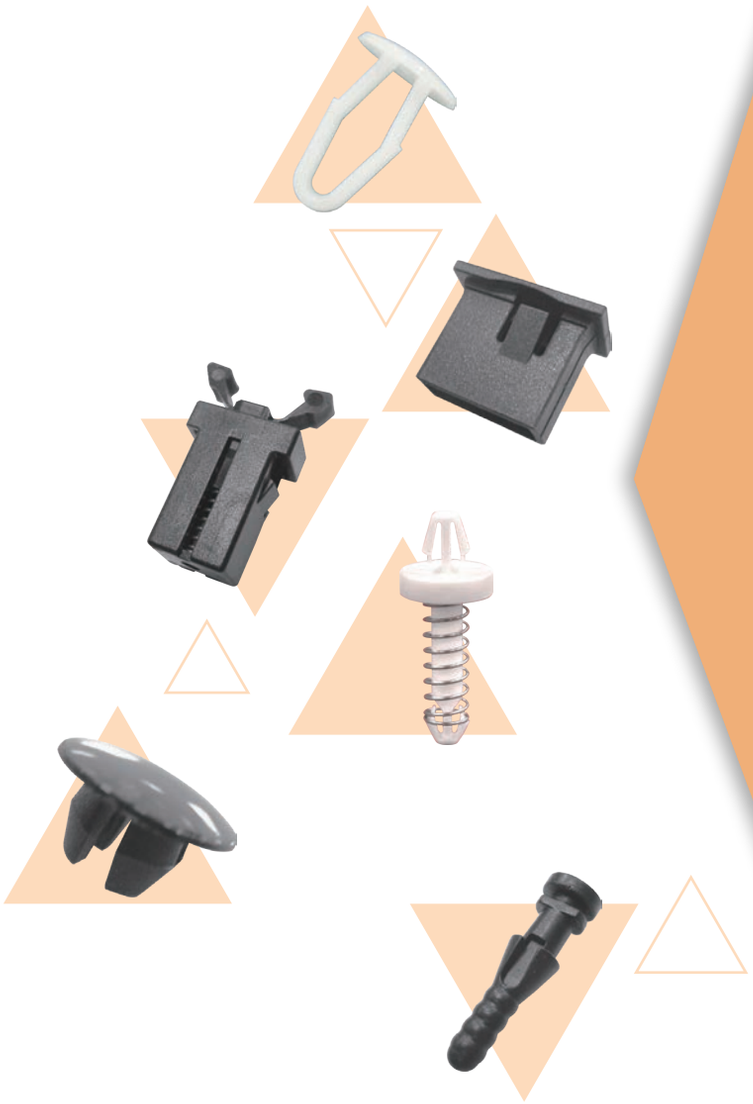

7


- ▶ USB護蓋
  USB Housing
- ▶ 防塵蓋
  Connector Cover
- ▶ 鉚釘
  Snap Rivet
- ▶ 門扣
  Door Lock
- ▶ 螺絲固定座
  Plastic Conical Anchors

USB座護蓋 USB HOUSING

用途：用於USB接頭防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

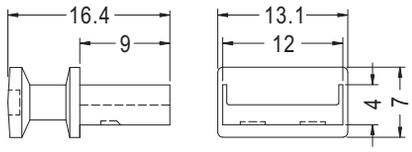

Part No.	Package
USBC-2	1000




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

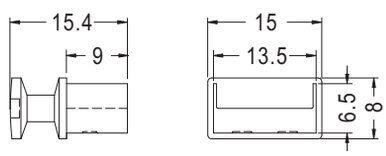


Part No.	Package
USBC-6	1000



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

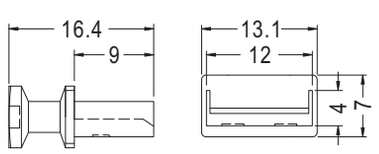




Part No.	Package
USBC-24	1000

Part No.	Package
USBC-37	1000




- Material: PP (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm

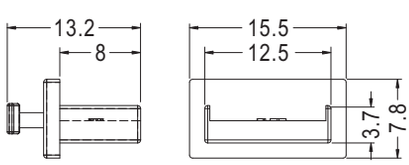

Part No.	Package
USBC-33	1000



- Material: PP
- Color: Black
- Unit: mm




Part No.	Package
USBC-14	1000

USB座護蓋 USB HOUSING

用途：用於USB接頭防塵與保護。




- Material: PP
- Color: Black/Computer
- Unit: mm



Part No.	Package
USBC-4	1000



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/Black
- Unit: mm

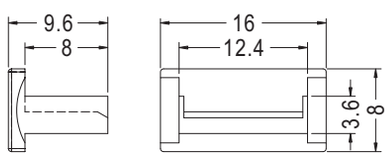


Part No.	Package
USBC-11	1000

USB座護蓋 USB HOUSING

用途：用於重要的USB接頭之堵塞，避免重要資料洩漏。拔卸困難，兼具防塵與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

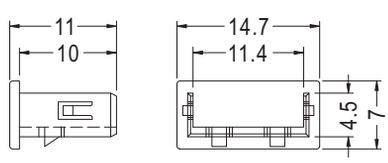

Part No.	Package
USBC-8	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

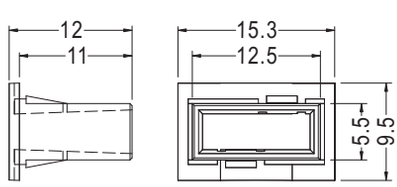


Part No.	Package
USBC-7	1000

USB座護蓋 USB HOUSING

用途：用於USB接頭防塵及保護。



- Material: PP
- Color: Black
- Unit: mm

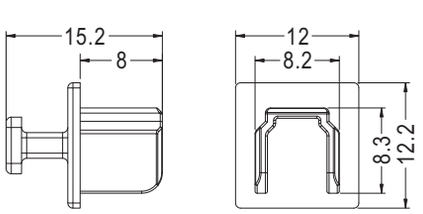


Part No.	Package
USBC-34	1000

USB座護蓋 USB HOUSING

用途：用於USB接頭防塵及保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

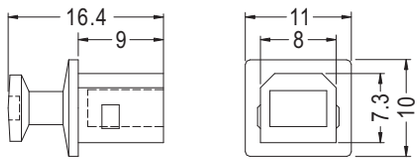

Part No.	Package
USBC-1	1000



- Material: PP
- Color: Black/Computer
- Unit: mm

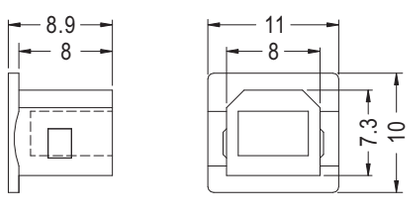


Part No.	Package
USBC-3	1000

MICRO USB防塵蓋 MICRO USB CONNECTOR COVER

用途：用於MICRO USB接頭防塵與保護。




- Material: TPE
- Color: Black
- Unit: mm

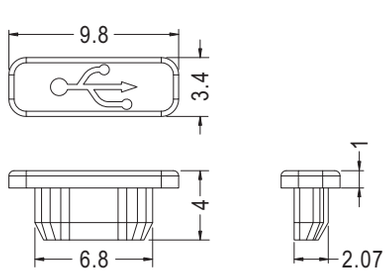

Part No.	Package
USBC-15	1000




- Material: PE
- Color: Black
- Unit: mm

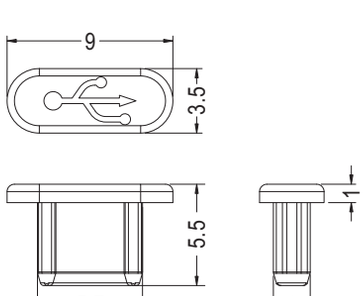

Part No.	Package
USBC-31	1000

- Material: TPE(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
USBC-31-1	1000

MINI USB座護蓋 MINI USB HOUSING

用途：用於 MINI USB 接頭防塵與保護。




- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

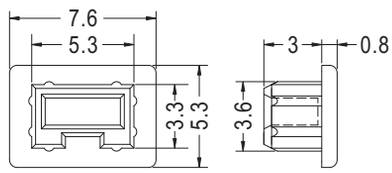


Part No.	Package
USBC-9	1000



- Material: TPE
- Color: Black
- Unit: mm




Part No.	Package
USBC-10	1000



Part No.	Package
USBC-13	1000




- Material: TPE
- Color: Black
- Unit: mm

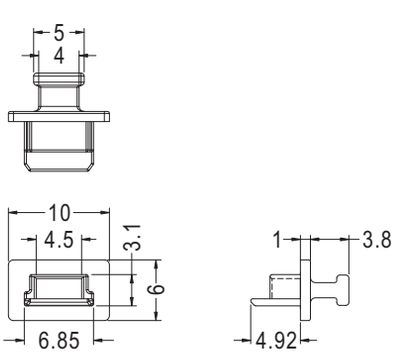

Part No.	Package
USBC-25	1000




- Material: TPE
- Color: Black
- Unit: mm

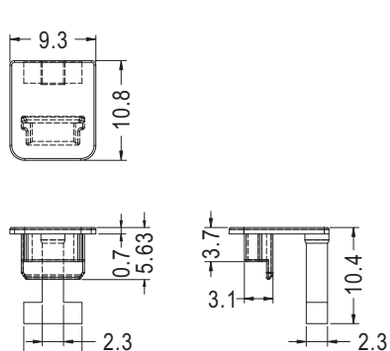


Part No.	Package
USBC-16	1000

MINI SAS HD防塵蓋 MINI SAS HD COVER

用途：用於MINI SAS HD接頭防塵與保護。

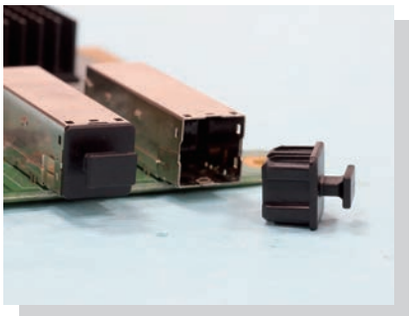


- Material: PE
- Color: Black
- Unit: mm

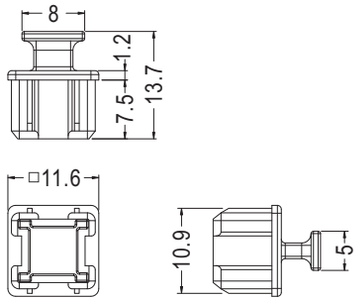

Part No.	Package
KPS-32	1000



- Material: TPE
- Color: Black
- Unit: mm




Part No.	Package
KPS-39	1000

USB座護蓋 USB HOUSING

用途：用於USB接頭防塵與保護。




- Material: TPE
- Color: Black
- Unit: mm

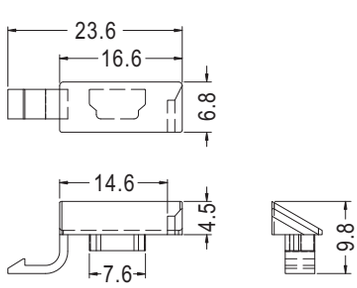

Part No.	Package
USBC-17	1000



- Material: TPU
- Color: Black
- Unit: mm




Part No.	Package
USBC-30	1000

防塵蓋 CONNECTOR COVER

用途：用於汽車點煙器防塵與保護用。



- Material: TPE
- Color: Black
- Unit: mm




Part No.	Package
DCVER-1	500


防塵蓋 CONNECTOR COVER

用途：用於USB接頭防塵與保護用。



- Material: TPE
- Color: Black
- Unit: mm







Part No.	Package
COVER-1	500



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm







Part No.	Package
CJCV-3	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm






Part No.	Package
CJCV-7	1000


防塵蓋 CONNECTOR COVER

用途：用於USB接頭防塵與保護用。



- Material: TPU
- Color: Black/White
- Unit: mm






Part No.	A	Package
CJCV-1	1.8	500
CJCV-2	12.0	


BBU防塵蓋 CONNECTOR COVER

用途：用於BBU的防塵與保護用。



- Material: TPU
- Color: Black
- Unit: mm






Part No.	Package
CJCV-4	1000


連接器蓋 CONNECTOR COVER

用途：用於連接器之防塵與保護。



- Material: TPU
- Color: Black/White
- Unit: mm



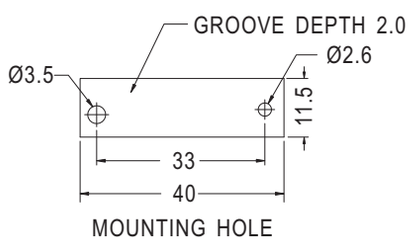


Part No.	Package
EMC-1	500

防塵蓋 CONNECTOR COVER


用途：用於SIM CARD CAP防塵與保護用。



- Material: TPU
- Color: Black/White
- Unit: mm

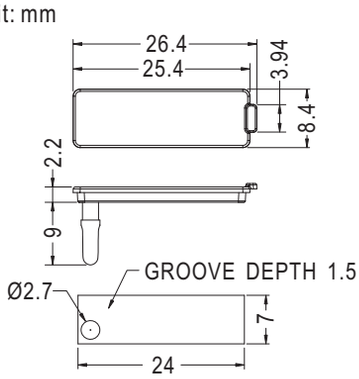

Part No.	Package
EM-303	500

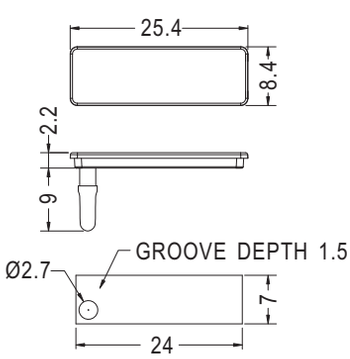


Part No.	Package
EM-303-1	500


SD 防塵蓋 SD CONNECTOR COVER

用途：用於 SD 卡防塵與保護用。




- Material: TPE
- Color: Black
- Unit: mm



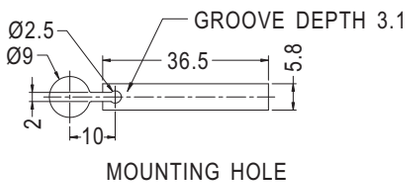


MOUNTING HOLE

Part No.	Package
CJCV-6	1000

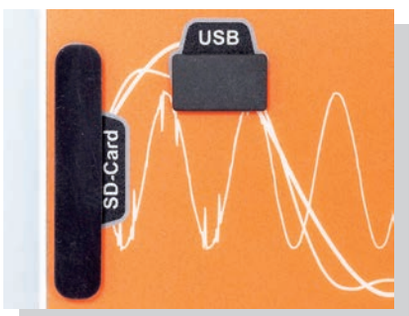

- Material: TPE
- Color: Black
- Unit: mm



MOUNTING HOLE


Part No.	Package
CJCV-11	1000

USB TYPE-C防塵蓋 USB 3.0 C-TYPE COVER


用途：用於 USB 3.0 TYPE-C 接頭之防塵與保護。



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
USB3C-1	1000



Part No.	Package
USB3C-2	1000




- Material: PE
- Color: Black
- Unit: mm



Part No.	Package
USB3C-3	1000



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
USB3C-4	1000

USB座護蓋 USB HOUSING

用途：用於USB 3.0接頭防塵與保護。



- Material: TPE
- Color: Black
- Unit: mm

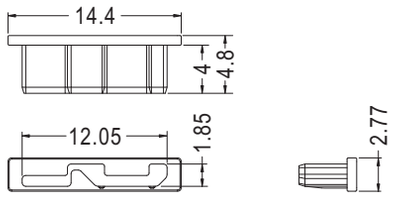


Part No.	Package
USBC-21	1000


防塵蓋 CONNECTOR HOLDER

用途：用於KVM連接器之防塵與保護。




- Material: PE
- Color: Black
- Unit: mm



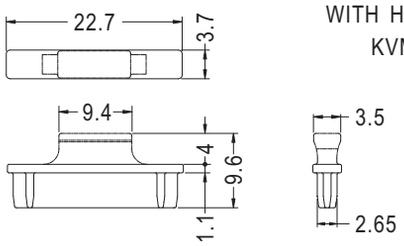


Part No.	Package
KVM-1	1000
KVM-2	

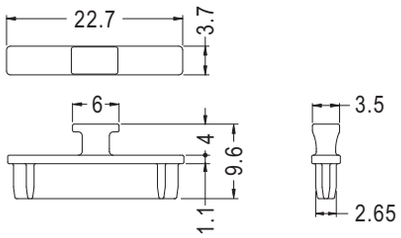


Part No.	Package
KVM-3	1000

CF防塵蓋 CONNECTOR COVER

用途：用於CF連接器之防塵與保護。

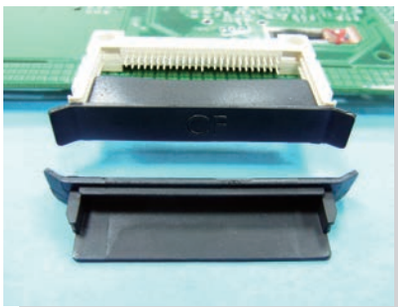

- Material: TPU
- Color: Black
- Unit: mm

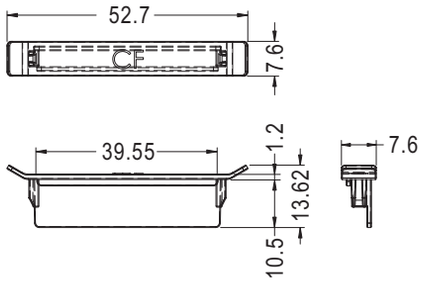


Part No.	Package
CFC-1	500

USB座護蓋 USB HOUSING

用途：用於 USB 防塵與保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
USBH-1	1000

IPHONE防塵蓋 IPHONE CONNECTOR COVER


用途：用於iPhone連接器的防塵與保護用。




- Material: TPU
- Color: Black
- Unit: mm



Part No.	A	For	Package
IPOD-1	1.5	iPhone 3	1000
IPOD-2	1.0	iPhone 4	

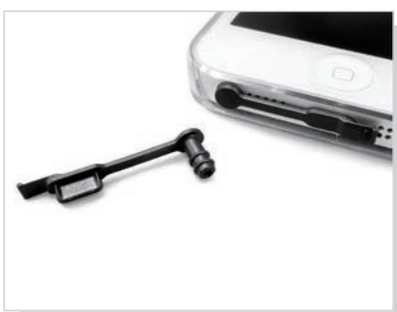


- Material: TPU
- Color: Black
- Unit: mm

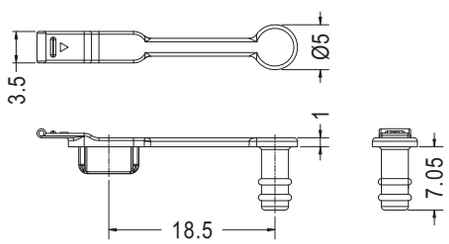

Part No.	Package
IPOD-3	1000



- Material: TPU
- Color: Black
- Unit: mm




Part No.	Package
IPOD-4	1000

IPHONE防塵蓋 IPHONE CONNECTOR COVER

用途：用於iPhone充電器接頭之防塵與保護。




- Material: PE
- Color: Natural
- Unit: mm



Part No.	Package
IPWC-1	1000



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
IPWC-2	2000

防塵蓋 CONNECTOR COVER

用途：用於 MINI USB 接頭之防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
KPS-20	2000

MICRO USB防塵蓋 MICRO USB CONNECTOR COVER


用途：用於 MICRO USB 接頭防塵與保護用。



- Material: PE
- Color: Natural
- Unit: mm



Part No.	Package
KPS-21	2000




Part No.	Package
KPS-24	1000


防塵蓋 CONNECTOR COVER

用途：用於 RJ-45 連接器之防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm






Part No.	Package
PJCV-1	1000


防塵蓋 CONNECTOR COVER

用途：用於 RJ-11 連接器之防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm





Part No.	Package
PJCV-11	1000


防塵蓋 CONNECTOR COVER


用途：用於USB接頭防塵與保護。





- Material: PE
- Color: Natural
- Unit: mm





Part No.	Package
KPS-5	1000


Part No.	Package
KPS-6	1000

防塵蓋 CONNECTOR COVER

用途：用於連接器之防塵與保護。




- Material: PE
- Color: Natural
- Unit: mm



Part No.	A	B	C	D	Package
KPS-1	15.8	13.4	11.2	10.0	500
KPS-2	10.7	9.0	9.6	8.6	1000
KPS-3	10.3	8.4	8.0	7.0	



- Material: PE
- Color: Natural/Black
- Unit: mm




Part No.	Package
KPS-16	1000

連接器蓋 CONNECTOR COVER

用途：用於天線連接器之防塵與保護。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-589	1000

防塵蓋 CONNECTOR COVER

用途：用於連接器之防塵與保護。




- Material: PE
- Color: Natural/White/Black
- Unit: mm




Part No.	A	B	C	D	E	Package
KPSA-1	5.7	2.85	3.85	7.8	2.0	1000
KPSA-3	4.5	2.3	3.3	3.5	3.2	

光纖連接器護蓋 PHOTO TR. HOUSING

用途：用於光纖連接器之防塵與保護。

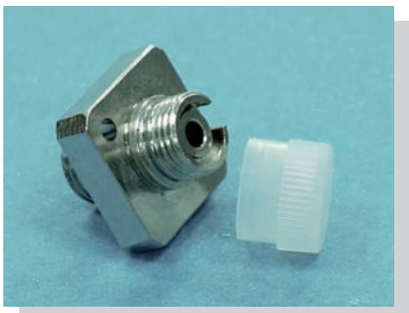


- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
KPS-4	1000

端子蓋 TERMINAL COVER

用途：用於連接器RCA端子之防塵與保護用。

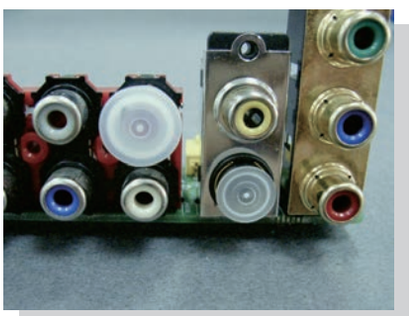


- Material: PE
- Color: Natural
- Unit: mm



Part No.	Package
KPS-9	1000



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
CRCAM-1	1000

端子蓋 CONNECTOR COVER

用途：用於F端子之防塵與保護用。




- Material: PE
- Color: Natural/Black
- Unit: mm



Part No.	Package
KPS-12	1000



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
KPS-31	1000

端子蓋 CONNECTOR COVER

用途：用於天線端子之防塵與保護。



- Material: PE
- Color: Transparent
- Unit: mm




Part No.	Package
KPS-29	1000

防塵蓋 CONNECTOR COVER

用途：用於連接器之防塵與保護。



- Material: PE
- Color: Black/Red
- Unit: mm




Part No.	Package
KPS-15	1000

端子蓋 CONNECTOR COVER

用途：用於端子之防塵與保護。




- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
KPS-13	1000

端子蓋 CONNECTOR COVER

用途：用於端子之防塵蓋、美觀。

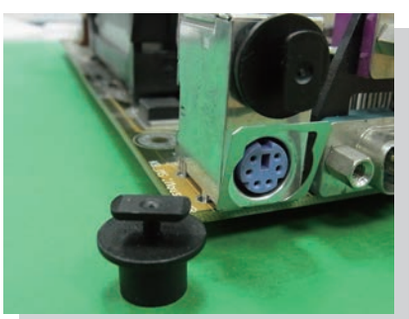

- Material: PP
- Color: Black
- Unit: mm

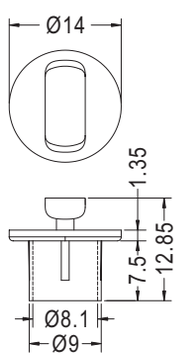


Part No.	Package
MOUC-1	1000

防塵蓋 CONNECTOR COVER

用途：用於電源連接器防塵與保護。



- Material: Rubber
- Color: Black
- Unit: mm

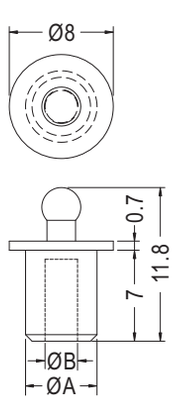


Part No.	A	B	Package
JKCV-1	5.5	2.5	1000
JKCV-4	4.0	2.0	

防塵蓋 CONNECTOR COVER

用途：用於連接器的防塵與保護。



- Material: PP (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

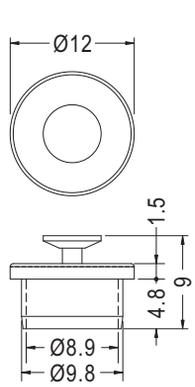


Part No.	Package
KPS-18	1000

S端子蓋 CONNECTOR COVER

用途：S端子之防塵蓋、美觀。




- Material: PP
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	Package
SVDOC-1	8.0	9.0	9.6	1000
SVDOC-3	8.1	9.1	6.0	




- Material: PP
- Color: Natural
- Unit: mm

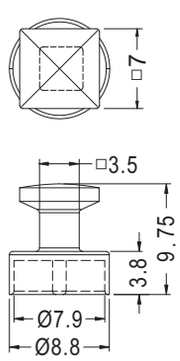

Part No.	Package
SVDOC-1S	1000



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
SVDOC-2	1000

平衡端子蓋 BALANCED CONNECTOR CAP


用途：平衡端子XLR座之防塵蓋、美觀。



- Material: PP/PE
- Color: Computer
- Unit: mm

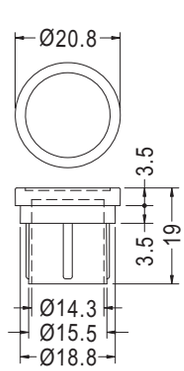


Part No.	Package
XLR-1	250

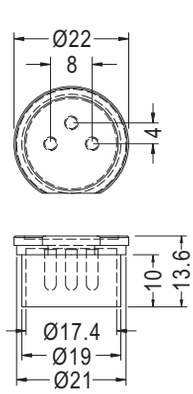


Part No.	Package
XLR-2	250

BNC絕緣座 BNC ROUND BASE

用途：用於BNC端子之絕緣。

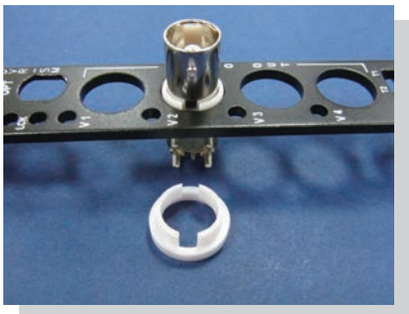


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




Part No.	Package
BNCH-1	1000

BNC防塵蓋 BNC CONNECTOR COVER

用途：用於BNC接頭防塵保護用。

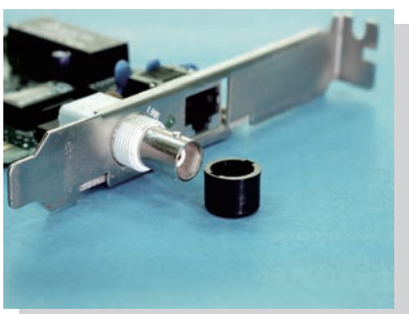


- Material: PE
- Color: Black/Gray
- Unit: mm



Part No.	Package
BNC-2	1000




- Material: PE
- Color: Natural
- Unit: mm

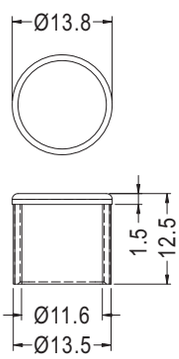


Part No.	Package
BNC-4	1000

端子蓋 CONNECTOR COVER

用途：RJ-45 轉接 RJ-11 接頭。

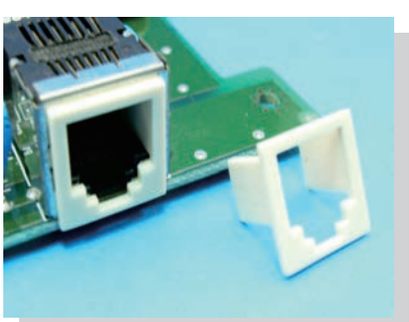

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural/White
- Unit: mm




Part No.	A	B	C	D	E	F	G	Package
ASID-1	13.5	12.0	6.8		8.0	1.1	12.9	1000
ASID-2	13.9	11.9	7.1	1.3	7.9	1.1	12.0	
ASID-3	11.8	9.6	7.0	1.5	8.0	1.0	12.5	

RJ防塵蓋 CONNECTOR COVER


用途：用於RJ-11連接器之防塵蓋。



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
CRJ-11	1000

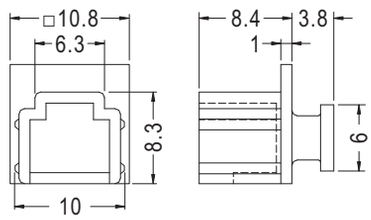


Part No.	Package
CRJ-11S	1000







Part No.	Package
CRJ-11-2	1000

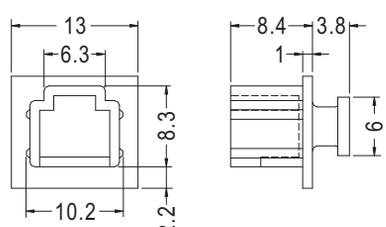


Part No.	Package
CRJ-11-2S	1000

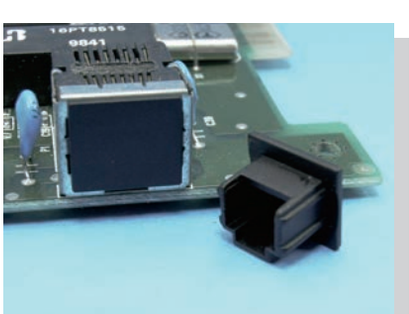

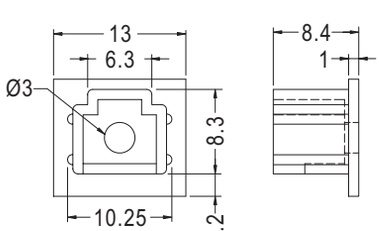


Part No.	Package
CRJ-11-3	1000




Part No.	Package
CRJ-11-6	1000

RJ防塵蓋 CONNECTOR COVER

用途：用於多餘的RJ-11連接器之堵塞，避免誤用。

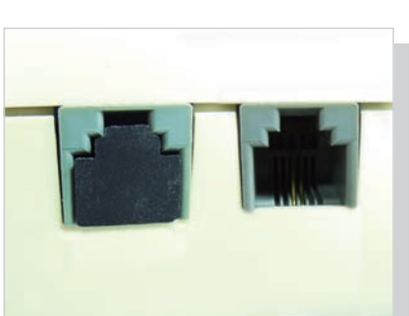

- Material: Silicon Rubber
- Color: Black
- Unit: mm

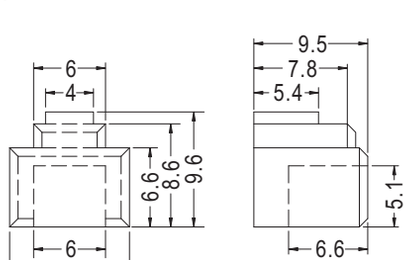


Part No.	Package
CRJ-11-4I	1000

RJ防塵蓋 CONNECTOR COVER


用途：用於RJ-11連接器之防塵蓋。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

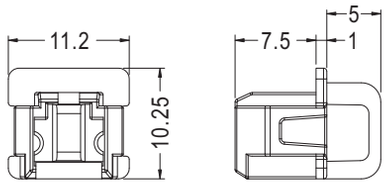

Part No.	Package
CRJ-11-5	1000

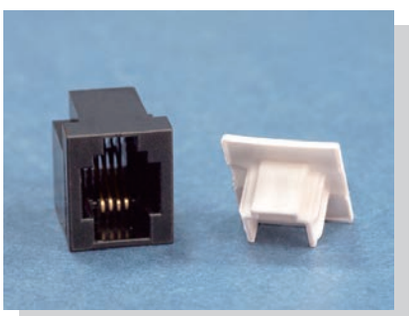

- Material: PE
- Color: White
- Unit: mm

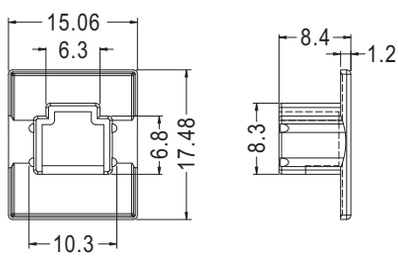


Part No.	Package
CRJ-11-7	1000

RJ防塵蓋 CONNECTOR COVER

用途：用於網路接頭RJ-12防塵與保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

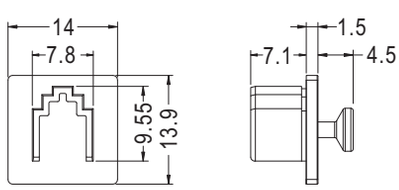


Part No.	Package
CRJ-12	1000

RJ-22防塵蓋 CONNECTOR COVER

用途：用於網路接頭RJ-22防塵與保護。



- Material: PE
- Color: Black
- Unit: mm

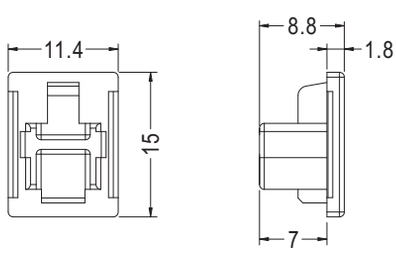


Part No.	Package
RJ-22	1000


RJ-45防塵蓋 CONNECTOR COVER

用途：用於網路接頭RJ-45防塵與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






Part No.	Package
PJB-45	1000










Part No.	Package
★PJBA-45	1000



- Material: ABS
- Color: White
- Unit: mm









Part No.	Package
PJSA-45	1000



- Material: PE+EVA
- Color: Black
- Unit: mm







Part No.	Package
RJ-45	500




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm






Part No.	A	Package
PJC-45	11.9	500
PJC-45L	12.0	









Part No.	Package
PJS-45	500


RJ-45防塵蓋 CONNECTOR COVER

用途：用於多餘的RJ-45連接器之堵塞，避免誤用。

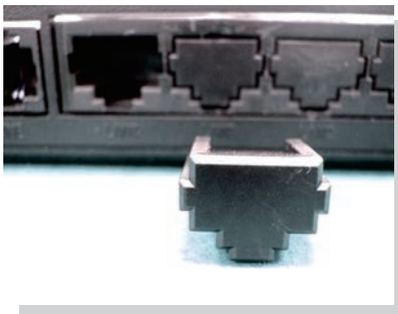

- Material: PE
- Color: Black
- Unit: mm






Part No.	Package
PJT-45	500


Part No.	Package
PJU-45	500

RJ-45防塵蓋 CONNECTOR COVER


用途：用於網路接頭RJ-45防塵與保護。

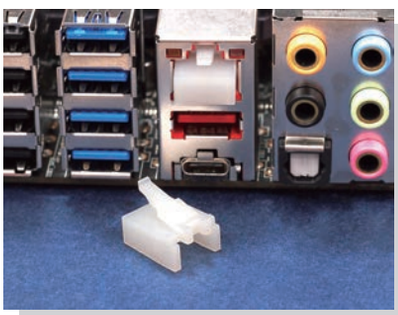


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
PJRA-45	500

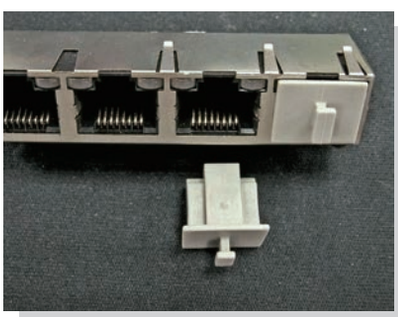


- Material: PE
- Color: Black/Gray
- Unit: mm

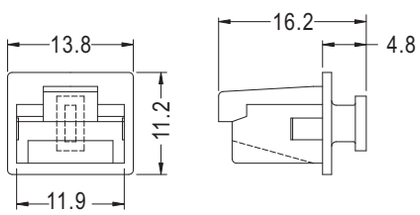

Part No.	Package
PJR-45	500




- Material: PE
- Color: Black
- Unit: mm

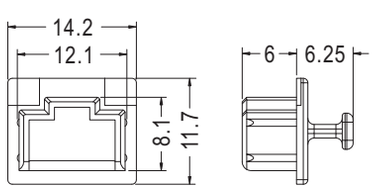

Part No.	Package
PJD-45	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

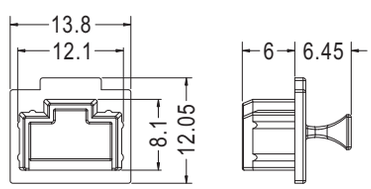


Part No.	Package
PJD-45-1	1000

RJ-45防塵蓋 CONNECTOR COVER

用途：用於網路接頭RJ-45防塵與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

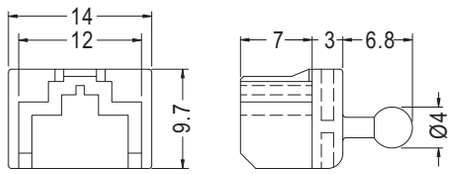


Part No.	Package
PJV-45	1000

防塵蓋 CONNECTOR COVER

用途：用於CD ROM音源線之防塵與保護。

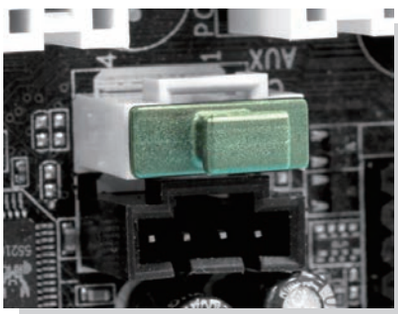

- Material: PE
- Color: Black
- Unit: mm

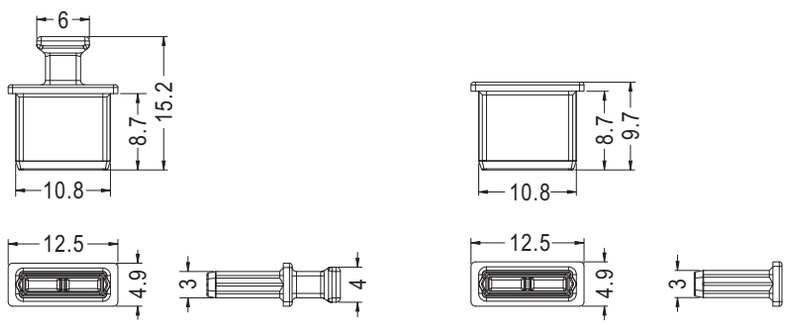

Part No.	Package
CDMCV-1	1000


Part No.	Package
CDMCV-2	1000

光纖連接器護套 FIBER OPTIC CONNECTOR COVER

用途：用於光纖接頭PLT130T防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

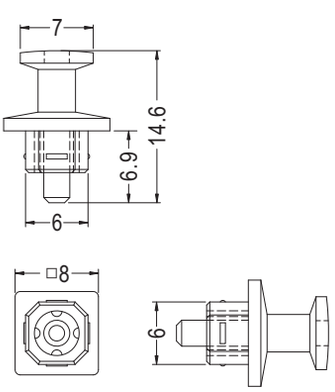

Part No.	Package
OPC-1	1000



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
OPC-2	1000


用途：用於光纖接頭防塵與保護。




- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
SFPC-3	1000

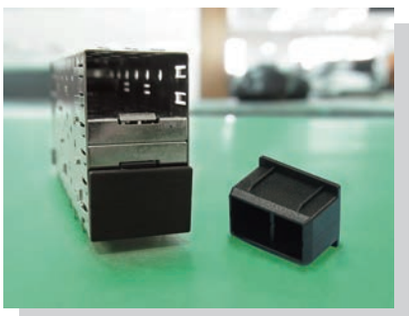


- Material: PE
- Color: Black
- Unit: mm



Part No.	A	B	C	D	E	Package
SFPC-13	9.0	8.0	14.0	9.25	11.0	1000
SFPC-17	11.0	10.0	18.5	8.9	10.0	

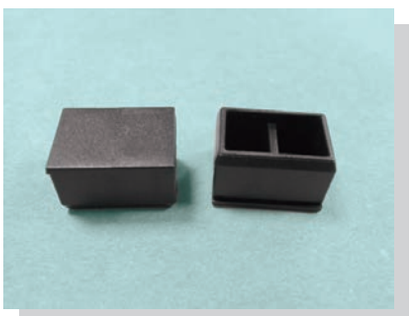

- Material: PE
- Color: Black
- Unit: mm

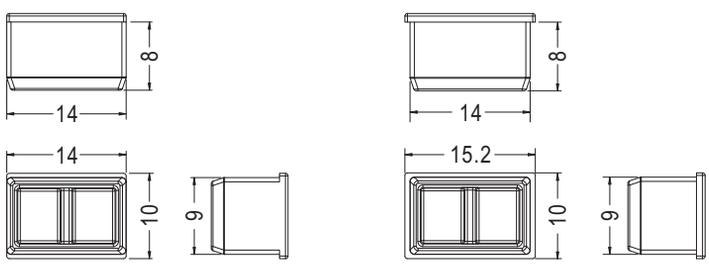


Part No.	Package
SFPC-7	1000

Part No.	Package
SFPC-8	1000



- Material: PE
- Color: Black
- Unit: mm

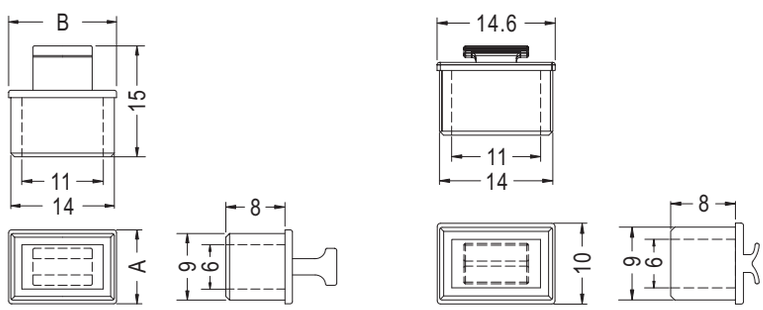


Part No.	A	B	Package
SFPC-1	10.0	14.6	1000
SFPC-10	9.8	14.4	


Part No.	Package
SFPC-2	1000

光纖連接器護套 FIBER OPTIC CONNECTOR COVER


用途：用於光纖接頭防塵與保護。

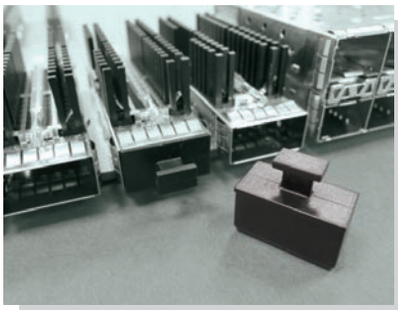

- Material: PE
- Color: Black
- Unit: mm

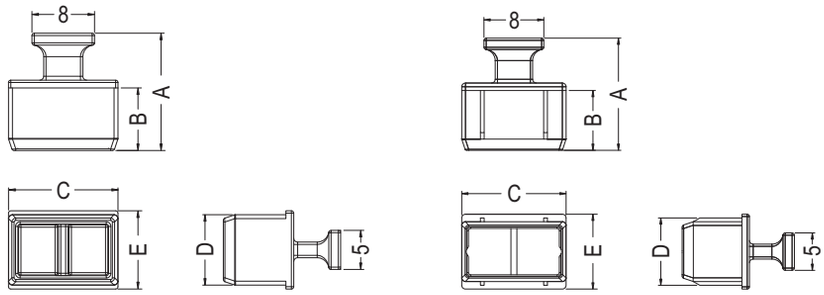

◆ SFPC-11,SFPC-12,SFPC-14

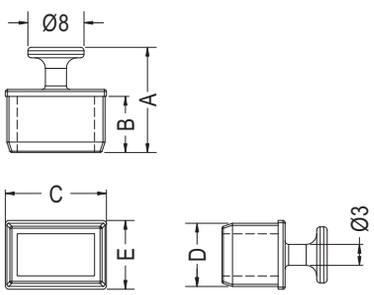

◆ SFPC-18


Part No.	A	B	C	D	E	Package
SFPC-4	15.0	8.0	14.0	9.0	10.0	1000
SFPC-5	17.0	10.0	18.5	8.7		
SFPC-11	15.0	8.0	14.0	9.0		
SFPC-12	17.0	10.0	18.5	8.9		
SFPC-14	15.0	8.0	14.0	9.25	11.0	
SFPC-18			14.4	9.0	9.8	

光纖連接器護套 FIBER OPTIC CONNECTOR COVER

用途：用於光纖接頭防塵與保護，有抗 EMI 功能。



- Material: TPE
- Color: Black
- Unit: mm




NEW


Part No.	Package
SFPC-19	1000

光纖連接器護套 FIBER OPTIC CONNECTOR COVER

用途：用於光纖接頭防塵與保護。

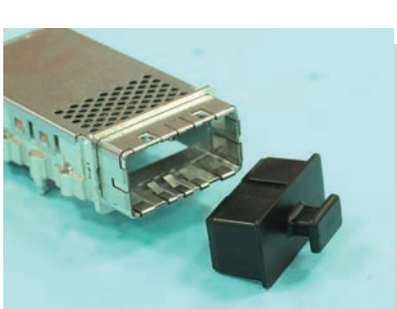

- Material: PE
- Color: Black
- Unit: mm

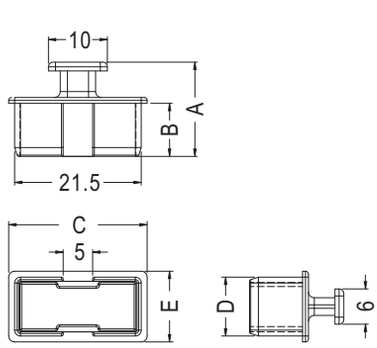


Part No.	A	B	C	D	E	Package
CXP-1	16.0	9.0	23.5	10.0	12.0	1000
CXP-2	16.0	9.0	22.0	10.0	11.0	

光纖連接器護套 FIBER OPTIC CONNECTOR COVER


用途：用於光纖接頭防塵與保護。




- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

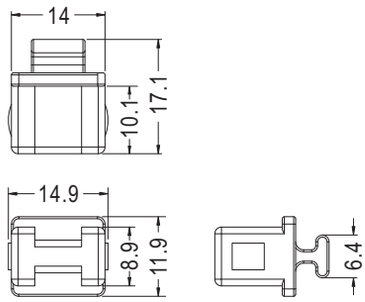

Part No.	Package
SFPC-9	1000

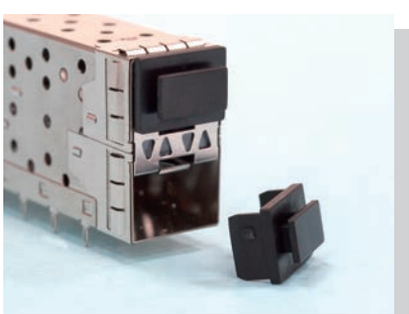

- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

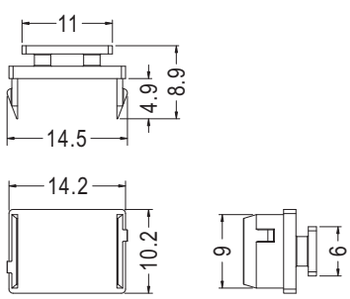


Part No.	Package
SFPC-15	1000

光纖防塵蓋 CONNECTOR COVER


用途：用於光纖座之防塵與保護。



- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
COVER-11	1000



Part No.	Package
COVER-12	1000




- Material: TPE
- Color: Black
- Unit: mm

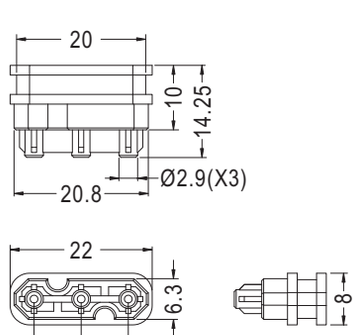


Part No.	Package
COVER-3	1000

SATA 防塵蓋 CONNECTOR COVER

用途：用於多餘不使用的SATA端子之遮蔽，避免誤用。

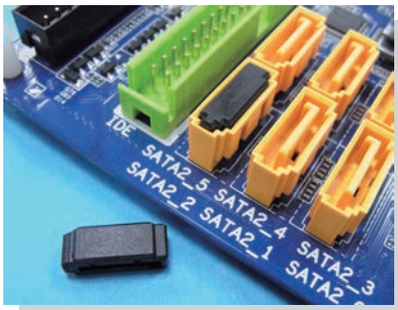

- Material: PE
- Color: Black
- Unit: mm

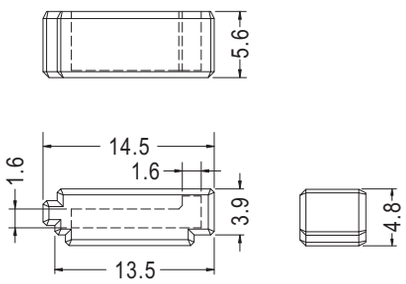


Part No.	Package
CSATA-1	1000

SATA護蓋 SATA HOUSING

用途：用於SATA端子之防塵。



- Material: PE
- Color: Black
- Unit: mm

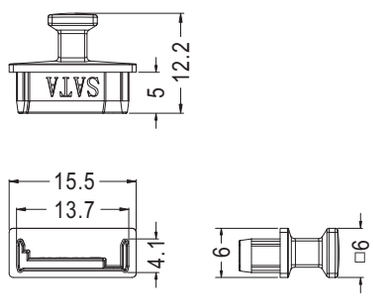


Part No.	Package
SATAC-1	1000

SATA防塵蓋 SATA EXPRESS COVER


用途：用於SATA端子之防塵。



- Material: PE
- Color: Black
- Unit: mm

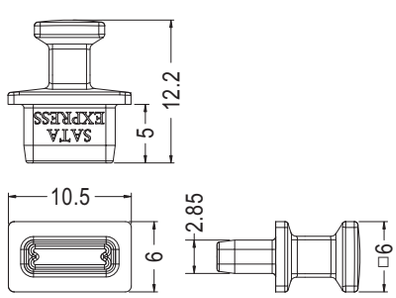


Part No.	Package
SATAC-2	1000




Part No.	Package
SATAC-3	1000

SATA防塵蓋 CONNECTOR COVER

用途：用於SATA端子之防塵蓋。

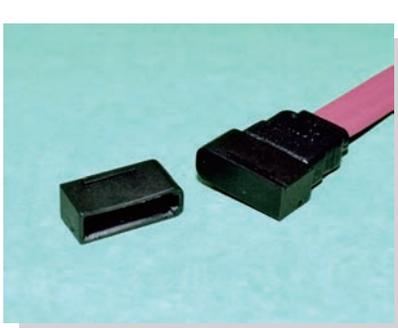

- Material: PE
- Color: Black
- Unit: mm




Part No.	A	B	C	Package
SATAC-7	16.2	14.0	13.0	1000
SATAC-15	26.4	24.2	23.2	

SATA 防塵蓋 CONNECTOR COVER


用途：用於SATA端子之防塵蓋。




- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

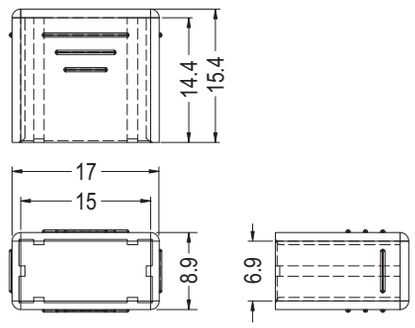

Part No.	Package
CVSATA-7	1000

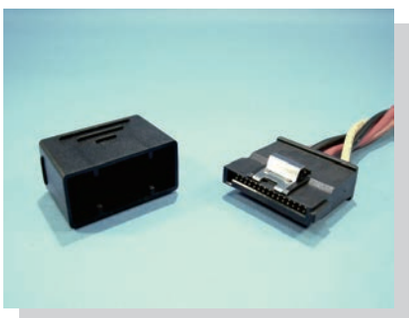


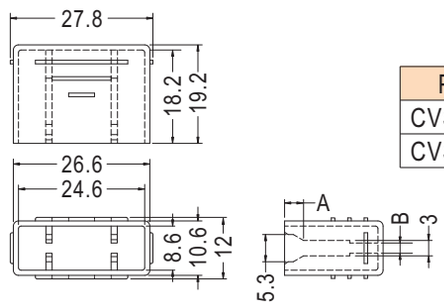

Part No.	A	B	Package
CVSATA-15	3.7	2.0	500
CVSATA-15S	9.7		




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

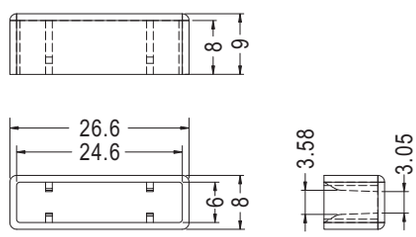


Part No.	Package
CVSATAA-15	500

ESATA護蓋 ESATA COVER

用途：於ESATA上保護插頭，防氧化。

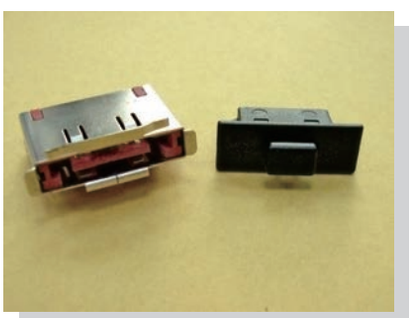

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

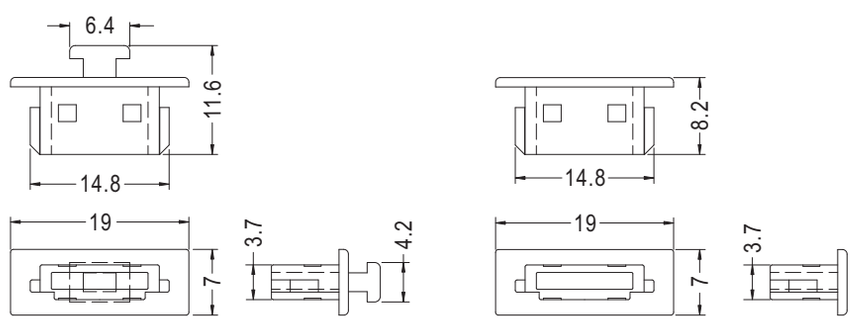


Part No.	Package
ESATA-7	1000

Part No.	Package
ESATA-7-1	1000

防塵蓋 CONNECTOR COVER


用途：用於數位 D.P 端子之防塵蓋、美觀。

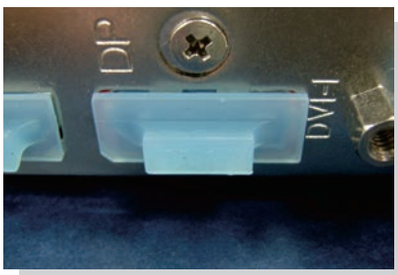


- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm



- Material: PE/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

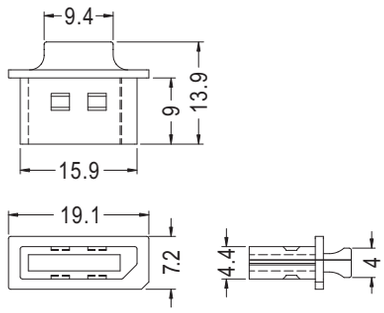




Part No.	Package
DPC-1	1000


Part No.	B	C	Package
DPC-3	7.2	4.4	1000
DPC-3L	7.4	4.5	

防塵蓋 CONNECTOR COVER

用途：使多餘或無功能的 Display Port (DP端子)遮蔽，避免使用者誤插。

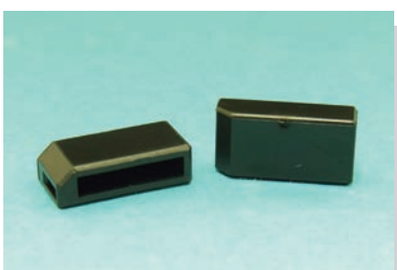

- Material: PE
- Color: Black
- Unit: mm

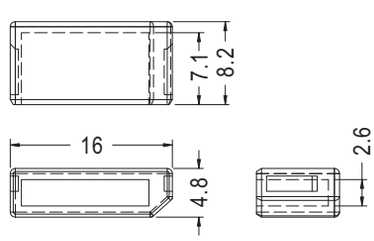


Part No.	Package
DPC-2	1000

防塵蓋 CONNECTOR COVER

用途：用於 Display Port (DP端子) 之防塵與保護 。



- Material: PE
- Color: Natural
- Unit: mm

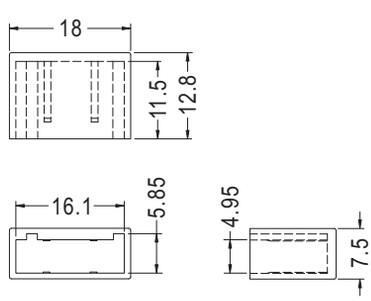


Part No.	Package
KPS-37	1000

防塵蓋 CONNECTOR COVER

用途：用於MINI D.P數位端子之防塵蓋、美觀。




- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm

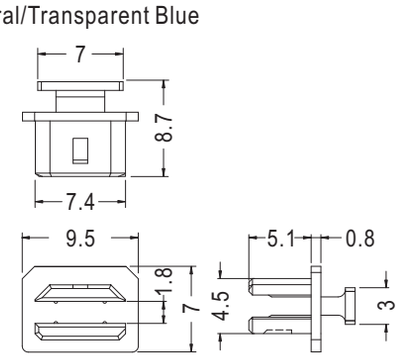


Part No.	Package
MIDP-2	2000


用途：用於MINI數位端子之防塵蓋、美觀。

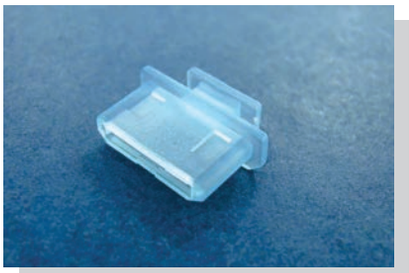





- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm







Part No.	Package
MIHDMI-2	2000







Part No.	Package
MIHDMI-3	2000

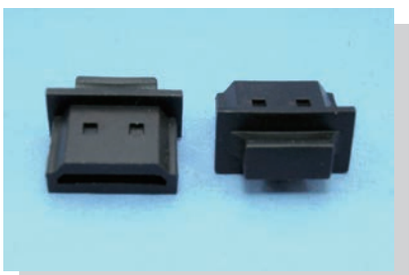

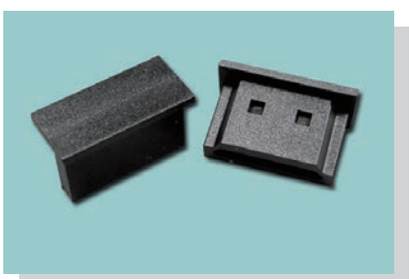



- Material: PE
- Color: Black
- Unit: mm






Part No.	Package
HDMIC-1	1000






Part No.	Package
HDMIC-2	1000









Part No.	Package
HDMIC-10	1000



- Material: Rubber
- Color: Black
- Unit: mm






Part No.	Package
HDMIC-11	1000


MICRO HDMI防塵蓋 CONNECTOR COVER

用途：用於MICRO HDMI端子座之防塵蓋、美觀。



- Material: TPE
- Color: Black
- Unit: mm






Part No.	Package
HDMIC-8	1000


HDMI防塵蓋 CONNECTOR COVER

用途：用於 HDMI 端子座之防塵、美觀，具有封孔功能，避免錯誤使用拆拔。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




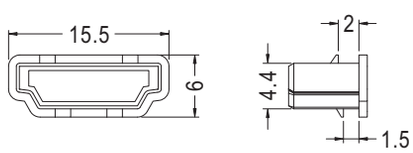


Part No.	Package
HDMIC-3	1000



- Material: PE
- Color: Black
- Unit: mm





Part No.	Package
HDMIC-4	1000


HDMI端子蓋 HDMI COVER

用途：用於 HDMI 端子上保護插頭，防氧化。



- Material: PE
- Color: Natural
- Unit: mm







Part No.	Package
HDMIT-1	1000

D.TYPE防塵蓋 D.TYPE CONNECTOR COVER

用途：用於D.TYPE連接器之防鏽、防塵與保護。

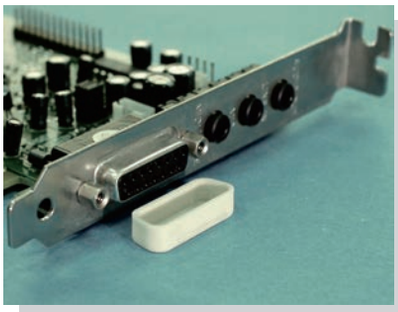


- Material: PP
- COLOR: Natural/Black/Gray
- Unit: mm




Part No.	A	B	C	D	Package
DTC-9F	18.5	16.5	7.8	10.2	1000
DTC-15F	26.8	24.8			500
DTC-25F	40.6	38.6			
DTC-9M	20.0	18.0	9.4	11.8	1000
DTC-15M	28.2	26.4			500
DTC-25M	42.0	40.0			



- Material: Nylon 66 (UL)
- Flame Class:94V-2/94V-0
- Color:Natural/Black
- Unit: mm




Part No.	Package
DTC-20	1000




Part No.	Package
DTC-26	1000


- Material: PE
- Color: Natural/Black/Computer
- Unit: mm



Part No.	Package
DTC-37M	250




Part No.	Package
DTC-50S	500



Part No.	A	B	C	D	Package
DTC-50M	38.7	36.5	7.4	9.6	500
DTC-68M	50.2	48.0			



- Material: PP (UL)
- Flame Class: 94HB
- Color: Black/Transparent
- Unit: mm




Part No.	Package
DTC-9MS	1000

D.TYPE防塵蓋 D.TYPE CONNECTOR COVER

用途：用於D.TYPE連接器之防鏽、防塵與保護。



- Material: PE
- Color: Natural/Black
- Unit: mm

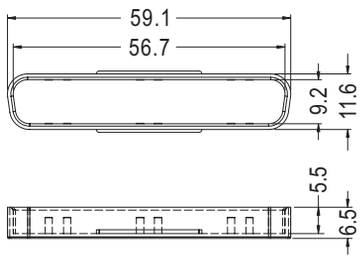

Part No.	Package
DTC-37ML	250


DVI防塵蓋 CONNECTOR COVER

用途：用於連接器防塵與保護用。






- Material: PP (UL)
- Flame CLASS: 94HB
- Color: Black/Transparent Blue
- Unit: mm



Part No.	Package
DVIC-1	500

- Material: TPE
- Color: Yellow/Blue
- Unit: mm




Part No.	Package
DVIC-2-N	500

防塵蓋 CONNECTOR COVER

用途：用於防塵與保護用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
PCIEC-1	1000


VGA防塵蓋 CONNECTOR COVER

用途：VGA端子之防塵蓋、美觀。



- Material: PP (UL)
- Flame CLASS: 94HB
- Color: Transparent Blue
- Unit: mm







MOUNTING HOLE

Part No.	Package
VGAC-1	500


防塵蓋 CONNECTOR COVER

用途：用於連接器防塵與保護用。

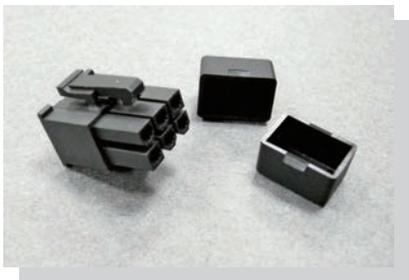


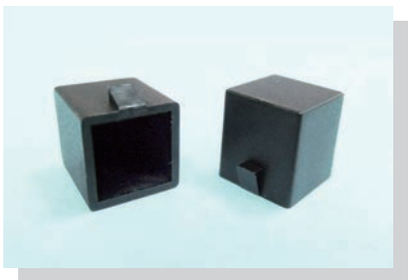

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
VGAB-1	1000




Part No.	Package
VGAB-2	1000


防塵蓋 CONNECTOR COVER

用途：用於汽車連接器防塵與保護。



- Material: PE
- Color: Black
- Unit: mm






MOUNTING HOLE


Part No.	Package
CVA-5	1000

防塵蓋 CONNECTOR COVER

用途：用於IDE CONNECTOR 防塵與保護。

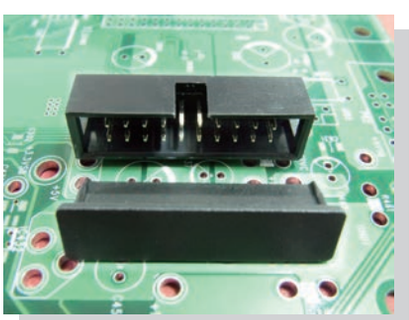

- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
DKCV-1	500

防塵蓋 CONNECTOR HOLDER

用途：用於連接器防塵與保護用。




- Material: NBR
- Color: Black
- Unit: mm




Part No.	Package
TF-246	1000

防塵蓋 CONNECTOR COVER


用途：用於連接器的防塵與保護。

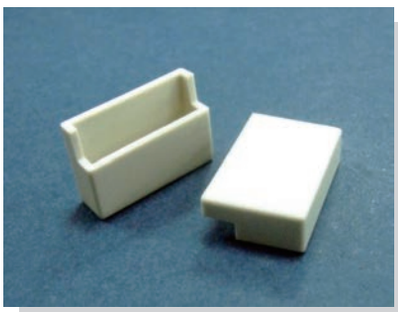

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
COVER-4	500




Part No.	Package
COVER-7	500

防塵蓋 CONNECTOR COVER

用途：用於電子零件晶體之防塵與保護。

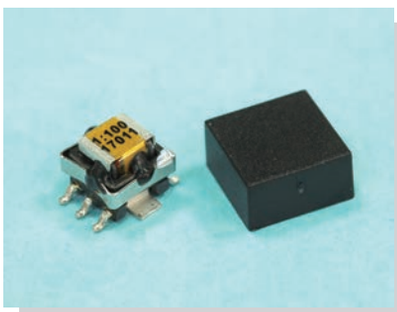

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COVER-14	1000

防塵蓋 CONNECTOR COVER

用途：用於防塵與保護用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
COVER-6	1000

防塵蓋 CONNECTOR COVER

用途：用於 PC250 端子防塵蓋。

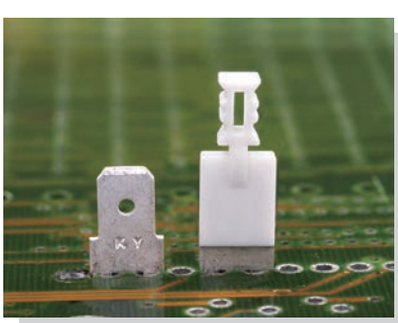


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



Part No.	Package
CVP-250	1000



- Material: PE
- Color: Natural/Black
- Unit: mm




Part No.	Package
KPS-42	1000

1394端子防塵蓋 CONNECTOR COVER


用途：用於1394接頭防塵與保護。




- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
CVR-1394	1000




Part No.	Package
CVR-1394S	1000

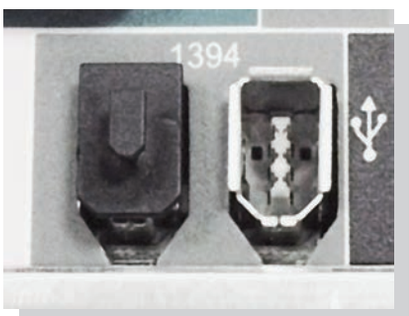

- Material: PP (UL)
- Flame Class: 94HB
- Color: Gray
- Unit: mm




Part No.	Package
CVR-1394-1	1000



Part No.	A	Package
CVR-1394-2	10.0	1000
CVR-1394-3	11.5	




- Material: PE
- Color: Black/Computer
- Unit: mm



Part No.	Package
CVRB-1394	1000



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
CVRD-1394	1000

端子防塵蓋 CONNECTOR COVER


用途：做為端子之防塵與保護。



- Material: TPE
- Color: Black
- Unit: mm





Part No.	Package
SCCVA-3	1000




Part No.	Package
SCCVA-4	1000

用途：保護電源插頭之防塵、防氧化。

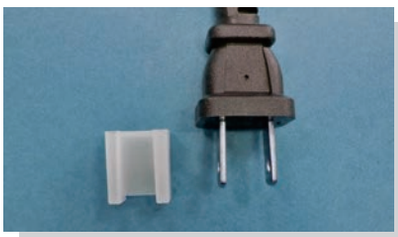

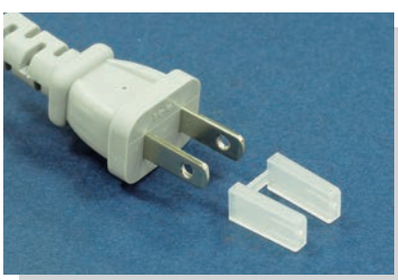


- Material: PE
- Color: Natural
- Unit: mm





Part No.	Package
PLCC-1	250

- Material: PP
- Color: Natural
- Unit: mm




Part No.	Package
PLCC-14	250

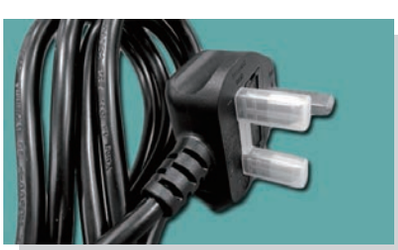


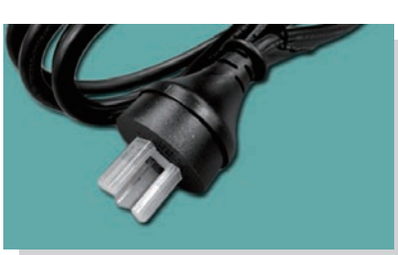

- Material: PE
- Color: Natural
- Unit: mm




Part No.	Package
PLCC-8	1000




Part No.	Package
PLCC-9	1000








Part No.	A	Package
PLCC-10	4.9	1000
PLCC-11	4.1	

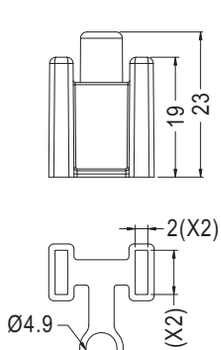

Part No.	Package
PLCC-13	1000






Part No.	Package
PLCC-15	1000

插頭保護座 SOCKET COVER

用途：用於電源插座後端，防短路、保護用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
PLCD-1	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

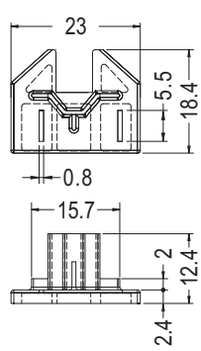

Part No.	Package
PLCD-2	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

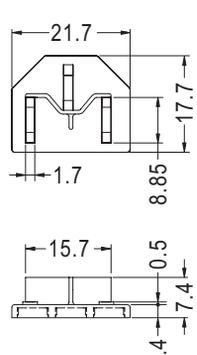

Part No.	Package
PLCD-3	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
PLCD-4	500


電源插座防塵蓋 POWER CONNECTOR COVER

用途：用於三插電源座防塵與保護。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm






Part No.	Package
PLCC-2	500


電源插座防塵蓋 POWER CONNECTOR COVER

用途：用於兩插電源座防塵與保護。



- Material: PP
- Color: White
- Unit: mm






Part No.	Package
PLCC-3	500


電源插座防塵蓋 POWER CONNECTOR COVER

用途：用於電源座之防塵與保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




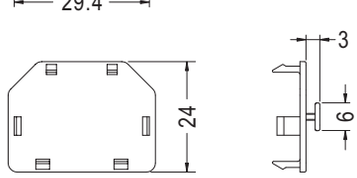


Part No.	Package
PLCC-5	500



- Material: PE
- Color: Black
- Unit: mm



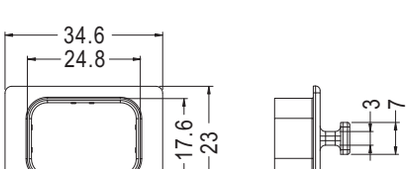


Part No.	Package
PLCC-16	500

電源插座防塵蓋 POWER CONNECTOR COVER

用途：用於電源插座接頭防塵與保護。




- Material: PE+EVA
- Color: Black/Yellow
- Unit: mm

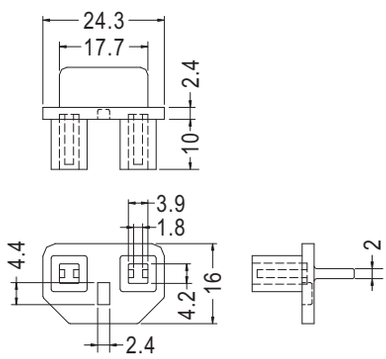

Part No.	Package
PLC-1	250


- Material: TPE (UL)
- Flame Class: 94V-0
- Color: Black/Yellow
- Unit: mm

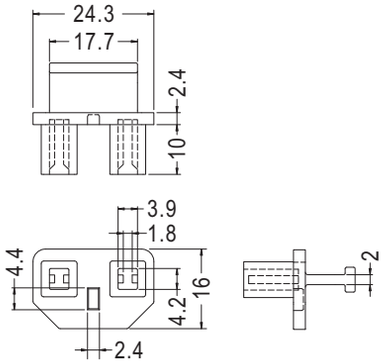

Part No.	Package
PLC-3	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

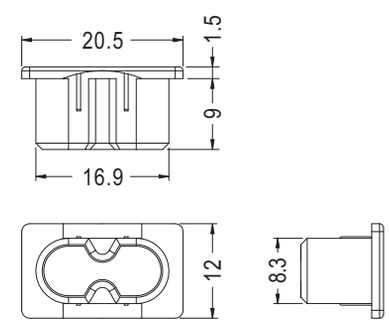


Part No.	Package
PLC-2	500

防塵蓋 IP CONNECTOR HOLDER

用途：用於機板上，保護電源插座避免刮傷。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

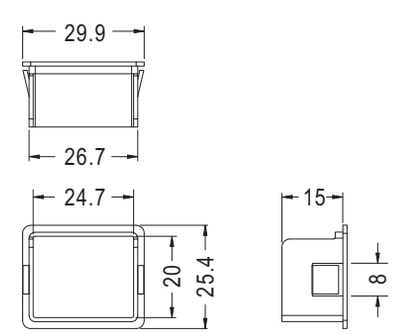


Part No.	Package
PLCC-7	1000

用途：用於零件之防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
CVR-2508	1000






Part No.	Package
CVR-3318	1000






Part No.	Package
CVR-3325	1000






Part No.	A	B	C	Package
CVR-3421	21.5	25.0	5.8	1000
CVR-3423	23.0	24.8	6.0	





Part No.	Package
CVR-4098	500






Part No.	Package
CVR-4415	1000

防塵蓋 CONNECTOR COVER

用途：用於連接器之防塵與保護。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	D	Package
CVR-3213	32.0	1000
CVR-3413	34.0	

防塵蓋 CONNECTOR COVER

用途：用於防塵與保護。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
CVR-6118	500

電源蓋 POWER SUPPLY CAP

用途：用於電源線之固定與保護，避免脫落。

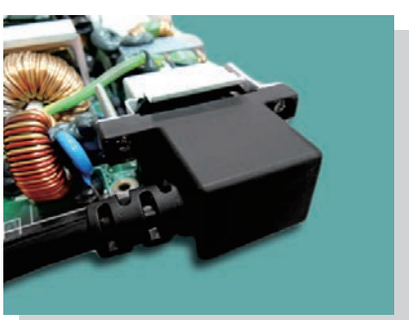

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

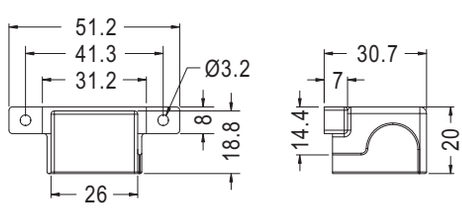


Part No.	Package
CVA-8	500

防塵蓋 CONNECTOR COVER


用途：用於防塵與保護用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

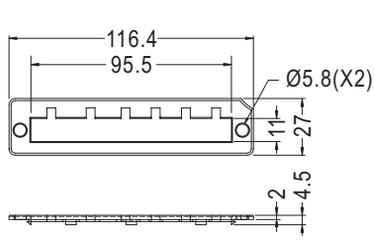


Part No.	Package
PCIE-1	500




Part No.	Package
PCIE-2	500

機板電源保護蓋 POWER CONNECTOR COVER

用途：保護主機板電源端子，防塵與美觀。

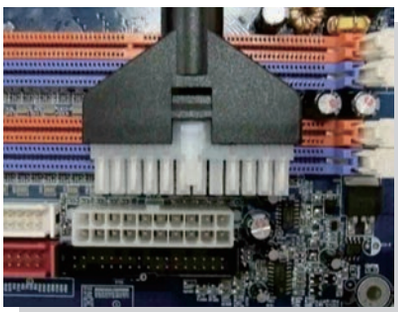


- Material: PE
- Color: Black
- Unit: mm

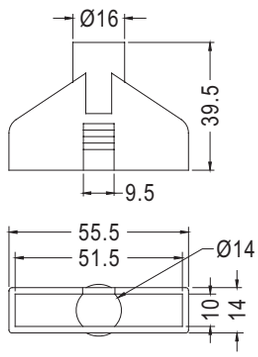


Part No.	Package
STAT-CV24	250

連接器防塵蓋 CONNECTOR COVER

用途：用於連接器的防塵與保護。

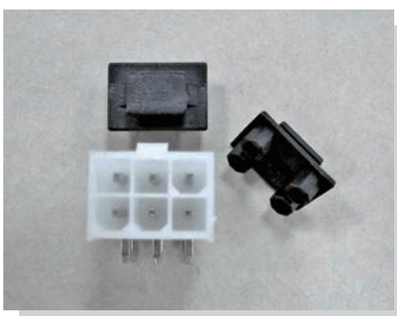

- Material: PP
- Color: Black
- Unit: mm

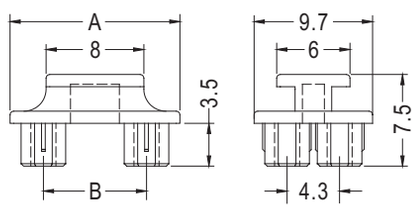


Part No.	A	B	Package
PWIC-6	13.9	8.4	500
PWIC-8	18.0	12.7	

零件墊座 PARTS HOUSING

用途：用於連接器之保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

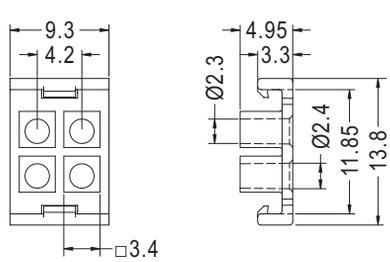


Part No.	Package
012-958	1000

耳機孔護套 MIC HOLE STOPPER

用途：用於3.5 mm耳機孔，防塵與保護。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

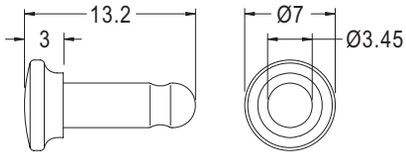


◆ 插入耳機孔靜音會動作
◆ Activate silent mode function, When Plug Into Headphone Jack.

Part No.	Package
MHSC-1	2000

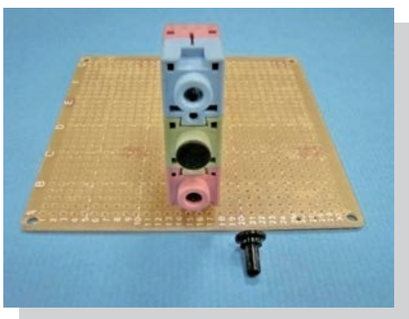


- Material: PP
- Color: Black
- Unit: mm




Part No.	Package
MHSC-2	2000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MHSC-3	2000

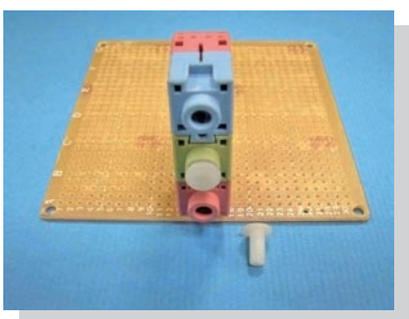

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

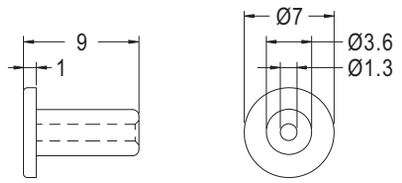


Part No.	Package
MHSC-4	2000

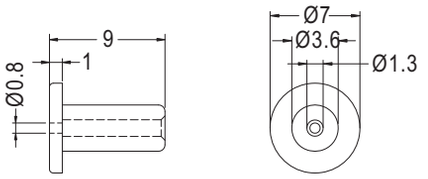

Part No.	Package
MHSC-4-1	2000




- Material: TPE
- Color: Black
- Unit: mm




Part No.	A	B	C	D	耳機孔	Package
MHSC-5	8.0	0.95	5.0	3.35	Ø3.5	2000
MHSC-6	6.0	1.0	4.2	2.2	Ø2.5	


用途：用於PC板金手指防塵與保護。

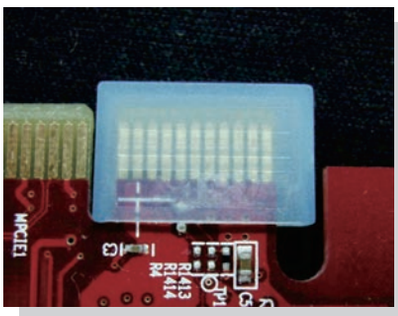


- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm

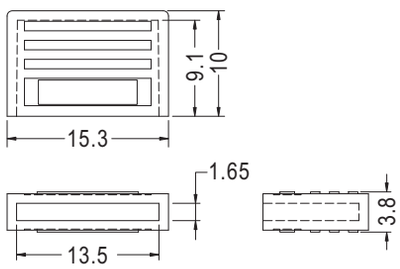

Part No.	Package
GDFC-13	2000

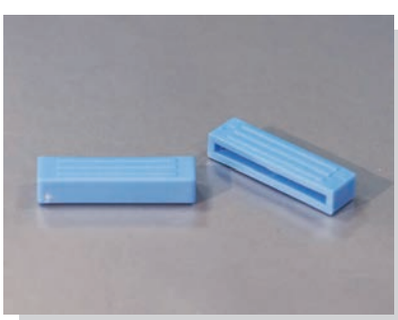

- Material: Nylon 66(UL)
- Flame Class: 94V-2/94V-0
- Color: Blue
- Unit: mm

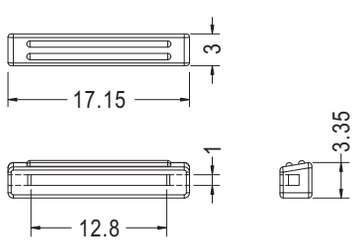


NEW


Part No.	Package
GDFC-14	2000




- Material: PE
- Color: Transparent Blue
- Unit: mm

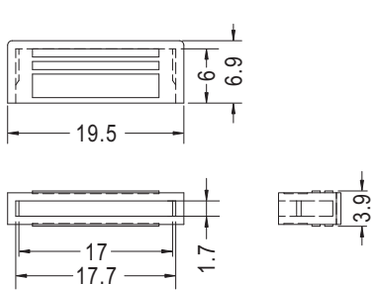


Part No.	Package
GDFC-17	2000
GDFC-18	

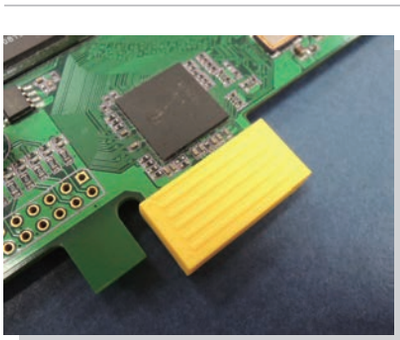


- Material: PE
- Color: Yellow
- Unit: mm

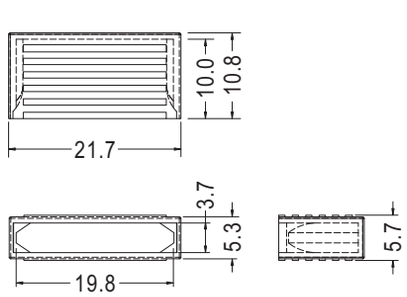

Part No.	Package
GDFC-20	1000

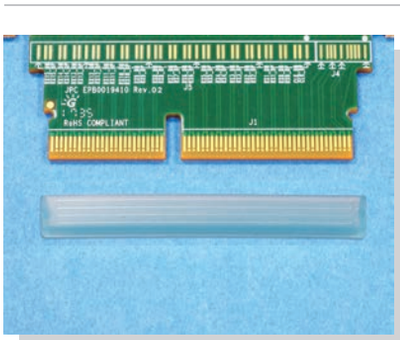


- Material: PE
- Color: Transparent Blue
- Unit: mm

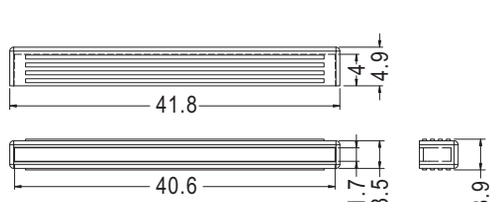


Part No.	Package
GDFC-40	1000

防塵蓋 CONNECTOR COVER


用途：用於PC板金手指防塵與保護。

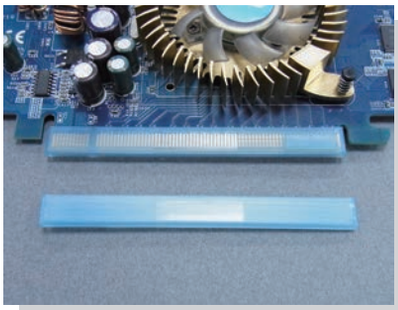


- Material: PE
- Color: Natural/Transparent Blue
- Unit: mm

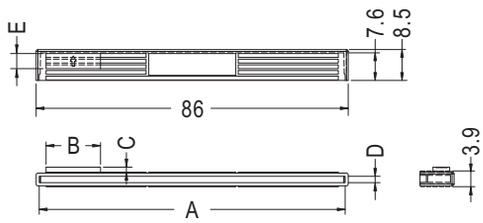


Part No.	A	B	C	D	E	Package
GDFC-83	84.31	15.0	1.43	1.75	4.16	500
GDFC-84	84.8			1.7		

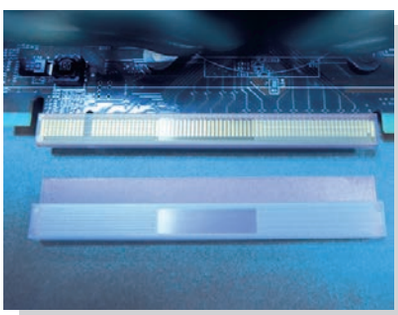


- Material: PE
- Color: Transparent Bule
- Unit: mm

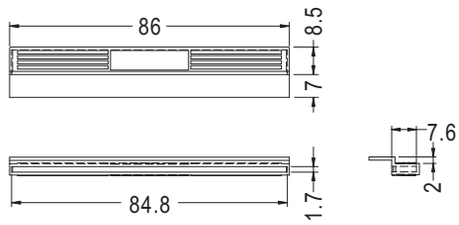


Part No.	Package
GDFC-84-2N	1000

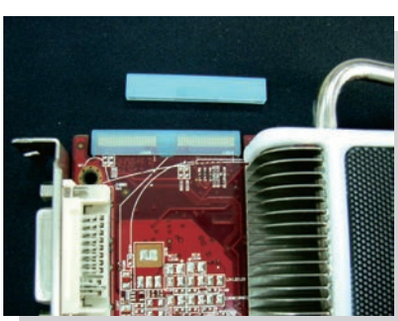


- Material: PE
- Color: Black/Transparent Bule
- Unit: mm

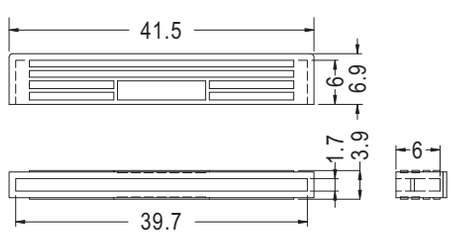

Part No.	Package
GDFC-39	1000

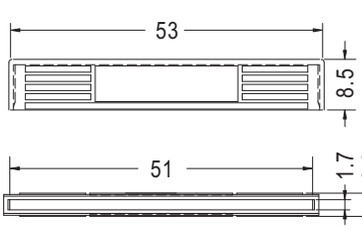


Part No.	Package
GDFC-51	500

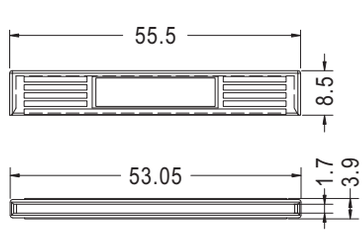

Part No.	Package
GDFC-53	500




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Orange
- Unit: mm

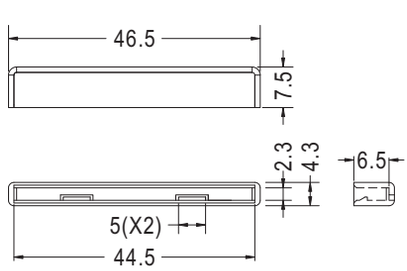


Part No.	Package
HANE-63	1000

防塵蓋 CONNECTOR COVER

用途：用於PC板金手指防塵與保護。

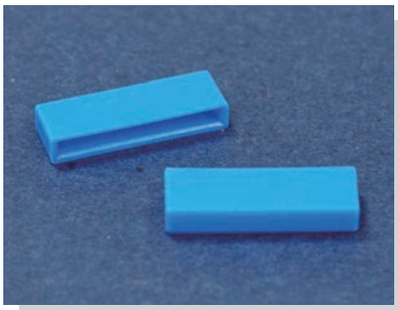


- Material: PE
- Color: Bule
- Unit: mm

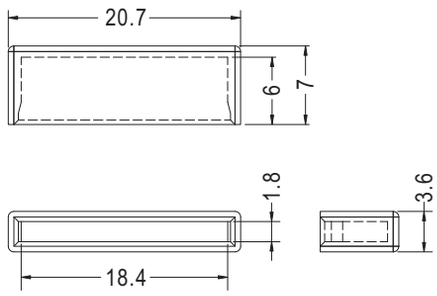


Part No.	Package
GDFC-18N	1000

防塵套 CONNECTOR COVER

用途：用於PC板金手指之絕緣與防塵。

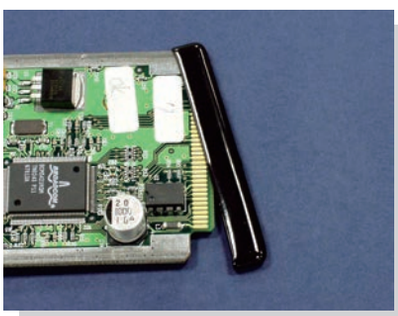

- Material: Soft P.V.C
- Color: Black
- Unit: mm




THICKNESS 1.7~1.8


Part No.	A	B	C	T	Package
FHCV-52	51.8	49.8	11.5	1.0	1000
FUSE-5	65.9	63.5	7.0	1.2	
FUSE-6	91.4	89.0	10.0	1.2	

連接器座 CONNECTOR HOLDER


用途：用於連接器防塵與保護用。

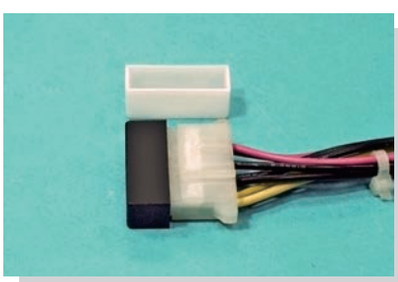


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

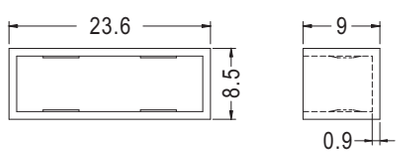

Part No.	Package
FHC-1	500

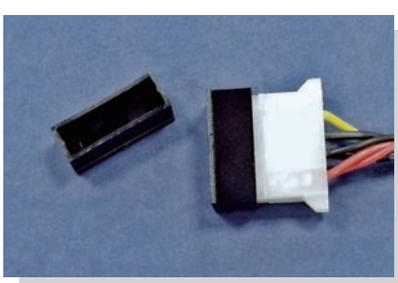


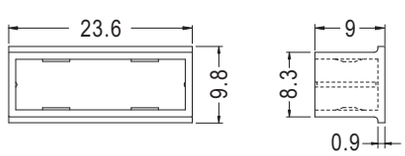


Part No.	Package
FHC-2	500

連接器座 CONNECTOR HOLDER


用途：用於連接器防塵與保護用。

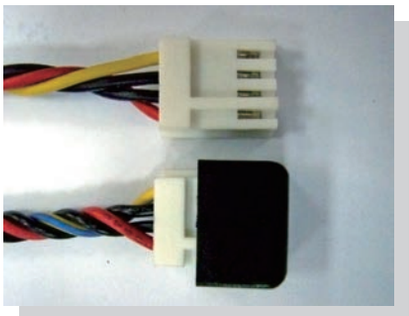


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FHC-3	1000




Part No.	Package
FHC-4	500

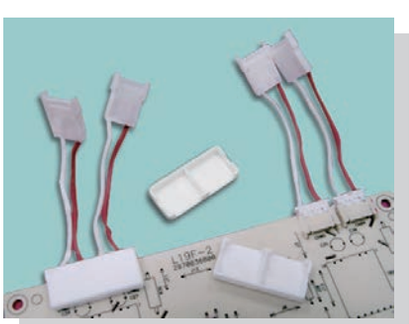

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
CDELT-2	500




Part No.	Package
CDELT-3	500

防塵蓋 CONNECTOR COVER

用途：用於連接器防塵與保護用。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
FHCA-1	1000

PCMIC卡保護蓋 PCMIC CARD SOCKET COVER


用途：用於PCMIC卡保護用。

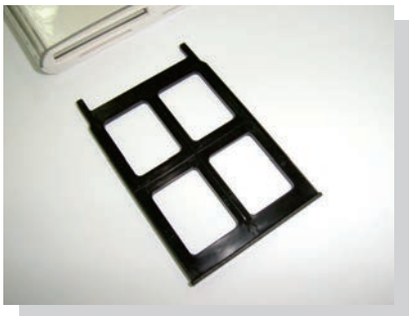


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
PCMIC-1	500

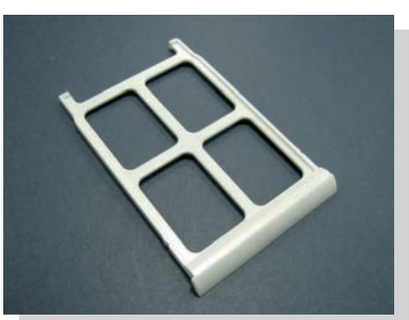


- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black/White
- Unit: mm



Part No.	Package
PCMIC-2	500




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black/White
- Unit: mm



Part No.	Package
PCMIC-3	500




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
PCMIC-4	500

面板 CARD BEZEL

用途：用於IC卡讀卡機之面板。

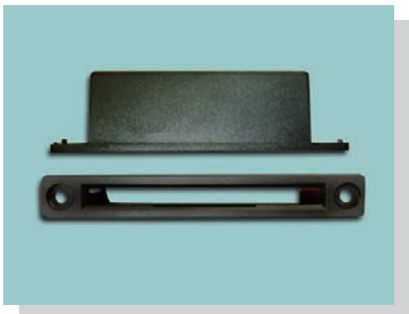


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

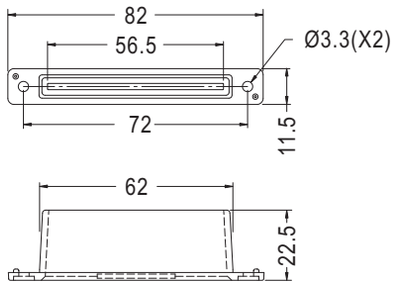


Part No.	Package
CRDCV-56	100

DDR防塵蓋 DDR COVER

用途：用於DDR記憶體之防塵。

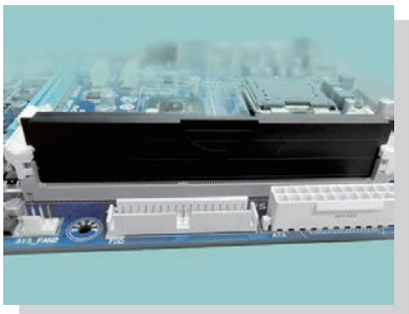

- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

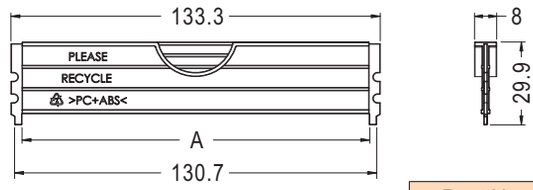


Part No.	A	For	Package
DRAMCV-2	125.5	DDR3	50
DRAMCV-4	125.3	DDR4	

D-SUB保護蓋 D-SUB COVER


用途：用於D-SUB之保護用。




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

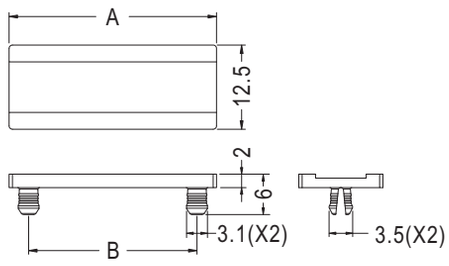

Part No.	A	B	Package
CVR-3012	30.8	25.0	500
CVR-5312	53.0	47.0	250
★CVR-6912	69.3	63.5	

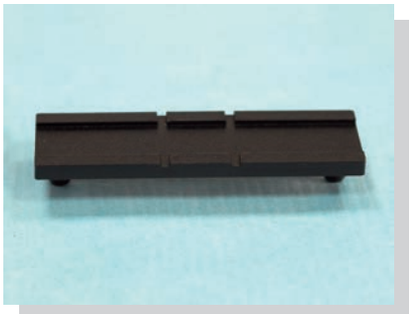


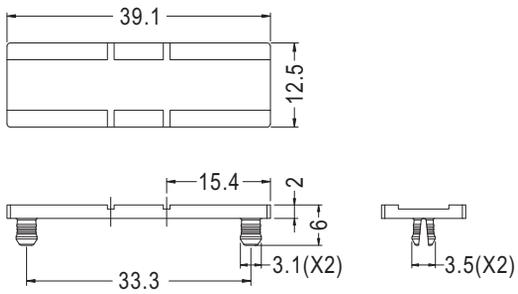


Part No.	Package
CVR-3912	500

高壓防塵蓋 PLASTIC COVER

用途：用於開關電源高壓部分，防止蟑螂入侵，避免造成短路可做為絕緣及防塵、保護用。
(尺寸可依客戶 PC 板設計)

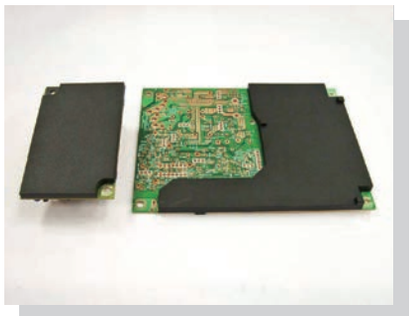


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

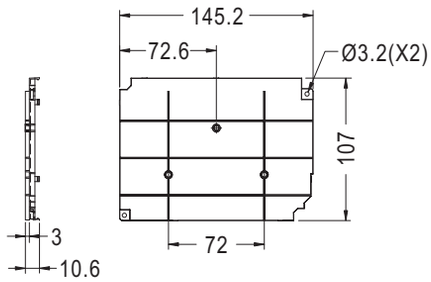


Part No.	Package
CV145107	500

SD卡保護蓋 SD CARD SOCKET COVER


用途：用於 SD 卡保護用。

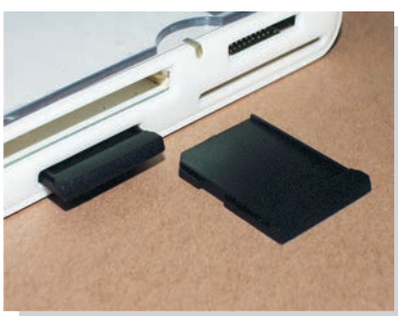

- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
SD-24	500




Part No.	Package
SD-25	500

SIM卡保護蓋 SIM CARD SOCKET COVER

用途：SIM 卡之防塵與保護。



- Material: PC
- Color: Black
- Unit: mm




Part No.	Package
FR2515N	1000

MICRO SD卡保護蓋 CARD SOCKET COVER

用途：用於 MIRCO SD 卡保護用。



- Material: PC+ABS (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm




Part No.	Package
MIOSD-1	1000

防塵蓋 CONNECTOR COVER

用途：用於零件之絕緣。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

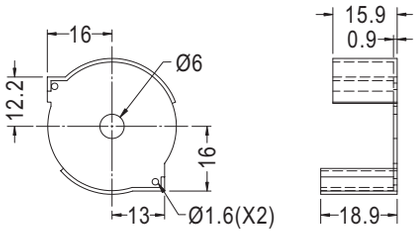


Part No.	Package
BASE-L5	1000

開關蓋 SWITCH COVER

用途：用於開關保護用。



- Body Material: Nylon 66 (UL)
- Cover Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

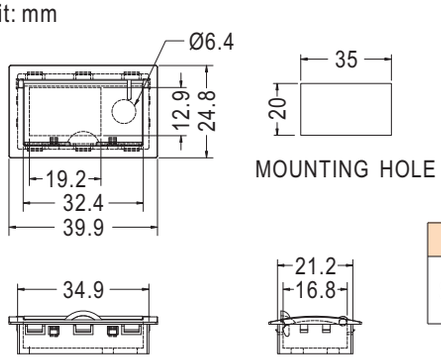


Part No.	Part No.	Package
SCAB-2F	SCAB-2A	21
	SCAB-2B	

開關遮板 SWITCH COVER


用途：用於開關蓋保護用。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
SCAB-7	500




Part No.	Package
SCAB-12	500

開關蓋 TACT SWITCH CAP

用途：用於開關之按鍵。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
TSC-29	1000


尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，代替螺絲，省時不需工具，結合力強。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm

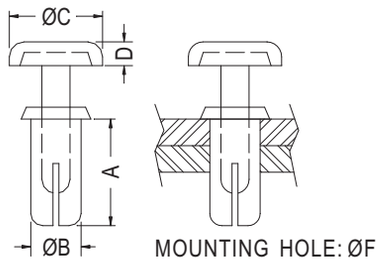


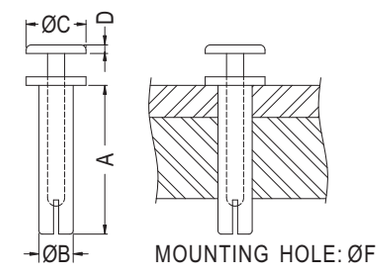


◆ **SR2-4,SR2-5,R2-6,R2-7,SR2-9**

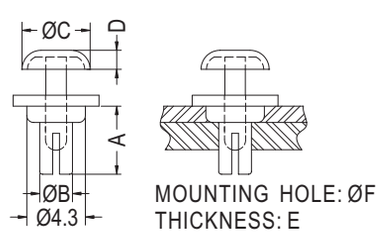

◆ **SR2.5-5.8**

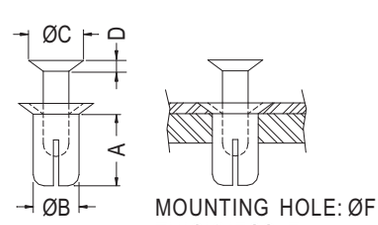

◆ **SR3-4.7F,SR3-13F**

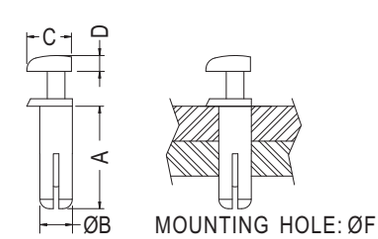

◆ **SR3.5-11D**


Part No.	A	B	C	D	E	F	Package
SR2-3.2	3.2	2.0	4.2	1.2	1.3~2.0	2.0	2000
SR2-3.2S	3.2		4.2	1.2	1.3~2.0		
SR2-4	4.0		3.5	0.5	2.0~3.0		
SR2-5	5.0		4.8	0.75	2.5~3.5		1000
SR2-6	6.0				3.5~4.5		
SR2-7	7.0				4.5~5.5		
SR2-9	8.7	1.95	3.5	0.5	7.2		
SR2.5-5.8	5.0	2.4	5.0	1.4	2.2~3.2	2.4	
SR2.6-3.2	3.2	2.6		1.7	1.0~2.0	2.6	
SR2.6-4.2	4.2				2.0~3.0		
SR2.6-4.8	4.8			1.4	2.5~3.4		
SR2.6-5.5	5.5				3.0~4.3		
SR2.6-6.4	6.4				4.3~5.0	2.6~2.7	
SR2.6-7.2	7.2				4.0~5.3	2.6	
SR2.8-24	24.0	2.8	6.0	1.7	18.5~19.5	2.8	
SR3-3.5	3.6	3.0	6.3		1.0~2.0	3.0	
SR3-4.5	4.5				2.0~3.0		
SR3-4.7F	3.9		3.2	0.5	1.5~2.0		
SR3-5	5.0		6.3	1.7	2.5~3.5	3.0~3.1	
SR3-5.5	5.5				3.0~3.5	3.0	
SR3-5.5-2					3.0~4.0		
SR3-6	6.0				3.5~4.5		
SR3-6.5	6.5				4.0~4.5		
SR3-6.5-1					4.0~5.0		
SR3-7.5	7.5				5.0~6.0		
SR3-8	8.1				5.5~6.5		
SR3-9	9.1				6.5~7.5		
SR3-10	10.0				7.5~8.5		
SR3-12	12.0				7.0~9.0	3.0~3.1	
SR3-13	13.2				10.0~11.0	3.0	
SR3-13F	13.0	3.2	5.3	1.0		3.3	
SR3-15	15.5	3.0	6.2	1.7	11.5~13.0	3.0	
SR3-17	17.0		3.2		12.0~14.0	3.0~3.1	
SR3-18.5	18.5		6.3		15.0~16.5	3.0	
SR3.2-4.5	4.5	3.2			1.5~3.0	3.2	
SR3.5-3.5	3.5	3.5	6.3		1.5~2.0	3.5	
SR3.5-4.5	4.5				2.0~3.0		
SR3.5-5	5.0				2.5~3.5		
SR3.5-5.5	5.5				3.0~4.0		
SR3.5-6	6.0						
SR3.5-7	7.0				4.5~5.5		
SR3.5-7.5	7.5				5.0~6.0		
SR3.5-9	9.0				6.0~7.0		
SR3.5-11D	11.0	3.5	4.9	1.7	6.5~7.5	3.5~3.6	
SR3.5-23	23.0		6.3		18.5~20.0	3.5	
SR3.5-32	32.0	3.45			28.0		
SR3.8-6.5	6.5	3.8		2.0	4.0~4.5	3.8	

尼龍鉚釘 SNAP RIVET


用途：用於PC板、鐵板零件固定，代替螺絲，省時不需工具，結合力強。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



MOUNTING HOLE: ØF
THICKNESS: E



MOUNTING HOLE: ØF
THICKNESS: E

◆ **SR4-5.5F,SR4-6F,SR4-7F,SR4-7FS, SR4-8F,SR4-10F,SR4-13F,SR5-4.5F**


Part No.	A	B	C	D	E	F	Part No.
SR4-4.6	4.6	4.0	7.8	1.9	2.5~3.5	4.0~4.1	1000
SR4-5	5.0					4.0	
SR4-5.5F	5.5		5.8	0.7	2.0~3.0		
SR4-6	6.1		7.8	1.9	3.5~4.5		
SR4-6F			7.5	1.1	3.0~4.0		
SR4-7	7.1		8.0	2.0	4.5~5.5		
SR4-7F	7.2		7.5	1.1	3.5~5.0		
SR4-7FS	7.0		6.4	0.8			
SR4-8	8.1		8.0	2.0	5.5~6.5		
SR4-8F	8.2		7.5	1.1			
SR4-9	9.0		8.0	2.0	6.5~7.5		
SR4-10	10.0				7.5~8.5		
SR4-10F			6.8	1.5			
SR4-12	12.0		8.0	2.0	9.5~10.5		
SR4-13F	14.5		6.4	1.0	10.0~11.0		
SR4-14	13.7		8.0	2.0	11.0~12.0		
SR4-15	15.3				11.5~13.0		
SR4-15.5	15.5						
SR4-20	20.0				15.0~17.0		500
SR4-25	24.5				22.0~23.0		
SR4.3-5	5.0	4.3	7.8	1.9	2.5~3.5	4.3	1000
SR5-4.5	4.6	5.0	8.9	2.2	1.5~2.5	5.0	1000
SR5-4.5F	7.0		8.5	2.5	3.5~4.5		
SR5-5.5	5.5		8.9	2.0	2.5~3.5		
SR5-6.5	6.5			2.2	3.5~4.5		
SR5-7.5	7.5				4.5~5.5		
SR5-8.5	8.4				5.5~6.5		
SR5-9.5	9.5			2.1	5.5~7.5		
SR5-10.5	10.5				6.5~8.5		
★SR5-10.5L		4.95	10.0				
SR6-6	6.0	6.0	12.0	2.5	2.5~4.0	6.0	
SR6-8	8.0			3.0	4.5~6.0		
SR6-10.5	10.5				7.5~8.5	6.1	


尼龍鉚釘 SNAP RIVET

用途：用於風扇之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE Ø3.0
THICKNESS: E


Part No.	A	E	Package
SRFA3-3.5	3.5	1.0~2.0	1000
SRFA3-4	4.0	1.5~2.5	

尼龍鉚釘 SNAP RIVET

用途：用於風扇之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.1~Ø3.2
THICKNESS: E


Part No.	A	E	Package
SRE3-4.5	4.5	2.0~3.0	1000
SRE3-5.5	5.5	3.0~4.0	

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

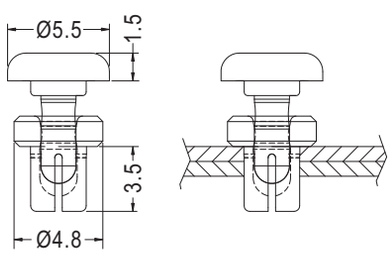


MOUNTING HOLE Ø3.0
THICKNESS 1.6

Part No.	Package
ULCZ-1.6	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 10.0~11.0

Part No.	Package
SRS3-13P	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø3.5
THICKNESS: E


Part No.	A	E	Package
SRF3.5-11	11.0	8.0	1000
SRF3.5-29	29.0	25.0	
SRF3.5-37	37.0	34.0	

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE: ØF
THICKNESS: E


Part No.	A	B	C	D	E	F	Package
SRS3.5-4.5P	4.5	3.5	6.3	1.7	1.5~3.0	3.5	1000
SRS3.5-7P	7.0	3.5	5.0	1.7	4.5~5.5	3.5~3.6	

尼龍鉚釘 SNAP RIVET

用途：用於風扇之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
SRF3.5-65	500

MOUNTING HOLE Ø3.5
THICKNESS 62.0



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
SRF4-8	1000


MOUNTING HOLE Ø4.2
THICKNESS 5.5~6.5

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm

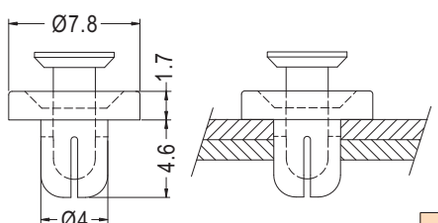

Part No.	Package
SRF4-4.6F	1000


MOUNTING HOLE Ø4.0
THICKNESS 1.8~2.5

尼龍鉚釘 SNAP RIVET

用途：用於風扇之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø4.0


Part No.	A	Package
SRF4-28	28.0	500
SRF4-30	30.0	
SRF4-31	31.0	

尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，代替螺絲，省時不需工具，結合力強。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.5
THICKNESS 5.0~6.0


Part No.	Package
SRR3.5-7.5	1000

尼龍鉚釘 SNAP RIVET

用途：用於風扇之固定。

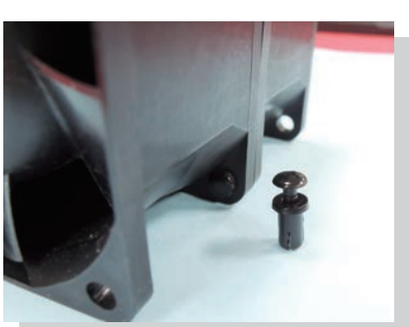

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




MOUNTING HOLE Ø4.5
THICKNESS: E


Part No.	A	E	Package
SRR4.5-8	8.0	4.2	1000
SRR4.5-9	9.0	5.2	
SRR4.5-10	10.0	6.2	
SRR4.5-12	12.0	8.2	
SRR4.5-14	14.0	10.2	
SRR4.5-16	16.0	12.2	

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。

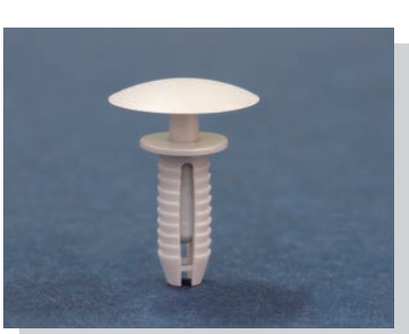

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



MOUNTING HOLE Ø7.0
THICKNESS 10.0


Part No.	Package
SRB-1	1000


尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，代替螺絲，省時不需工具，結合力強。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE Ø4.3~Ø4.4
THICKNESS 4.5


Part No.	Package
SRH4.2-8	1000

固定扣 DOOR LATCH












用途：固定於兩片鐵板，一般用於機器的門扣，拆卸方便。



- Clip Material: Nylon 66 (UL) 94V-2/ PC (UL) 94V-2
- Pin Material: Nylon 66 (UL) 94V-2
- DI-11 Material: Pom (UL) 94HB
- Color: Natural/White/Black
- Unit: mm



Plunger Head Style

DL-1/DL-6	DL-2	DL-3/DL-4	DL-5	DL-7	DL-17
					
DL-9	**DL-10**	**DL-11**	**DL-14**	**DL-16**	
					


Part No.	L	T	G	Hole		Package
				A Board	B Board	
DL-1	11.1	1.6	2.0~4.2	Ø7.5	Ø8.0	500
DL-2						
DL-3	10.4	1.6	2.0~4.2	Ø6.0~Ø6.1	Ø6.4	
DL-4	11.4	2.5	3.0~5.2			
DL-5	9.5	1.6	2.0~3.6	Ø4.5	Ø4.8	
DL-6	12.0	2.4	3.5	Ø6.6	Ø7.8	
DL-7						
DL-9	13.0	4.3	6.9	Ø6.0	Ø6.35	
DL-10	11.0	2.0	5.5	Ø6.0	Ø6.4~Ø6.5	
DL-11	10.5	1.0~1.65	2.1~4.35	Ø7.5~Ø7.6	Ø8.0~Ø8.2	
DL-14	11.0	2.0	5.5	Ø6.0	Ø6.4~Ø6.5	
DL-16	10.4	1.6	2.0~4.2	Ø6.0~Ø6.1	Ø6.4	
DL-17	12.67	1.6	2.0~3.6	Ø4.5	Ø4.8	

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




CHASSIS Ø3.5
THICKNESS 2.5~3.5

Part No.	Package
SRS3.5-5P	1000



CHASSIS Ø4.1
THICKNESS 4.5~5.5

Part No.	Package
SRS4-7P	1000



CHASSIS Ø4.1~Ø4.2
THICKNESS 6.5~7.5


Part No.	Package
SRS4-9K	1000

尼龍鉚釘 SNAP RIVET

用途：用於風扇之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



HOLE IN FAN Ø3.1~Ø3.3
THICKNESS 3.9~4.6

Part No.	Package
SRCC-12F	1000


鉚釘 SNAP RIVET

用途：用於風扇之固定。



- Material: TPE
- Pin Material: Nylon 66(UL)
- Flame Class : 94V-2/94V-0
- Color: Black
- Unit: mm

HOLE IN FAN Ø3.6
THICKNESS 0.8




HOLE IN FAN Ø3.5
THICKNESS 5.0

Part No.	Package
SRCC-13	1000



- Material: TPV(UL)
- Pin Material: Nylon 66(UL)
- Flame Class : 94V-0
- Color: Black
- Unit: mm



HOLE IN FAN Ø4.5
THICKNESS 3.5


Part No.	Package
SRCC-11	1000

尼龍鉚釘 SNAP RIVET

用途：用於CPU座與主機板之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

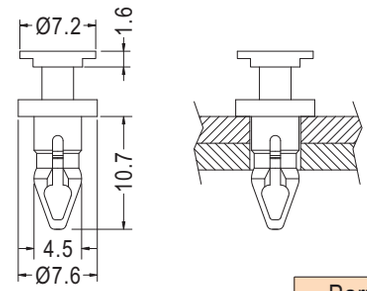


MOUNTING HOLE Ø4.6
THICKNESS 4.8MAX

Part No.	Package
SRCC-4	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.1
THICKNESS 4.8MAX

Part No.	Package
SRCC-5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.0
THICKNESS 4.4

Part No.	Package
SRCC-7	1000

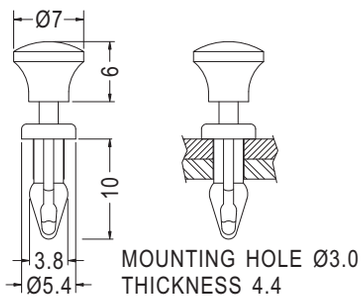

MOUNTING HOLE Ø3.0
THICKNESS 4.4


Part No.	Package
SRCC-7-1	1000

鉚釘 SNAP RIVET

用途：用於風扇之固定。



- Material: TPU
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

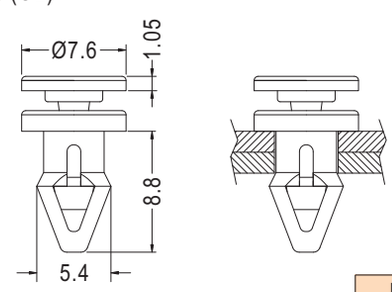

HOLE IN FAN Ø4.4
THICKNESS 3.0


Part No.	Package
SRCC-9	1000

尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，結合力強。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø8.0
THICKNESS 3.5~4.2


Part No.	Package
PR-1	500

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.5~Ø4.7
THICKNESS 8.3~10.0

Part No.	Package
PR-2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø5.0
THICKNESS 2.5~6.0

Part No.	Package
PR-5	1000






MOUNTING HOLE Ø7.0 MAX.
THICKNESS 6.0

Part No.	Package
PR-6	1000



- Bmaterial: PC (UL)
- Flame Class: 94V-0
- Color: White/Black
- Unit: mm



MOUNTING HOLE Ø3.5
THICKNESS 1.6~2.4

NEW


Part No.	Package
SRU3.5-4.5	1000

鉚釘 SNAP RIVET

用途：用於PC板、鐵板零件固定，結合力強。



- Material: POM
- Color: Black
- Unit: mm




CHASSIS Ø7.0
THICKNESS 3.2~3.8


Part No.	Package
DLB-1	1000

尼龍鉚釘 SNAP RIVET

用途：用於車用板件或板件間之固定，使用方便。

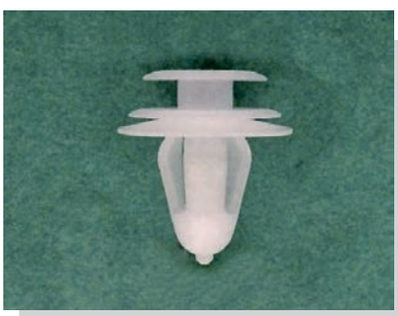

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø8.0
THICKNESS 0.8~1.6


Part No.	Package
CAPR-10	500

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
PIC-10	8.5	1000
PIC-14	12.7	

尼龍鉚釘 SNAP RIVET

用途：用於裝配的孔或機板間之固定，敲入後可牢固於物件上。

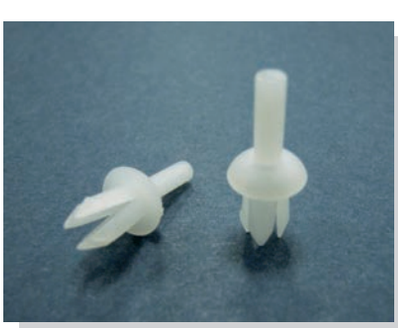


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS: ØD
THICKNESS: E

- Material: Nylon 66 (UL)/PP
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



MOUNTING HOLE: ØD


Part No.	A	B	C	D	E	Package
PSR-1	17.62	7.62	7.14	4.0	1.57~5.0	1000
PSR-2	16.1	7.4	7.14	4.8	1.57~5.53	

Part No.	A	B	C	D	F	Package
PSR-3	26.5	11.6	11.6	6.3	1.9	1000
PSR-4	17.8	7.9	8.7	4.8	2.0	

用途：用於裝配的孔或機板間之固定，敲入後可牢固於物件上。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø5.0
THICKNESS 1.5~5.0

Part No.	Package
PSR-5	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.4~Ø3.7
THICKNESS 3.4~4.8

Part No.	Package
PSR-6	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø5.0
THICKNESS 3.0~7.0

Part No.	Package
PSR-7	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø5.1
THICKNESS 4.1~5.1

Part No.	Package
PSR5.1-7	1000


用途：用於裝配的孔或機板間之固定，
敲入後可牢固於物件上。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØD
THICKNESS: E




CHASSIS: ØD
THICKNESS: E
◆ **PSR-8**



CHASSIS: ØD
THICKNESS: E
◆ **PSR5.5-10S**



CHASSIS: ØD
THICKNESS: E
◆ **PSR5.5-11**




CHASSIS: ØD
THICKNESS: E
◆ **PSR5.5-11.5**

Part No.	A	B	C	D	E	Package
PSR-8	18.0	8.2	7.5	4.0~4.2	4.0~6.5	1000
PSR5-7	18.7	7.3	9.9	5.2	2.0	
PSR5.5-10	26.7	10.0	14.6	5.7~6.0	7.0	
PSR5.5-10S	23.4	9.9	12.0	5.5	7.0	
PSR5.5-15	36.5	14.9	14.6	6.0	10.0	
PSR5.5-11	23.8	11.0	16.0	5.5~6.4	2.5~6.5	
★PSR5.5-11.5	28.8	11.8	11.1	5.5	2.4~7.9	




- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6~Ø6.4

Part No.	Package
PSR6-1	1000

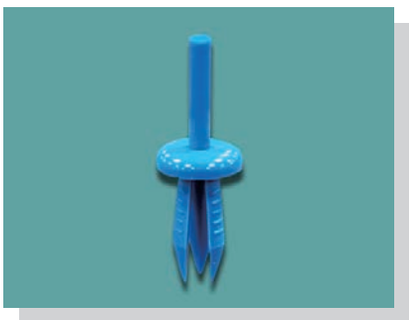


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Blue
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 5.0

Part No.	Package
PSR4-12	1000

- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Blue
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 5.0


Part No.	Package
PSR4-12L	1000

用途：用於裝配的孔或機板間之固定，
敲入後可牢固於物件上。






- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



CHASSIS Ø6.0
THICKNESS 6.0

Part No.	Package
PSR6-11	1000

- Material: PE
- Color: Gray
- Unit: mm




CHASSIS Ø7.0
THICKNESS 7.0

Part No.	A	Package
PSR6-14	29.3	1000
PSR6-14L	30.3	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.0
THICKNESS 1.5~6.0

Part No.	Package
PSR4-7.5	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS: ØD
THICKNESS: E

Part No.	A	B	C	D	E	Package
PSR6-10	23.0	10.0	14.8	6.0	2.0~7.0	1000
PSR6-15	36.8	15.0	14.8	6.35	6.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø3.0
THICKNESS: 3.0 MAX


Part No.	Package
PSR3-5.5	1000

尼龍鉚釘 SNAP RIVET

用途：用於裝配的孔或機板間之固定，敲入後可牢固於物件上。

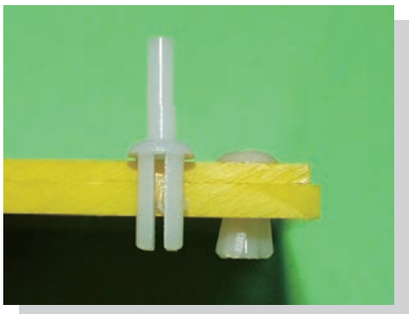


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.0
THICKNESS 4.0

Part No.	Package
PSR4-8	1000




CHASSIS Ø4.6~Ø4.8
THICKNESS 6.5

Part No.	Package
PSR48-10	1000

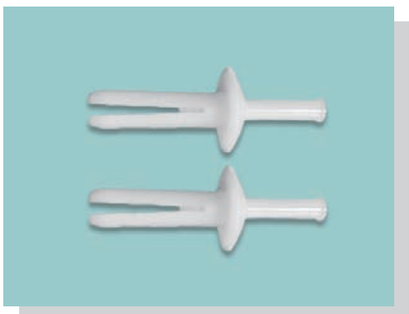


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø6.4

Part No.	Package
PSR64-25	1000



CHASSIS Ø6.35


Part No.	Package
PSRB-1	1000


尼龍鉚釘 SNAP RIVET

用途：用於兩片機板間之固定，配合拉釘工具使用。



- Clip Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: POM (UL)/94HB
- Color: Black
- Unit: mm






Part No.	Package
CRK5-15	500

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

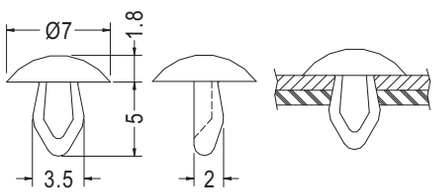

CHASSIS Ø3.15~Ø3.2
THICKNESS 1.6~1.9

Part No.	Package
MB-4	2000

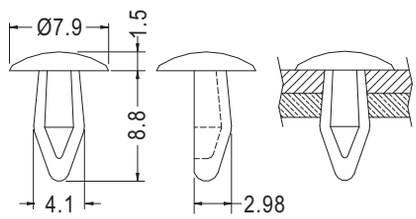


CHASSIS Ø3.5~Ø3.7
THICKNESS 3.5~4.0

Part No.	Package
MB-5	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm

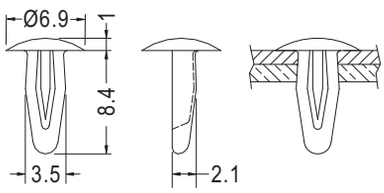


CHASSIS Ø3.1~Ø3.2
THICKNESS 2.0~2.5

Part No.	Package
MB-6	2000

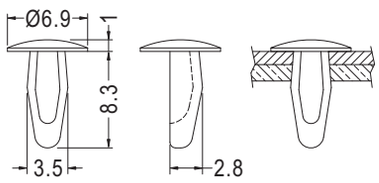


CHASSIS Ø3.1~Ø3.2
THICKNESS 2.0~2.5

Part No.	Package
MB-7	2000

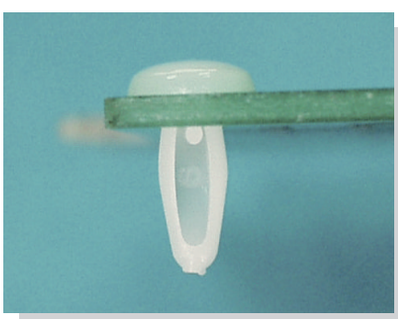

- Material: POM(UL)/Nylon 66 (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm

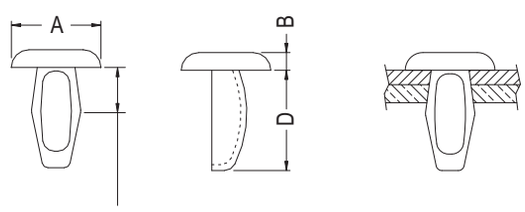


MOUNTING HOLE: E
BOARD THICKNESS: F


Part No.	A	B	D	E	F	Package
MB-1N	7.6	1.6	8.6	3.3~3.5	2.0~3.1	2000
MB-1						
MB-1(B)						
MB-2N	7.6	1.3	10.8	3.3~3.6	3.0~4.0	1000
MB-2						
MB-2(B)						
MB-3N	7.3	1.4	8.4	3.0~3.2	2.0~3.5	2000
MB-3N(B)						

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

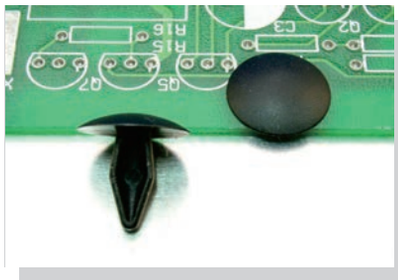


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

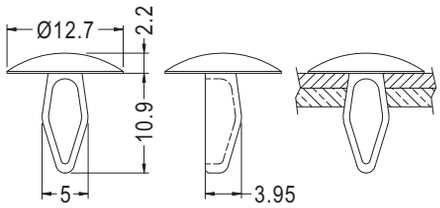

CHASSIS Ø4.0
THICKNESS 2.5~3.5


Part No.	Package
MB-18	1000

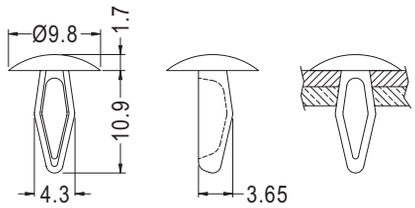

CHASSIS Ø3.9~Ø4.05
THICKNESS 2.1~3.7


Part No.	Package
MB-19	1000



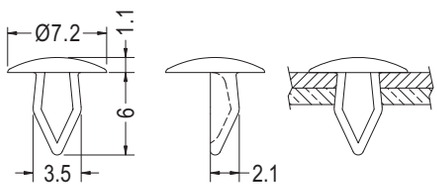

CHASSIS Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	Package
MB-27	1000

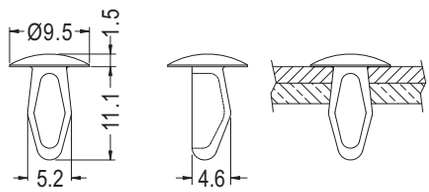


CHASSIS Ø4.7~Ø4.8
THICKNESS 2.5~4.0

Part No.	Package
MB-36	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

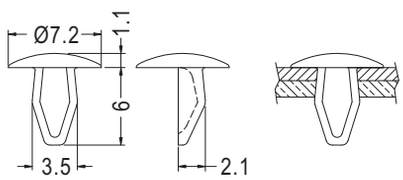

CHASSIS Ø3.0~Ø3.2
THICKNESS 0.8~2.0

Part No.	Package
MB-43	2000

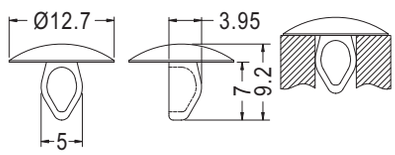


CHASSIS Ø4.8

Part No.	Package
MB-52	2000



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Natural/White/Black
- Unit: mm

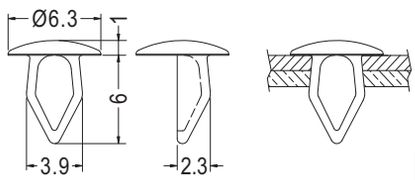


MOUNTING HOLE Ø3.5
THICKNESS 0.8~2.0


Part No.	Package
MB-55	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

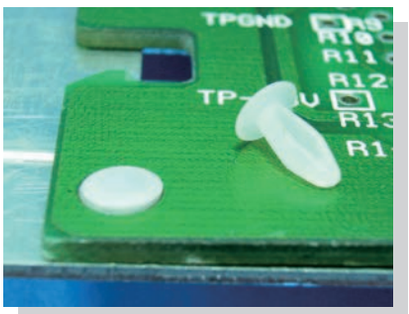


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

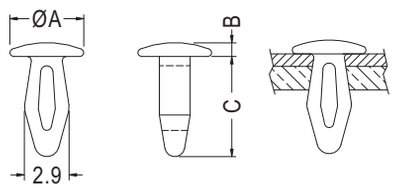

CHASSIS Ø2.5
THICKNESS 2.0~2.5


Part No.	A	B	C	Package
MB-16	4.8	0.9	6.5	1000
MB-21	4.75	0.95		

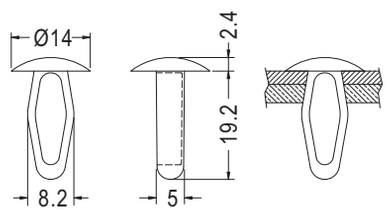

CHASSIS Ø6.4
THICKNESS 5.0


Part No.	Package
MB-39	1000



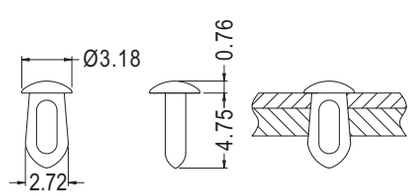

CHASSIS Ø2.16~Ø2.29
THICKNESS 0.81~2.72

Part No.	Package
MB-56	1000

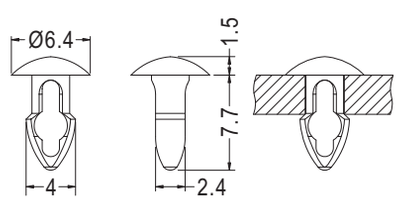


CHASSIS Ø3.17
THICKNESS 3.17


Part No.	Package
★MB-57	2000

鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

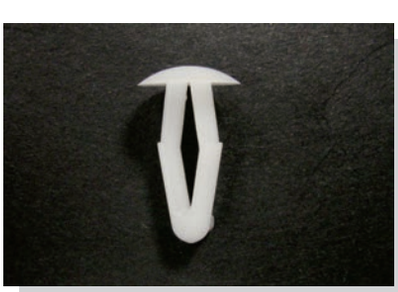


- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

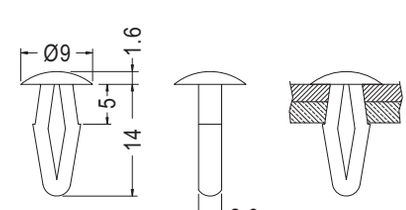

CHASSIS Ø3.9
THICKNESS 1.0~5.0

Part No.	Package
MB-23	1000



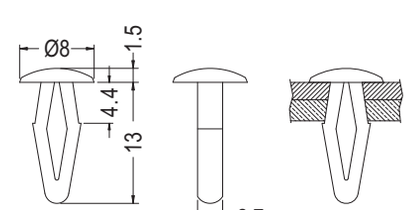

CHASSIS Ø3.2
THICKNESS 1.0~4.5


Part No.	Package
MB-28	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)/ POM
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

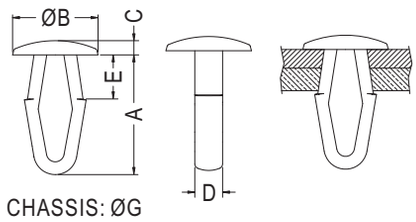


CHASSIS: ØG
THICKNESS: T

Part No.	A	B	C	D	E	G	T	Package
MB-30	16.8	12.0	2.0	3.9	6.2	6.4	1.5~6.2	2000
MB-48	15.0	11.0	2.9	3.4	5.7	4.7	1.0~5.5	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

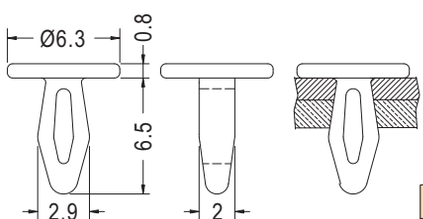


MOUNTING HOLE Ø2.5
THICKNESS 2.0~2.5

Part No.	Package
MB-50	2000

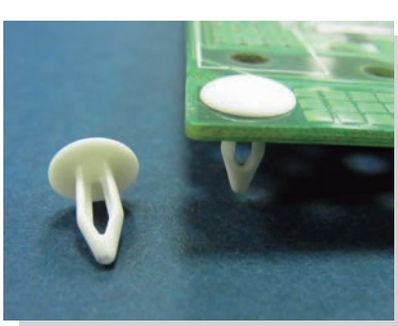


- Material: Nylon 66/PBT (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

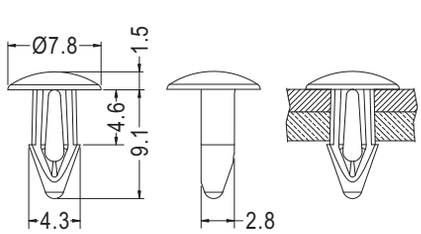

HOLE IN P.C.B Ø3.6

Part No.	Package
MB-34	2000

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

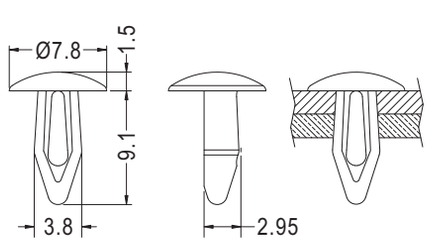


CHASSIS Ø3.5
THICKNESS 3.5~4.3


Part No.	Package
MB-44	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於各種零件間之固定，省時方便。

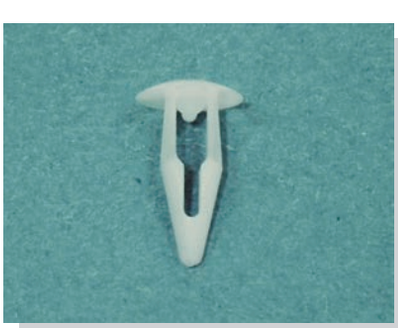

- Material: Nylon 66 (UL)/POM (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: White/Black
- Unit: mm

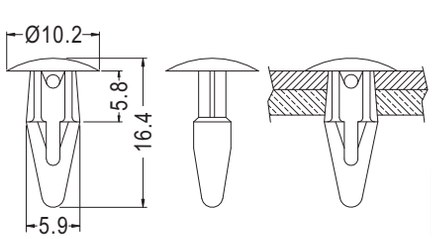


CHASSIS Ø5.0

Part No.	Package
MBT-1	1000

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

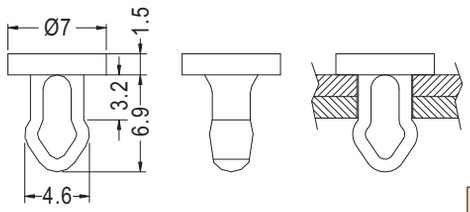


CHASSIS Ø4.0

Part No.	Package
MBT-2	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.0
THICKNESS 3.4

Part No.	Package
HSR-8A	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLE
THICKNESS 3.0


Part No.	Package
MBS3-3	2000

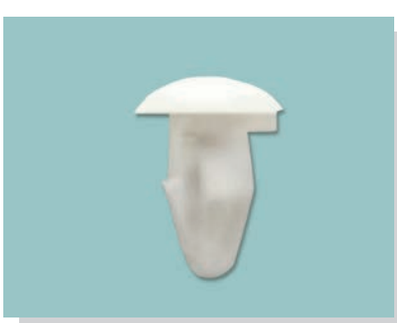







MOUNTING HOLE
THICKNESS 2.5




MOUNTING HOLE
THICKNESS 1.5

Part No.	Package
MBU3-3	2000

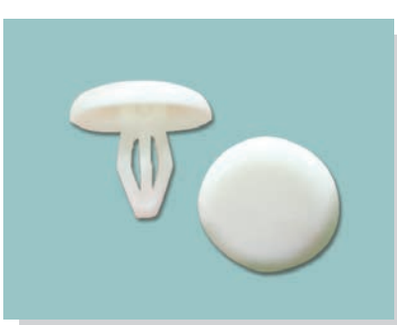





MOUNTING HOLE


Part No.	Package
MBS3-4	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/White
- Unit: mm




HOLE Ø5.0~Ø5.2
THICKNESS 3.2

Part No.	Package
HSRA-1	1000

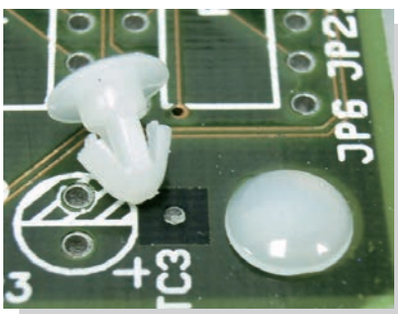

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø3.0
THICKNESS: B


Part No.	A	B	C	Package
MBL3-2	2.2	2.0	5.5	2000
MBL3-2.5	2.5	2.4	6.4	
MBL3-3	3.0	2.8	6.4	
MBL3-3.5	3.7	3.5	5.5	


尼龍鉚釘 MOUNTING BUTTON

用途：裝於機殼上，避免使用者不當自行拆機。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)






MOUNTING HOLE
THICKNESS 3.5~3.8


Part No.	Package
LEFS-2	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

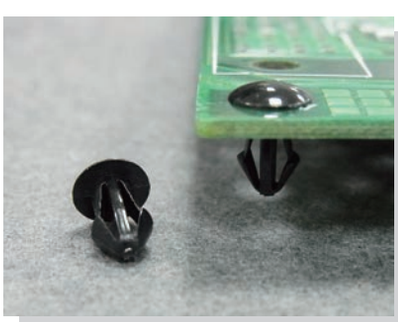

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.5

Part No.	Package
MB-33	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø4.0
THICKNESS 2.2


Part No.	C	Package
MB-32	7.0	1000
MB-53	8.0	

尼龍鉚釘 MOUNTING BUTTON

用途：裝於機殼上，避免使用者不當自行拆機。

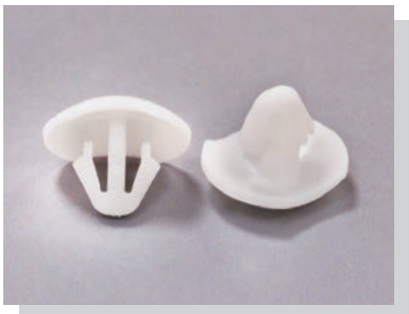

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm

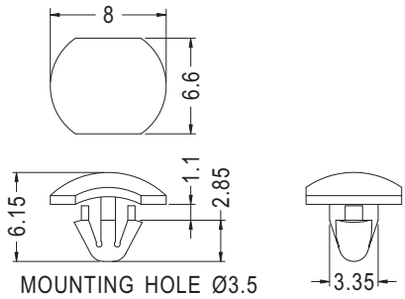

MOUNTING HOLE Ø3.5
THICKNESS 1.2~1.4


Part No.	Package
MB-45	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE Ø4.8
THICKNESS: E

Part No.	A	B	C	E	Package
MBL4.8-2	10.7	12.0	6.7	2.0	1000
MBL4.8-2-4	11.1				
MBL4.8-2.4	11.2	12.0	6.7	2.4	
MBL4.8-3	11.1	10.0	7.3	2.0	
MBL4.8-4	12.8	12.0	6.7	4.0	

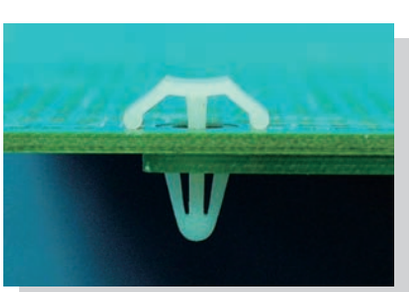


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

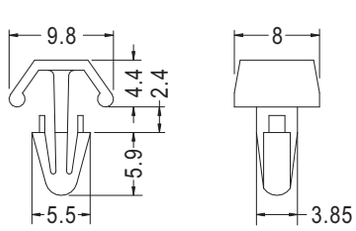

CHASSIS Ø4.0
THICKNESS 2.5~3.2

Part No.	Package
MB-10	1000





CHASSIS Ø3.2
THICKNESS 0.8~2.3


Part No.	Package
MB-12	1000

鉚釘 MOUNTING BUTTON

用途：用於螺絲孔的塞頭。



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black/Gray
- Unit: mm

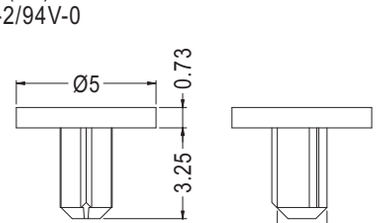

CHASSIS Ø1.8~Ø2.0


Part No.	Package
MB-20	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

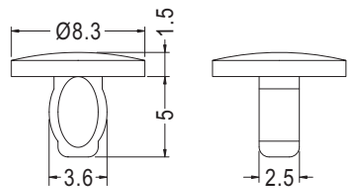


CHASSIS Ø3.2~Ø3.5

Part No.	Package
MB-8	1000

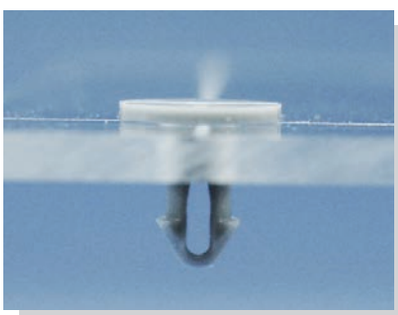

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm




CHASSIS Ø2.0
THICKNESS 3.2

Part No.	Package
MB-14	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø2.3
THICKNESS 1.6


Part No.	Package
MBT2.3-1.6	2000



CHASSIS Ø3.0
THICKNESS 1.6~1.8


Part No.	Package
MBT3-2	2000





CHASSIS Ø4.0

Part No.	A	B	Package
MBT-7	4.3	6.0	2000
MBT4-2	2.0	3.7	




CHASSIS Ø4.5
THICKNESS 3.0


Part No.	Package
MBT-10	1000

鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。

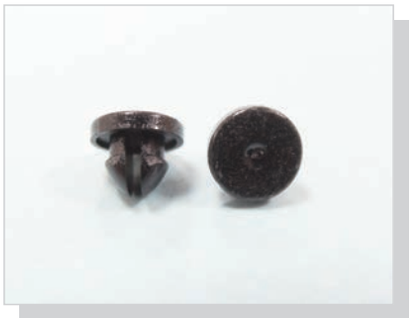

- Material: PC
- Color: Black
- Unit: mm

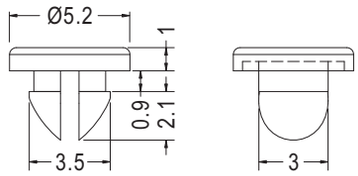

CHASSIS Ø3.1
THICKNESS 0.8


Part No.	Package
MBT3.1-0.8	2000


尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

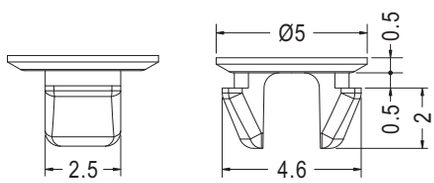




MOUNTING HOLE Ø4.0
CHASSIS THICKNESS 1.0~1.2

Part No.	Package
MBE4-1.2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø6.2
THICKNESS 2.4

Part No.	Package
MBT6.2-3	2000




CHASSIS Ø6.0
THICKNESS 1.2

Part No.	Package
MBT6-2	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.35
THICKNESS 0.79~1.58

Part No.	Package
MBT-11	2000



MOUNTING HOLE Ø4.8
THICKNESS 0.8~3.6

Part No.	Package
MBT-12	2000




MOUNTING HOLE Ø9.5
THICKNESS 0.8~3.6


Part No.	Package
MBT-13	1000

尼龍鉚釘 SNAP RIVET


用途：用於PC板、鐵板、書本間固定，結合力強，搭配BRR1-1使用。

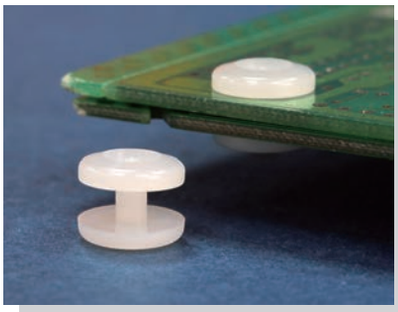


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



TO FIT IN Ø3.2 HOLE



◆ **BRR1-1**



THICKNESS: E
(組裝示意圖)


Part No.	A	E	Package
BRP1-1.6	1.6	0.76	1000
BRP1-2.4	2.4	1.57	
BRP1-3.4	3.3	2.54	
BRP1-4	4.0	3.18	
BRP1-5.6	5.5	4.75	
BRP1-7.2	7.1	6.35	

尼龍鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

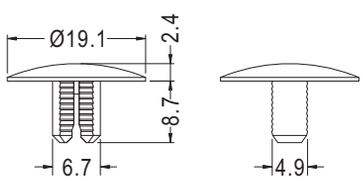

MOUNTING HOLE Ø7.1
ASSEMBLED THICKNESS 8.8~12.8


Part No.	Package
MBG2-8.7	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.5

Part No.	Package
MBW-7	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.0


Part No.	Package
MBW-9	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.0
THICKNESS 5.7~10.7

Part No.	Package
MBW-28	1000




MOUNTING HOLE Ø4.0
THICNKESS 2.1~15.9

Part No.	Package
★MBW-55	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø4.5~Ø4.8

Part No.	Package
MBW-14	1000

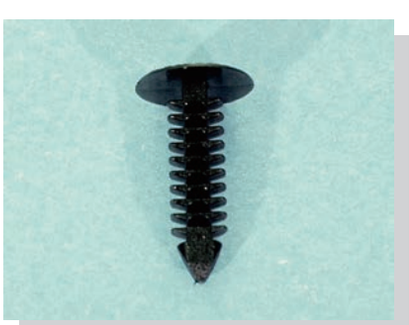


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø4.8
THICKNESS: E


Part No.	A	B	E	Package
MBW-17	18.5	17.5	2.54~15.2	1000
MBW-23	21.5	20.5	4.0~25.0	

- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE ØF
THICKNESS 1.5~8.0

Part No.	C	F	Package
MBW-42S	3.3	2.7~3.3	1000
MBW-42	3.4	3.0~3.3	

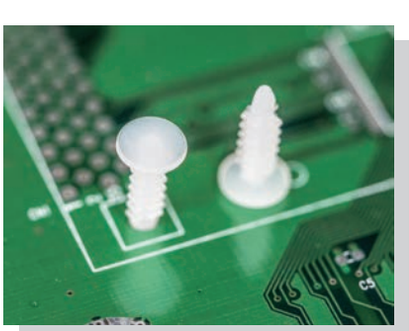


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø6.4~Ø7.0

Part No.	Package
MBW-24	1000

- Material: Nylon 6 (UL)
- Flame Class: 94V-2
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.0~Ø6.3
THICKNESS 2.5~12.0

Part No.	Package
MBW-51	1000

用途：用於木板、鐵板、PC板...等，板子間的結合固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø7.0
THICKNESS 3.2~6.0

Part No.	Package
MBW-27	1000

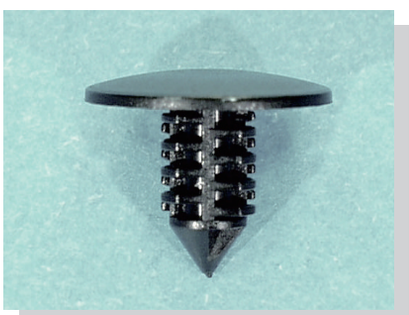


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE: ØF
THICKNESS: E

Part No.	A	B	C	D	E	F	G	Package
MBW6-11	13.0	11.0	2.0	18.5	0.8~7.4	6.35	7.4	1000
MBW7-20	23.0	20.0	3.0	25.4	2.54~20.0	7.0	7.86	

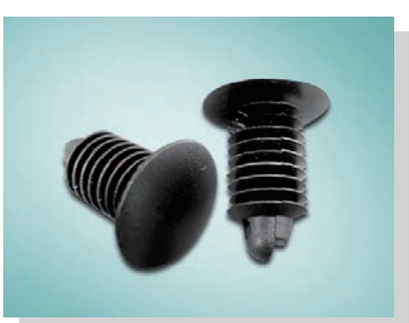

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø5.5
THICKNESS 0.7~6.4

Part No.	Package
MBW5-12	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.2
THICKNESS 1.57~6.35


Part No.	Package
MBW-31	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.2
THICKNESS 1.6~9.5

Part No.	Package
MBW-49	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø6.35
THICKNESS 1.57~6.35

Part No.	Package
MBW-32	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø7.9
THICKNESS 1.6~15.9

Part No.	Package
MBW-33	1000



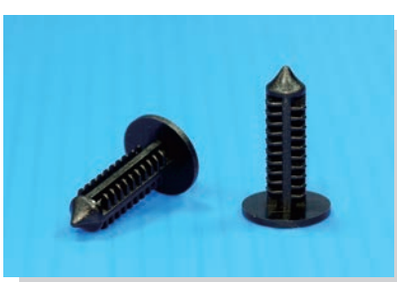


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø5.0
THICKNESS 2.5~4.5

Part No.	Package
MBW-29	1000



MOUNTING HOLE Ø5.0
THICKNESS 1.5~11


Part No.	Package
★MBW-52	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø7.9
THICKNESS 1.6~15.9

Part No.	Package
MBW-43	1000




MOUNTING HOLE Ø4.8
THICKNESS 1.6~12.7

Part No.	Package
MBW-50	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0
THICKNESS 1.6~3.0

Part No.	Package
MBW-47	1000

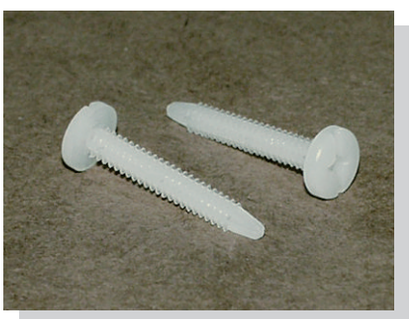

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	Package
MBW-18	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.0


Part No.	Package
MBW-21	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.2

Part No.	Package
MBW-36	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

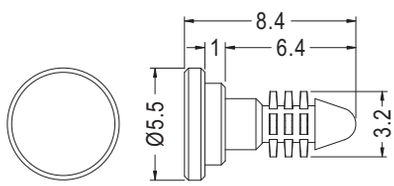

MOUNTING HOLE Ø3.0

Part No.	Package
MBW-38	2000

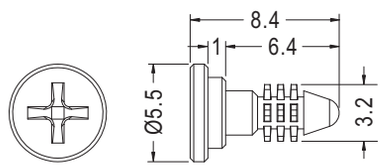

MOUNTING HOLE Ø3.0


Part No.	Package
MBW-40	2000

尼龍鉚釘 MOUNTING BUTTON

用途：用於木板、鐵板、PC板...等，板子間的結合固定。



- Material: POM
- Color: White
- Unit: mm



MOUNTING HOLE Ø3.96
THICKNESS 0.8~7.92


Part No.	Package
MBW-48	500

螺絲鉚釘 SCREW RIVET

用途：螺絲孔之保護。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



FOR NUT: H
THICKNESS: E


Part No.	B	C	D	E	G	H	Package
MBWC-1	12.0	2.5	16.8	5.0	3.5	M6	1000
MBWC-1-1					3.45		
MBWC-4	18.0			10.0			
MBWC-5	14.0			5.0	4.5	M8	


尼龍鉚釘 SNAP RIVET

用途：用於木板、鐵板、PC板...等，板子間的結合固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





MOUNTING HOLE
THICKNESS 60.0


Part No.	Package
MBW-34	500


尼龍鉚釘 SNAP RIVET

用途：用於PC板、鐵板、書本間固定，可調式，結合力強，可搭配BRR1-1使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm





(使用示意圖)


Part No.	Package
MBW-41	500

散熱片鉚釘 SNAP RIVET

用途：將散熱片固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE Ø3.0


Part No.	Package
MBW3-8	1000

鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.2
THICKNESS 3.0

Part No.	Package
MBW-22	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0


Part No.	Package
MBWB-1	1000

鉚釘 SNAP RIVET

用途：用於PC板與機板間固定，省時方便。

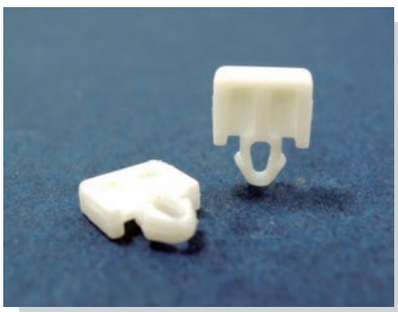

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLE
THICKNESS 1.0


Part No.	Package
MBWB-2	1000

尼龍鉚釘 MOUNTING BUTTON

用途：用於電線固定。

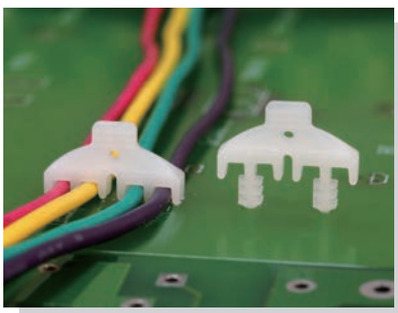

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

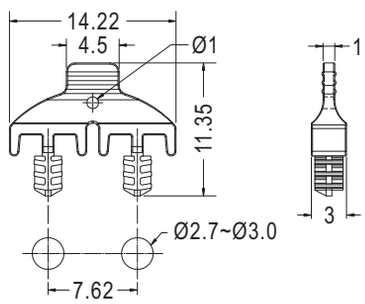


MOUNTING HOLE


Part No.	Package
MBW-46	1000

塑膠鉚釘 MOUNTING BUTTON

用途：用於機板與機板間之固定，使用方便。

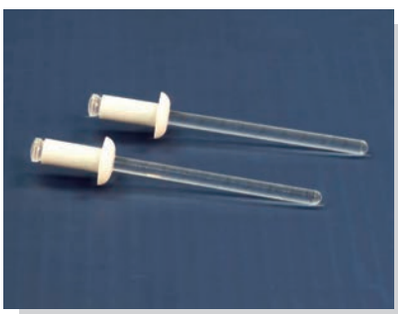

- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLE: ØF
THICKNESS: G
SHEAR FORCE: H (剪斷力) (kg)


Part No.	A	B	C	D	E	F	G	H	Package
CR32-1	3.2	6.4	6.4	1.4	2.1	Ø3.3	1.0~4.0	20.0	500
CR32-2		9.6					4.0~7.0		
CR32-3		12.7					7.0~10.0		
CR40-1	4.0	6.4	8.0	1.8	2.4	Ø4.1	1.0~4.0	25.0	
CR40-2		9.6					4.0~7.0		
CR40-3		12.7					7.0~10.0		
CR48-1	4.8	8.0	9.6	2.0	2.8	Ø4.9	1.5~5.0	40.0	
CR48-2		11.2					5.0~8.0		
CR48-3		14.4					8.0~11.0		
CR56-1	5.6	9.6	12.0	2.2	3.4	Ø5.7	2.0~5.5	65.0	
CR56-2		12.7					5.5~8.5		
CR56-3		15.9					8.5~12.0		

塑膠鉚釘 MOUNTING BUTTON

用途：用於機板間之固定，使用方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.0

Part No.	Package
PNL-8	1000

用途：用於機板間之固定，使用方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø3.3
THICKNESS 7.7

Part No.	Package
PNL-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.5

Part No.	Package
PNLA-5.2	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




MOUNTING HOLE Ø2.5

Part No.	Package
PNL-7.8	1000



MOUNTING HOLE Ø2.5

Part No.	Package
★PNL-17.8	1000




MOUNTING HOLE Ø3.0

Part No.	Package
PNL-18	1000








MOUNTING HOLE: ØF

Part No.	A	B	C	D	F	G	Package
PNLS-8	8.0	2.4	3.3	2.0	2.5	11.3	1000
PNLS-15	8.1	2.0	2.7	1.8	2.3	11.4	
PNLS-16	14.5	2.0	2.7	1.8	2.3	17.8	

- Material: LCP (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



MOUNTING HOLE Ø2.4


Part No.	Package
PNLSA-8	1000

插梢 PIN

用途：PC板與機板間固定，省時方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
CNPS8000	1000

插梢 PIN

用途：配合超音波熱熔，可當螺絲固定。



- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	Package
ACSR-7	2000

插梢 PIN

用途：做為塑膠插梢PIN使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



Part No.	Package
BPLTA-3	2000




- Material: POM
- Color: Natural
- Unit: mm



Part No.	Package
PIN3.3-7.5	2000




- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



Part No.	Package
PIN4.4-3	2000


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm



Part No.	A	Package
PIN2-3.3	3.3	2000
PIN2-3.6	3.6	


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。

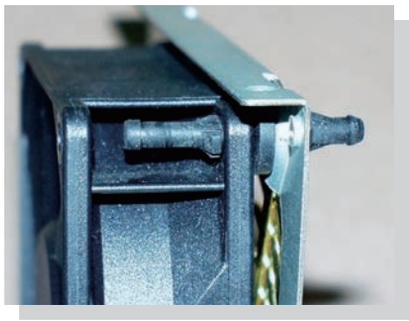


- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度，H:為55度硬度




① Fan Mounting Hole Ø4.5 And 3.0~5.5 Thickness.
② Support Mounting Hole Ø5±0.1 And 1.0 ~2.0 Thickness.

Part No.	Package
BUB-30	1000




① Fans Mounting Hole Ø4.5 Chassis Thickness 3.5~4.0
② Support Mounting Hole Ø4.5~4.8 Chassis Thickness 0.8~2.0

Part No.	Package
BUB-29	1000




① Fans Mounting Hole Ø4.6±0.2 And 3.0 ~5.5 Thickness.
② Support Mounting Hole Ø6.5±0.1 And 1.0~2.0 Thickness.

Part No.	Package
BUB-30L	1000

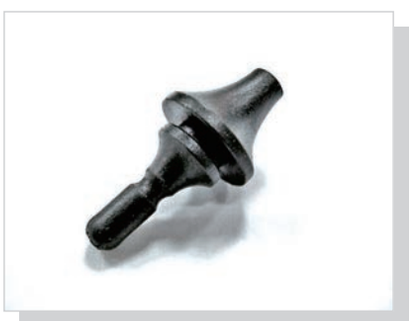

G:為45度硬度，H:為55度硬度

- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm




Part No.	Package
BUC-2	1000



G:為45度硬度，H:為55度硬度

- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm



Part No.	Package
BUB-189	1000


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。



- Material: TPE
  G: Hardness is Shore A45
  H: Hardness is Shore A55
- Color: Black/Blue
- Unit: mm

G:為45度硬度，H:為55度硬度




MOUNTING HOLE: ØH

Part No.	A	B	D	E	F	G	H	Package
BUB-1	4.4	0.8	3.6	7.8	2.0	22.6	4.3	1000
BUB-5		1.3	3.0	10.25	1.6	23.0	4.4	
BUB-20	3.5	0.8	3.8	5.8	1.5	20.0	3.5	
BUB-22	4.4		3.6	7.8	2.5	23.1	4.4	
BUB-23			4.5	8.8	1.5	23.0		
BUB-25		1.4	3.6	7.8	2.5	23.7		
BUB-25.4		4.0	3.0	7.5	2.0	25.4	4.2	
BUB-70	3.5	0.8	27.0	5.8	1.5	70.0	3.5	
BUB-88		1.0	4.0	8.8		21.85		
BUB-88S				7.8				
BUB-151	4.0	1.6	3.8	7.0	2.0	22.85	4.0	
BUB-158	4.4	0.8	3.6	7.8	2.5	23.1	4.4	
BUB-174		1.1	4.5	8.8	1.5	23.3	4.3	
BUB-199	4.3	1.2	3.8	8.0		27.0	4.5	




- Material: TPE
- Color: Black
- Unit: mm



MOUNTING HOLE Ø3.5


Part No.	Package
BUB-209	1000






MOUNTING HOLE Ø3.5

Part No.	Package
BUB-213	1000

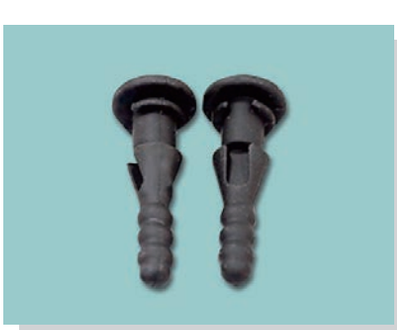



- Material: Silicon Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE: ØH

Part No.	A	B	D	E	F	G	H	Package
BUB-23I	4.4	0.8	4.5	8.8	1.5	23.0	4.4	1000
BUB-130I	4.3	0.9	3.9	7.6	1.2	22.2	4.3	

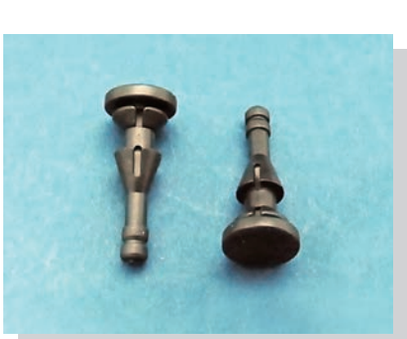



◆ BUB-7



◆ BUB-25.5

Part No.	A	B	C	D	E	F	G	Package
BUB-7I	5.4	0.8	4.4	3.5	10.5	2.0	24.3	1000
BUB-25.5I	4.0	1.3	3.5	4.0	9.0	2.2	25.5	


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。




- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度




Part No.	A	D	G	Package
BUB-96	3.4	5.4	25.4	1000
BUB-96-1	4.0			
BUB-97	3.4	6.4	26.4	






Part No.	Package
BUB-180	1000




FAN MOUNTING Ø4.5
THICKNESS 6.8



MOUNTING HOLE
THICKNESS 1.6


Part No.	Package
BUB-126	1000



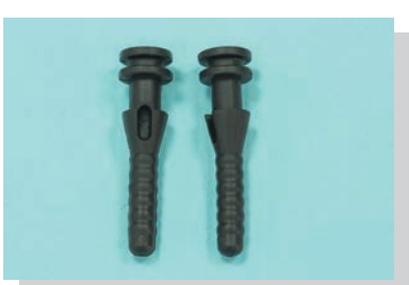


G:為45度硬度， H:為55度硬度

- Material:TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm




MOUNTING HOLE Ø4.4

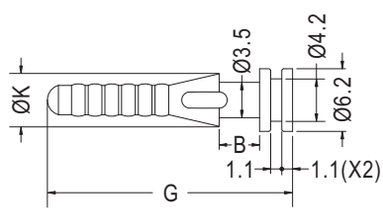


MOUNTING HOLE Ø3.5


Part No.	Package
BUB-152	1000

Part No.	B	G	K	Package
BUB-194	4.0	24.3	5.2	1000
BUB-205			5.0	
★BUB-218	5.0	25.3		





MOUNTING HOLE Ø4.4~Ø4.5
THICKNESS 0.8



MOUNTING HOLE Ø4.5


Part No.	Package
BUB-32	1000

Part No.	Package
BUB-182	1000

Part No.	Package
BUB-202	1000


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。

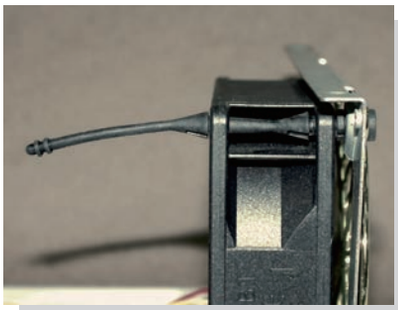

- Material:TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度

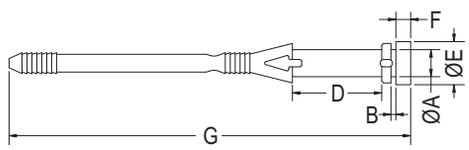


MOUNTING HOLE: ØH

Part No.	A	B	D	E	F	G	H	Package
BUB-9	3.3	1.0	8.0	6.0	1.2	30.9	3.3	1000
BUB-10	3.5	0.8	3.5	6.3	1.6	46.7	3.5	
BUB-35	4.4	1.2	3.0	7.5	2.0	35.0	4.4	
BUB-49	3.5	1.4	3.5	6.3	1.6	48.5	3.5	
BUB-53	4.4	1.2	3.0	7.5	2.0	53.3	4.4	
BUB-54	4.4	2.0	3.0	7.0	2.0	54.1	4.4	
BUB-57	3.5	0.8	19.0	5.2	1.5	57.3	3.5	
BUB-65	4.4	0.8	14.5	7.0	2.4	65.2	4.4	
BUB-65-1	4.4	0.8	14.5	7.0	1.7	62.0	4.4	
BUB-69	4.4	0.8	19.0	7.0	1.5	68.8	4.2	
BUB-71	4.4	1.6	19.5	7.0	2.4	71.0	4.4	
BUB-73	3.5	0.8	26.0	7.0	1.4	73.0	3.5	
BUB-74	4.4	0.8	3.0	7.5	2.0	70.0	4.4	
BUB-85	4.4	0.8	5.0	7.5	2.0	70.0	4.4	
BUB-100	3.1	1.0	18.0	6.0	1.7	55.33	3.3	
BUB-201	4.0	1.5	14.5	7.0	1.5	60.4	4.3	



- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度

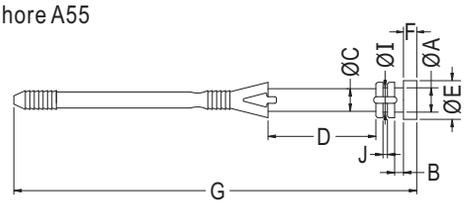



Part No.	A	B	C	D	E	F	G	I	J	Package
BUB-4	4.5	1.5	4.0	3.5	9.0	1.5	24.7	4.0	1.0	1000
BUB-26	4.4	1.6	4.4	4.5	8.8	1.6	25.2	4.4	0.8	
BUB-68	4.0	1.5	4.0	4.0	8.0	1.5	68.0	4.0	1.0	
BUB-72	4.4	1.6	4.1	19.5	7.0	2.4	72.0	4.4	0.8	



- Material: TPE/Silicon Rubber
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度

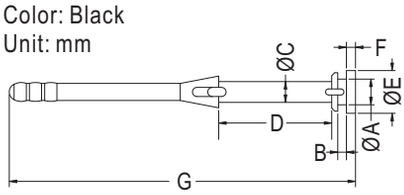

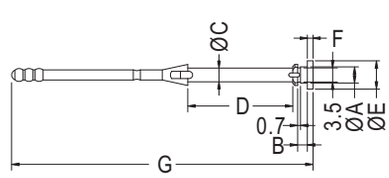

MOUNTING HOLE Ø3.5

◆ **BUB-211**

Part No.	A	B	C	D	E	F	G	Package
BUB-48	4.2	0.8	3.5	3.5	7.0	1.4	48.0	1000
BUB-56	4.2	1.4	3.4	18.5	7.0	1.5	56.7	
BUB-76	4.2	2.9	3.4	26.0	7.0	1.4	75.1	
BUB-83	4.4	0.8	4.0	19.5	7.0	1.4	69.2	
BUB-150	3.5	0.8	3.5	19.0	7.0	1.5	57.3	
BUB-153	3.5	2.6	3.4	26.0	7.0	1.4	74.8	
BUB-184	3.96	0.91	3.4	27.0	7.0	0.98	73.94	
★BUB-211	4.0	2.4	3.4	26.0	7.0	1.4	74.6	


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。




- Material: TPE/Silicon Rubber
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm


G:為45度硬度，H:為55度硬度

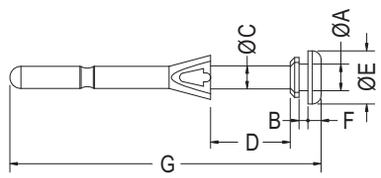

Part No.	A	B	C	D	E	F	G	Package
BUB-127	3.0	1.0	2.6	9.0	6.0	1.5	35.2	1000

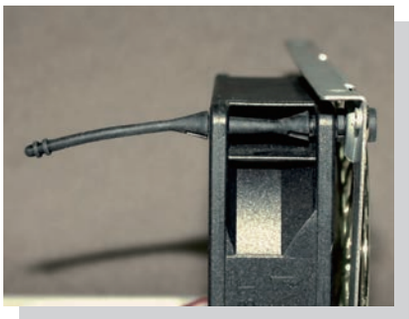



- Material: Silicon Rubber/TPE
- Color: Black
- Unit: mm

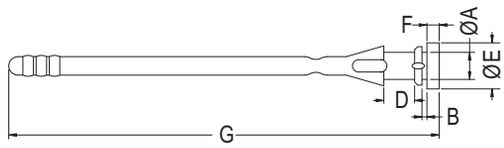


MOUNTING HOLE: ØH

Part No.	A	B	D	E	F	G	H	Package
BUB-85I	4.4	0.8	5.0	7.5	2.0	70.0	4.5	1000

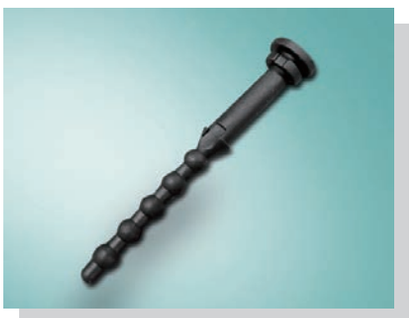

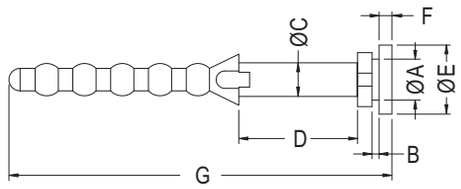


Part No.	A	B	C	D	E	F	G	Package
BUB-45I	4.83	0.82	3.96	13.97	8.13	1.52	45.09	1000
BUB-45		0.81		13.72				

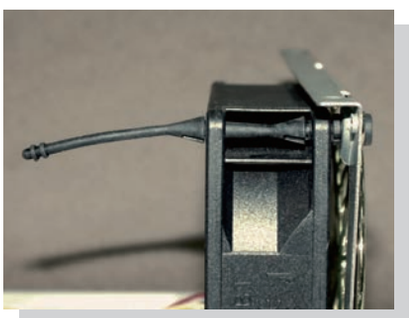

G:為45度硬度，H:為55度硬度

- Material:TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

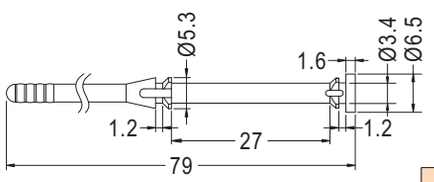


FANS MOUNTING HOLE Ø3.6
CHASSIS MOUNTING HOLE Ø3.6

Part No.	Package
BUB-79	500




- Material: Silicon Rubber
- Color: Black
- Unit: mm

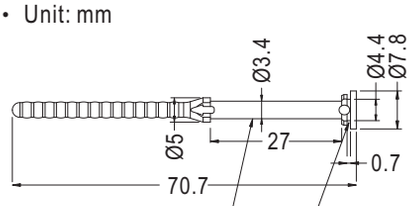

HOLE IN FAN Ø3.5
THICKNESS 28.0
CHASSIS Ø4.5
THICKNESS 0.8

Part No.	Package
BUB-161I	1000

- Material:TPE
- Color: Black
- Unit: mm

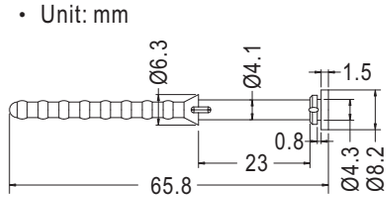

CHASSIS Ø4.4

Part No.	Package
BUB-66	1000


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。



- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度

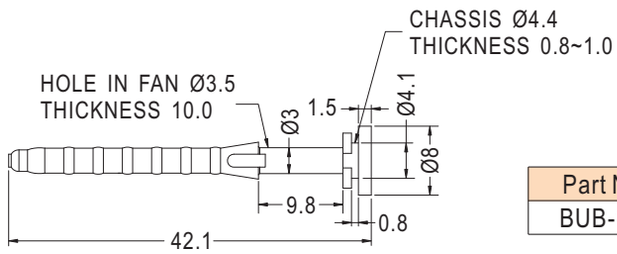


Part No.	Package
BUB-179	1000



- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm


G:為45度硬度， H:為55度硬度

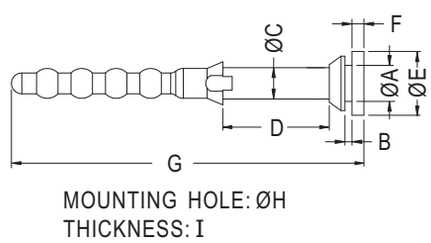

Part No.	A	B	C	D	E	F	G	H	I	Package
BUB-175L	4.6	0.9	4.0	13.72	8.13	1.52	45.02	5.5	0.9	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm

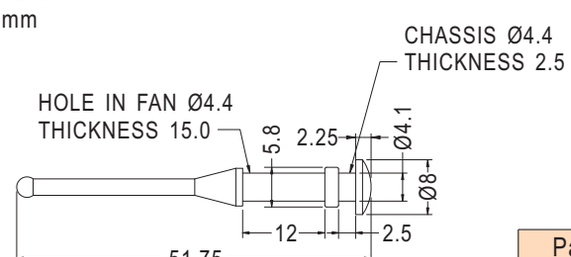


Part No.	Package
TF-268I	1000



- Material:TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm


G:為45度硬度， H:為55度硬度

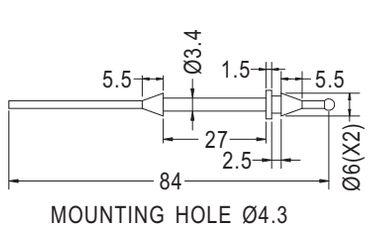

Part No.	Package
BUB-159	1000


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。

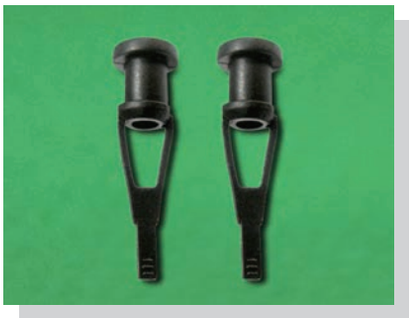


- Material:TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度

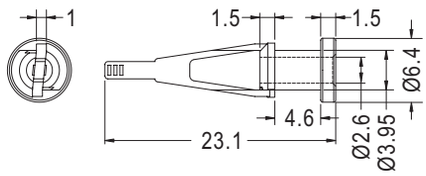

Part No.	Package
BUB-95	1000






MOUNTING HOLE : ØH

Part No.	A	B	C	E	H	Package
BUB-136	21.9	5.4	8.8	3.4	3.5	1000
BUB-172	22.0	4.5	8.5	4.1	4.5	


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。

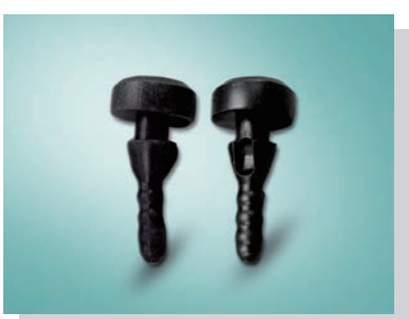


- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度




MOUNTING HOLE Ø4.3
THICKNESS 4.0


Part No.	Package
BUB-155	1000



MOUNTING HOLE Ø4.4~Ø4.5


Part No.	Package
BUB-196	1000

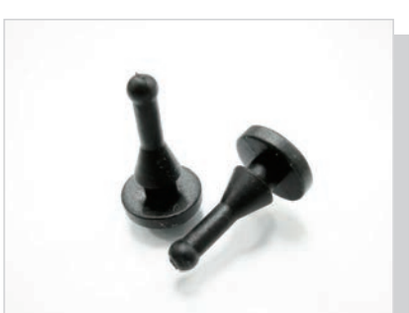



Part No.	G	Package
BUB-90	20.5	1000
BUB-124	40.5	





MOUNTING HOLE Ø2.0

Part No.	Package
BUB-138	1000


風扇鉚釘 FAN SNAP RIVET


用途：用於電腦電源風扇之固定，降低噪音、牢固。



- Material: TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度






MOUNTING HOLE
CHASSIS THICKNESS 0.8

Part No.	Package
BUB-139	1000



- Material: TPE(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




NEW

Part No.	Package
BUB-217	1000



- Material: Silicon Rubber
- Color: Black
- Unit: mm



Part No.	Package
BUB-86I	1000


風扇鉚釘 FAN SNAP RIVET

用途：用於電腦電源風扇之固定，降低噪音、牢固。




- Material:TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm

G:為45度硬度， H:為55度硬度




Part No.	Package
BUB-16.7	1000



Part No.	Package
BUB-171	1000






MOUNTING HOLE Ø3.5

Part No.	Package
BUB-177	1000






- Material:TPE
  G:Hardness is Shore A45
  H:Hardness is Shore A55
- Color: Black
- Unit: mm



Part No.	Package
BUB-132	1000




Part No.	Package
BUB-133	1000

塑膠鉚釘 MOUNTING BUTTON

用途：用於風扇鉚釘之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm
- 專利品 (PAT.)




MOUNTING HOLE Ø4.4~Ø4.5
THICKNESS 8.0

Part No.	Package
SRMKA-8	1000

用途：用於電腦電源風扇之固定，降低噪音、牢固。




- Body Material: TPE
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

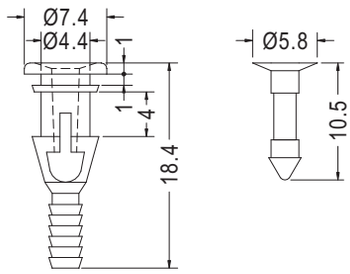

CHASSIS HOLE Ø4.8~Ø5.0

Part No.	Package
FSP-1	1000




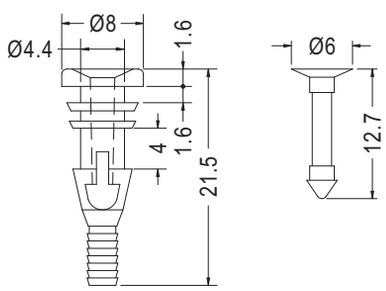

CHASSIS HOLE Ø4.8~Ø5.0

Part No.	Package
FSP-2	1000




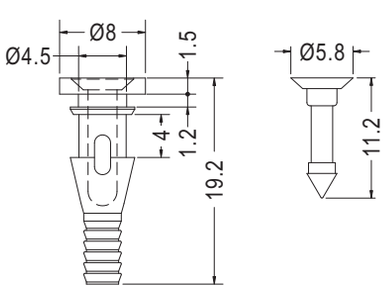

MOUNTING HOLE Ø4.5

Part No.	Package
FSP-3	1000




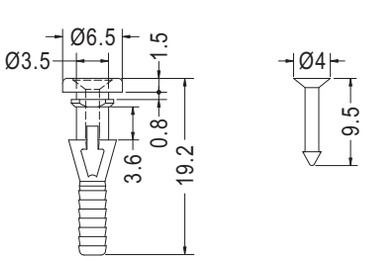

MOUNTING HOLE Ø3.5

Part No.	Package
FSP-10	1000





CHASSIS: ØH


Part No.	B	D	G	H	Z	Package
FSP-4	1.05	3.9	18.55	4.5~4.7	10.8	1000
FSP-5	0.9	3.9	14.3	4.5~4.7	10.8	
FSP-6	1.6	5.0	20.1	4.5	12.1	

風扇鉚釘 FAN SNAP RIVET

用途：用於電源座之防塵與保護。



- Material: TPU
- Flame Class: 94V-2
- Pin Material: Nylon 66 (UL)
- Color: Black
- Unit: mm

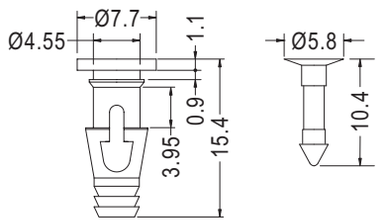


CHASSIS HOLE Ø4.5~Ø4.7


Part No.	Package
FSP-9	1000

風扇鉚釘 FAN SNAP RIVET

用途：用於兩片零件間之固定。

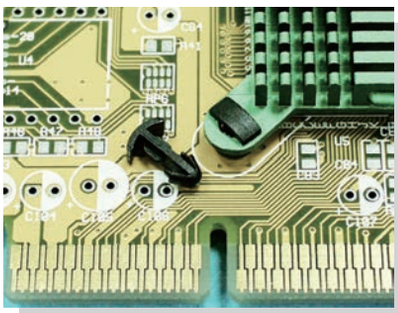


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



P.C.B Ø3.0

Part No.	A	Package
MBB-6	6.0	2000
MBB-7	7.0	
MBB-8	8.0	




P.C.B Ø3.0


Part No.	A	Package
MBB-6A	6.0	2000

風扇鉚釘 FAN SNAP RIVET

用途：用於PC板上IC與散熱片間固定方便，牢固。

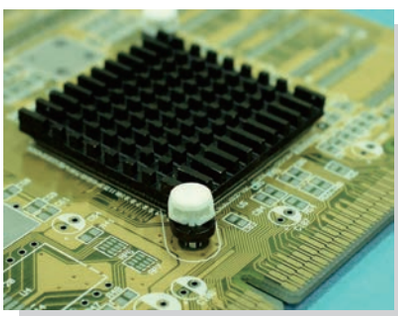


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




CHASSIS Ø3.0

Part No.	A	B	C	Package
MCC-1	12.5	4.4	5.3	2000
MCC-2	12.7	5.3	4.7	
MCC-3	10.3	5.0	2.5	

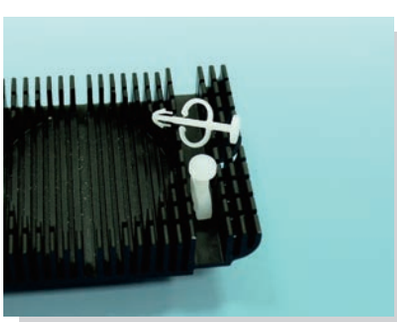

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø3.0


Part No.	A	B	C	D	Package
MEE-1	20.3	5.1	4.0	10.1	1000
MEE-2	17.0	2.5	3.4	10.3	

散熱片扣件 HEAT SINK RIVET

用途：用於PC板上與IC散熱片間固定，方便、牢固。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black /White
- Unit: mm



P.C.B: ØA

◆ PC板Ø3.0散熱片孔徑建議開Ø3.2
◆ PC板Ø3.5散熱片孔徑建議開Ø3.7
◆ PC板Ø4.0散熱片孔徑建議開Ø4.2~Ø4.3
◆ 彈簧尺寸可依客戶訂製

Applications: Use on PC Boards and affix Heat Sinks, stable and easy to use.


◆ PC Boards Ø 3.0, suggests for a Heat Sink of Ø 3.2 in diameter.
◆ PC Boards Ø 3.5, suggests for a Heat Sink of Ø 3.7 in diameter.
◆ PC Boards Ø 4.0, suggests for a Heat Sink of Ø 4.2 - 4.3 in diameter.
◆ Custom spring sizes are available upon request.

Part No.	A	B	C	D	E	F	Package
HSR-4	3.0	4.3	1.5	11.5	2.5	4.3	1000
HSR-6	3.0	6.4	1.5	8.7	2.5	4.3	
HSR-6S	3.0	6.35	1.5	8.7	2.5	4.0	
HSR-7	3.0	6.4	1.5	10.6	2.5	4.3	
HSR-9	3.0	6.4	1.5	11.5	2.5	4.4	
HSR-10	3.0	5.0	1.75	8.3	2.5	4.3	
HSR-11	3.0	6.4	2.75	21.0	2.5	4.3	
HSR-12	3.0	5.5	1.5	8.7	3.6	4.0	
HSR-13	3.0	6.2	1.0	7.8	2.5	4.2	
HSR-16	3.0	6.3	1.5	11.5	2.2	4.2	
HSR-23	3.0	6.4	1.5	11.4	2.6	4.3	
HSR-24	3.0	5.5	1.5	14.0	2.8	4.1	
HSR-25	3.0	5.5	1.6	11.4	3.0	4.0	
HSR-26	3.5	6.4	1.5	11.5	2.5	4.8	
HSR-30	3.0	5.0	1.75	12.32	2.5	4.3	
HSR-31	3.0	6.4	1.5	11.4	2.5	4.5	
HSR-32	3.0	5.5	1.5	9.0	1.9	3.6	
HSR-33	3.5	6.4	1.5	11.4	2.5	4.8	
HSR-34	3.0	6.0	1.9	17.6	2.5	4.2	
HSR-35	3.0	6.2	1.0	9.0	2.5	4.3	
HSR-41	3.0	5.5	1.5	10.0	2.5	4.3	
HSR-42	3.0	5.5	1.5	12.0	2.5	4.3	

Part No.	A	B	C	D	E	F	Package
HSR-44	3.0	5.5	1.5	9.0	3.5	4.3	1000
HSR-45	4.0	6.5	1.5	11.1	3.5	5.4	
HSR-49	3.0	6.3	0.8	5.7	2.1	4.2	
HSR-50	3.0	6.2	1.0	7.0	2.5	4.3	
HSR-51	4.0	8.0	1.6	16.5	3.3	5.5	
HSR-53	3.0	5.5	1.0	7.4	2.1	4.2	
HSR-56	4.0	6.5	1.5	11.1	3.5	5.15	
HSR-57	3.0	5.5	0.8	6.6	2.1	4.2	
HSR-61	2.7	4.7	1.2	12.7	2.0	3.6	
HSR-62	3.0	6.3	1.5	25.5	2.7	4.0	
HSR-64	3.0	6.4	1.5	10.6	2.5	4.3	
HSR-65	3.2	5.5	1.5	9.0	1.9	3.8	
HSR-66	4.0	6.5	1.5	22.7	3.85	5.35	
HSR-68	3.0	6.2	1.2	11.0	1.5	4.3	
HSR-72	3.0	5.5	1.5	11.0	1.9	3.6	
HSR-73	4.0	8.0	1.5	15.85	2.7	5.5	
HSR-83	3.0	5.8	1.5	17.0	1.7	4.3	
HSR-85	4.0	8.0	1.5	15.8	4.0	5.5	
HSR-93	3.0	6.4	1.6	12.7	2.8	4.3	
HSR-95	3.8	8.0	1.6	15.5	3.3	5.3	
HSR-96	3.0	6.4	1.8	14.0	3.3	4.0	
HSR-97	3.0	6.2	1.2	13.5	1.3	4.3	
HSR-98	3.0	5.5	0.8	8.4	2.1	4.2	


散熱片扣件 HEAT SINK RIVET

用途：用於PC板上與IC散熱片間固定、方便、牢固。

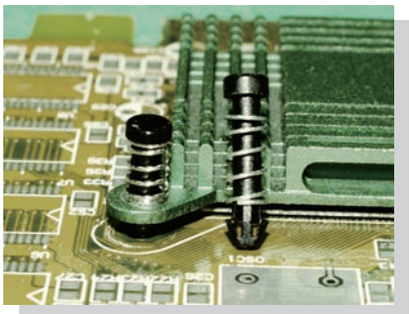

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

◆ PC板Ø2.5散熱片孔徑建議開Ø2.7
◆ PC板Ø2.7散熱片孔徑建議開Ø2.9
◆ PC板Ø3.0散熱片孔徑建議開Ø3.2
◆ 彈簧尺寸可依客戶訂製



P.C.B: ØA


Applications: Use on PC Boards and affix Heat Sinks, stable and easy to use.
◆ PC Boards Ø 2.5, suggests for a Heat Sink Of Ø 2.7 in diameter
◆ PC Boards Ø 2.7, suggests for a Heat Sink Of Ø 2.9 in diameter
◆ PC Boards Ø 3.0, suggests for a Heat Sink Of Ø 3.2 in diameter
◆ Custom spring sizes are available upon request

Part No.	A	B	C	D	E	F	Package
HSR-14	3.0	4.6	5.9	13.0	3.5	4.2	1000
HSR-29	3.0	6.4	0.9	9.5	3.3	4.0	
HSR-55	3.0	6.0	1.8	9.6	2.5	4.0	
HSR-91	2.7	4.7	1.2	11.8	2.0	3.6	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

◆ PC板Ø3.0散熱片孔徑建議開Ø3.2
◆ PC板Ø3.5散熱片孔徑建議開Ø3.7
◆ PC板Ø4.0散熱片孔徑建議開Ø4.2~Ø4.3
◆ 彈簧尺寸可依客戶訂製




P.C.B: ØA

Applications: Use on PC Boards and affix Heat Sinks, stable and easy to use.
◆ PC Boards Ø 3.0, suggests for a Heat Sink of Ø 3.2 in diameter
◆ PC Boards Ø 3.5, suggests for a Heat Sink of Ø 3.7 in diameter
◆ PC Boards Ø 4.0, suggests for a Heat Sink of Ø 4.2 - 4.3 In diameter
◆ Custom spring sizes are available upon request

Part No.	A	B	C	D	E	F	Package
HSR-12.7	3.0	6.4	1.6	12.7	3.2	4.2	1000
HSR-38	3.2	6.0	1.5	9.0	2.4	4.1	
HSR-60	3.0	6.3	0.8	5.7	2.7	4.2	






P.C.B: ØA

Part No.	A	B	C	D	E	F	Package
HSR-37	1.5	5.0	1.0	10.0	2.0	2.0	1000
HSR-39	2.3	5.6	1.2	12.7	2.0	3.1	
HSR-40	2.3	4.7	1.2	12.4	2.0	3.1	
HSR-48	2.2	5.6	0.9	7.6	2.1	3.3	
HSR-54	2.2	5.6	0.9	11.6	2.0	3.3	
HSR-67	1.7	5.0	1.0	10.0	2.0	2.2	
HSR-71	2.3	4.7	1.2	12.4	1.5	3.1	
HSR-89	2.2	4.5	0.9	7.7	2.0	3.3	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



HOLE IN P.C.B Ø3.0
HOLE HEAT SINK Ø3.2~Ø3.4

Part No.	Package
HSR-103	1000

散熱片扣件 HEAT SINK RIVET


用途：用於PC板上與IC散熱片間固定，方便、牢固。

PC板Ø3.0散熱片孔徑建議開Ø3.2






- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



HOLE IN P.C.B Ø3.0
HOLE IN HEAT SINK Ø3.2

Part No.	Package
HSR-1	1000




HOLE IN P.C.B Ø3.0
P.C.B THICKNESS 1.2~1.7

Part No.	Package
HSR-2	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø2.5

Part No.	Package
HSR-36	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.0

Part No.	Package
HSR-74-201	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE IN P.C.B Ø3.0
HOLE HEAT SINK Ø3.2


Part No.	Package
HSR-90	1000

散熱片扣件 HEAT SINK RIVET

用途：用於PC板上與IC散熱片間之固定，方便、牢固。

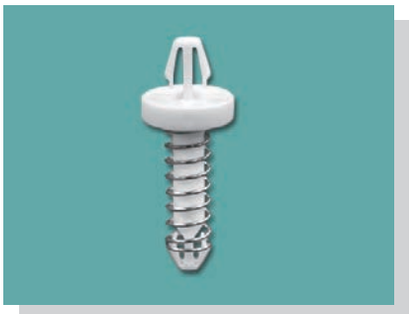

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE IN P.C.B Ø3.5
THICKNESS 1.6

HOLE IN P.C.B Ø3.5

Part No.	Package
HSR-58	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




P.C.B Ø3.3
THICKNESS 1.6

P.C.B Ø4.0
THICKNESS 0.8~1.0

Part No.	Package
HSRD-2	1000

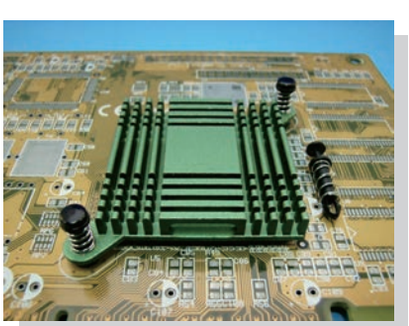

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø3.0


Part No.	D	F	Package
SRMK-8.5	8.5	3.7	1000
SRMK-11.5	11.5	3.5	

插梢 PIN

用途：加強散熱片銅插梢之固定，避免震動脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm
- 專利品 (PAT.)




Part No.	Package
MBTA-1	2000

喇叭座 SPEAKER HOLDER

用途：將Ø50喇叭固定於機板上。

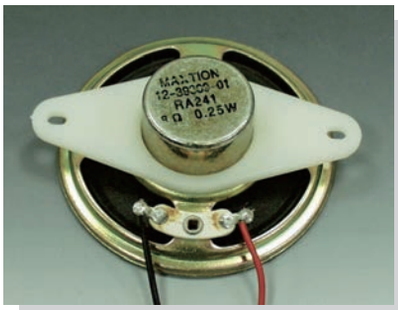


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SPK-1	250

喇叭座 SPEAKER HOLDER

用途：將Ø38喇叭固定於機板上。

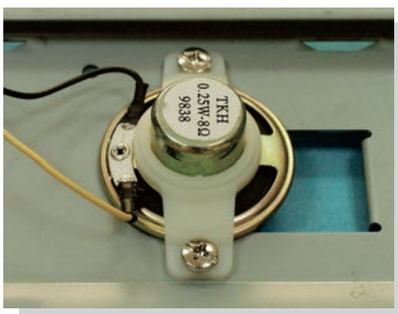

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
SPK-2	250

喇叭箱扣 LOUDSPEAKER BUCKLE

用途：固定音箱外蓋用。



- Body Material: TPE
- Color: Black
- Unit: mm




BODY

CHASSIS Ø10.5
THICKNESS 2.5

Part No.	Package
SPLK-1FA	500

- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0




PIN

CHASSIS Ø6.1
THICKNESS 6.4

Part No.	Package
SPLK-1FB	500



- Body Material: TPU
- Color: Black
- Unit: mm




BODY

CHASSIS Ø10.5
THICKNESS 2.5

Part No.	Package
SPLK-2FA	500

- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0



PIN


Part No.	Package
SPLK-2FB	500


門扣擋梢 DOOR LOCK TIP

用途：用於面板固定用。



- Body Material: POM
- Color: Black
- Unit: mm
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0







Part No.	Package
DTTL-1A	500

Part No.	Package
DTTL-1B	500




- Body Material: POM
- Color: Black
- Unit: mm
- Pin Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0







Part No.	Package
DTTL-3A	500

Part No.	Package
DTTL-3B	500

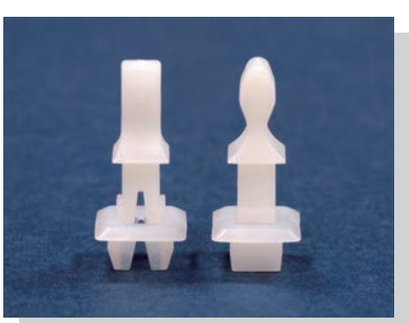

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







Part No.	Package
DTTL-4	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm







Part No.	Package
DTTL-5B	500

固定扣 SNAP LATCH


用途：固定於機器上，牢固結合不脫落。

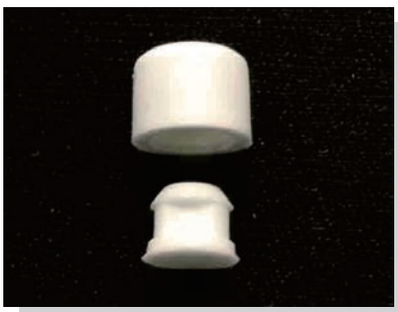


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



Part No.	Package
LO-6052A	1000




Part No.	Package
LO-6052B	1000




Part No.	Package
LO-6053A	1000




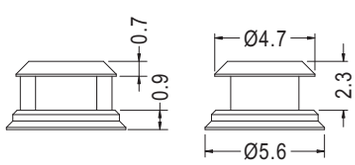

Part No.	Package
LO-6055A	1000




Part No.	Package
LO-6055B	1000

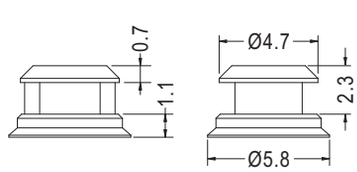


Part No.	Package
LO-6056A	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

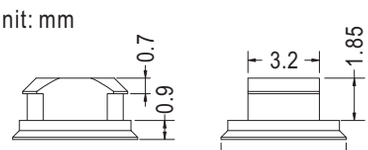


Part No.	Package
LO-6057A	1000




Part No.	Package
LO-6057B	1000

零件座 PARTS HOUSING

用途：用於零件座。

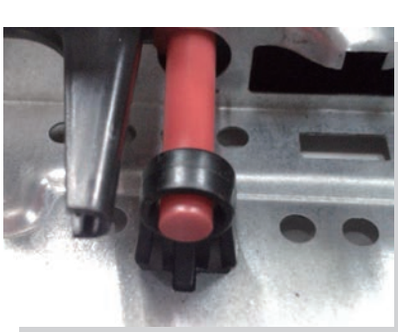

- Material: PS
- Color: Black
- Unit: mm




Part No.	Package
EMU-5	1000

用途：用於機器之開關門扣，方便機器門之開與關。




- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm

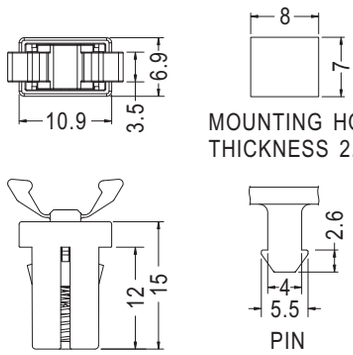


Part No.	Package
DT-1	500

- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94V-0
- Color: Black
- Unit: mm

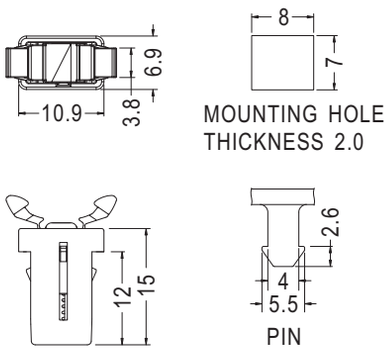


Part No.	Package
DT-16	500


- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM
- Color: Black
- Unit: mm

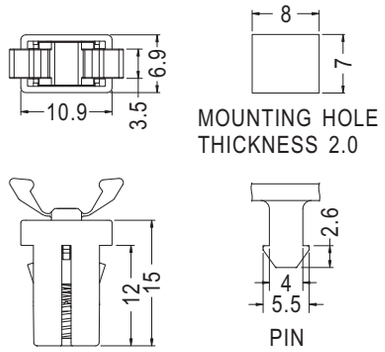

Part No.	Package
DT-18	500

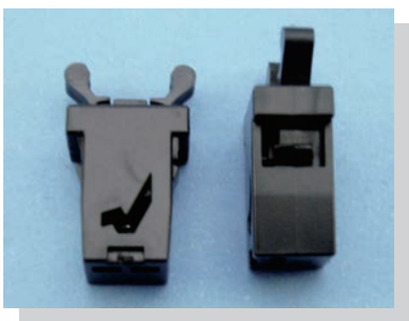

- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm

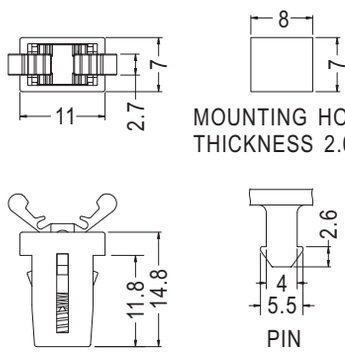


Part No.	Package
DT-4	500

門扣 DOOR LOCK

用途：用於機器之開關門扣，方便機器門之開與關。




- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM
- Color: Black
- Unit: mm

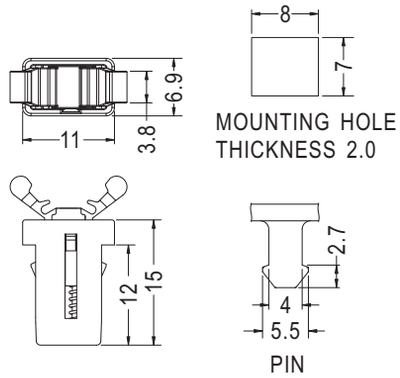

Part No.	Package
DT-19	500




- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM
- Color: Black
- Unit: mm

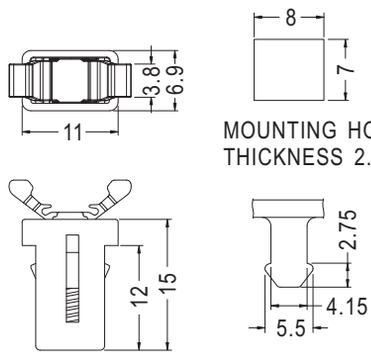

Part No.	Package
DT-21	500



- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM
- Color: Black
- Unit: mm

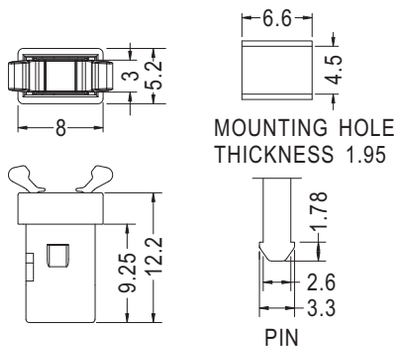


Part No.	Package
DT-22	500

門扣 DOOR LOCK

用途：可配合DT-22之門扣，方便機器門之開與關。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
DTA-4	500

門扣 DOOR LOCK

用途：可配合 DT-1 之門扣，方便機器門之開與關。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
DTA-1	500

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
DTA-3	500

門扣 DOOR LOCK

用途：用於機器之開關門扣，方便機器門之開與關。




- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm

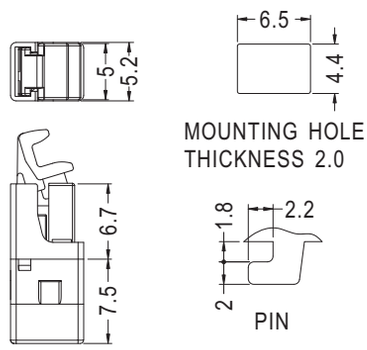

Part No.	Package
DT-12	500




- Catcher Material: Nylon 66 (UL)/94V-2
- Case Material: POM (UL)/94HB
- Color: Black
- Unit: mm

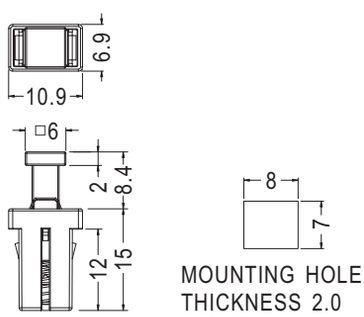

Part No.	Package
DT-14	500



- Material: Nylon 66(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

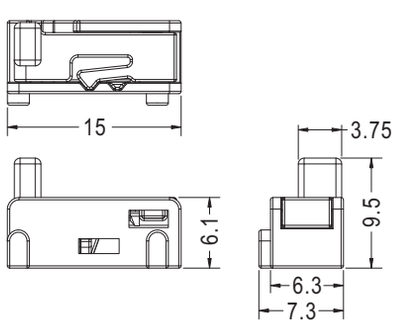

NEW


Part No.	Package
DT-50	500


門扣 DOOR LOCK

用途：用於機器之開關門扣，方便機器門之開與關。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm





MOUNTING HOLE


Part No.	Package
DT-10	2000

門扣 DOOR LOCK

用途：用於機器之合鈕，方便機器門之開與關。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
DT-11	500

門扣 DOOR LOCK

用途：用於機器之開關門扣，方便機器門之開與關。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS Ø9.0
THICKNESS 1.2~1.6

Part No.	Package
DT-48A	1000

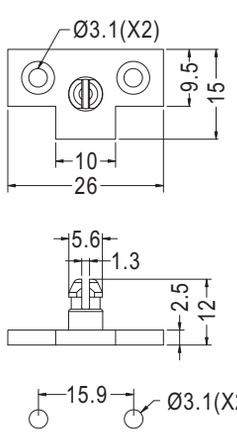

HOLE IN CHASSIS


Part No.	Package
DT-48B	1000

門扣擋梢 DOOR LOCK TIP

用途：用於機器之開關門扣，方便機器門之開與關。



- Material: POM
- Color: Natural
- Unit: mm




Part No.	Package
DT-49	1000

門扣擋梢 DOOR LOCK TIP

用途：用於機器之開關門扣，方便機器門之開與關。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



MOUNTING HOLES

Part No.	Package
DTA-42	500

- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm



MOUNTING HOLES


Part No.	Package
DT-42	500

門扣擋梢 DOOR LOCK TIP

用途：用於面板固定用。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm




門扣擋梢
DOOR LOCK PIN

Part No.	Package
DT-45A	500




門扣本體
DOOR LOCK BODY

Part No.	A	Package
DT-45B	1.0	500
DT-45BL	1.1	

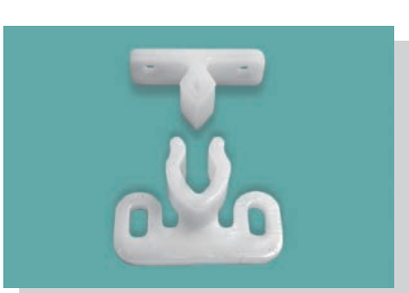




- Material: POM (UL)
- Flame Class: 94HB
- Color: Natural
- Unit: mm

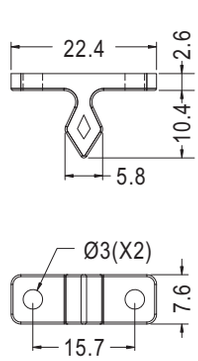


Part No.	Package
DT-46A	1000




Part No.	Package
DT-46B	1000


門扣擋梢 DOOR LOCK TIP

用途：用於面板固定用。

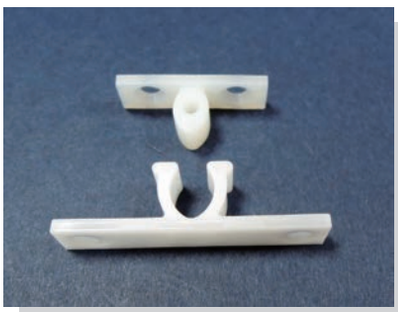

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







MOUNTING HOLES

Part No.	Package
DT-43A	1000

- Material: POM
- Color: Natural
- Unit: mm





MOUNTING HOLES


Part No.	Package
DT-43B	1000


門扣 DOOR LOCK

用途：用於機器之開關門扣，方便機器門之開與關，可配合DTA-1使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

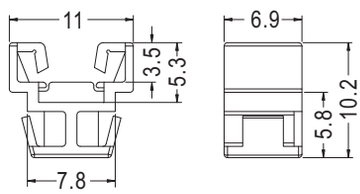




MOUNTING HOLE
THICKNESS 2.0


Part No.	Package
DT-47B	1000

彈簧固定座 SPRING POSITION MOUNT

用途：用於旋轉機構角度定位。

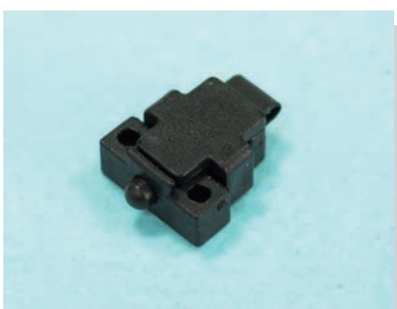


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Position Pin Material: POM
- Color: Black
- Unit: mm
- 專利品 (PAT.)

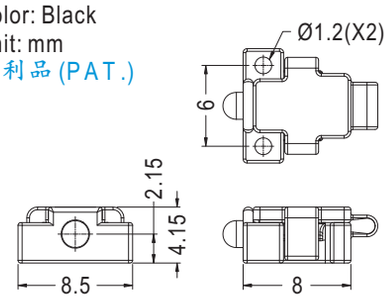


Part No.	Part No.	Package
DTB-1F	DTB-1A	1000
	DTB-1B	
	SPG-504	


磁鐵門扣 MAGNET DOOR LOCK

用途：用於機器之開關門扣磁性強，方便機器門之開與關。

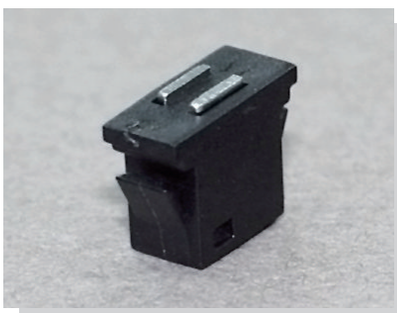

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: SPCC
- Color: Black
- Unit: mm

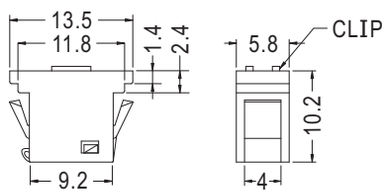

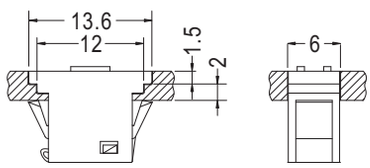

MOUNTING HOLE


Part No.	Package
DTM-1	500

磁鐵門扣 MAGNET DOOR LOCK

用途：用於機器之開關門扣磁性強，方便機器門之開與關。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Clip Material: SPCC
- Color: Black
- Unit: mm

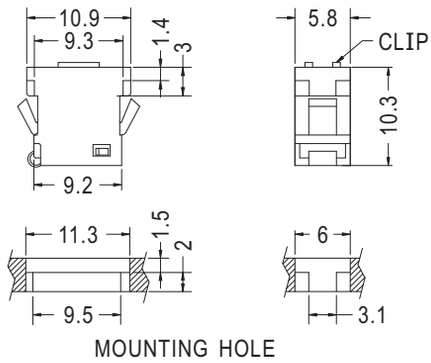


Part No.	Package
DTM-2	500

旋轉型門扣 DOOR LOCK

用途：固定於兩片鐵板，一般用於機器的門扣，拆卸方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

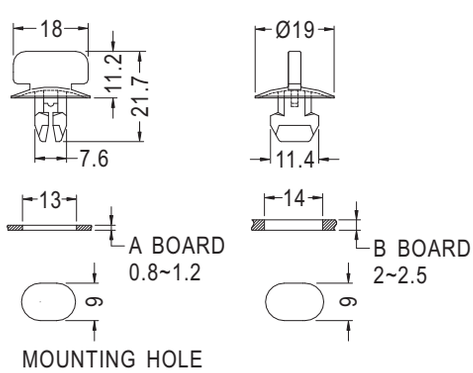


Part No.	Package
TF-1	200


固定扣 SNAP LATCH

用途：固定於兩片鐵板，一般用於機器的門扣，拆卸方便。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm



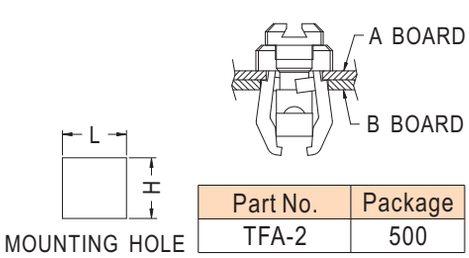

Part No.	Package
TFA-2	500


A Board	MOUNTING HOLE (LxH):9x9
	THICKNESS:1.2~1.5
B Board	MOUNTING HOLE (LxH):9.5x9
	THICKNESS:1.2~2.5

卡勾 COLLUDE

用途：配合螺絲，固定PC板於機板上。



- Material: PC (UL)
- Flame Class: 94V-2
- Color: Transparent
- Unit: mm




Part No.	Package
HW2839	1000

螺絲固定座 PLASTIC CONICAL ANCHORS

用途：用於螺絲與牆壁固定，結合力強。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Drill Size: 3/16(Ø4.8)




Part No.	Package
PCA-1	1000

- Material: Steel
- Finish: Nickel Plated




Part No.	Package
STP-3.5	1000


- Drill Size: Ø6.3

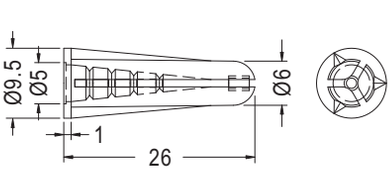

Part No.	Package
PCA-4	1000

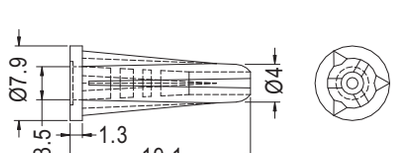


Part No.	Package
PCA-6	1000

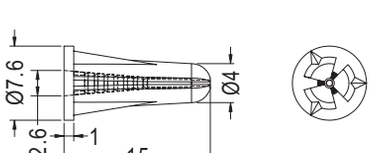

Part No.	Package
PCA-8	1000



- Material: PP
- Color: Black/Gray
- Unit: mm
- Drill Size: Ø6.3




Part No.	Package
PCA-2	1000

用途：用於螺絲與牆壁固定，結合力強。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- Drill Size: Ø4.8



Part No.	Package
PCA-5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm
- Drill Size: Ø6.3



Part No.	Package
PCA-7	1000



- Material: PP
- Color: Natural/Yellow
- Unit: mm
- Drill Size: Ø6.35




NEW

Part No.	Package
PCA-9	1000




- Material: PP
- Color: Natural
- Unit: mm
- Drill Size: Ø6.3



Part No.	Package
PEB3-25	1000

- Material: Nylon 66 (UL)/PP
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm




Part No.	A	B	Package
PEC5-28	28.1	2.5	1000
PEC5-30	30.0	3.1	

用途：用於螺絲與牆壁固定，結合力強。




- Material: PP/PE
- Color: Natural/White
- Unit: mm

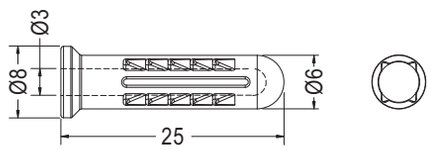


Part No.	Package
PEBR-1	1000




- Material: Nylon 66 (UL)/PP (UL)
- Flame Class: 94HB/94V-2/94V-0
- Color: Natural/White/Black/Gray
- Unit: mm



Part No.	A	B	C	D	E	Package
PEB4-20	20.1	2.8	4.0	2.9	4.0	1000
PEB6-25	24.7	3.5	4.8	4.0	5.0	
PEB6-30	29.6	4.0	6.0	4.8	6.0	
PEB6-31	29.6	3.5	6.0	4.0	6.0	

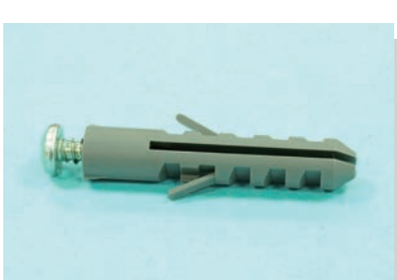

- Material: PP
- Color: Gray
- Unit: mm

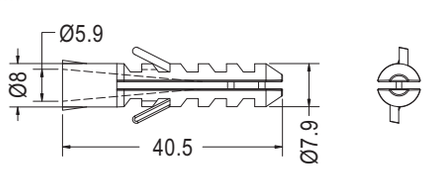


可與STP5-32自攻螺絲配合使用

Part No.	Package
PEB5-40.5	1000




- Material: PP
- Color: Natural/Red
- Unit: mm




MOUNTING HOLE Ø6.35

Part No.	Package
PEB4-29	1000

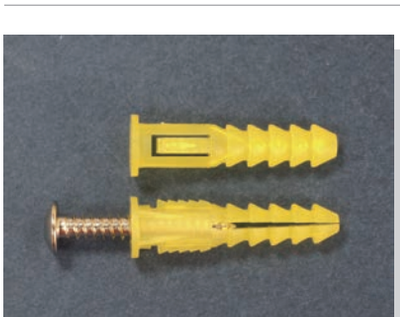


- Material: PP
- Color: Yellow
- Unit: mm

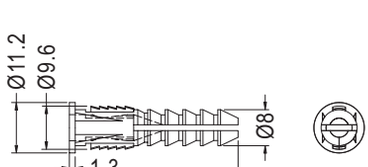

可與STP5-32自攻螺絲配合使用

Part No.	Package
PEB8-38	1000

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

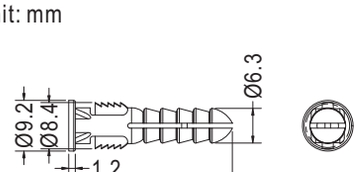


Part No.	Package
★PEB4-30	1000

用途：用於螺絲與石膏牆壁固定，結合力強。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm

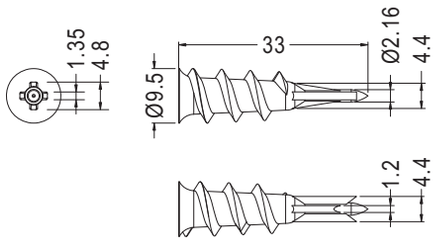

Part No.	Package
WMEZ-2	1000




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm

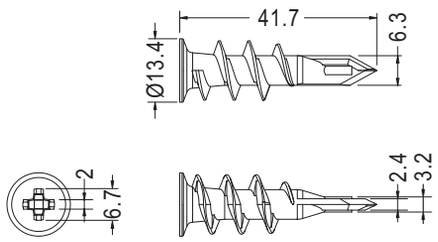

Part No.	Package
WMEZ-1	1000




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: White
- Unit: mm



Part No.	A	B	Package
WMEZ-3	25.0	11.8	1000
WMEZ-4	37.6	14.9	



- Material: PP
- Color: Natural
- Unit: mm

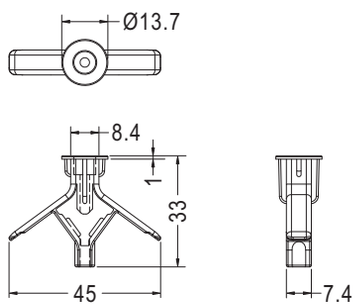


Part No.	Package
WMEA-1	1000

防水帽蓋 WATERPROOF CAP

用途：用於零件之防水蓋。



- Material: TPV
- Color: Black
- Unit: mm

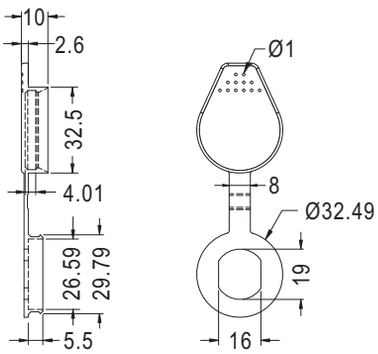


Part No.	Package
EMS-1	100

帽蓋連接帶 CAP SENSING POINT SELF RETAINING

用途：用於零件接頭之防水，中間有連接，避免防塵蓋遺失。



- Material: Nylon 66 (UL)/PE
- Flame Class: 94HB
- Color: Black
- Unit: mm

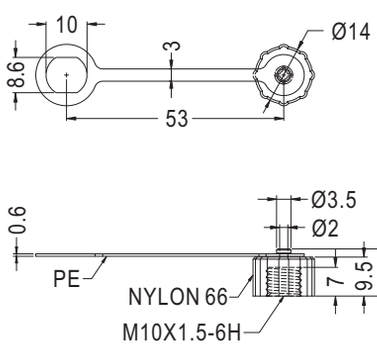


Part No.	Package
CAV-1	500

防水圈 WATERPROOF RING

用途：用於零件之連接，避免配件遺失。




- Material: EPDM
- Color: Black
- Unit: mm

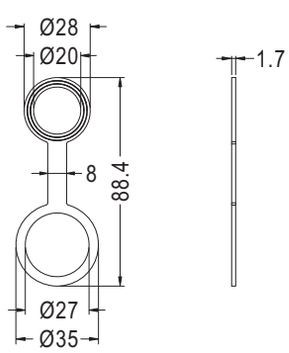


Part No.	Package
TF-568	100


線圈固定座 COIL HOLDER

用途：將鐵粉芯線圈固定於PC板上。

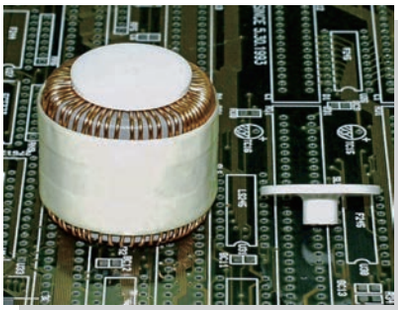

- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm






Part No.	Package
TRMH-20	500

風扇護蓋 REAR FAN PROTECTIVE COVER


用途：用於電腦風扇外框。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

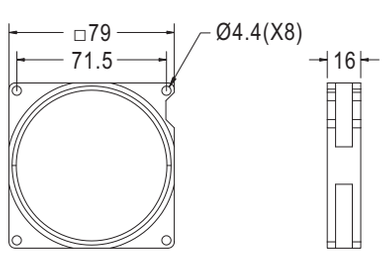

Part No.	Package
FANCS-3	500

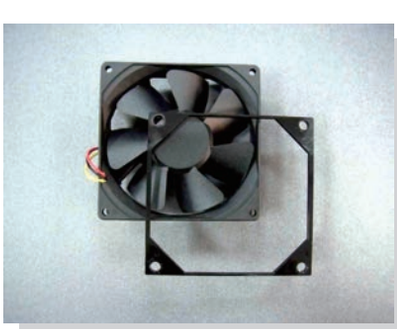

- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

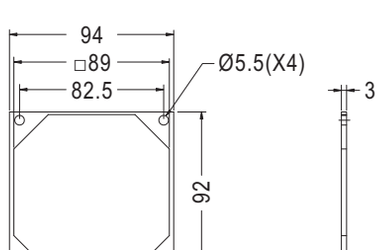


Part No.	Package
FANCV-1	500

風扇護蓋 REAR FAN PROTECTIVE COVER

用途：用於電腦風扇外框。




- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

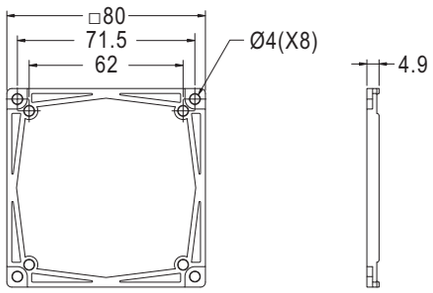

Part No.	Package
FANCV-3	500




- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

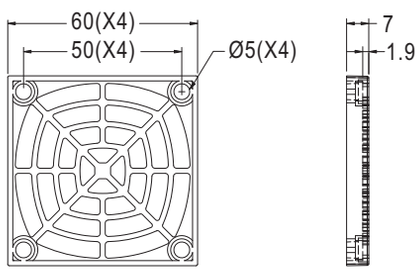


Part No.	Package
FANCV-9	100

風扇防塵座 ANTI-DUST FAN GUARD


用途：用於電腦或儀器風扇之防塵，避免灰塵進入機器內。

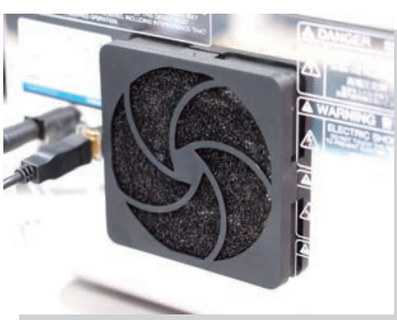


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm



◆ FANCV-5A



◆ FANCV-5B




◆ FANCV-5C


Part No.	Package
FANCV-5	500

風扇框護墊 FRAME PAD

用途：用於電腦風扇外框之防震，降低噪音。

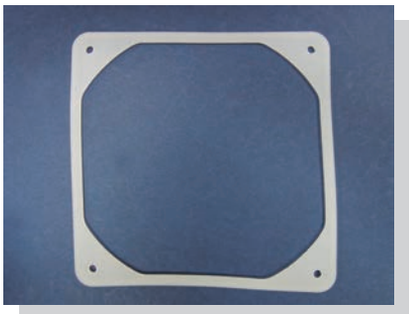


- Material: Silicon Rubber
- Color: Black/Transparent
- Unit: mm

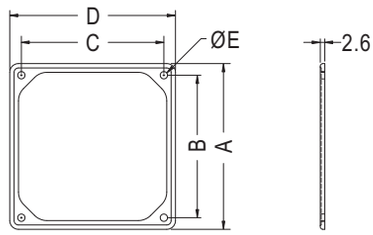

Part No.	A	B	C	D	E	Package
TF-143	94.8	81.5	81.5	94.8	4.2	50
TF-144	122.7	104.8	104.8	122.7	4.0	
TF-147	61.4	49.4	49.4	61.4	4.0	100



- Material: Silicon Rubber
- Color: Black
- Unit: mm

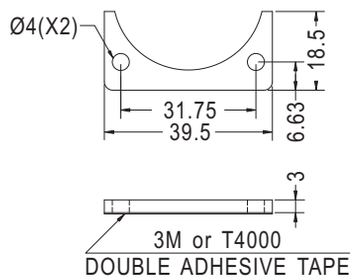

Part No.	Package
TF-018	200


8




- 螺絲
  Screw
- PC板拉柄
  Card Puller
- PC板導槽
  Card Guide

螺絲帽蓋 SCREW CAP

用途：用於螺絲凸出之保護，美觀不刮手，避免不當之拆卸。

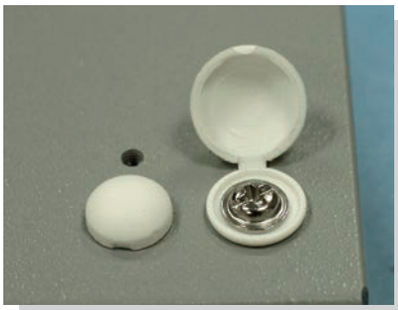


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



Part No.	A	B	C	D	E	Package
SCW-1	9.8	4.1	8.0	3.3	1.3	1000
SCW-2	13.3	4.1	11.6	4.3	1.4	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm



Part No.	Package
SCW-3	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品 (PAT.)



Part No.	Package
SCW-5	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

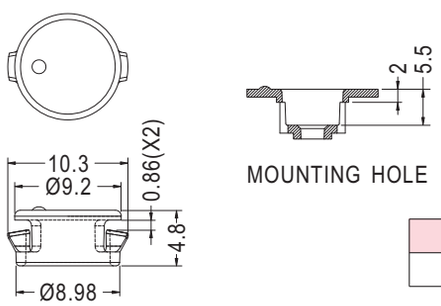


Part No.	Package
SCWA-6	1000

螺絲帽蓋 SCREW BONNET

用途：配合一般螺絲，作為螺絲蓋使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MP-2.5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	T	Package
MP-3	6.0	3.0	5.5	M3X0.5P	1000
MP-4	8.0	4.0	7.7	M4X0.7P	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MP-5	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

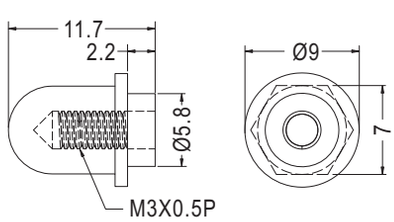

Part No.	Package
MP-26	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

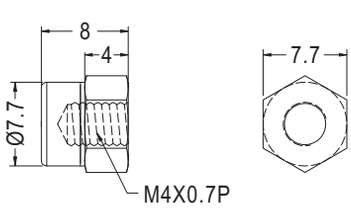


Part No.	Package
MP-4-1	1000

螺絲帽蓋 SCREW BONNET

用途：配合一般螺絲，作為螺絲蓋使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MP5-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MP-6	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

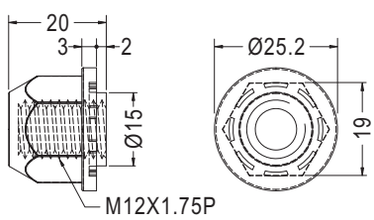

Part No.	Package
MP-12	1000




- Material: PBT
- Color: Black
- Unit: mm

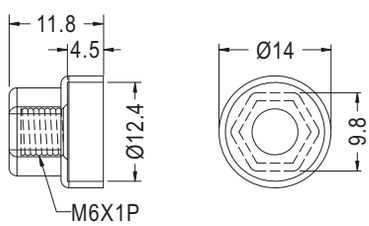

Part No.	Package
MP6-1	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MP-632	1000

螺絲帽蓋 SCREW BONNET

用途：配合一般螺絲，作為螺絲蓋使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm

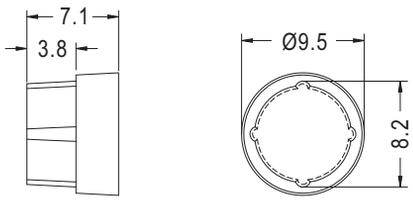

Part No.	Package
SWVB-1	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

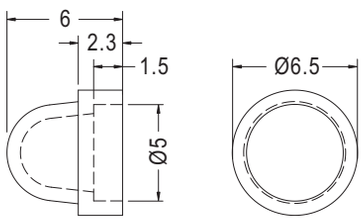


Part No.	Package
SWV-4	1000

螺絲帽蓋 SCREW BONNET

用途：配合一般螺絲 M8，作為螺絲蓋使用。

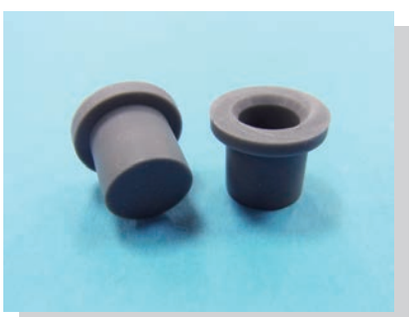

- Material: Silicon Rubber
- Color: Black/Gray
- Unit: mm




Part No.	Package
TF-250	1000

螺絲帽蓋 SCREW BONNET


用途：配合一般螺絲，作為螺絲蓋使用。



- Material: Silicon Rubber
- Color: Black
- Unit: mm



Part No.	Package
EMC-40	1000

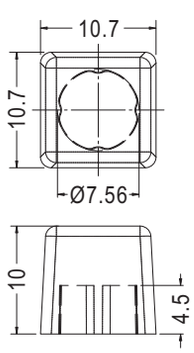


Part No.	Package
EMC-41	1000

用途：配合一般螺絲或塑膠螺絲使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MOA3	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	T	Package
MO-3	8.5	5.4	3.2	0.8	M3X0.5P	1000
MO-4	9.7	6.9	4.5	0.9	M4X0.7P	
MO-632	10.6	7.8	4.2	1.0	6-32 UNC	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



Part No.	A	B	C	T	Package
MO-6-68	13.0	10.0	6.8	M6X1P	2000
MO-8-85	17.0	13.0	8.5	M8X1.25P	1000

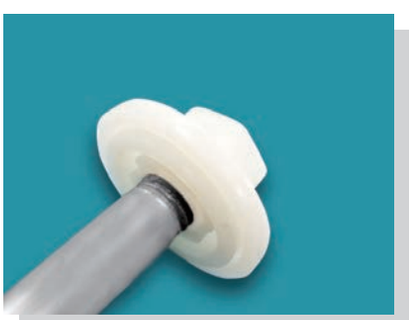

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/White/Black
- Unit: mm




Part No.	Package
CAM-12	100

翼形螺帽 NUT

用途：配合一般螺絲或塑膠螺絲使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	C	D	T	Package
SMO-3	15.96	5.0	8.0	6.4	M3X0.5P	1000
SMO-4	21.58	8.0	10.1	10.0	M4X0.7P	
SMO-632	22.0	8.0	10.5	10.0	6-32 UNC	
SMO-832	21.0	8.0	10.0	10.0	8-32 UNC	

塑膠螺帽 NUT

用途：配合一般螺絲或塑膠螺絲使用。




- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm



Part No.	A	B	T	Package
M-2	3.95	1.4	M2X0.4P	2000
M-2L	3.95	3.0	M2X0.4P	
M-2.6	5.0	2.0	M2.6X0.45P	
M-3	5.5	2.7	M3X0.5P	
M-3S	5.4	2.3	M3X0.5P	
M-3.5	5.9	2.8	M3.5X0.6P	
M-4	6.9	3.3	M4X0.7P	1000
M-4F	7.0	2.5	M4X0.7P	
M-5	8.0	4.4	M5X0.8P	
M-6	10.0	5.0	M6X1.0P	
S4-40	6.4	2.5	4-40 UNC	
S6-32	7.9	3.2	6-32 UNC	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
M-10	500

塑膠螺帽 NUT

用途：配合鏡頭調整或塑膠螺絲使用。

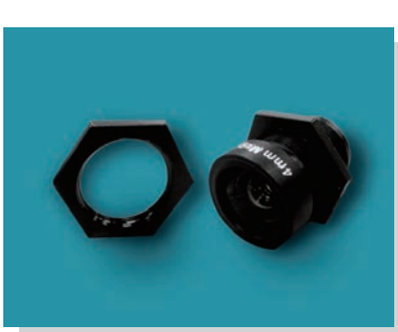

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
M12-2	2000

塑膠螺帽 NUT

用途：配合鏡頭調整或塑膠螺絲使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
MOC-12	1000

塑膠螺帽 NUT

用途：配合一般螺絲或塑膠螺絲使用。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MO-13	1000


- Material: PP
- Color: Natural/Black
- Unit: mm



Part No.	Package
MO-25.4	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	B	T	Package
MOPG-7	17.1	5.0	PG7	1000
MOPG-9	22.0	5.1	PG9	
MOPG-11	24.0	6.1	PG11	
MOPG-13.5	27.2	6.1	PG13.5	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm



Part No.	Package
MOB-2.5	1000




Part No.	Package
MOB-2.6	1000


塑膠螺帽 NUT

用途：配合一般螺絲或塑膠螺絲使用。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






◆ MO-12


Part No.	A	B	C	T	Package
MO-12	17.9	5.0		M12X1.5P	1000
MO-16	22.0	6.6	24.7	M16X1.5P	
MO-20	27.0	6.6	29.8	M20X1.5P	500
MO-25	33.0	8.5	36.2	M25X1.5P	
MO-32	41.0	7.6	46.4	M32X1.5P	100

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。

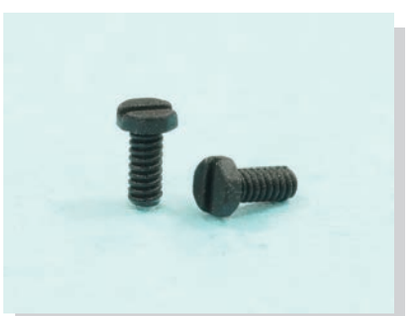


- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	A	Package
MI1.2-2.5	2.5	1000
MI1.2-3	3.0	
MI1.2-4	4.0	
MI1.2-5	5.0	
MI1.2-6	6.0	




- Material: Nylon 66 (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	A	Package
M1.6-3	3.0	1000
M1.6-4	4.0	
M1.6-4.5	4.5	
M1.6-5	5.0	
M1.6-6	6.0	
M1.6-7	7.0	
M1.6-8	8.0	
M1.6-9	9.0	
M1.6-10	10.0	

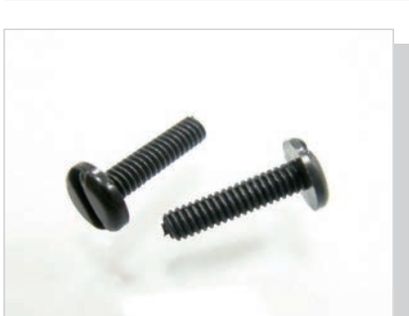

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural /Black
- Unit: mm



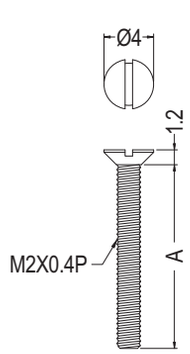


◆ MI2-14.8F


Part No.	A	Package
MI2-6	6.0	1000
MI2-8	8.0	
MI2-10	10.0	
MI2-12	12.0	
MI2-14.8F	14.8	

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural /Black
- Unit: mm






Part No.	A	Package
MI2.5-5	5.0	1000
MI2.5-12	12.0	

Part No.	A	B	C	T	Package
MI3-5N	5.5	2.0	5.0	M3X0.5P	1000
MI3-6N			6.0		
MI3-8N			8.0		
MI3-10N			10.0		
MI3-12N			12.0		
MI4-7N	7.0	2.7	7.0	M4X0.7P	
MI4-10N			10.0		

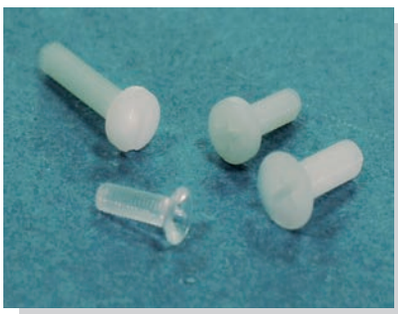

- Material: Nylon 66 (UL)/PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	A	B	C	T	Package
M2-3	3.3	1.4	3.0	M2X0.4P	2000
M2-4			4.0		
M2-5			5.0		
M2-6			6.0		
M2-6.5			6.5		
M2-8			8.0		
M2-10			10.0		
M2-12			12.0		
M2-15			15.0		
M2.5-4	4.3	1.5	4.0	M2.5X0.45P	
M2.5-5			5.0		
M2.5-6			6.0		
M2.5-8			8.0		
M2.5-10			10.0		
M2.5L-13	6.3		13.0		
M2.6-4	4.3		4.0	M2.6X0.45P	
M2.6-5			5.0		
M2.6-6			6.0		
M2.6-8			8.0		
M2.6-10			10.0		
M3-4	5.5	2.1	4.0	M3X0.5P	
M3-5			5.0		
M3-6			6.0		
M3-8			8.0		1000
M3-10			10.0		
M3-12			12.0		
M3-14			14.0		
M3-15			15.0		
M3-17			17.0		

Part No.	A	B	C	T	Package
M3-18	5.5	2.1	18.0	M3X0.5P	1000
M3-20			20.0		
M3-25			25.0		
M3-30			30.0		
M4-6	7.0	2.5	6.0	M4X0.7P	
M4-8			8.0		
M4-10			10.0		
M4-12			12.0		
M4-14			14.0		
M4-16			16.0		
M4-20			20.0		
M4-25			25.0		
M4-30			30.0		
M4-35			35.0		
M5-20	9.1	3.6	20.0	M5X0.8P	
R440-6	5.2	2.4	6.4	4-40 UNC	2000
R440-8			8.0		
R440-9			9.5		1000
R440-12			12.7		
R440-15			15.5		
R440-4S	5.8	1.8	4.75		
R632-6	6.7	2.5	6.35	6-32 UNC	2000
R632-8			8.0		
R632-9			9.5		1000
R632-12			12.7		
R632-15			15.9		
R632-19			19.1		

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Natural
- Unit: mm



Part No.	A	Package
M2-4.5F	4.5	2000
M2-5.5F	5.5	
M2-6.5F	6.5	
M2-7.5F	7.5	
M2-8.5F	8.5	




- Material: Nylon 66 (UL)/PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural /Black
- Unit: mm




Part No.	A	B	C	T	Package
M3-5F	5.3	1.2	4.8	M3X0.5P	1000
M3-5.3F	5.3	1.6	5.0		
M3-6F	5.6	1.6	6.0		
M3-8F			8.0		
M3-10F			10.0		
M3-12F			12.0		
M3-14F			14.0		
M3-4.2F	6.0	1.7	4.2		2000
M4-8F	7.6	2.0	8.0	M4X0.7P	1000
M4-10F			10.0		
M4-12F			12.0		
M4-14F			14.0		
M4-16F			16.0		
M4-18F	7.65	2.7	18.0		
M5-15F	9.1	9.1	14.8	M5X0.8P	



- Material: Nylon 66 (UL)/PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

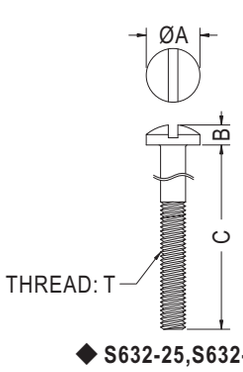

◆ S632-25,S632-28




Part No.	A	B	C	T	Package
M3.5-10	6.9	2.2	10.0	M3.5X0.6P	1000
M3.5-15			15.0		
M3.5-20			20.0		
M3.5-25			25.0		
M3.5-30			30.0		
S440-6	5.2	2.1	6.4	4-40 UNC	2000
S440-8			8.0		
S440-9			9.5		
S440-12			12.7		1000
S440-15			15.5		
S632-6	6.7	2.5	6.35	6-32 UNC	2000
S632-8			8.0		
S632-9			9.5		1000
S632-12			12.7		
S632-15			15.9		
S632-19			19.1		
S632-25			25.4		
S632-28			28.0		

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural /Black
- Unit: mm




Part No.	Package
MIL4-20	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
★STM3-4	4.0	2000
STM3-6	6.0	
STM3-8	8.0	
STM3-10	10.0	
STM3-12	12.0	



Part No.	A	Package
STM4-6	6.0	2000
STM4-8	8.0	
STM4-10	10.0	
STM4-12	12.0	




Part No.	A	Package
STM5-16	16.0	1000
STM5-25	25.0	



Part No.	A	Package
STM632-6	6.35	2000
STM632-8	8.0	
STM632-9	9.5	
STM632-12	12.7	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
M4-8L	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
M4-9NBD	1000

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural /Black
- Unit: mm



Part No.	Package
MRL4-3	1000




- Material: PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	A	Package
MR4-9.5	9.5	1000
MR4-12	12.0	
MR4-20	20.0	




- Material: PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm



Part No.	Package
M6-4	1000




- Material: PC(UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
M6-8F	500

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。

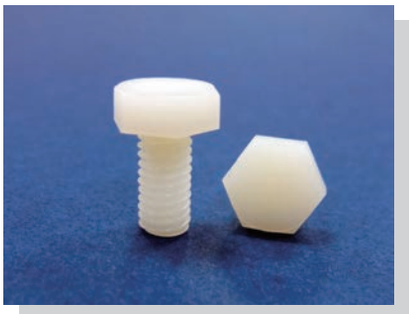


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
STM6-12	2000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
M8-7	1000



- Material: PE
- Color: Black
- Unit: mm




Part No.	Package
EM-528	500

塑膠螺絲 SCREW

用途：用於汽車點煙器插座之固定。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
ATFF-1	1000

塑膠螺絲 SCREW


用途：用於零件、紙張及PC板之固定。



- Material: PP (UL)
- Flame Class: 94HB
- Color: Black/White
- Unit: mm




Part No.	Package
KSM-1A	1000




Part No.	Package
KSM-1B	1000



- Material: PE
- Color: Black/White
- Unit: mm



Part No.	Package
KSM4-5M	1000




Part No.	Package
KSM4-6F	1000

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black/Gray
- Unit: mm




Part No.	A	B	C	T	Package
MIA6-16	16.0	3.5	15.0	M6X1P	1000
MIA8-20	20.0	5.0	18.5	M8X1.25P	500

塑膠螺絲 SCREW

用途：用於零件、紙張及PC板之固定。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

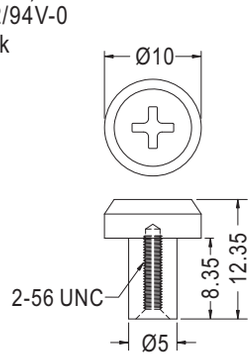


Part No.	Package
KSC256-8.4F	2000

翼形螺絲 SCREW


用途：用於固定需絕緣之零件，重量輕，耐腐蝕。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	Package
SM3-6	6.0	2000
SM3-8	8.0	
SM3-10	10.0	
SM3-12	12.0	




Part No.	A	T	Package
SM4-6	6.0	M4X0.7P	2000
SM4-8	8.0		
SM4-10	10.0		
SM4-12	12.0		
SM632-6	6.35	6-32 UNC	
SM632-8	8.0		
SM632-9	9.5		
SM632-12	12.7		

塑膠螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕。



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	Package
MUS2-10	2000

止付螺絲 SET SCREW


用途：做為螺絲之固定，絕緣，重量輕，耐腐蝕。



- Material: PC (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm




Part No.	Package
THRI3-6	2000



Part No.	Package
THRI4-7	2000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



NEW


Part No.	Package
THRIA3-2.4	2000

內牙螺絲 THREADED ROD

用途：做為螺絲之固定，絕緣，重量輕，耐腐蝕。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
THR5-8	2000



- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Transparent
- Unit: mm




Part No.	A	Package
THRI6-6	6.0	2000
THRI6-8	8.0	
THRI6-10	10.0	

手轉螺絲 CAPTIVE SCREW

用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	Package
HASW3-8	5.0	1000
HASW3-9	6.0	
HASW3-13	10.0	
HASW3-18	15.0	
HASW3-23	20.0	
HASW3-28	25.0	
HASW3-33	30.0	





Part No.	A	Package
HASW4-8	5.0	1000
HASW4-13	10.0	
HASW4-18	15.0	
HASW4-23	20.0	
HASW4-28	25.0	
HASW4-33	30.0	






Part No.	A	Package
HASW5-10	7.0	1000
HASW5-15	12.0	
HASW5-20	17.0	
HASW5-25	22.0	
HASW5-30	27.0	
HASW5-35	32.0	
HASW5-40	37.0	
HASW5-45	42.0	
HASW5-50	47.0	

手轉螺母 HAND SPIN NUT

用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。



- Material: PC+ABS (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	N	Package
GPM3-20	M3X0.5P	1000
GPM4-20	M4X0.7P	
GPM632-20	6-32 UNC	

螺絲 SCREW

用途：螺絲式，固定於機殼。




- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
GPE2-24	1000



- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

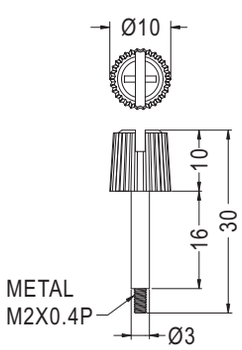


Part No.	Package
GPE2-30	1000

螺絲 SCREW

用途：做為螺絲之固定，絕緣，重量輕，耐腐蝕。



- Plastic Material: PP
- Screw Material: Steel
- Color: Black
- Unit: mm

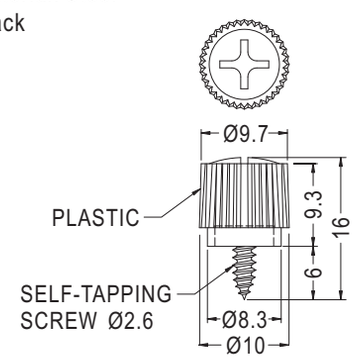


Part No.	Package
GPE2.6-6	1000

螺絲 SCREW

用途：螺絲式，固定於機殼。



- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	A	B	Package
GPE3-5.5	5.5	11.8	1000
GPE3-8	8.0	14.3	
GPE3-15	15.0	21.3	
GPE3-23	23.0	29.3	

手轉螺絲 CAPTIVE SCREW

用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。




- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	Package
GPR3-5.5	1000



- Head Material: PC (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




Part No.	Package
GPED3-6	500

螺絲 SCREW

用途：螺絲式，固定於機殼。



- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm



Part No.	A	Package
GPEA3-6	6.0	1000
GPEA3-8	8.0	


螺絲 SCREW

用途：螺絲式，固定於機殼。






- Head Material: PC+ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
GPE4-8	500

- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
GPE4-8L	8.0	500
GPE4-12L	12.0	

手轉螺絲 CAPTIVE SCREW

用途：用於外殼及零組件之固定，可手轉，不需工具，方便不脫落。




- Head Material: PP (UL)
- Head Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
GPE4-12-1	200



- Head Material: PP (UL)
- Head Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	A	Package
GPE8-21	13.0	100
GPE8-32	24.7	

螺絲 SCREW

用途：螺絲式，固定於機殼。



- Head Material: ABS (UL)
- Head Flame Class: 94V-2/94V-0
- Color: Black/Dark Gray
- Unit: mm




Part No.	Package
GPE4-13.5	250

用途：螺絲式，固定於機殼。




- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Black
- Unit: mm

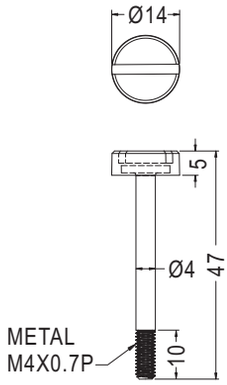

Part No.	Package
GPE4-42	250




- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
GPE5-20	500




- Head Material: PC (UL)
- Head Flame Class: 94V-2
- Color: Black
- Unit: mm

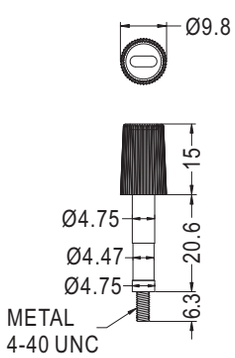

Part No.	Package
GPE44-1	500



- Head Material: PP
- Color: Black/Computer
- Unit: mm



Part No.	Package
GPE632-6	500


螺絲 SCREW

用途：螺絲式，固定於機殼。






- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Natural/Black
- Unit: mm

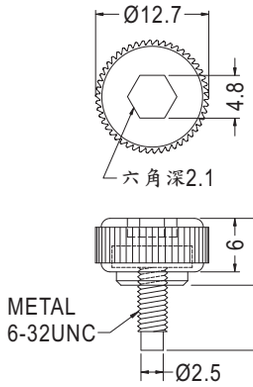


Part No.	Package
GPE632-5	500

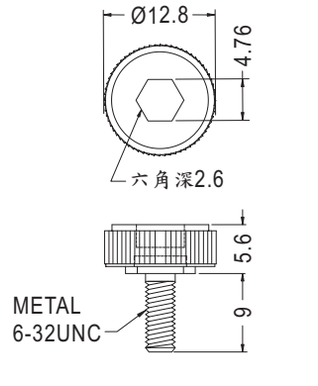

Part No.	Package
GPE632-9	500




- Head Material: ABS (UL)
- Head Flame Class: 94HB
- Color: Black/Blue
- Unit: mm




Part No.	Package
GPR632-6	500

旋鈕螺絲 SCREW

用途：用於固定需絕緣之零件，重量輕，耐腐蝕，可用手旋轉，一般用於電腦外殼之固定。

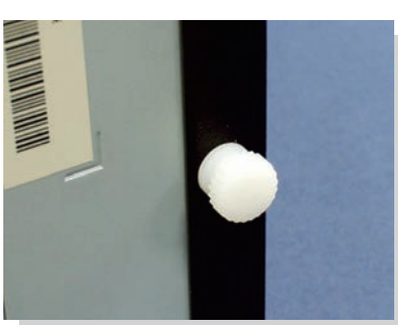


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	C	T	Package
SUS632	9.0	6.9	9.8	6-32 UNC	1000
SUS832	10.6	7.2	9.6	8-32 UNC	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
RSUS632	5.0	1000
RSUS632-6	6.0	

PC板拉柄 CARD PULLER

用途：與PC板導槽配合，可快速將PC板拉出與壓入。

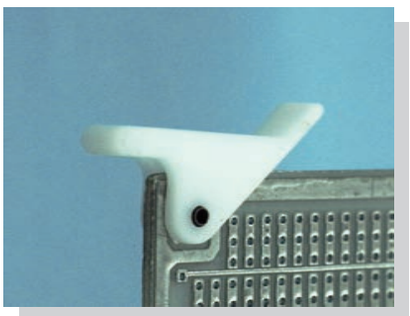

- Material: POM (UL)
- Flame Class: 94HB
- Pin Material: Steel
- Color: White
- Unit: mm

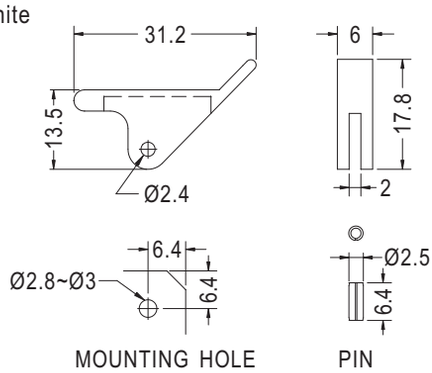


MOUNTING HOLE　　PIN

Part No.	Package
CP-15	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

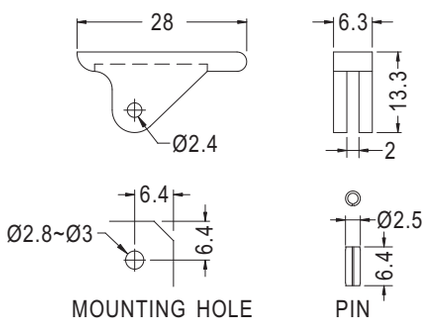


MOUNTING HOLE　　PIN

Part No.	Package
CP-20	1000



- Material: Nylon 66 (UL) /POM (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

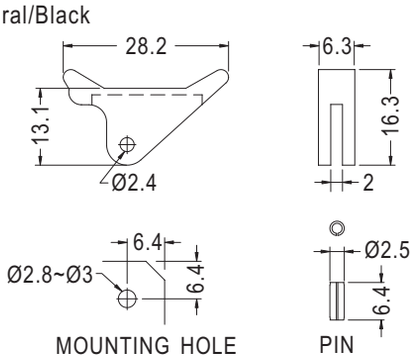


MOUNTING HOLE　　PIN

Part No.	Package
CP-25	1000



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

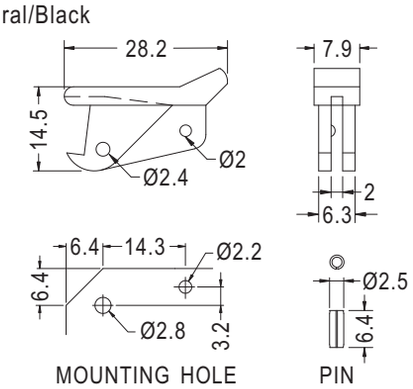

MOUNTING HOLE　　PIN


Part No.	Package
CP-30	1000

PC板拉柄 CARD PULLER

用途：與PC板導槽配合，可快速將PC板拉出與壓入。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

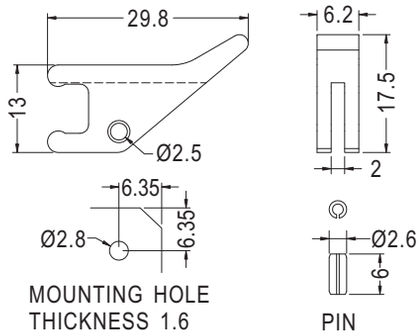

Part No.	Package
CP-90	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

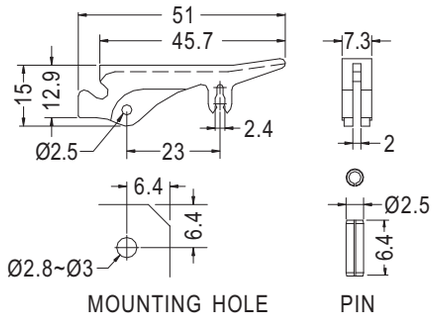

Part No.	Package
CP-37	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black/Red
- Unit: mm

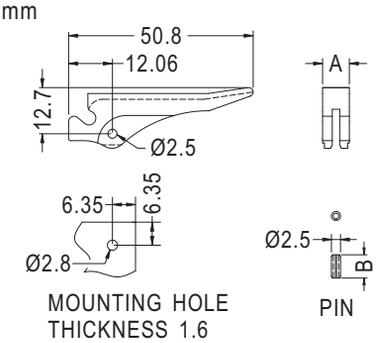

Part No.	A	B	Package
CP-38	7.3	6.4	500
★CP-38L	8.8	8.0	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

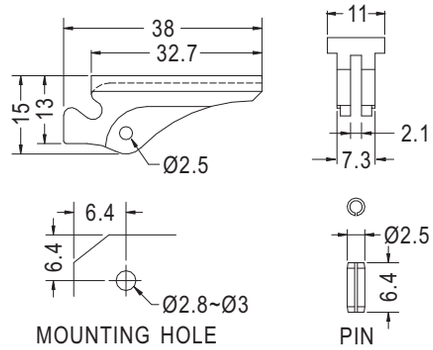


Part No.	Package
CP-47	500

PC板拉柄 CARD PULLER

用途：與PC板導槽配合，可快速將PC板拉出與壓入。

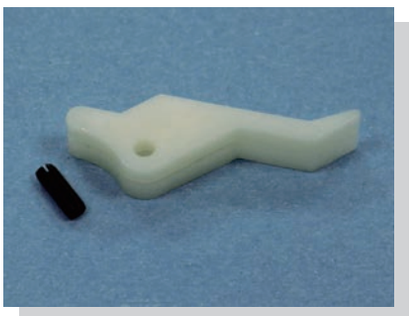

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

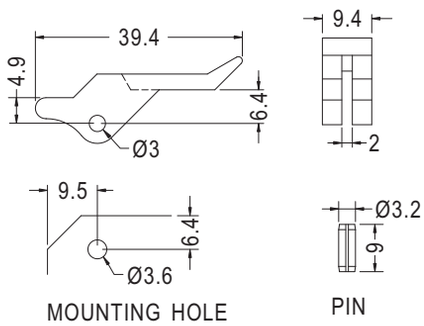


MOUNTING HOLE　PIN

Part No.	Package
CP-50	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

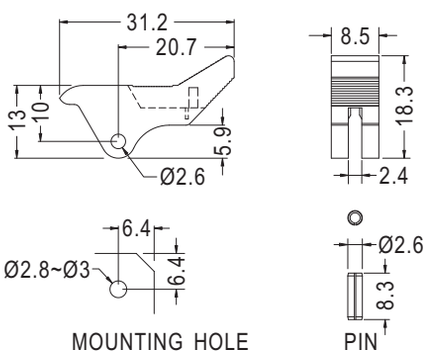


MOUNTING HOLE　PIN

Part No.	Package
CP-70	1000



- Material: POM (UL)
- Flame Class: 94HB
- Pin Material: Steel
- Color: Black
- Unit: mm

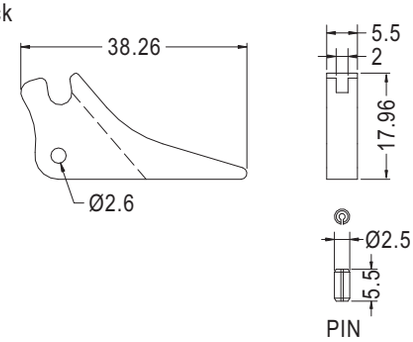


PIN

Part No.	Package
CP-72	500



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

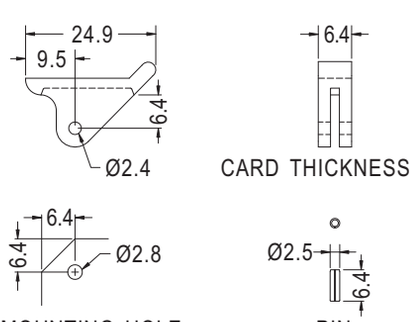

MOUNTING HOLE　PIN


Part No.	Package
CP-82	1000

PC板拉柄 CARD PULLER

用途：與PC板導槽配合，可快速將PC板拉出與壓入。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Pin Material: Steel
- Color: Natural/Black
- Unit: mm

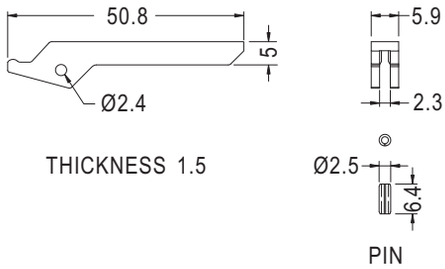

Part No.	Package
CP-84	1000




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

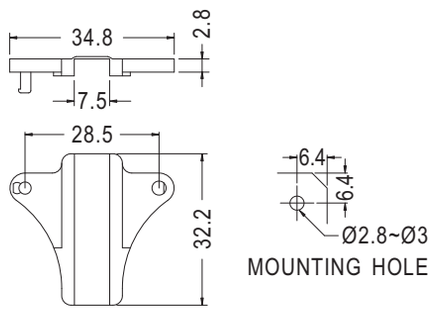

Part No.	Package
CP-35	500



- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Gray/Orange
- Unit: mm

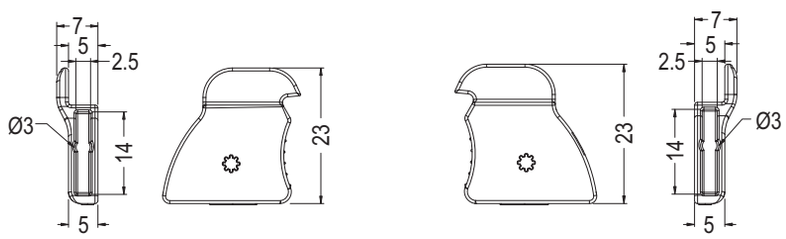

Part No.	Package
CP-76	1000


Part No.	Package
CP-77	1000

PC板導槽 CARD GUIDE

用途：固定PC板於機殼上，安裝方便。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

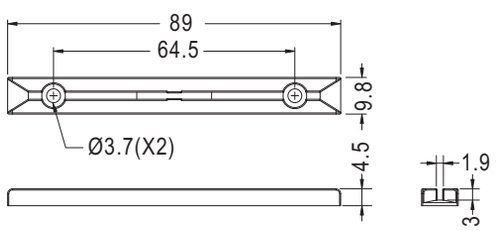


Part No.	Package
CGBC-89	250

PC板導槽 CARD GUIDE

用途：用螺絲鎖於機板，固定PC板於機殼上，安裝方便。

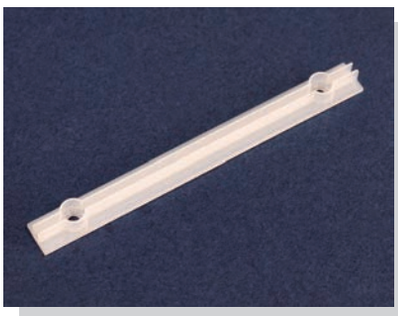


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

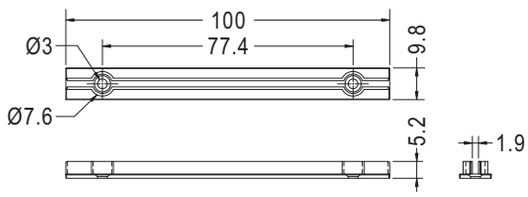

Part No.	Package
CGBB-100	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

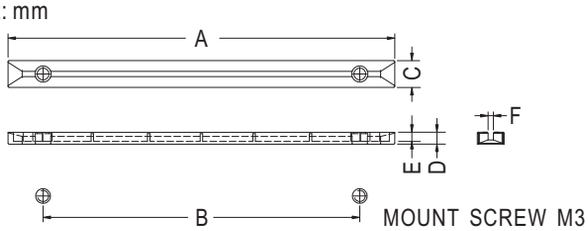


Part No.	A	B	C	D	E	F	Package
CGB-100L	100.0	77.0	10.0	7.2	5.4	2.2	250
CGB-120	119.0	94.5	9.8	4.5	3.0	1.9	
CGB-140	139.8	114.5	9.7	4.3	2.8		
CGB-160	158.7	135.0					

PC板導槽 CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。

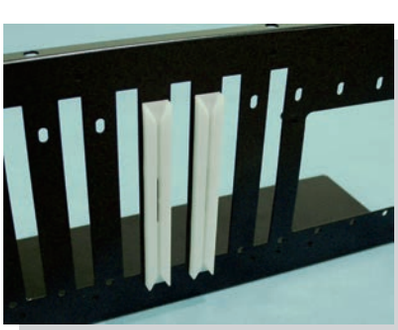


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

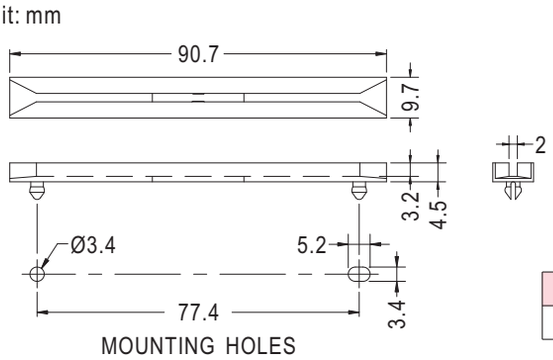

Part No.	Package
CG-9A	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

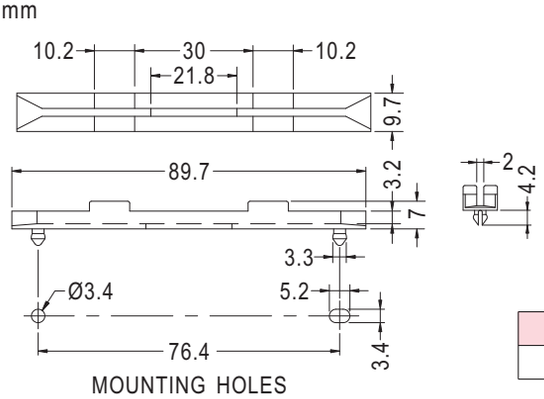


Part No.	Package
CG-9AL	250

用途：固定PC板於機殼上，安裝方便，免螺絲。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

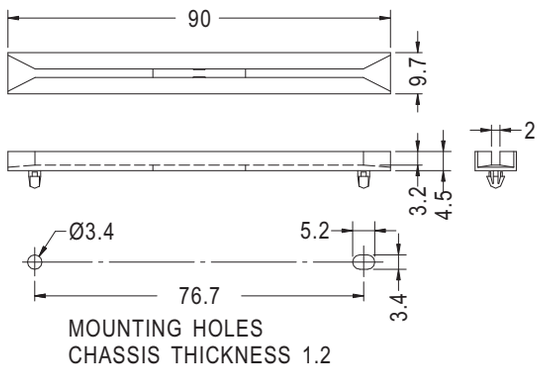

Part No.	Package
CG-9B	250




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

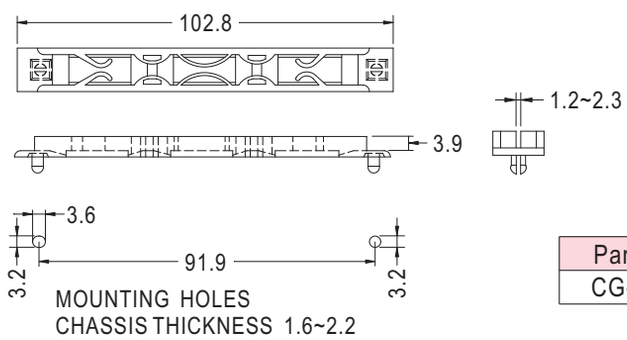

Part No.	Package
CG-10A	250




- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

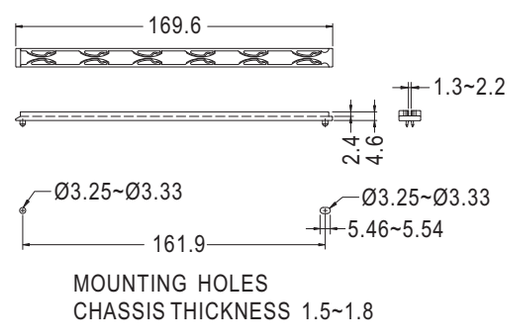


Part No.	Package
CGE-169	500


用途：固定PC板於機殼上，安裝方便，免螺絲。

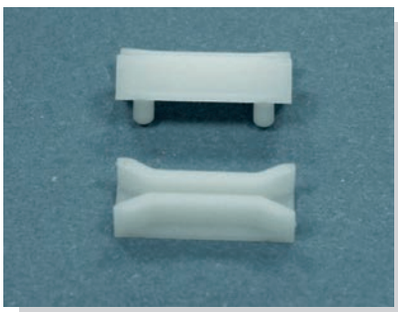


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

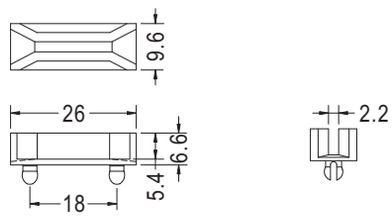


Part No.	Package
CG-26	500

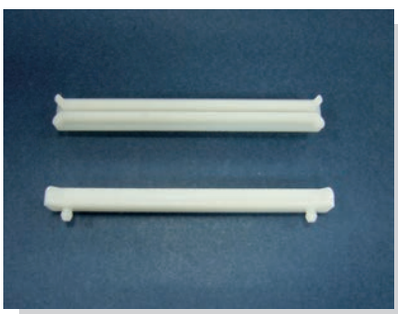


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

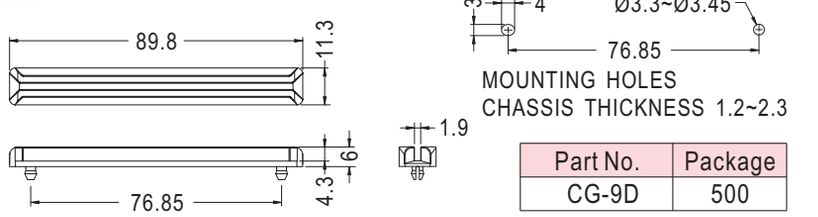


Part No.	Package
CG-9D	500

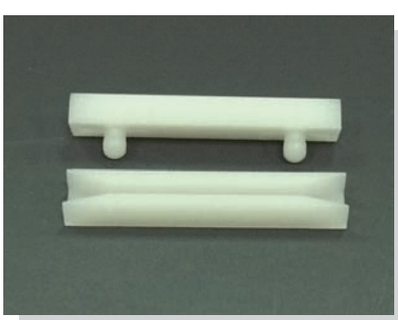


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

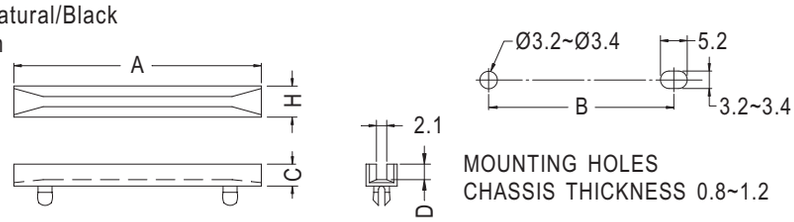

Part No.	A	B	C	D	E	H	Package
CG-38	38.0	25.4	4.5	3.2	0.8~1.2	6.4	500
CG-38L	38.0	25.4	4.6	3.0	1.0~1.6	9.6	
CG-50	50.8	38.0	4.5	3.2	0.8~1.2	6.4	
CG-50S	50.8	38.0	2.5	1.2	0.8~1.2	6.4	

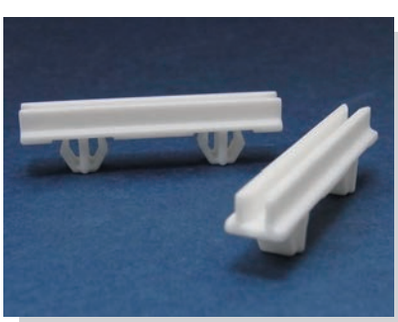


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

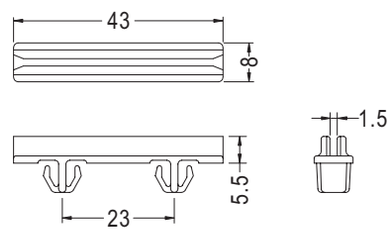

Part No.	Package
CGC-43	500




- Material: PC (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

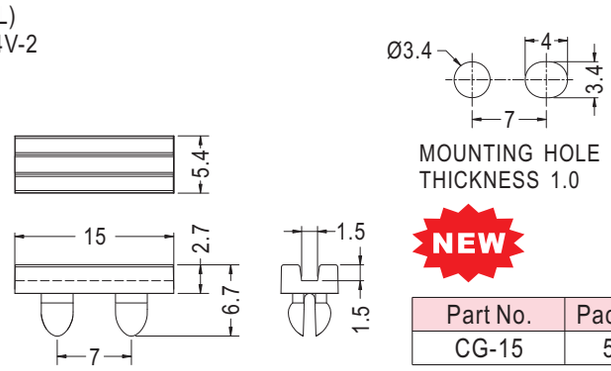


Part No.	Package
CG-15	500

用途：固定PC板於機殼上，安裝方便，免螺絲。

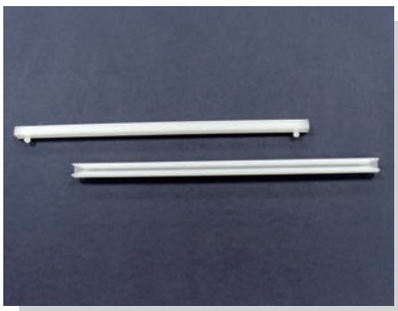


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

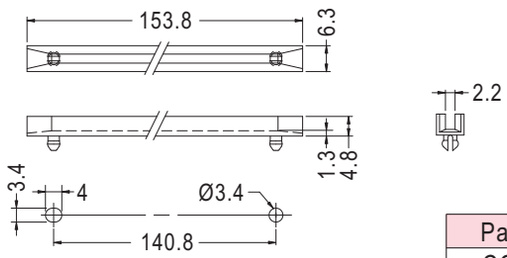


MOUNTING HOLES
CHASSIS THICKNESS 1.2

Part No.	Package
CG-153	100

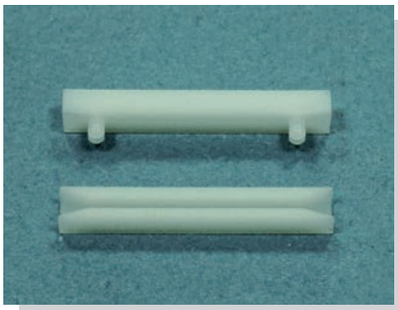

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

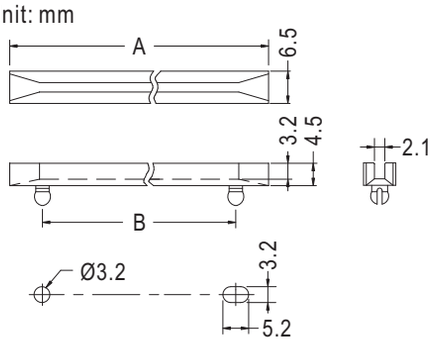


MOUNTING HOLES
CHASSIS THICKNESS 0.8~1.2

Part No.	A	B	Package
CG-250	63.5	50.8	500
CG-300	76.2	63.5	
CG-350	88.9	76.2	250
CG-400	101.6	88.9	
CG-450	114.3	101.6	200
CG-500	127.0	114.3	
CG-550	139.7	127.0	
CG-600	152.4	139.7	




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

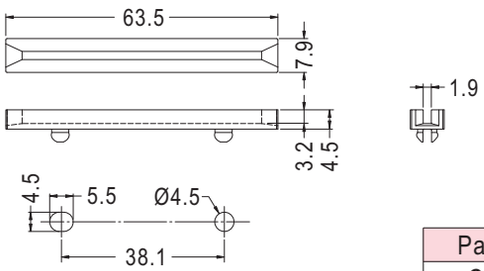


MOUNTING HOLES
CHASSIS THICKNESS 0.8

Part No.	Package
CG-63	500

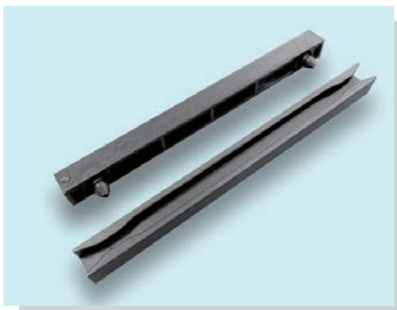

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

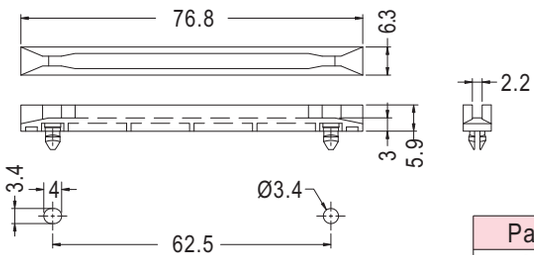


MOUNTING HOLES
CHASSIS THICKNESS 1.0


Part No.	Package
CG-77	500

PC板導槽 CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。

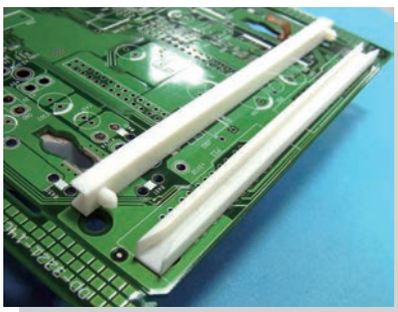

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

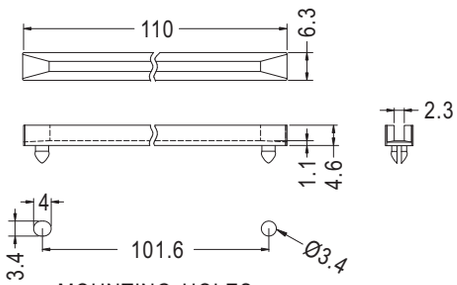


MOUNTING HOLES
THICKNESS 0.8~1.2

Part No.	Package
CG-110	100




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

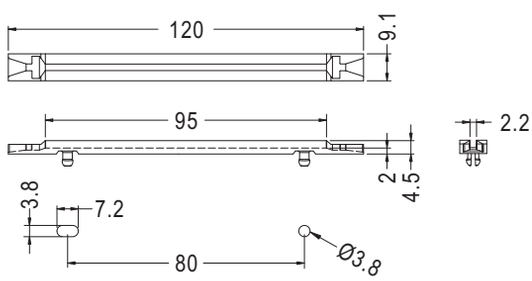


MOUNTING HOLES
CHASSIS THICKNESS 1.6

Part No.	Package
CG-120	100

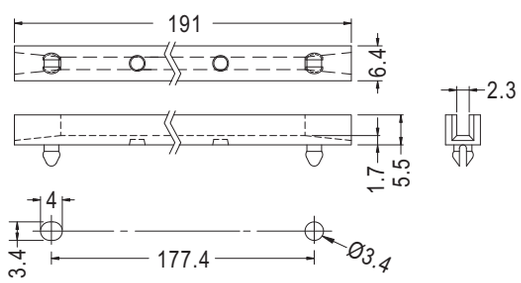

MOUNTING HOLES
CHASSIS THICKNESS 1.2


Part No.	Package
CG-191	100

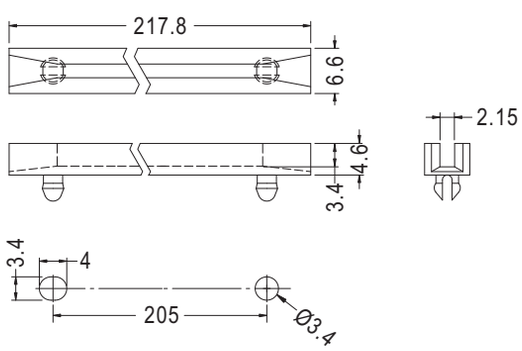

MOUNTING HOLES
CHASSIS THICKNESS 1.2

Part No.	Package
CG-218	100


- Material: PC
- Color: Black

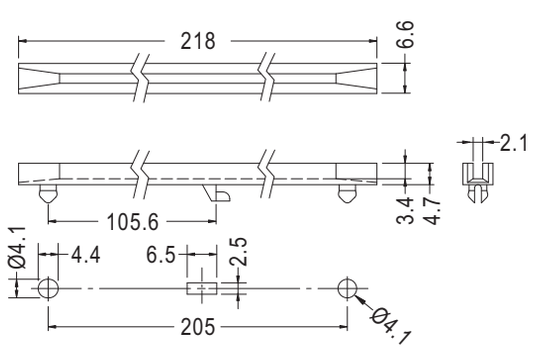


MOUNTING HOLES
CHASSIS THICKNESS 1.2

Part No.	Package
CGF-218	100

用途：固定PC板於機殼上，安裝方便，免螺絲。

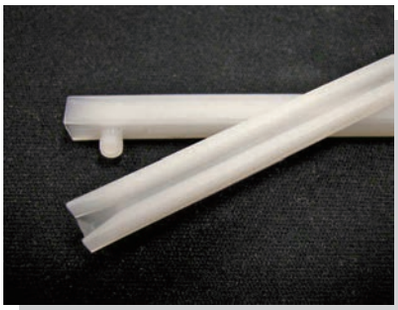


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

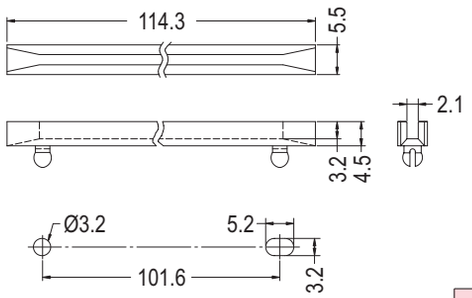


MOUNTING HOLES
CHASSIS THICKNESS 0.8~1.2

Part No.	Package
CG-450S	500

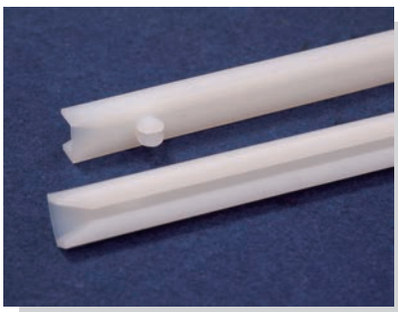


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

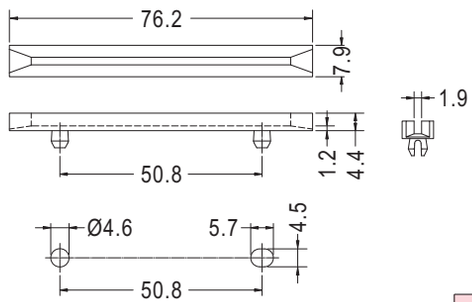


MOUNTING HOLES
CHASSIS THICKNESS 1.2~2.3

Part No.	Package
CG-300L	500

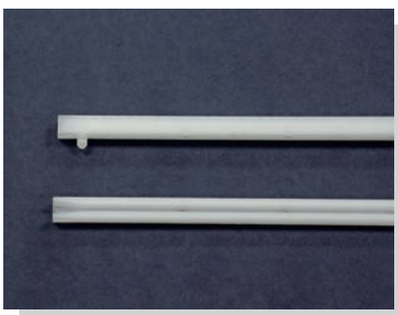


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

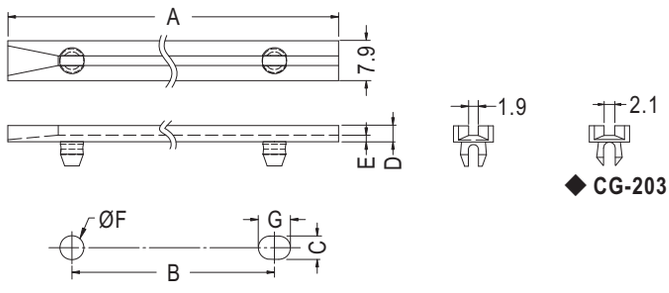


MOUNTING HOLES
CHASSIS THICKNESS 1.2~2.3

Part No.	A	B	C	D	E	F	G	Package
CG-203	203.2	177.8	4.6	3.2	1.9	4.6	5.4	100
CG-600A	152.4	127.0	4.62	3.2	1.3	4.75	6.4	200
CG-650	164.1	139.7	4.47	4.4	1.2	4.57	5.71	
CG-700	177.8	152.4	4.62	3.2	1.3	4.75	6.35	100
CG-700A	177.8	152.4	4.4	3.2	1.3	4.5	5.6	
CG-750	190.5	165.1	4.47	3.2	1.3	4.57	5.71	

用途：固定PC板於機殼上，安裝方便，免螺絲。

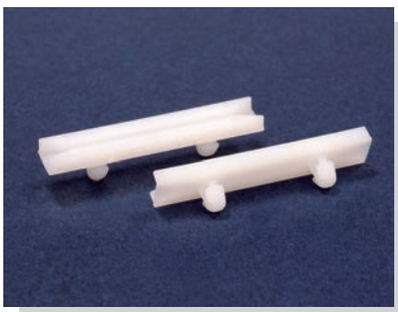


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

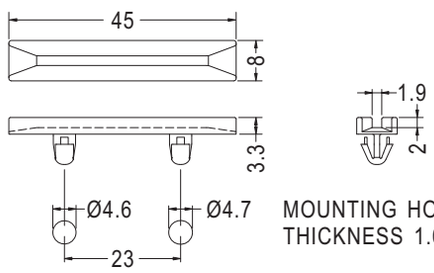


MOUNTING HOLES
THICKNESS 1.6~1.8

Part No.	Package
CG-45	1000

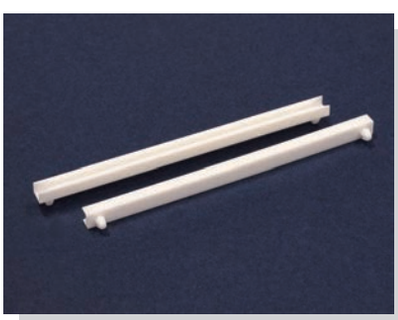

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

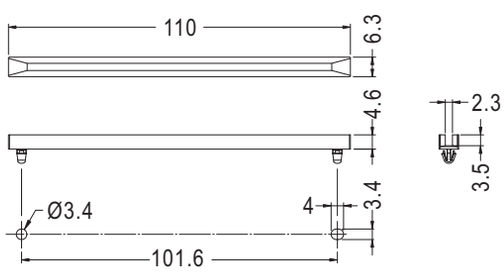


MOUNTING HOLES
THICKNESS 1.2

Part No.	Package
CGLJ-110	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

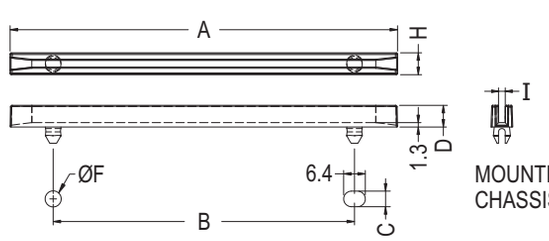


MOUNTING HOLES
CHASSIS THICKNESS: T

Part No.	A	B	C	D	F	H	I	T	Package
BCG-250	63.5	38.1	4.8	6.35	4.8	6.35	2.2	1.2~2.3	500
BCG-450	114.3	88.9	4.6	6.4	4.75	6.4	2.0	1.2~2.3	

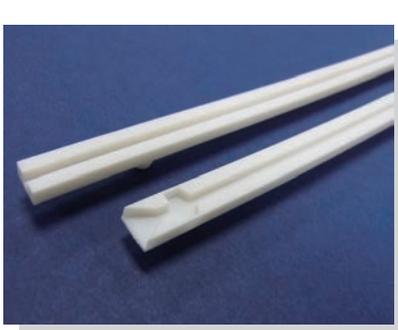


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

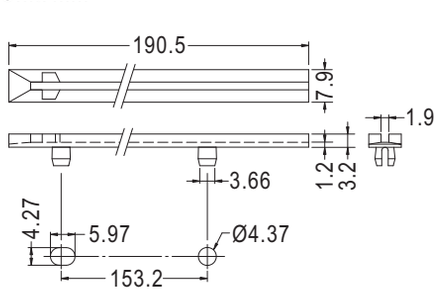

MOUNTING HOLES

Part No.	Package
FR-190	500

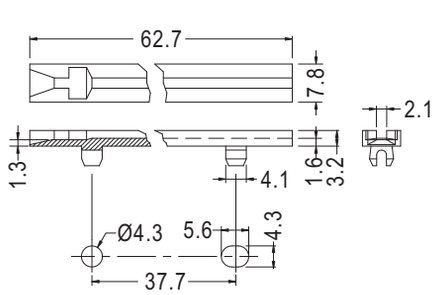


MOUNTING HOLES


Part No.	Package
FR-250	500

PC板導槽 CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。

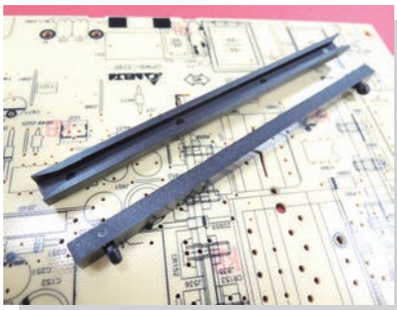


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

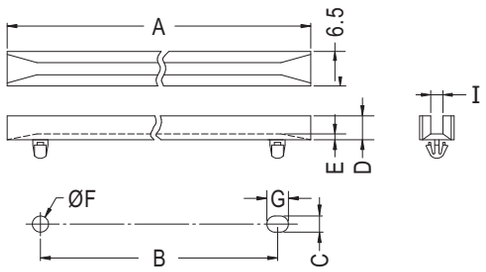


MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	F	G	I	T	Package
CGDLA-102	103.0	89.5	3.3	4.4	1.3	3.4	5.5	2.8	1.0	500
CGDLA-102L									1.5	
CGDLA-350	89.2	76.7	3.0	4.5	1.1	3.0	4.0	2.3	0.8	250

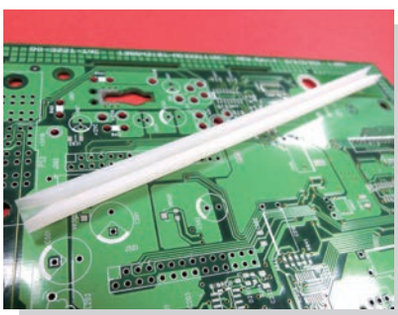

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

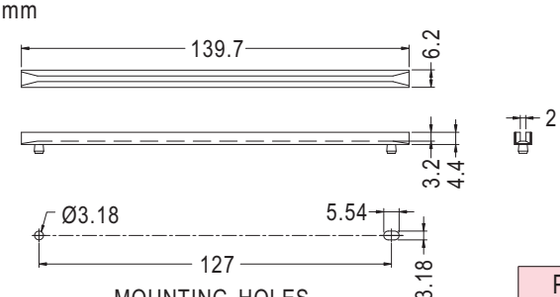


MOUNTING HOLES
THICKNESS 0.8~2.0

Part No.	Package
CG-140	250



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

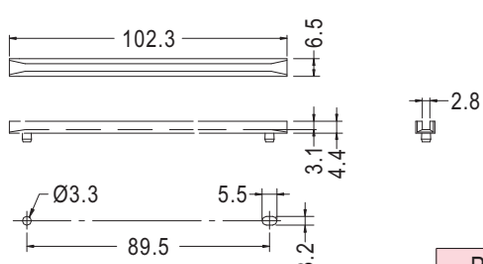

MOUNTING HOLES
CHASSIS THICKNESS 1.2~2.2


Part No.	Package
CGA-102	250

PC板導槽 CARD GUIDE

用途：用螺絲鎖於機板，固定PC板於機殼上，安裝方便。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

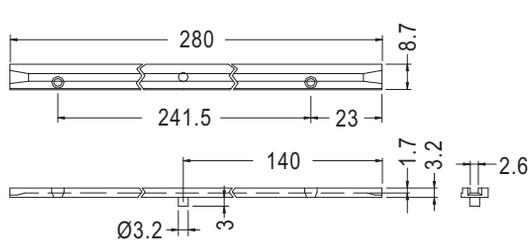


Part No.	Package
CGS-280	100

用途：固定PC板於機殼上，安裝方便，免螺絲。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



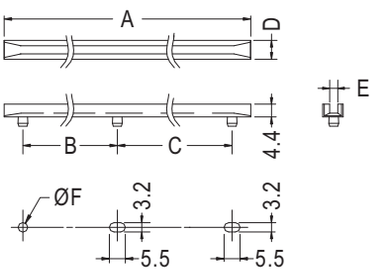

MOUNTING HOLES
CHASSIS THICKNESS: G

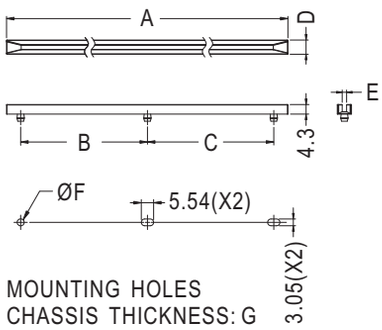


MOUNTING HOLES
CHASSIS THICKNESS: G

◆ **CGA-178S**

Part No.	A	B	C	D	E	F	G	Package
CGA-178	178.5	83.0	83.0	6.5	2.8	3.3	1.2~2.2	200
CGA-178S	177.8	82.55	82.55	6.4	2.0	3.18	1.2~2.2	
CGA-203	203.2	95.2	95.2	6.2	2.0	3.2	1.2~2.0	100
CGA-217	217.0	102.0	102.0	6.5	2.8	3.3	1.2~2.2	200




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

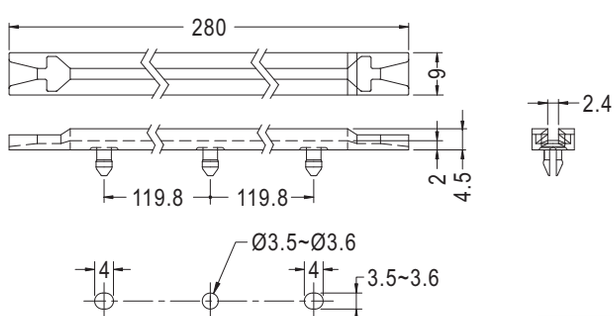


HOLE IN CHASSIS
MAX. THICKNESS 2.0

Part No.	Package
CG-280	100

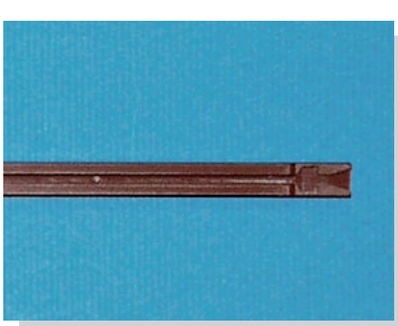


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Red
- Unit: mm

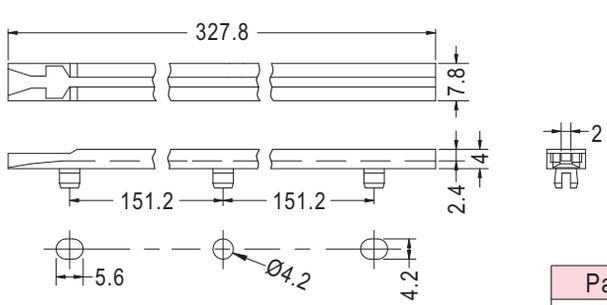


MOUNTING HOLES

Part No.	Package
FR-1300	100

用途：固定PC板於機殼上，安裝方便，免螺絲。

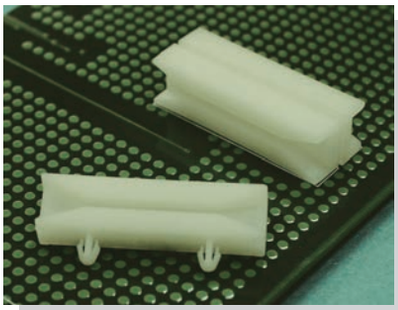


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

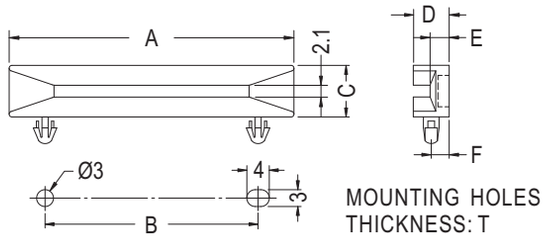


MOUNTING HOLES
THICKNESS: T

Part No.	A	B	C	D	E	F	T	Package
CGLA-4	38.4	20.0	9.2	6.4	3.4	3.2	1.6~1.7	500
CGLA-4(1)							1.0	
CGLA-4(2)							2.0	
CGLA-4S	40.0	20.0	8.0	6.0	3.0	3.0	1.6	
CGLA-6	51.0	38.2	9.2	6.4	3.4	3.2	1.6~1.7	
CGLA-8	81.0	60.0	8.0	6.0	3.0	3.0	1.6~1.8	250
CGLA-8(2)							1.8~2.1	
CGLA-8(8)							1.8	
CGLA-8(25)							2.5	
CGLA-9(1)	91.5	71.0					1.6~1.8	
CGLA-9(2)							1.8~2.1	

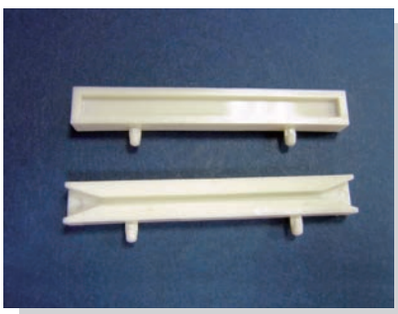


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

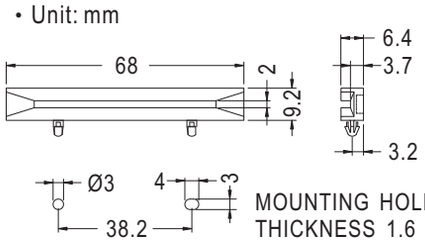


MOUNTING HOLES
THICKNESS 1.6

Part No.	Package
CGLA-10	200

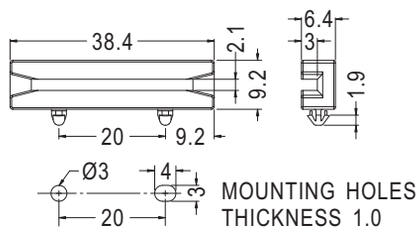


MOUNTING HOLES
THICKNESS 1.0

Part No.	Package
CGLA-11	500

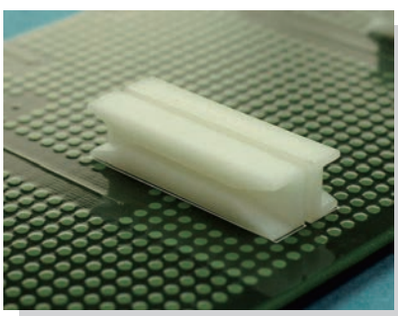


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

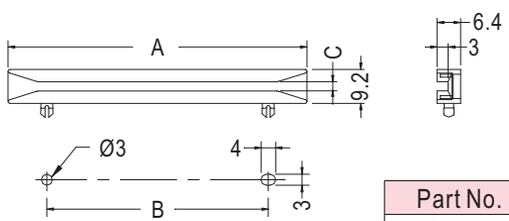


MOUNTING HOLES
P.C.B THICKNESS 1.3 MAX.

Part No.	A	B	C	Package
CGL-4	38.4	20.0	2.0	500
CGL-8	81.0	60.0	2.5	250

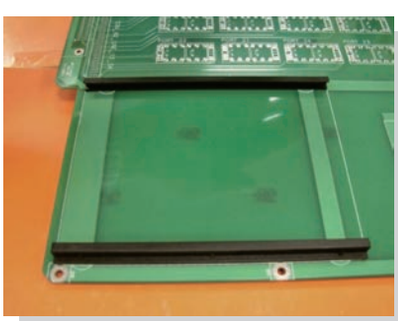

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

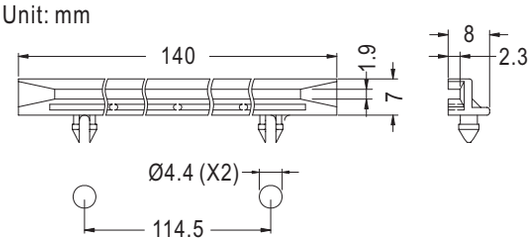


MOUNTING HOLES
P.C.B THICKNESS 1.6 MAX.


Part No.	Package
CGA-140	100

PC板導槽 CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。

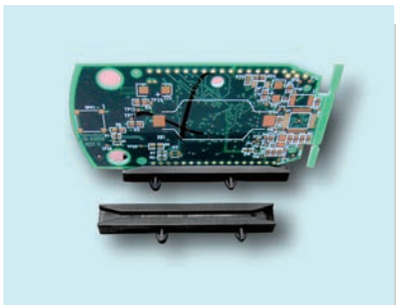


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

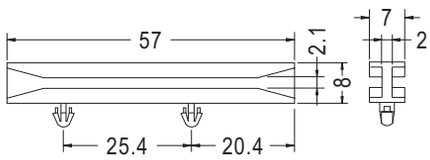


CHASSIS Ø3.0
P.C.B THICKNESS 1.8

Part No.	Package
CGDLA-57	500

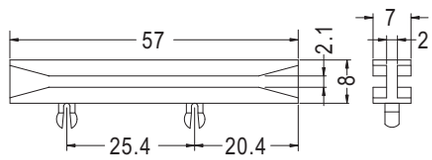


HOLE IN P.C.B Ø3.0
P.C.B THICKNESS 1.8

Part No.	Package
CGDLB-57	500

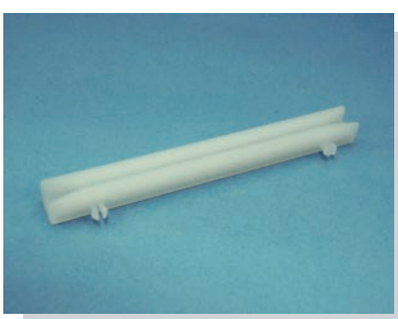

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm

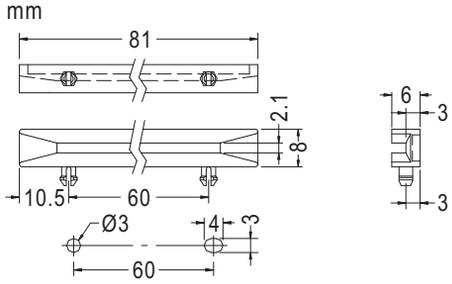

MOUNTING HOLES
P.C.B THICKNESS 1.8


Part No.	Package
CGLC-8	500

PC板導槽 CARD GUIDE

用途：固定IC卡於PC板上，安裝方便，免螺絲。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

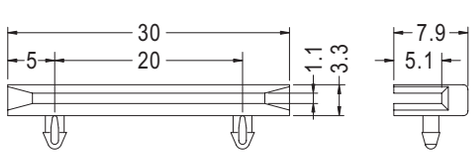


MOUNTING HOLES Ø2.0
P.C.B THICKNESS 1.6

Part No.	Package
CGLC-30	500

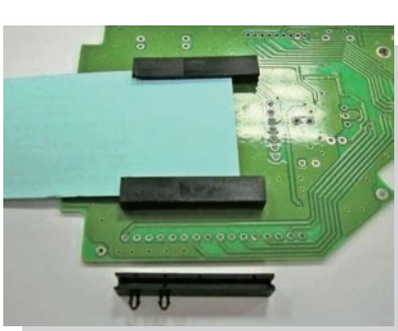


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

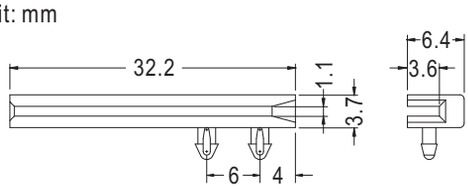

P.C.B Ø2.0
THICKNESS 1.6


Part No.	Package
CGLC-32-1	500

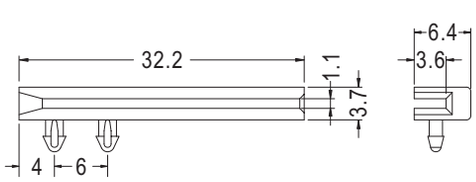


P.C.B Ø2.0
THICKNESS 1.6

Part No.	Package
CGLC-32-2	500

用途：固定PC板於機殼上，安裝方便，免螺絲。

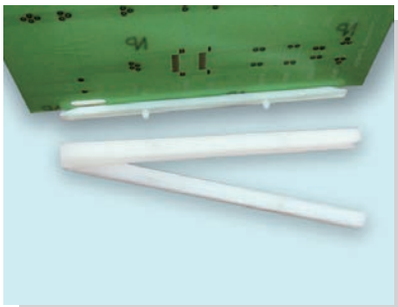

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

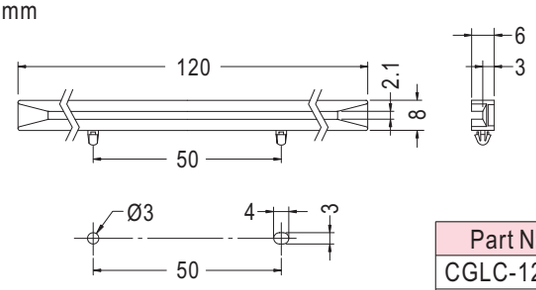


MOUNTING HOLES
CHASSIS THICKNESS: T

Part No.	T	Package
CGLC-120	1.6~1.8	200
CGLC-120S	1.0	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

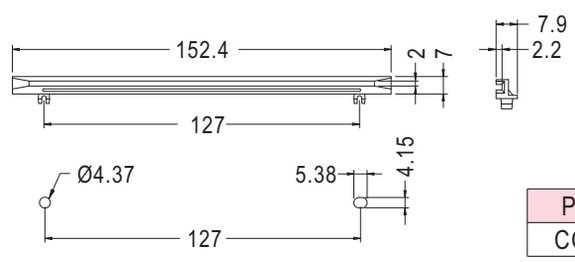


MOUNTING HOLES
CHASSIS THICKNESS 1.2~2.3

Part No.	Package
CGLC-153	250




- Material: ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

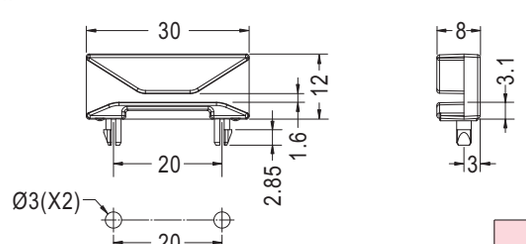


MOUNTING HOLES
CHASSIS THICKNESS 1.6

Part No.	Package
CG-30	500

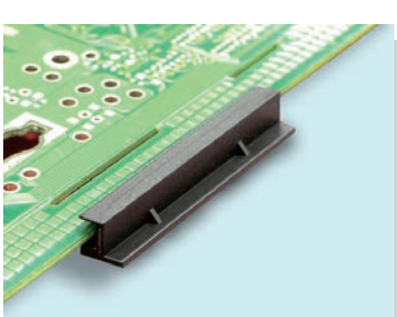

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

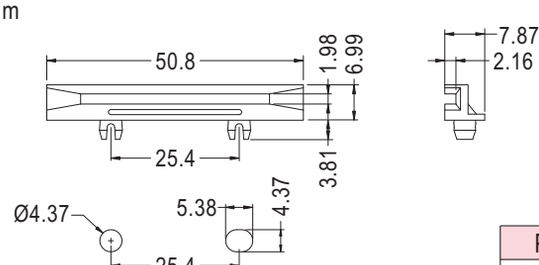


MOUNTING HOLES
THICKNESS 1.2~2.3


Part No.	Package
CGLC-50.8	1000

PC板導槽 CARD GUIDE

用途：固定PC板於機殼或PC板上，安裝方便，免螺絲。

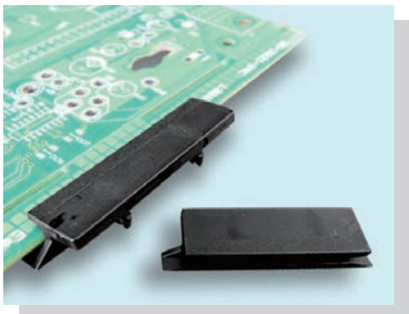


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm
- 專利品(PAT.)

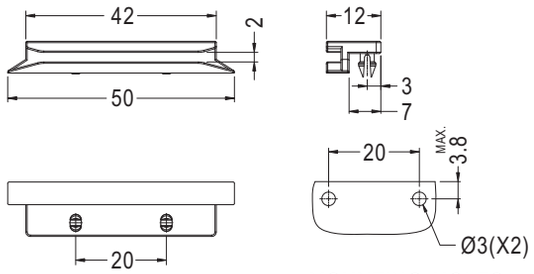


MOUNTING HOLES
THICKNESS 1.6


Part No.	Package
CGLD-50	500

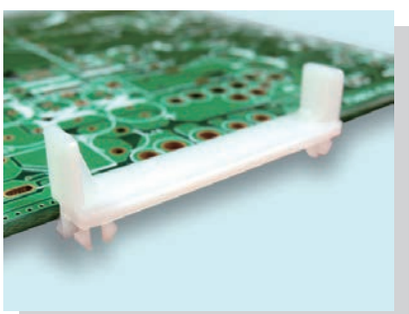


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

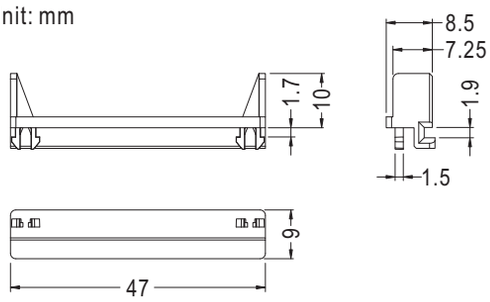

Part No.	Package
CGLG-47	1000

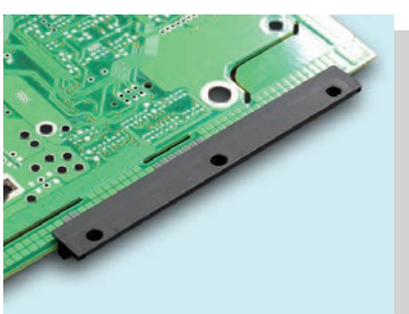


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

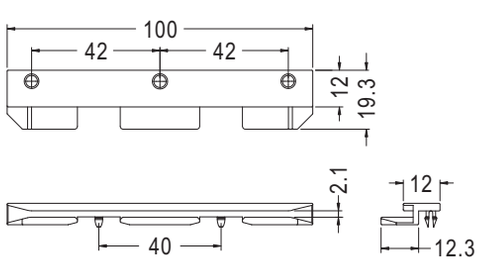


Part No.	Package
CGLI-100	1000

直立式導槽 CARD GUIDE


用途：固定PC板於機殼或PC板上，安裝方便，免螺絲。

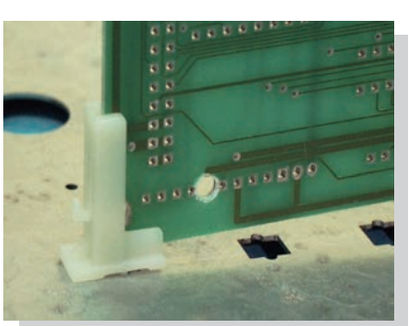


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



CHASSIS THICKNESS 1.0~2.0




PC MOUNTING HOLE




MOUNTING HOLE

Part No.	Package
CGH-1	500

用途：固定 OCP 3.0板於機殼或 PC板上，安裝方便，免螺絲 。

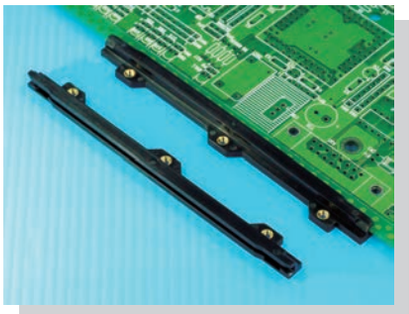


- Material: PC+ABS (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

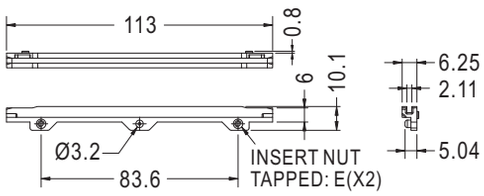


NEW

Part No.	E	Package
CGLM-1	M3X0.5P	250

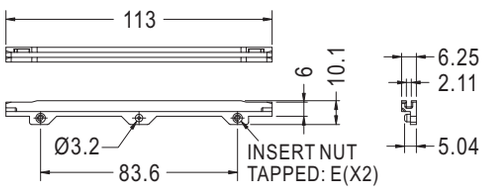


NEW


Part No.	E	Package
CGLM-113	M3X0.5P	250
CGLM-113-M2	M2X0.4P	

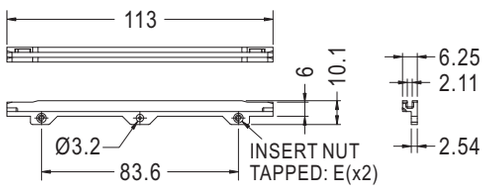

NEW


Part No.	E	Package
CGLN-113	M3X0.5P	250
CGLN-113-M2	M2X0.4P	

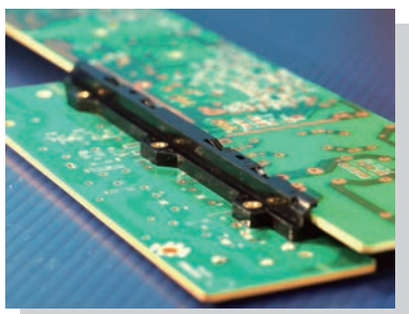


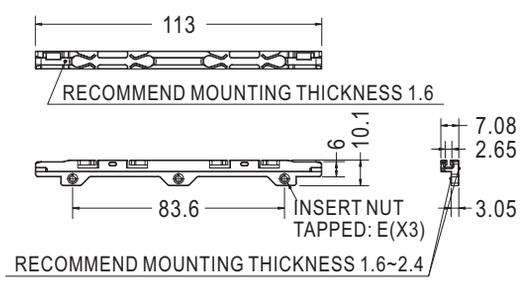

NEW

Part No.	E	Package
CGLN-2	M3X0.5P	250
CGLN-2-M2	M2X0.4P	

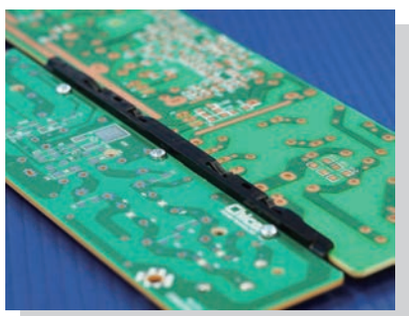

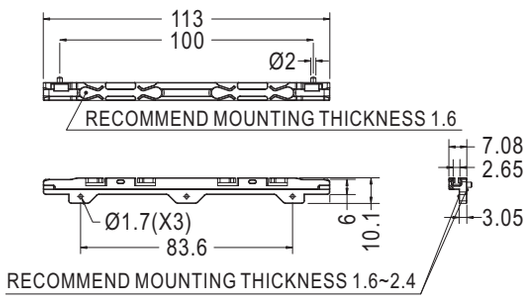


NEW


Part No.	Package
CGLN-3	250

直立式導槽 CARD GUIDE


用途：固定PC板於機殼或PC板上，安裝方便，免螺絲 。

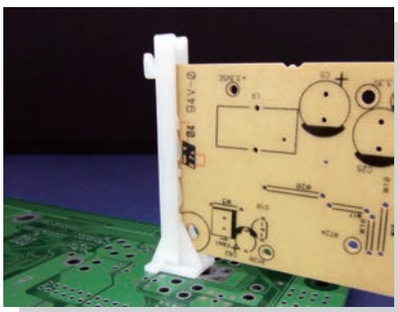


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

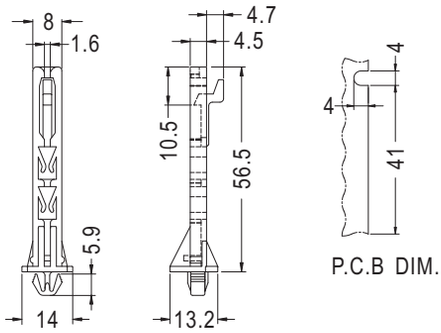


Part No.	Package
CGHI-1	500

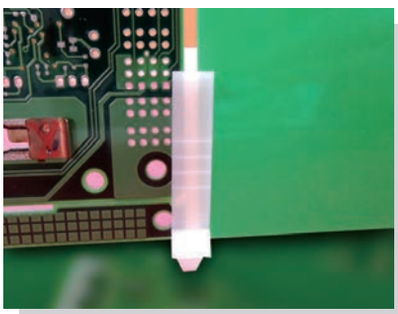


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

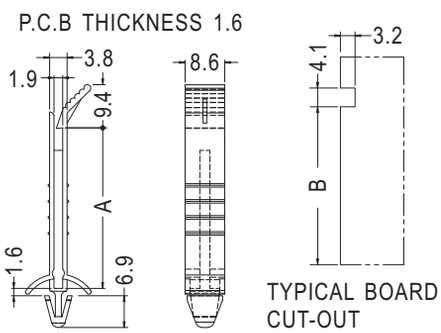

Part No.	A	B	Package
CGHE-22.4	22.4	22.0	500
CGHE-34.9	34.9	34.5	
CGHE-47.5	47.5	47.1	
CGHE-73.0	73.0	72.6	

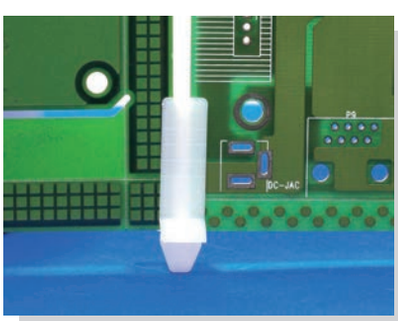

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

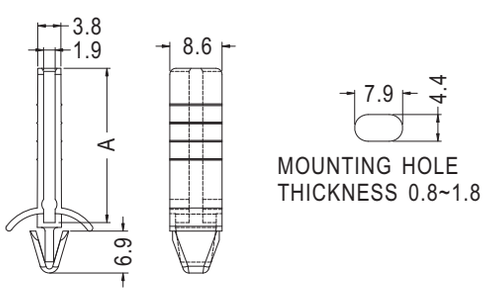


Part No.	A	Package
CGHC-25.4	25.4	500
CGHC-38.1	38.1	
CGHC-50.8	50.8	
CGHC-76.2	76.2	200

用途：固定PC板於機殼或PC板上，安裝方便，免螺絲。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

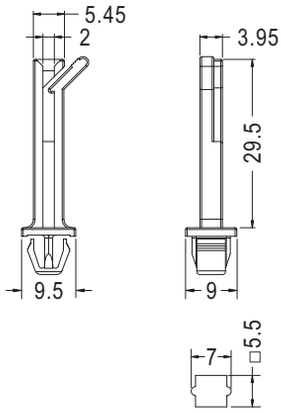


MOUNTING HOLE
THICKNESS 1.2~1.8

Part No.	Package
CGH-31	500

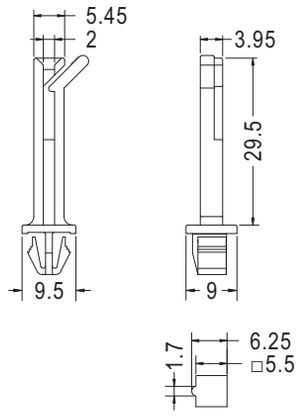



MOUNTING HOLE
THICKNESS 2.0~3.0

Part No.	Package
CGH-31L	500

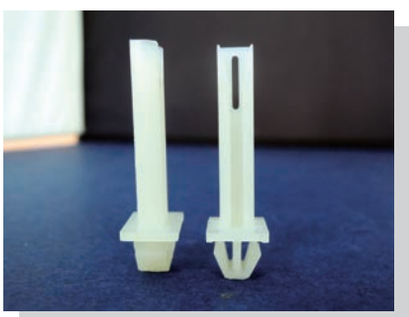


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

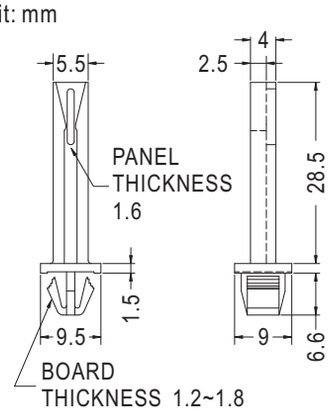




MOUNTING HOLE


Part No.	Package
CGH-37	1000

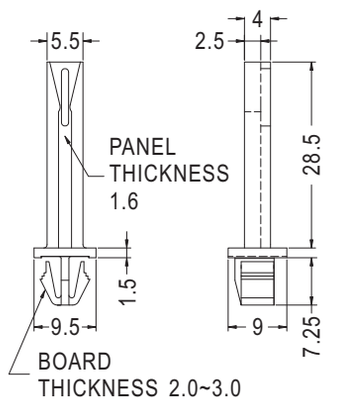





MOUNTING HOLE

Part No.	Package
CGH-37L	1000

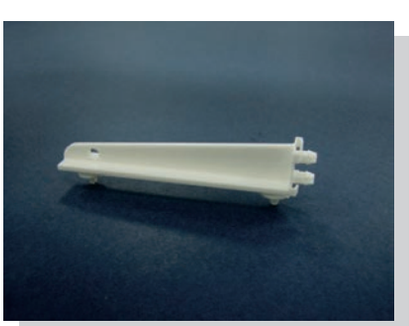

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

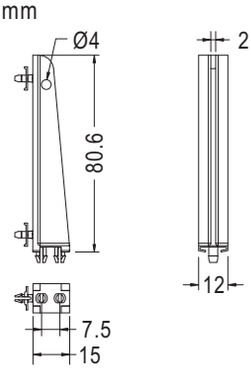




MOUNTING HOLES

Part No.	Package
CGC-1	250


用途：配合螺絲固定PC板於機殼或PC板上，安裝牢固，不脫落。




- Material: PC+ABS (UL)
- Flame Class: 94V-2
- Color: Black/Blue
- Unit: mm
- 專利品 (P.A.T.)

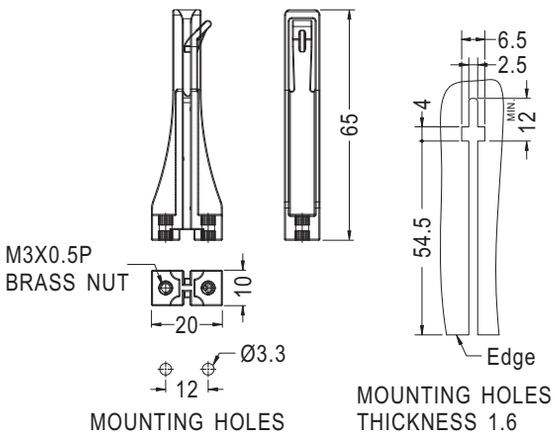


Part No.	Package
CGHA-65	500

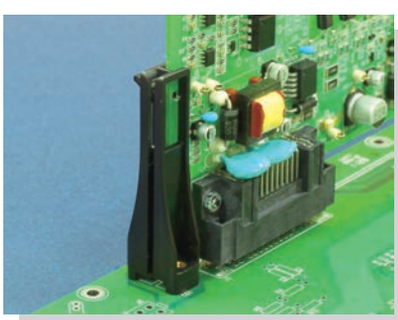


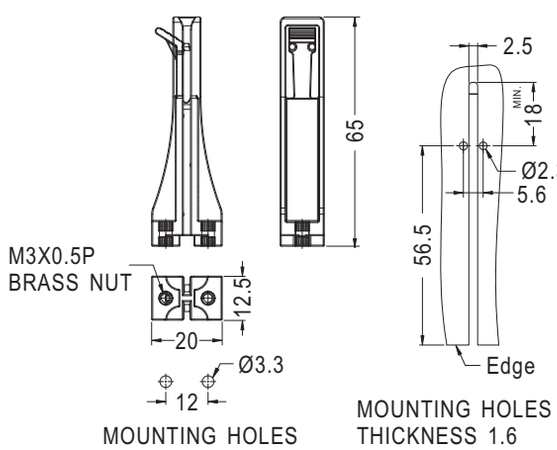


Part No.	Package
CGHB-65	500

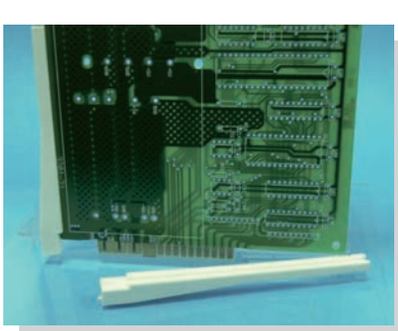


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	A	B	Package
CGH-90	77.2	89.2	200
CGH-130	118.5	130.0	100

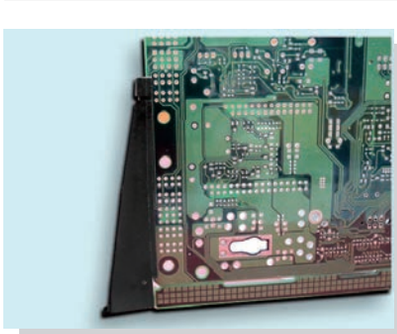


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

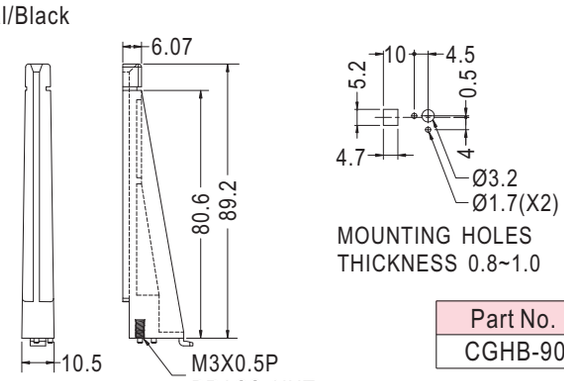


Part No.	Package
CGHB-90	1000

PC板導槽 CARD GUIDE

用途：固定PC板於機板上，成90°不晃動。

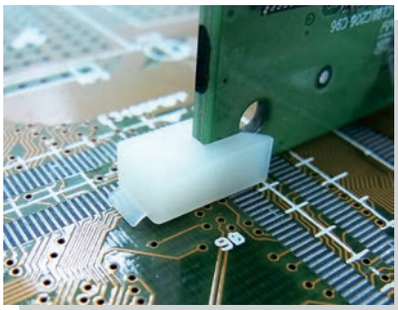

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

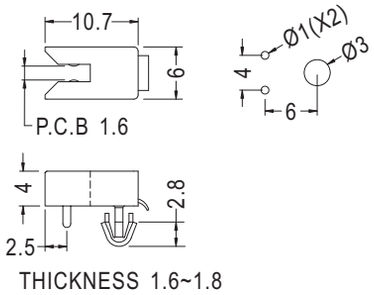

THICKNESS 1.6~1.8


Part No.	Package
ULCG-1	1000

PC板導槽 CARD GUIDE

用途：固定PC板於機殼上，安裝方便，免螺絲。




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

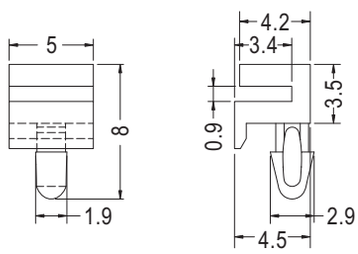


HOLE IN P.C.B Ø2.2
THICKNESS 1.6

Part No.	Package
ULCG-2	1000

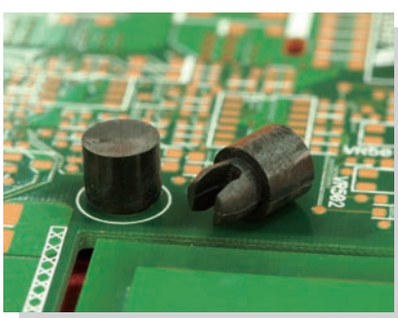

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




HOLE IN CHASSIS Ø4.3
BOARD THICKNESS 1.6~2.0

Part No.	A	Package
CGB-2	2.0	2000
CGB-6	4.8	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

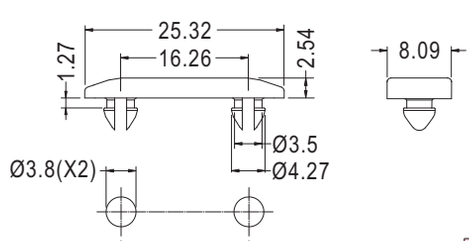

MOUNTING HOLES
THICKNESS 1.2

Part No.	Package
INTEC-1	500



9


- ▶ 腳墊
  Plastic Foot
- ▶ 橡膠腳墊
  Rubber Foot
- ▶ 金框腳墊
  Gold Covering Foot
- ▶ 銀框腳墊
  Silver Covering Foot
- ▶ EVA泡棉
  EVA Foam

腳墊 PLASTIC FOOT

用途：插梢式，可快速將腳墊固定於機殼，不脫落。



- Material: PE/TPR
- Pin Material: PP
- Color: Black/Gray/Computer
- Unit: mm





MOUNTING HOLE
CHASSIS THICKNESS: T


Part No.	A	B	C	D	H	T	Package
FF-1	20.8	11.8	19.8	6.4	8.0	1.0~2.5	500
FF-2	20.0	15.4	18.0	10.0			
FF-3	23.7	19.2	19.5	13.7			250
FF-4	25.0	12.5	23.5	6.5			500
FF-5	30.0	18.8	27.7	12.8			200
FF-6	28.5	14.0	26.5	8.2	10.0	1.0~3.5	250
FF-7	12.7	8.5	12.0	4.4	5.0	1.0~2.0	1000
FF-8	15.7		15.0				
FF-9	20.0	7.0	18.6	4.0	8.0		500
FF-10	23.8	10.0	22.0	5.0		1.0~2.5	
FF-11	31.5	13.6	28.5	7.8	10.0	1.0~3.5	250
FF-12	20.0	20.8	18.0	15.0	8.0	1.0~3.0	
FF-13		24.3		18.0		0.8~1.0	
FF-14	19.5	10.5	18.7	5.0		0.8~2.0	500
FF-16	29.4	23.0	26.5	15.0	10.0	1.0~3.5	100
FF-19	20.0	9.1	18.0	6.0	4.0	0.8	1000
FF-20		8.4		5.2	5.0		
FF-21		25.6	19.3	20.5	8.0	0.8~2.0	250
FF-22	19.2	12.1	17.2	7.9		0.8~1.2	500
FF-24	23.0	13.3	21.0	8.0		0.8~2.0	
FF-25	24.0	15.8	20.0	10.5			250
FF-26	22.0	10.5	21.0	3.5		1.0~3.0	500
FF-27	26.7	21.0	24.8	16.0			200
FF-28	20.0	13.5	18.0	10.0		0.8~2.0	250
FF-31	27.0	12.0	26.0	6.9	10.0		
FF-34	41.2	21.6	40.0	14.0			100
FF-35	14.0	10.6	12.7	5.8	6.0	1.0~2.5	1000
FF-36	22.0	10.5	20.0	3.5	8.0	1.0~3.0	500
FF-41	20.8	12.6	19.8	7.2		1.0~2.5	
FF-43	12.0	10.0	10.5	5.8	5.0		1000
FF-44	20.8	11.8	19.8	6.9	8.0		500
FF-51	20.0	17.8	18.0	14.0	5.0	1.6	

腳墊 PLASTIC FOOT

用途：機械外殼之座墊，使用螺絲固定，安全不脫落，耐重壓。




- Material: ABS/PP
- Color: Black
- Unit: mm



Part No.	A	B	C	D	E	Package
FFT-1	15.0	8.0	7.5	3.7	3.5	1000
FFT-2	20.0	12.1	8.2	4.1	5.5	500
FFT-3	25.1	16.2	10.4	4.3	8.1	100
FFT-4	24.4	22.4	8.9	4.6	6.0	
FFT-5	26.0	12.7	10.9	5.1	5.7	
FFT-6	22.5	22.4	8.6	4.6	6.0	
FFT-7	17.0	17.0	7.5	3.2	6.0	
FFT-8	19.8	20.0	9.5	4.2	5.7	500
FFT-9	20.0	12.8	9.5	3.6	5.7	
FFT-10	20.0	10.5	9.2	4.4	4.0	
FFT-11	28.5	8.2	11.29	7.1	6.0	100



- Material: TPR
- Color: Black
- Unit: mm




Part No.	Package
FFT-15	200

腳墊 PLASTIC FOOT

用途：插梢式，可快速將腳墊固定於機殼，不脫落，耐重壓。



- Material: TPE
- Pin Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm



CHASSIS Ø4.0
THICKNESS 0.8~1.0


Part No.	Package
FF-15	1000


腳墊 PLASTIC FOOT

用途：機械外殼之座墊，使用螺絲固定，安全不脫落。



- Material: PE/PP/Rubber/Silicon Rubber
- Color: Black/White
- Unit: mm





◆ **NF-001,NF-006, NF-007,NF-008, NF-008A,NF-014**


Part No.	A	B	C	D	E	Material	Package
NF-001	14.8	7.0	6.0	3.0	3.1	PE	1000
NF-002	11.5	7.4	5.6	3.2	3.3	Rubber	
NF-004	16.0	7.8	6.0	3.0	4.0		
NF-005	17.2	7.0	9.0	4.0	3.0		
NF-006	20.2	8.0	10.0	3.0	4.0	PE	500
NF-007	25.0	5.8	8.5	3.3	2.8		
NF-007I					3.0	Silicon Rubber	
NF-008	20.0	10.5	9.8	3.0	5.0	PE	
NF-008A				4.0			1000
NF-009	11.0	5.7	6.0	3.5	2.3	PE/PP	
NF-013	18.0	9.8	7.8		2.7	PP	
NF-014	28.0	20.0	9.7	3.8	6.0	PE/PP	100
NF-018		25.0		4.2		Rubber	
NF-020	20.2	15.0	9.4	3.5	4.0		
NF-046	22.0	14.0	9.5	4.0	6.5		

腳墊 PLASTIC FOOT

用途：可快速將腳墊固定於機殼，不脫落。



- Foot Material: TPE
- Color: Black
- Unit: mm




Part No.	Package
FF-37	1000

腳墊 PLASTIC FOOT


用途：插梢式，可快速將腳墊固定於機殼，不脫落。



- Foot Material: TPE
- Pin Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm



BODY




SNAP RIVET


◆ 不同板厚配合SR4-系列鉚釘使用。
◆ Mate With KY Series SR4- Rivets For Use Of Varied Thicknesses.

Part No.	Part No.	Package
FF-40F	FF-40	1000
	SR4-	

用途：插梢式，可快速將腳墊固定於機殼，不脫落，可更換鉚釘配合不同板厚。

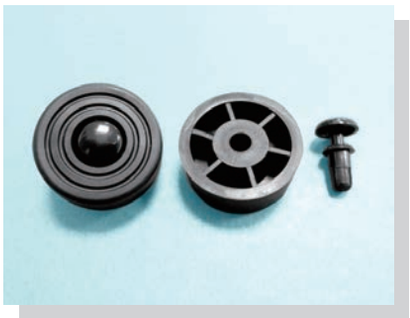

- Foot Material: TPR
- Pin Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm

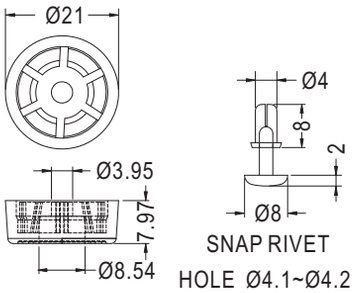


◆ 配合SR4-系列鉚釘使用。
◆ Use With SR4- Series.

Part No.	Part No.	Package
FF-46F	FF-46	1000
	SR4-	



- Foot Material: TPV
- Pin Material: Nylon 66 (UL) 94V-2
- Color: Black
- Unit: mm

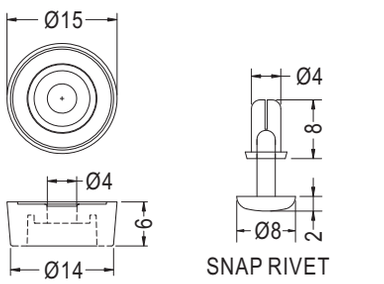


◆ 配合SR4-系列鉚釘使用。
◆ Use With SR4- Series.

Part No.	Part No.	Package
FF-47F	FF-47	1000
	SR4-	




- Foot Material: TPE
- Rivet Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

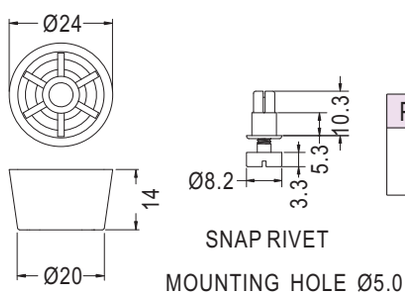

Part No.	Part No.	Package
FF-52F	FF-52	1000
	SRMB-1	




- Foot Material: TPE
- Rivet Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm

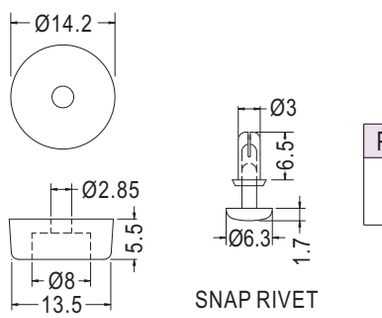


Part No.	Part No.	Package
FF-55F	FF-55	1000
	SR3-5.5	

腳墊 PLASTIC FOOT


用途：螺絲式，將腳墊固定於機殼，下有泡棉或矽膠，抗滑性佳。

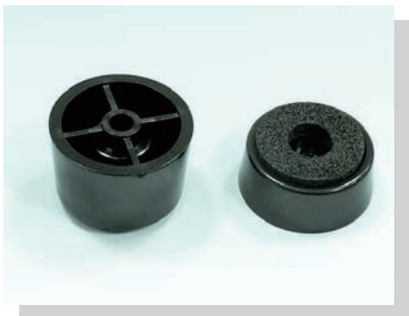

- Material: ABS
- Color: Black
- Unit: mm

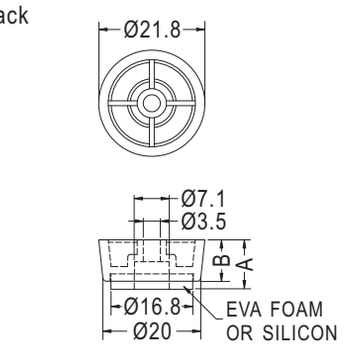


Part No.	A	B	Package
FFS-1	10.0	8.5	500
FFS-2	15.0	13.5	




Part No.	Package
FFS-5	500

腳墊 PLASTIC FOOT

用途：機械外殼之座墊，使用螺絲固定，安全不脫落，耐重壓。

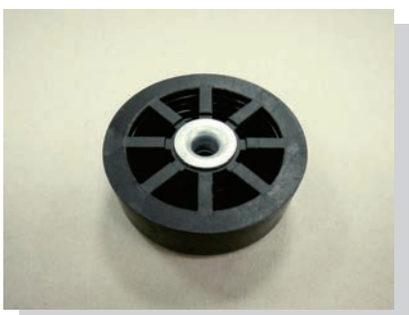


- Housing Material: TPR
- Color: Black
- Unit: mm

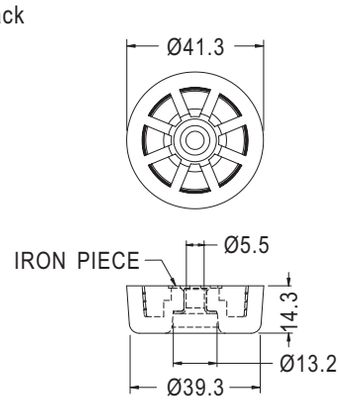

Part No.	Iron Piece	Package
FFR-1	Steel	50



- Material: TPU
- Color: Black
- Unit: mm

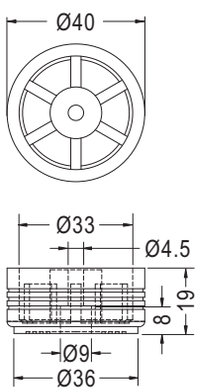


Part No.	Package
FFP-40	50

橡膠腳墊 RUBBER FOOT

用途：用於機器、電子儀器之腳墊，可自黏或螺絲固定兩用。



- Material: Rubber
- Color: Black
- Unit: mm

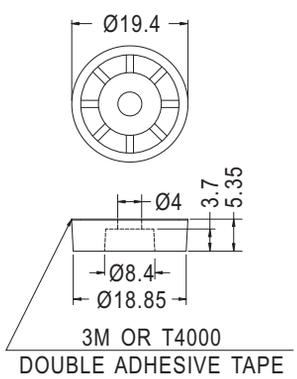


Part No.	Package
TF-605	1000

抗震腳墊 ANTI-VIBRATION FOOT

用途：特殊吸震材料，用於需抗震之重低音音響、影碟機等之防震腳墊，裝配容易、美觀防震性佳。



- Body Material: ABS
- Pad Material: TPE
- Color: Black
- Unit: mm




Part No.	A	Package
FFQ-1	20.0	500
FFQ-2	12.5	

銀框腳墊 SILVER COVERING FOOT

用途：用於音響、影碟機等之腳墊，裝配容易、美觀。




- Material: ABS (UL)
- Flame Class: 94HB
- Color: Black
- Unit: mm

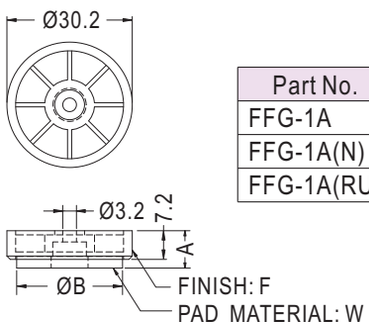

Part No.	A	B	F	W
FFG-1A	9.1	25.0	Silver Covering	EVA
FFG-1A(N)	9.1	25.0		EVA
FFG-1A(RU)	8.2	25.0	Silver Covering	Rubber



- Housing Material: ABS
- Color: Black
- Unit: mm

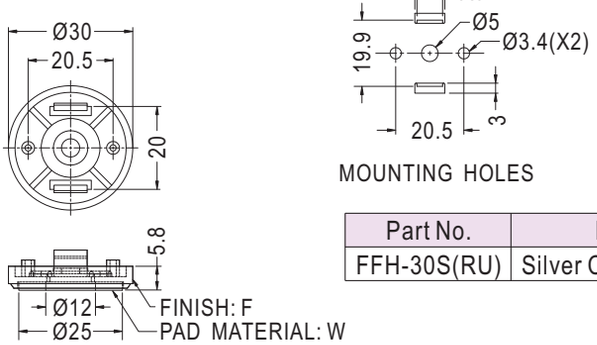


Part No.	F	W
FFH-30S(RU)	Silver Covering	Rubber

腳墊 PLASTIC FOOT

用途：用於音響、影碟機等之腳墊，裝配容易、美觀。



- Housing Material: ABS (UL)
- Housing Flame Class: 94HB
- Color: Black
- Unit: mm




Part No.	W
FFK-5	Rubber

腳墊 PLASTIC FOOT

用途：用於音響、影碟機等之腳墊，裝配容易、美觀。



- Housing Material: ABS
- Color: Black
- Unit: mm




Part No.	W
FFK-6	Silicon Rubber

銀框腳墊 SILVER COVERING FOOT

用途：用於音響、影碟機等之腳墊，裝配容易、美觀。




- Housing Material: ABS
- Color: Black
- Unit: mm

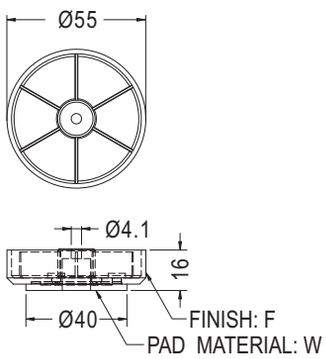


Part No.	F	W
RS-61N		TPR
RS-61S	Silver Covering	TPR

金框腳墊 GOLD COVERING FOOT


用途：用於音響、影碟機等之腳墊，裝配容易、美觀。

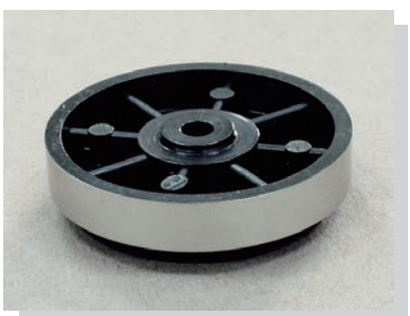


- Housing Material: ABS
- Color: Black
- Unit: mm

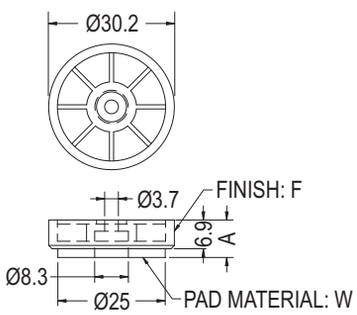

Part No.	A	F	W
FFG-1	9.0	Silver Covering	EVA
FFG-1(RU)	8.0	Silver Covering	Rubber
FFG-1G(RU)		Gold Covering	
FFG-1N		Silver Covering	



Part No.
FFG-3




Part No.	F	W
FFG-30(S)	Silver Covering	EVA

金框腳墊 GOLD COVERING FOOT


用途：用於音響、影碟機等之腳墊，
裝配容易、美觀。




- Housing Material: ABS
- Color: Black
- Unit: mm

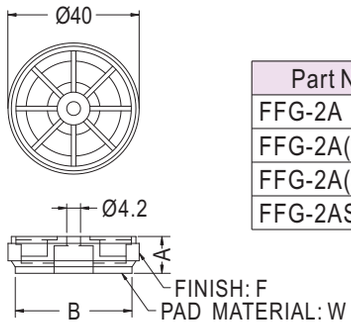

Part No.	A	B	F	W
FFG-2A	10.8	35.5	Gold Covering	EVA
FFG-2A(RU)	10.2			Rubber
FFG-2A(S)	11.0	35.0	Silver Covering	EVA
FFG-2AS(RU)	10.2	35.5		Rubber

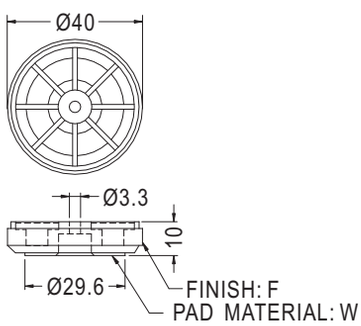

Part No.	F	W
FFG-2N		Rubber
FFG-2(S)	Silver Covering	

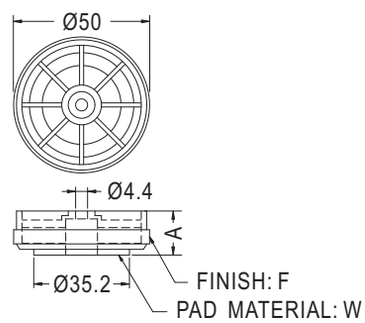


Part No.	A	F	W
FFG-3A	16.2	Gold Covering	EVA
FFG-3A(RU)	15.4		Rubber
FFG-3A(S)	16.0	Silver Covering	EVA
FFG-3A(G)N		Gold Covering	
FFG-3AN	16.2		EVA
FFG-3AN(RU)	15.4		Rubber

腳墊 PLASTIC FOOT


用途：用於音響、影碟機等之腳墊，
裝配容易、美觀。




- Housing Material: ABS
- Color: Black
- Unit: mm
- FFK Series: Without Silver/Gold Covering



Part No.	W
FFK-1	EVA
FFK-1P	Poron
FFK-1(RU)	Rubber



Part No.	W
FFK-3	EVA
FFK-3P	Poron
FFK-3(RU)	Rubber

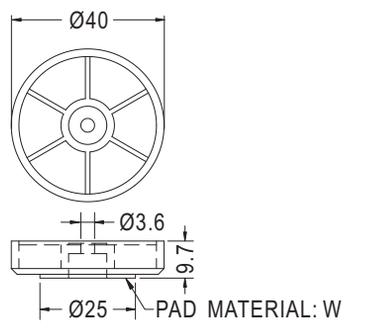

◆ ONLY FOR: FFK-4P外部霧面處理
◆ Matte Finish On The Outside.


Part No.	W
FFK-2	EVA
FFK-2P	Poron
FFK-2(RU)	Rubber
FFK-4P	Poron

金框腳墊 GOLD COVERING FOOT


用途：用於音響、影碟機等之腳墊，
裝配容易、美觀。




- Housing Material: ABS
- Color: Black
- Unit: mm




Part No.	A	F	W
RS-28	11.7	Golden Alum. Covering	EVA
RS-28(S)		Silver Alum. Covering	
RS-28S(RU)	10.7		Rubber
RS-28N(RU)			
RS-28(N)N	10.0		




Part No.	A	F	W
RS-40	10.7	Golden Alum. Covering	EVA
RS-40(S)		Silver Alum. Covering	
RS-40S(RU)	9.8		Rubber




Part No.	A	F	W
RS-45	10.7	Golden Alum. Covering	EVA
RS-45(S)		Silver Alum. Covering	
RS-45(RU)	9.7	Golden Alum. Covering	Rubber
RS-45S(RU)		Silver Alum. Covering	
RS-45(S)I			Silicon Rubber




Part No.	A	F	W
RS-50	14.8	Gold Covering	EVA
RS-50(RU)	14.0		Rubber
RS-50N	14.8		EVA
RS-50N(RU)	14.0		Rubber
RS-50(S)	14.8	Silver Covering	EVA
RS-50S(RU)	14.0		Rubber



Part No.	F	W
RS-50-2	Golden Alum. Covering	EVA




Part No.	A	F	W
RS-55	10.7	Golden Alum. Covering	EVA
RS-55(S)		Silver Alum. Covering	
RS-55S(RU)	9.7		Rubber




Part No.	A	F	W
RS-60N	20.0		EVA
RS-60		Golden Alum. Covering	
RS-60(BK)		鍍黑灰色 Dark Gray Covering	
RS-60(S)		Silver Alum. Covering	
RS-60(S)RU	19.3		Rubber

金框腳墊 GOLD COVERING FOOT


用途：用於音響、錄影機等之腳墊，
裝配容易、美觀。

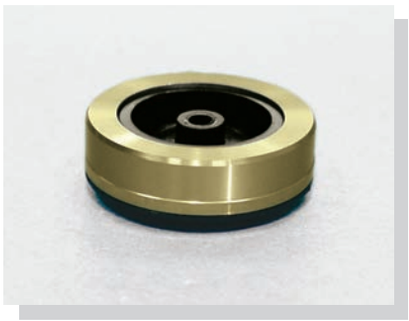


- Housing Material: ABS
- Metal Material: AL
- Color: Black
- Unit: mm

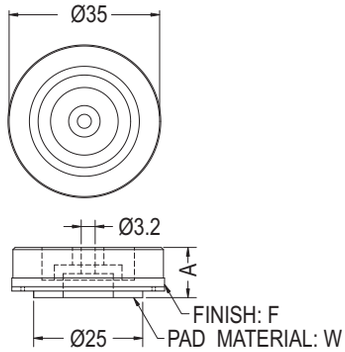


Part No.	A	F	W
RA-35	11.5	Golden Alum. Covering	EVA
RA-35(S)		Silver Alum. Covering	
RA-35(S)RU	10.5		Rubber

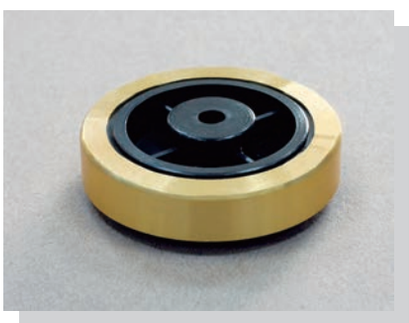

- Housing Material: ABS
- Metal Material: AL
- Color: Black
- Unit: mm

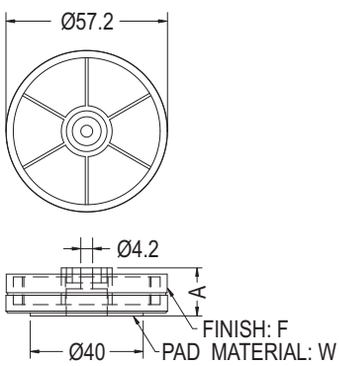


Part No.	A	F	W
RA-57	17.0	Golden Alum. Covering	EVA
RA-57(RU)	17.1		Rubber
RA-57(S)	17.0	Silver Alum. Covering	EVA
RA-57S(RU)	17.1		Rubber




Part No.	A	F	W
RA-40	12.0	Golden Alum. Covering	EVA
RA-40(RU)	11.0		Rubber
RA-40(S)	12.0	Silver Alum. Covering	EVA
RA-40S(RU)	11.0		Rubber
RA-40(K)	12.0	Champagne Color	EVA

金框腳墊 GOLD COVERING FOOT


用途：用於音響、錄影機等之腳墊，
裝配容易、美觀。

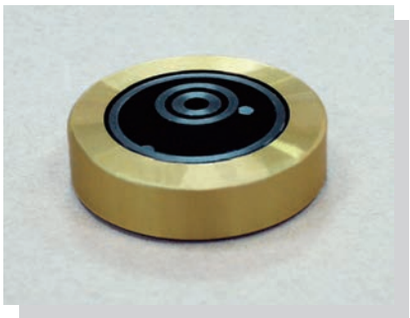


- Housing Material: ABS
- Metal Material: AL
- Color: Black
- Unit: mm

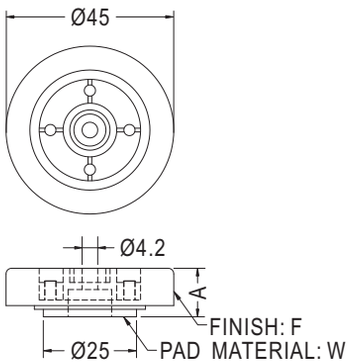

Part No.	A	F	W
RA-45S-1	12.5	Silver Alum. Covering	EVA
RA-45-1(RU)	11.5	Golden Alum. Covering	Rubber
RA45S-1(RU)		Silver Alum. Covering	

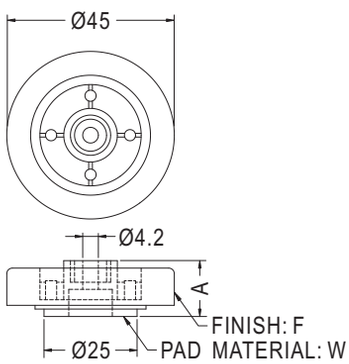


Part No.	A	F	W
RA-45	15.0	Golden Alum. Covering	EVA
RA-45(S)		Silver Alum. Covering	
RA-45(RUS)	14.0		Rubber
RA-45S(RU)	14.1		
RA-45S(I)			Silicon Rubber

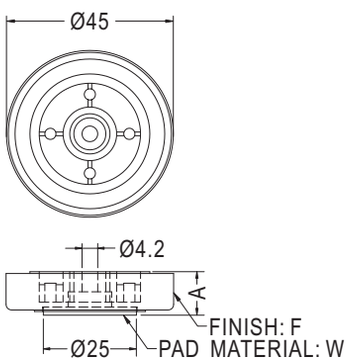

Part No.	A	F	W
RA-45S-3	12.5	Silver Alum. Covering	EVA



- Foot Material: PE
- Pin Material: PP
- Metal Material: AL
- Color: Black
- Unit: mm

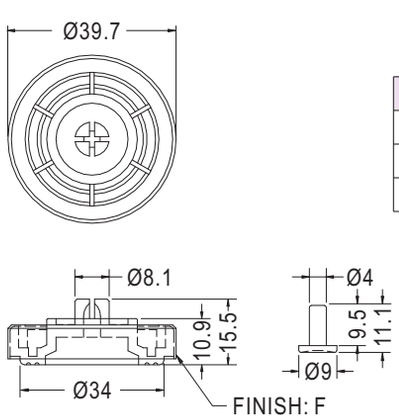


Part No.	F
RAFF-40	Golden Alum. Covering
RAFF-40(S)	Silver Alum. Covering
RAFF-40(B)	Black Alum. Covering

橡膠腳墊 RUBBER FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE Ø7.0


Part No.	Package
TF-017	1000

橡膠腳墊 RUBBER FOOT

用途：用於機殼之座墊，裝配容易安全不脫落。



- Material: Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-448	500

矽膠腳墊 SILICON RUBBER FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	Package
TF-561	1000


腳墊 PLASTIC FOOT

用途：固定於機殼，保護用。




- Material: TPR
- Color: Black
- Unit: mm





HOLE IN CHASSIS




Part No.	A	B	C	D	E	H	Package
TFF-1	9.0	3.0	16.3	10.0	20.0	16.0	1000
TFF-2	8.5	2.5	16.3	10.0	20.0	16.0	
TFF-3	9.0	2.4	20.2	13.5	22.8	19.8	
TFF-5	7.5	2.5	16.3	10.0	20.0	16.0	

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: TPR
- Color: Black
- Unit: mm





MOUNTING HOLE Ø5.6
THICKNESS 2.0

Part No.	Package
TNFF-1	1000




- Aterial: TPR
- Color: Black/Gray
- Unit: mm






MOUNTING HOLE Ø5.6
CHASSIS THICKNESS 1.0~1.2




Part No.	Package
TNFF-2	1000




- Material: TPR
- Color: Black
- Unit: mm










MOUNTING HOLE Ø5.0



MOUNTING HOLE Ø5.0

Part No.	Package
TNFF-3	1000

Part No.	Package
TNFF-4	1000


矽膠腳墊 SILICON RUBBER FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。






- Material: Silicon Rubber
- Color: Black/Gray
- Unit: mm



MOUNTING HOLE Ø4.2

Part No.	Package
TF-041	1000

- Material: EPDM
- Color: Black
- Unit: mm



MOUNTING HOLE Ø3.5

Part No.	Package
TF-546	1000

橡膠腳墊 RUBBER FOOT


用途：可快速將腳墊固定於機殼，裝配容易，不脫落。








- Material: Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE Ø5.2

Part No.	Package
TNF-1	1000




MOUNTING HOLE Ø8.2

Part No.	Package
TNF-2	1000




MOUNTING HOLE Ø6.35

Part No.	Package
TNF-3	1000



MOUNTING HOLE Ø4.2


Part No.	Package
TNF-5	1000



MOUNTING HOLE Ø6.5

Part No.	Package
TNF-6	2000

- Material: Neoprene



MOUNTING HOLE Ø4.0


Part No.	Package
TNF-41	1000

矽膠腳墊 SILICON RUBBER FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。




- Material: Silicon Rubber (UL)
- Flame Class: 94HB/94V-0
- Color: Black
- Unit: mm



MOUNTING HOLE Ø4.5~Ø5.0

Part No.	Package
TNF-7	2000




MOUNTING HOLE Ø6.3

Part No.	Package
TNF-44	2000

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE Ø5.0

Part No.	Package
TNF-46	1000



- Material: Rubber
- Color: Black
- Unit: mm




MOUNTING HOLE Ø7.0

Part No.	Package
TNF-47	1000



- Material:Neoprene
- Color: Black
- Unit: mm




MOUNTING HOLE Ø8.0
THICKNESS 2.0 MAX.

Part No.	Package
TNF-15	500



- Material: Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE Ø8.3~Ø8.5


Part No.	A	Package
TNF-9	9.0	2000
TNF-19	6.5	

橡膠腳墊 RUBBER FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: Rubber
- Color: Black
- Unit: mm



MOUNTING HOLE Ø3.5


Part No.	Package
TF-283	1000

腳墊 PLASTIC FOOT

用途：可快速將腳墊固定於機殼，裝配容易，不脫落。



- Material: TPE
- Color: Black
- Unit: mm

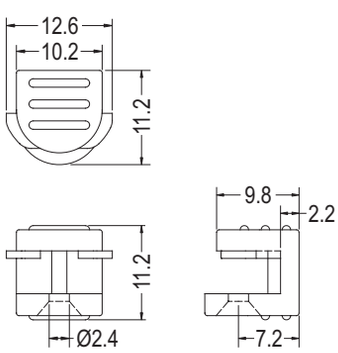


Part No.	Package
DELT-21	1000

橡膠腳墊 RUBBER FOOT

用途：機械外殼之座墊，內含有鐵華司，使用螺絲固定，安全不脫落，耐重壓。




- Material: Rubber
- Color: Black
- Unit: mm



Part No.	Package
NF-002ST	1000



- Material: Rubber
- Color: Black
- Unit: mm

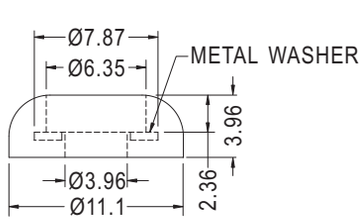


Part No.	Package
NF-011ST	1000

橡膠腳墊 RUBBER FOOT


用途：機械外殼之座墊，內含有鐵華司，使用螺絲固定，安全不脫落，耐重壓。



- Material: Rubber
- Color: Black
- Unit: mm




Part No.	Package
NF-012	1000




Part No.	Package
NF-012ST	1000



- Material: Rubber
- Color: Black
- Unit: mm




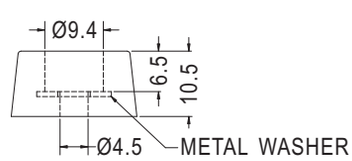

Part No.	Package
NF-015ST	1000




- Material: Rubber
- Metal Ring Material: Bronze
- Color: Black
- Unit: mm



Part No.	Package
NF-016ST	1000



- Material: Rubber
- Color: Black
- Unit: mm




Part No.	Package
NF-051ST	1000


用途：機械外殼之座墊，內含有鐵華司，使用螺絲固定，安全不脫落，耐重壓。



- Material: Rubber
- Color: Black
- Unit: mm




Part No.	Package
NF-004ST	1000




Part No.	Package
NF-039ST	1000




- Material: Silicon Rubber (UL)/Rubber
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
NF-005ST	1000




Part No.	Package
NF-030IST	1000



Part No.	Package
NF-047ST	1000




- Material: Silicon Rubber (UL)/Rubber
- Flame Class: 94HB
- Color: Black
- Unit: mm



Part No.	Package
NF-035IST	1000



- Material: Rubber
- Color: Black
- Unit: mm

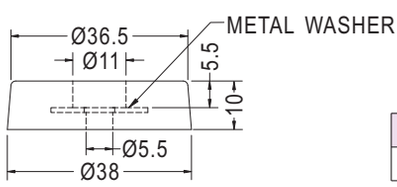


Part No.	Package
NF-050ST	500

腳墊 PLASTIC FOOT

用途：機械外殼之座墊，使用螺絲固定，安全不脫落，耐重壓。




- Material: TPE
- Color: Black
- Unit: mm



Part No.	Package
NF-031	1000



- Material: Rubber
- Color: Black
- Unit: mm




Part No.	Package
NF-045	1000

磁鐵腳墊 MAGNET PLASTIC FOOT

用途：磁鐵腳墊，可將HUB吸著於鐵板上。




- Foot Material: Nylon 66 (UL)
- Magnet Material: NdFeB
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm



Part No.	Package
MGFA-2	1000



- Foot Material: Steel
- Magnet Material: NdFeB
- Unit: mm




Part No.	Package
MGFF-4	1000

腳墊 PLASTIC FOOT

用途：用於機殼之座墊，裝配容易、安全不脫落。



- Material: PE
- Color: Black
- Unit: mm



MOUNTING HOLE Ø8.0


Part No.	Package
GL-4	500

矽膠腳墊 SILICON RUBBER FOOT

用途：做為腳墊止滑用。




- Material: Silicon Rubber
- Body Material: Nylon 66 (UL)
- Color: Black
- Unit: mm




Part No.	A	Package
FFDA-9AY	4.5	2000
FFDA-10AY	4.55	

腳墊 PLASTIC FOOT

用途：電腦外殼之座墊，使用插梢固定，安全不脫落。

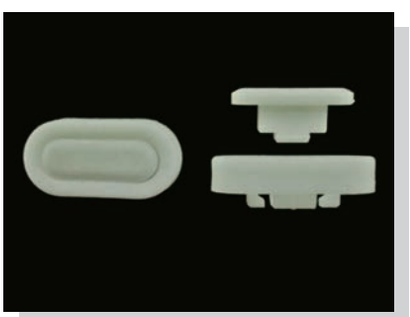


- Material: ABS (UL) 94HB/TPR
- Color: Black/White
- Unit: mm

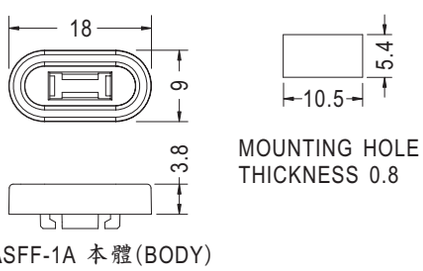

ASFF-1A 本體(BODY)

Part No.	Package
ASFF-1A	1000



ASFF-1B 插梢(PIN)


Part No.	Package
ASFF-1B	1000

腳墊 PLASTIC FOOT

用途：機械外殼之座墊，內含有鐵件，使用螺絲固定，安全不脫落，耐重壓。



- Material: TPR
- Metal Ring Material: SPCC
- Color: Gray
- Unit: mm

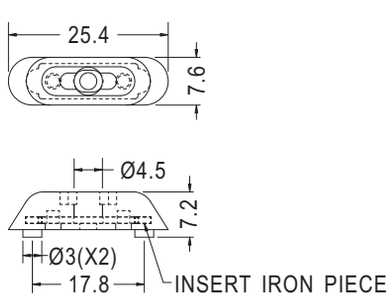


Part No.	Package
TF-356	1000

橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。




- Material: Rubber
- Color: Black
- Unit: mm



Part No.	A	B
RF-004	9.9	3.8
RF14-5A	14.0	5.0
RF27-7AC-1	27.8	7.4




- Material: Rubber
- Color: Black
- Unit: mm



Part No.
RF18-5A



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm




Part No.	A	B	C
RF5.8-4A	5.8	5.5	4.0
RF8-3.5	8.0	7.7	3.5
RF8.2-5	8.2	7.6	5.0
RF9-3.5	9.0	8.2	3.5
RF9.7-4.2A	9.7	9.3	4.2
RF15.5-5A	15.4	14.8	5.1
RF19-4A7	19.05	18.05	4.06
RF22.8-5	22.8	22.4	5.0
RF22-8.8	22.0	21.0	8.8
RF22-5	22.0	21.0	5.0


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM






◆ **RF8-6.5A,RF17-11A**

Part No.	A	B	C
RF6-5	6.0	5.0	5.0
RF7-3.2A	7.0	6.6	3.2
RF8-6.5A	8.0	7.2	6.5
RF-1094A	10.0	9.0	9.4
RF-003	10.0	9.5	4.2
RF-030	10.0	9.5	8.0
RF-1055	10.0	9.7	5.5
RF-009	10.8	10.2	3.0
RF11-5	11.0	9.6	5.0
RF-011	11.0	10.5	5.0
RF11-3.2A	11.3	10.7	3.2
RF12-27A	11.7	10.6	2.85
RF-039	11.9	11.2	6.4

Part No.	A	B	C
RF-015	12.0	11.2	5.1
RF-019	12.0	9.5	4.0
RF-019A	12.7	10.0	3.8
RF-032	12.7	11.5	4.0
RF-005	13.0	11.4	5.0
RF-012	13.0	12.2	4.5
RF15-11A	15.0	13.5	11.0
RF17-11A	17.0	13.25	11.0
RF-007	19.0	17.0	7.2
RF-020	19.0	15.8	4.2
RF20-5	19.8	18.0	5.0
RF-008	20.0	19.0	6.0
RF24-8	24.0	20.0	8.0




- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM



Part No.	A	B
RF-002	10.0	2.8
RF8-2A	8.0	2.0
RF8-2.6A	8.0	2.6
RF8-3A	8.0	3.0
RF8.8-2.9A	8.8	2.89
RF21.6-11A	21.6	11.0



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM




Part No.	A	B
RF-021	6.7	4.2
RF7.8-2.9A	7.8	2.9
RF9.5-3.9A	9.5	3.9
RF-1106	11.0	6.0
RF-022	11.3	5.6
RF14-8A	14.0	8.0
RF-006	15.9	8.0
RF21-8.5	21.6	8.52
RF21-10	21.6	10.0

橡膠腳墊 RUBBER FOOT


用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。



- Material: Rubber
- Color: Black
- Unit: mm

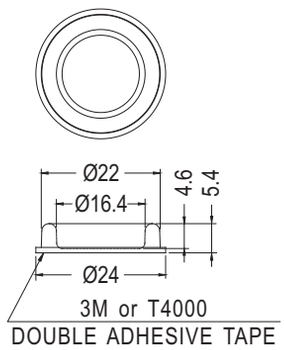

Part No.
RF-031

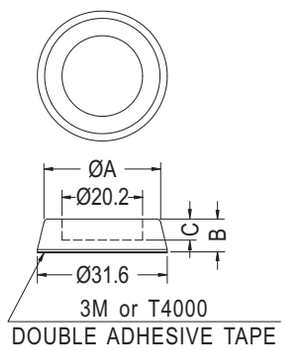


Part No.	A	B	C
RF-016	29.6	6.6	4.1
RF-017	29.0	8.8	4.9




- Material: Rubber
- Color: Black
- Unit: mm


Part No.	A	B	C	D	E
RF-018	22.3	19.6	4.9	9.0	9.8
RF20-10	21.0	18.1	10.6	6.9	10.6
RF-029	22.3	19.0	6.5	7.2	10.2



◆ **RF-018**



◆ **RF20-10**




◆ **RF-029**

橡膠華司 RUBBER WASHER

用途：背膠式，可快速將華司固定於機殼，黏性佳，不脫落。



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm




Part No.	A	B	C
RWF3.5-0.5	8.0	3.5	0.5
RWF3.5-1	8.0	3.5	1.0
RWF4.5-2	8.0	4.5	2.0
RWF3.5-1.5	11.0	3.5	1.5
RWF4.5-3	15.0	4.5	3.0
RWF18-8.5-15	18.0	8.5	1.5
RWF20-1.5	20.0	6.0	1.5
RWF25-2	25.0	11.0	2.0
RWF10.2-2	29.6	10.2	2.0
RWF40-2	40.0	12.0	2.0
RWF43-2	43.0	30.1	2.0

橡膠墊圈 O RING

用途：做為零件之油封或墊片。



- Material: NBR/NR/EPDM
- Color: Black
- Unit: mm



Part No.	A	B	Package
OR-1.7	1.7	0.6	2000
OR-2	2.0	1.0	
OR-2.7	2.75	0.6	
OR-2.8	2.8	0.5	
OR-2.9	2.9	1.78	
OR-3.6	3.6	1.78	
OR-4	4.0	2.0	
OR-4.6	4.6	1.78	
OR-5	5.0	1.0	
OR5.5-11.8	5.5	3.15	
OR-5.8	5.8	1.9	


Part No.	A	B	Package
OR-6	6.02	2.6	2000
OR6.07-1.63	6.07	1.63	
OR7-2	7.0	2.0	
OR-7.6	7.65	1.78	
OR-7.9	7.9	1.0	
OR-11	11.0	2.0	
OR-88	20.0	1.0	
OR-21.3	21.3	3.0	
OR-25.2	25.2	3.5	
OR-84.4	84.4	3.1	500

矽膠墊圈 O RING

用途：做為零件之油封或墊片。



- Material: Silicon Rubber
- Color: Black
- Unit: mm




Part No.	A	B	Package
OR2.4-1.9	2.4	1.9	2000
OR2.6-1.1	2.6	1.1	
OR8-1.5	8.0	1.5	
OR10.5-1	10.5	1.0	
OR15-1.5	15.0	1.5	

橡膠華司 RUBBER WASHER

用途：做為零件之墊片。



- Material: Rubber
- Color: Black
- Unit: mm




Part No.
RWF8.5-3N


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。
Different size available per request.

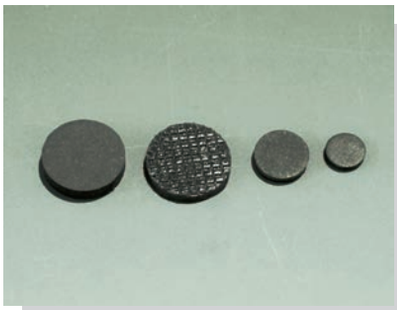

- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM,Poron
- Optional Thickness: 0.5~3.2mm



Part No.	A	B
RF3.8-2	3.8	2.0
RF0415	4.0	1.5
RF4-0.5		0.5
RF4-0.6		0.6
RF4-3		3.0
RF4.5-1.5	4.5	1.5
RF4.5-2.7		2.7
RF4.8-1	4.8	1.0
RF5-1.5	5.0	1.5
RF5-2		2.0
RF5-2.5		2.5
RF5-3.5		3.5
RF5.3-0.7	5.3	0.7
RF5.5-1.6	5.5	1.6
RF5.6-2	5.6	2.0
RF6-0.5	6.0	0.5
RF6-0.8		0.8
RF6-0.9		0.9
RF6-1		1.0
RF6-1.3		1.3
RF6-1.5		1.5
RF6-2		2.0
RF6-2.5		2.5
RF6-3		3.0
RF6-3.5		3.5
RF6.4-2.6	6.4	2.6
RF6.5-1	6.5	1.0
RF6.5-2.5		2.5
RF6.6-1.5	6.6	1.5
RF6.6-1.8		1.8
RF6.6-2		2.0
RF7-0.5	7.0	0.5
RF7-0.9		0.9
RF7-1		1.0
RF7-1.5		1.5
RF7-2		2.0
RF7-2.5		2.5
RF7-2.7		2.7
RF7-3		3.0
RF7.2-1.5	7.2	1.5
RF7.5-2	7.5	2.0


Part No.	A	B
RF-001	8.0	1.8
RF8-0.5		0.5
RF8-1		1.0
RF8-1.4		1.4
RF8-1.5		1.5
RF8-2		2.0
RF8-2.5		2.5
RF8-3		3.0
RF8.5-1.5	8.5	1.5
RF8.5-2		2.0
RF9-1	9.0	1.0
RF9-1.2		1.2
RF9-1.5		1.5
RF9-2		2.0
RF9-2.5		2.5
RF9-3		3.0
RF9.5-0.8	9.5	0.8
RF9.5-1.5		1.5
RF9.5-1.8		1.8
RF9.5-2		2.0
RF9.5-3		3.0
RF10-0.8	10.0	0.8
RF10-1		1.0
RF10-1.3		1.3
RF-1016		1.6
RF-1018		1.8
RF10-2		2.0
RF10-3		3.0
RF10.5-1	10.5	1.0
RF10.5-15		1.5
RF10.5-2		2.0
RF-11632	11.6	3.2
RF12-1.5	12.0	1.5
RF-1210		1.0
RF12-2.7		2.7
RF-1220		2.0
RF12-3		3.0
RF12-3.6		3.6
RF-1232		3.2
RF-12520	12.5	2.0
RF12.5-1		1.0

Part No.	A	B
RF12732	12.7	3.2
RF13-1	13.0	1.0
RF13-3		3.0
RF14-4	14.0	4.0
RF14530	14.5	3.0
RF14.5-4		4.0
RF-1463	14.6	3.0
RF-1510	15.0	1.0
RF-1520		2.0
RF-1530		3.0
RF16.5-3	16.5	3.0
RF18-1.3	18.0	1.3
RF18-1.5		1.5
RF18-2.5		2.5
RF19-1	19.0	1.0
RF19-2		2.0
RF19-3		3.0
RF19-4		4.0
RF-19823	19.8	2.3
RF20-1	20.0	1.0
RF20-1.5		1.5
RF20-1.8		1.8
RF-2023		2.3
RF-2025		2.5
RF-2030		3.0
RF22-2	22.0	2.0
RF22-2.5		2.5
RF22.1-10.4	21.7	10.4
RF24.6-3	24.6	3.0
RF25-2.3	25.0	2.3
RF27-3	27.0	3.0
RF28-3.2	28.0	3.2
RF30-2	30.0	2.0
RF40-1	40.0	1.0
RF58-1.5	58.0	1.5
RF58-2		2.0
RF64.7-2.5S	64.7	2.5


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。
Different size available per request.

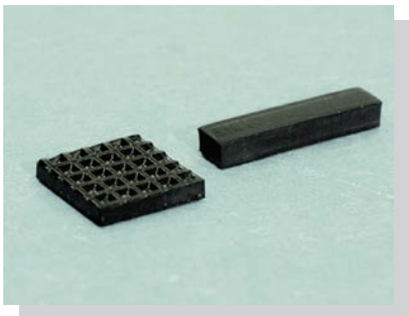

- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM,Poron
- Optional Thickness: 0.5~10mm

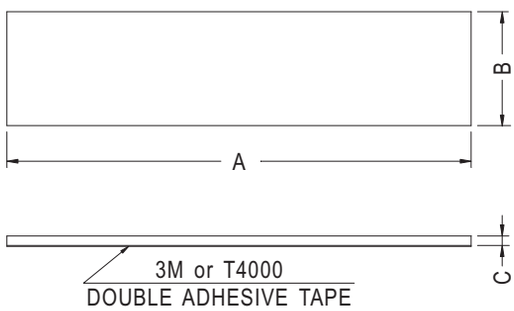

Part No.	A	B	C
SF050435	5.0	4.5	3.5
SF062313	6.0	2.3	1.3
SF060425		4.0	2.5
SF652840	6.5	2.8	4.0
SF652850			5.0
SF070215	7.0	2.0	1.5
SF070216			1.6
SF070304		3.0	0.4
SF073512		3.5	1.2
SF070420		4.0	2.0
SF070620		6.0	
SF080625	8.0		2.5
SF852530	8.5	2.5	3.0
SF853520		3.5	2.0
SF853525			2.5
SF80452	8.0	4.5	2.0
SF090855	9.6	8.0	5.5
SF100616	9.9	6.0	1.6
SF100119	10.0	1.9	1.9
SF103512		3.5	1.2
SF100409		4.0	0.9
SF100510		5.0	1.0
SF100520			2.0
SF100712		7.0	1.2
SF100825		8.0	2.5
SF100850			5.0
SF100730	10.5	7.2	3.0
SF110830	11.5	8.0	
SF118781	11.8	7.8	1.0
SF120565	12.0	5.0	6.5
SF120810		8.5	1.0
SF129515		9.5	1.5
SF121530		15.0	3.0
SF1256535	12.5	6.5	3.5
SF1251008		10.0	0.8
SF-1251015			1.5
SF130620	13.0	6.0	2.0
SF130630			3.0
SF130735		7.0	3.5
SF130740			4.0
SF130855	13.5	8.0	5.5
SF132525	13.0	2.5	2.5


Part No.	A	B	C
SF140430	14.0	4.0	3.0
SF140440			4.0
SF150320	15.0	3.2	2.0
SF150610		6.0	1.0
SF151016		10.0	1.6
SF151930		1.9	3.0
SF152530		25.0	
SF155030		50.0	
SF1585601	15.8	5.6	1.0
SF151025		10.0	2.5
SF-163530	16.0	3.5	3.0
SF160536		5.0	3.6
SF170525	17.0		2.5
SF1724330	17.2	4.3	3.0
SF180930	18.0	9.0	
SF181010		10.0	1.0
SF181020			2.0
SF195640	19.0	5.6	4.0
SF195720		5.7	2.0
SF-197774	19.7	7.7	4.0
SF197760			6.0
SF190814		8.0	1.4
SF190815			1.5
SF-1979723		9.7	2.3
SF1979725			2.5
SF-1979730			3.0
SF-1972015		20.0	1.5
SF202515	20.0	2.5	
SF200410		4.0	1.0
SF200420			2.0
SF200510		5.0	1.0
SF200515			1.5
SF200563			6.3
SF200568			6.8
SF200725		7.0	2.5
SF201010		10.0	1.0
SF201015			1.5
SF201020			2.0
SF201035			3.5
SF201056			5.6
SF201465		14.0	6.5
SF201515		15.0	1.5

Part No.	A	B	C
SF200612	20.5	6.0	1.2
SF210804	21.5	8.6	0.4
SF-221615	22.0	16.0	1.5
SF227640	22.6	7.6	4.0
SF237640	23.0		
SF230610	23.7	6.5	1.0
SF246011	24.8	6.0	1.1
SF250535	25.0	5.0	3.5
SF250550			5.0
SF250760		7.0	6.0
SF250810		8.0	1.0
SF250815			1.5
SF250820			2.0
SF251235		12.0	3.5
SF251224	25.4	12.7	2.4
SF251232			3.2
SF260510	26.8	5.5	1.0
SF270830	27.0	8.0	3.0
SF271810		18.0	1.0
SF271820			2.0
SF27183			3.0
SF279032	27.5	9.0	3.2
SF-3064	30.0	6.0	4.0
SF303555		3.5	5.5
SF-30709		7.0	0.9
SF3038		8.0	3.8
SF-301120		11.0	2.0
SF-301140			4.0
SF301230		12.0	3.0
SF301250			5.0
SF301525		15.0	2.5
SF302055		20.0	5.5
SF302501		25.0	1.0
SF30511	30.5	11.0	7.0
SF311510	31.5	15.5	1.0
SF311515			1.5
SF3267225	32.0	6.7	2.25
SF321720		17.0	2.0
SF321725			2.5
SF332055	33.0	20.0	5.5
SF332385	33.3	23.3	8.5
SF331125	33.5	11.5	2.5


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。
Different size available per request.

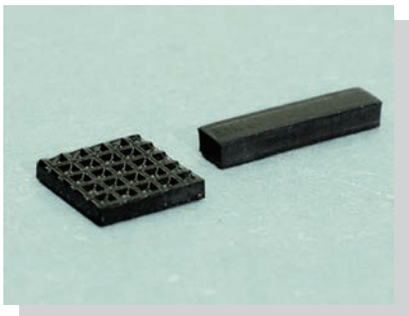

- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM,Poron
- Optional Thickness: 0.5~10mm

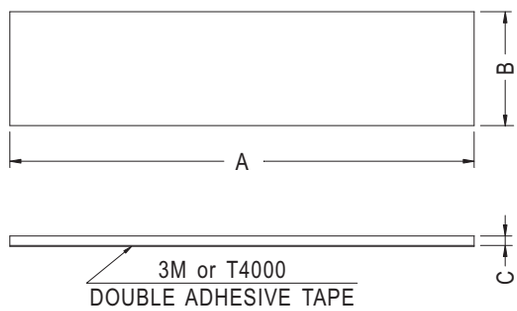


Part No.	A	B	C
SF340220	34.0	2.0	2.0
SF340904	34.6	9.5	0.4
SF-340901	34.7	9.7	1.0
SF351001	35.0	10.0	1.0
SF351580		15.0	8.0
SF352508		25.0	0.8
SF361810	36.0	18.0	1.0
SF361820			2.0
SF400509	39.5	5.0	0.9
SF-4009	40.0	9.0	1.5
SF400924			2.4
SF400930			3.0
SF401040		10.5	4.0
SF401235		12.0	3.5
SF401240			4.0
SF401250			5.0
SF401715		17.5	1.5
SF442010	44.5	20.0	10.0
SF451020	45.0	10.0	2.0
SF473530	47.5	3.5	3.0
SF481040	48.0	10.0	4.0
SF484410		44.0	1.0
SF491210	49.0	12.0	
SF500620	50.0	6.0	2.0
SF501038		10.0	3.8
SF541010	54.0		1.0
SF550515	55.0	5.0	1.5

Part No.	A	B	C
SF582508	58.0	25.0	0.8
SF582514			1.4
SF582516			1.6
SF600610	60.0	6.0	1.0
SF600613			1.3
SF600625			2.5
SF-6064			4.0
SF600907		9.0	0.7
SF601010		10.0	1.0
SF601025			2.5
SF6017530		17.5	3.0
SF602010		20.0	10.0
SF606767		6.7	6.7
SF652020	65.0	20.0	2.0
SF654030		40.0	3.0
SF700525	70.0	5.0	2.5
SF701820		18.0	2.0
SF702010		20.0	1.0
SF764005	76.0	40.0	0.5
SF-801004	80.0	10.0	
SF845208	84.6	52.6	0.8
SF880810	88.0	8.0	1.0
SF951232	95.0	12.0	3.2
SF980830	98.0	8.0	3.0
SF993555	99.0	3.5	5.5
SF990915		9.9	1.5
LSF-002	100.0	12.0	3.5


Part No.	A	B	C
SF107581	107.0	58.0	1.5
SF1100540	110.0	5.6	4.0
SF1101010		10.0	1.0
SF1111009	111.0		0.9
SF1200310	120.0	3.0	1.0
SF1254620	125.0	46.0	2.0
SF1302030	130.0	20.0	3.0
SF1302020			2.0
SF1340220	134.0	2.0	
SF1400520	140.0	5.0	1.0
SF140101		10.0	
SF140251		25.0	
SF14510520	145.0	105.0	2.0
SF1461010	146.0	10.0	1.0
SF1500712	150.0	7.0	1.2
SF-1501004		10.0	0.5
SF1501515		15.0	1.5
SF1600610	160.0	6.0	1.0
SF1664930	166.5	49.0	3.0
SF2500515	250.0	5.0	1.5
SF2506520		65.0	2.0
SF2701655	270.0	165.0	0.5
SF2581420	258.0	14.5	2.0
SF3101150	310.0	11.6	5.0
SF3101250		12.0	
SF5400208	540.0	2.9	0.8

橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

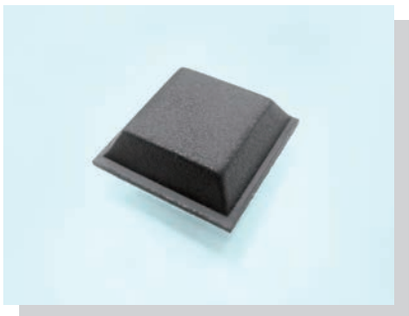

- Material: Rubber/Silicon Rubber/PU
- Color: Black
- Unit: mm

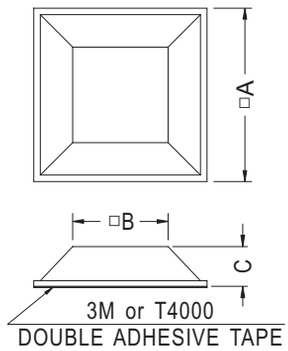

Part No.	A	B	C
SF-004	12.7	9.0	3.5
SF-005	12.7	7.0	6.0
SF-006	20.0	14.0	7.6
SF-007	10.5	8.6	2.5
SF-009	12.5	9.5	4.0
SF-016	12.7	9.8	3.0
SF-017	12.5	9.7	3.5


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。表面可分為平面、斜紋等。
Different size available per request.



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM,Poron...
- Optional Thickness: 0.7~5.0mm



Part No.	A	B
SF050510	5.0	1.0
SF050512		1.2
SF-6610	6.0	1.0
SF-6615		1.5
SF060625		2.5
SF-664		4.0
SF-665		5.0
SF060660		6.0
SF-001	6.4	3.0
SF070715	7.0	1.5
SF070720		2.0
SF070740		4.0
SF070755		5.5
SF070780		8.0
SF73732	7.3	2.0
SF-080801	8.0	1.0
SF-080802		2.0
SF080823		2.3
SF-0808025		2.5
SF090945	9.0	4.5
SF-002	9.7	2.0

Part No.	A	B
SF-979735	9.7	3.5
SF101007	10.0	0.7
SF101009		0.9
SF101010		1.0
SF101016		1.6
SF101020		2.0
SF101023		2.3
SF101025		2.5
SF101030		3.0
SF101035		3.5
SF101040		4.0
SF101050		5.0
SF101060		6.0
SF111160	11.0	
SF11511550	11.5	5.0
SF11511565		6.5
SF-121212	12.0	1.2
SF121225		2.5
SF-003		5.0
SF121255		5.5

Part No.	A	B
SF121270	12.0	7.0
SF-1272	12.7	2.3
SF-131320	13.0	2.0
SF14142	14.0	
SF141480		8.0
SF151512	15.0	1.2
SF-151515		1.5
SF151535		3.5
SF151550		5.0
SF161610	16.0	1.0
SF171725	17.0	2.5
SF181810	18.0	1.0
SF181820		2.0
SF181840		4.0
SF181850		5.0
SF202030	20.0	3.0
SF25425450	25.4	5.0
SF404010	40.0	1.0
SF404050		5.0
SF505050	50.0	


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM


尺寸可依客戶要求。
Different size available per request.




Part No.	A
SF14722	14.0
SF28722	27.8

橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

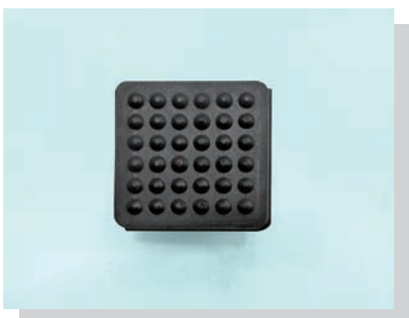


- Material: Rubber
- Color: Black
- Unit: mm



Part No.	A	B	C	D
P004	14.0	13.5	2.1	2.6
P005	15.0	14.5	2.6	3.1



- Material: Rubber
- Color: Computer
- Unit: mm



Part No.	Package
SF202013	1000


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。



- Material: Rubber/Silicon Rubber
- Color: Black
- Unit: mm
- Other Materials Available: EPDM

尺寸可依客戶要求。
Different size available per request.



Part No.	A	B	C
PT080210	8.0	2.0	1.0
PT100612	10.5	6.0	1.2
PT100614	10.5	6.0	1.4
TF-1627	15.2	9.2	3.0
PT158932S	15.8	9.3	2.0
PT160915	16.0	9.5	1.5
PT-1762	17.5	6.5	2.0
PT200612	20.5	6.2	1.2
PT200617	20.5	6.2	1.7
PT2492	24.0	9.0	2.0
PT270720	26.8	7.2	2.0
PT005	26.8	7.2	3.8
PT360712	36.0	7.0	1.2
PT690920	69.6	9.8	2.0


橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。



- Material: Rubber
- Color: Black
- Unit: mm


尺寸可依客戶要求。
Different size available per request.




Part No.	Package
TF201113	1000

橡膠腳墊 RUBBER FOOT

用途：背膠式，可快速將腳墊固定於機殼，黏性佳、不脫落。

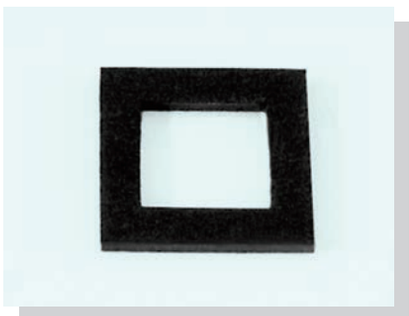

- Material: Rubber
- Color: Black
- Unit: mm




Part No.
SF141410

橡膠腳墊 RUBBER FOOT

用途：背膠式，可貼於D-SUB連接器之外觀或裡面保護或絕緣。




- Material: Silicon Rubber
- Color: Black
- Unit: mm

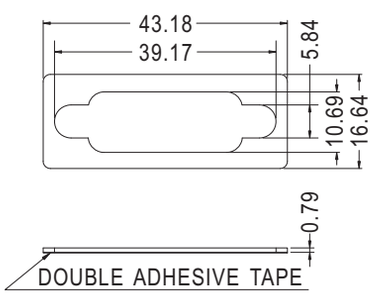

Part No.	Package
TF-1596	1000


EVA泡棉 EVA FOAM

用途：腳墊，零件之絕緣，可用背膠(單面或雙面)。

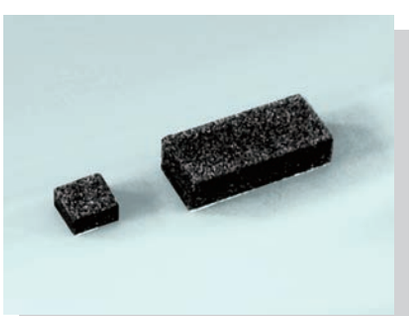


- Material: EVA
- Color: Black
- Unit: mm

尺寸可依客戶要求。
Different size available per request.




Part No.	A	B	C
EVA862	8.0	6.0	2.0
EVA120430	12.0	4.0	3.0


用途：用於功率晶體之導熱和絕緣。

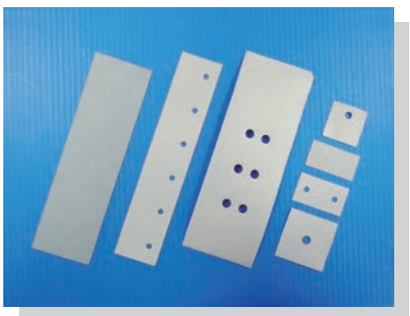


- Material: Silicon (UL)
- Flame Class: 94V-0
- Color: Gray
- Unit: mm

可依客戶指定長、寬、高裁切成各種形狀，如方形、圓形。
Different size available per request.

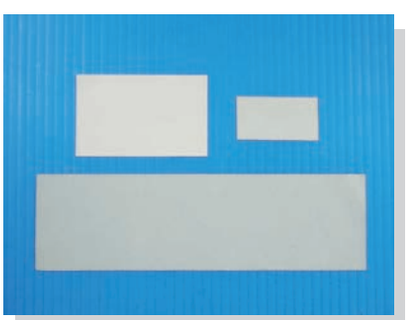


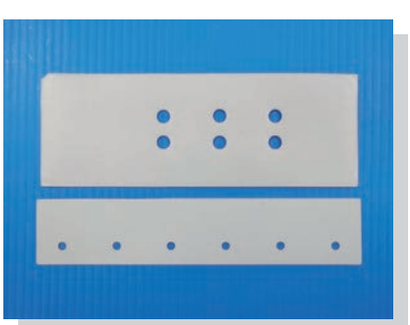




NEW

Part No.	A	B	C	Package
SI1913	19.0	13.0	0.3	20000
SI21125	21.0	12.5	0.3	5000
SI2519	25.0	19.0	0.3	20000
SI3012	30.0	12.0	0.3	
SI3030-1	30.0	30.0	0.3	5000
SI4520	45.0	20.5	0.3	
SI304802	48.0	30.0	0.23	3000
SI300200	300.0	200.0	0.3	500




NEW

Part No.	A	B	C	D	E	F	Package
SI3023	30.0	23.0	0.3	15.0	10.4	3.0	5000
SI3030	30.0	30.0	0.45	15.0	15.0	4.5	
SI2535	35.0	25.0	0.3	9.0	12.5	3.0	




NEW


Part No.	A	B	C	D	E	F	H	Package
SI30172H	30.5	17.8	0.3	6.4	8.9	3.1	17.7	10000
SI335125H2	33.5	12.5	0.3	5.75	7.0	3.0	22.0	3000
SI34132H	34.0	13.0	0.3	5.0	6.5	5.8	24.0	5000
SI5230	52.0	30.0	0.3	10.0	9.0	3.0	32.0	
SI752845	75.0	28.0	0.45	27.0	7.5	3.2	21.0	3000

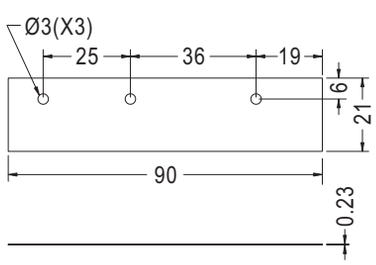

Part No.	Package
★SI9021	5000

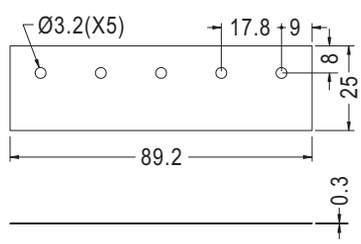

Part No.	Package
★SI8925H5	5000

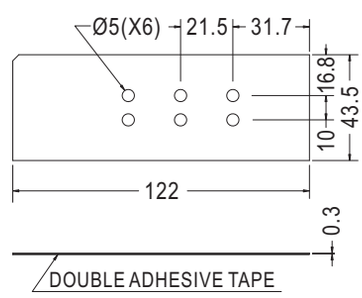


Part No.	Package
★SI12243H6A	3000

導電泡棉 CONDUCTIVE FOAM

用途：EMI屏蔽導電，可用背膠(單面或雙面)，尺寸可依客戶要求。
We Make Different Size For Your Order.


- Material: Emi Conductive Fabric
- Unit: mm




Part No.	Package
CRGI01	1000




Part No.	Package
CRGH06	1000



Part No.	Package
CRGP11	1000



Part No.	Package
CRGF02	1000



Part No.	Package
CRGR-G07	1000




Part No.	Package
CRGI12	1000



Part No.	Package
CRGS03	1000



Part No.	Package
CRGR08	1000



Part No.	Package
CRGT13	1000



Part No.	Package
CRGR04	1000



Part No.	Package
CRGC09	1000




Part No.	Package
CRGD14	1000




Part No.	Package
CRGI-E05	1000



Part No.	Package
CRGL10	1000



Part No.	Package
CRGI-W15	1000

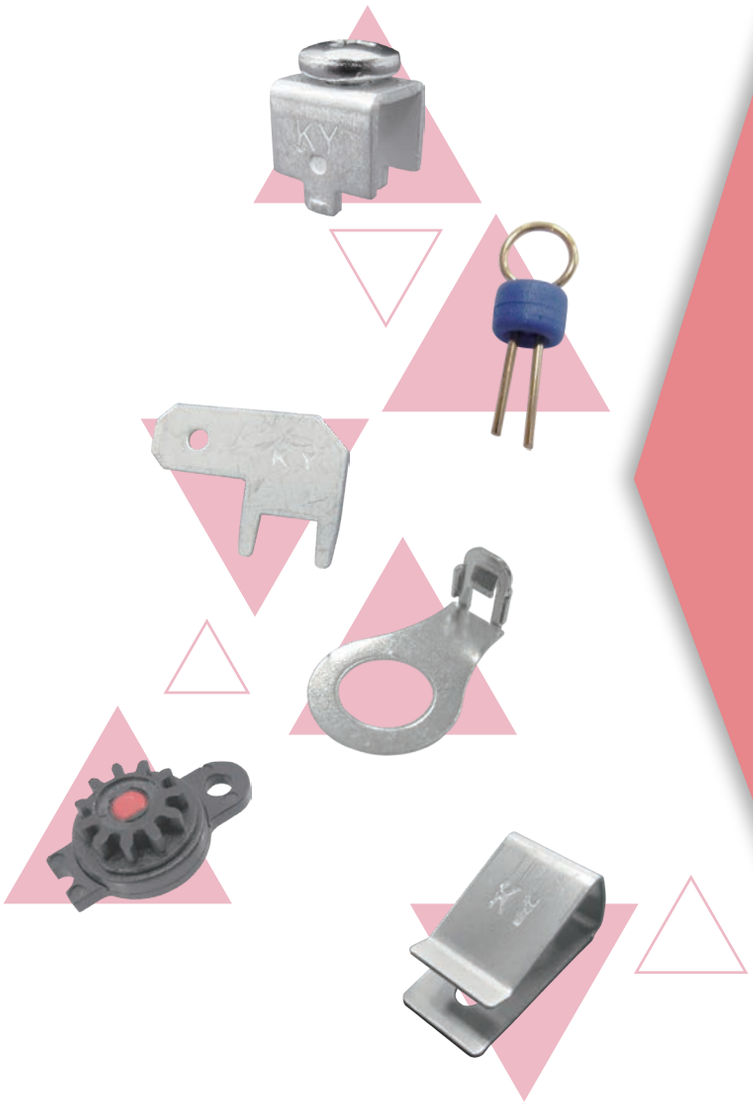

10

- ▶ 接線夾
  Connector
- ▶ 端子台
  Terminal Block
- ▶ 電線固定夾片
  Wire Clamp
- ▶ 測試針
  Test Pin
- ▶ 保險絲座
  Fuse Holder
- ▶ PC 板焊接端子
  P.C.B Terminal
- ▶ 接地片
  Ground Terminal
- ▶ 彈片
  Clamp
- ▶ 阻尼齒輪
  Damper Gear


插式電線連接頭 PUSH-IN WIRE CONNECTOR

用途：用於單心電源線之連接，插入式，免用膠帶，方便，省時。




- Material: PA 66 (UL) 94V-2
- Unit: mm


NOTE：
安培(Current)：24A(VDE)
伏特(Voltage)：600V
使用溫度(Working temp)：110C°
使用線徑範圍(Wire Range)：#12-22 AWG Solid conductor
撥線長度(Stripping Length)：11mm(0.43 inch)
顏色(Color)：以顏色區分,易於辨別使用電線數目
To identify the application wire quantity by different color.
安全認證通過：美國(UL),德國(VDE),芬蘭(Finko),歐洲(CE)




◆ PC252



◆ PC253



◆ PC254




◆ PC255


Part No.	Color	Poles	Package
PC252	Red	2	500
PC253	Orange	3	
PC254	Yellow	4	
PC255	Gray	5	

快速接線夾 QUICK SPLICE


用途：用於中途輔助接線，且使用時不需剝線，將電線放好位置壓入銅片即可，省時美觀。

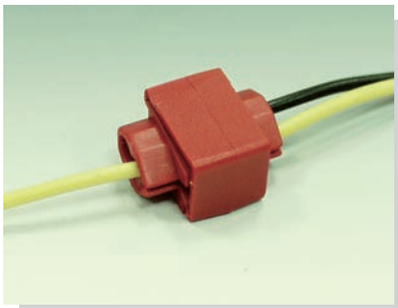

- Housing Material: PP
- Metal Material: Copper
- Finish: Tin Plated
- Unit: mm

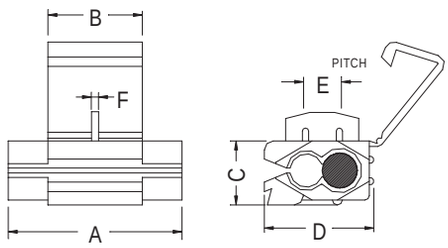


Part No.	Wire Range		A	B	C	D	E	F	Color	Package
	AWG	mm²								
3MR	22~18	1.25	19.5	10.6	8.2	13.5	3.9	0.8	Red	500
3MB	16~14	2.0							Blue	
3MY	12~10	5.5	20.0	20.0	11.1	15.0	4.8	0.9	Yellow	200

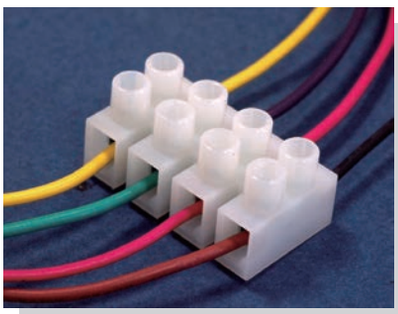


- Housing Material: Nylon 66 UL94V-2
- Pole: 1~12 Poles
- Working Temperature: 105℃
- PA7DS,PA9DS: With Wire Protestor
- Approved: UL、CSA、VDE、F、D、N、S...。
- Color: Natural

- H=底部加高(Raised Base)
- DS=加彈片(Wire Protector)
- F=平底型(Flat Base Type)

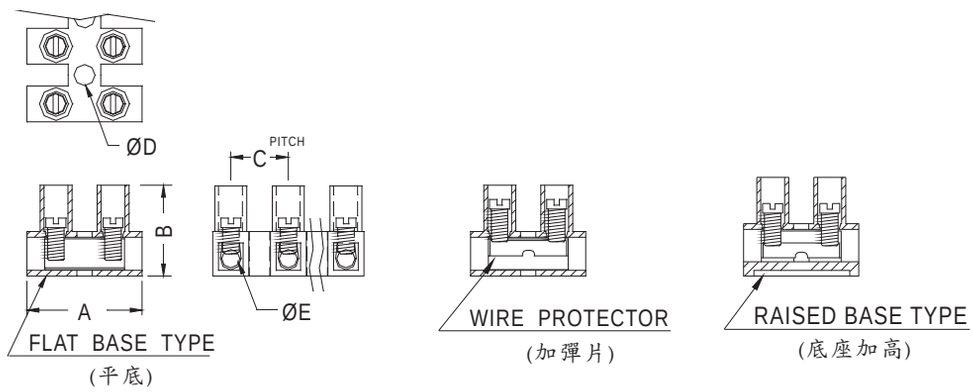


Part No.	mm² 線徑	Amp 安培	Volt 電壓	Screw 螺絲	A	B	C	D	E	Poles
PA7-H	1.5	17.5	450V	M2.6X5P	17.0	14.5	8.2	2.9	2.8	1~12
PA7-DSH										
PA7F-H						13.5				
PA7F-DSH										
PA9-H	2.5	24.0		M3.0X6P	20.2	16.7	10.0	3.6	3.2	
PA9-DSH										
PA9F-H						16.2				
PA12H-H	6.0	41.0	500V	M3.5X7P	23.8	19.0	12.0	3.9	4.2	
PA12H-DS										
PA14-H	10.0	57.0		M4.0X9P	25.6	25.0	13.5	4.4	5.0	
PA14H-DS				M4.0X7P						

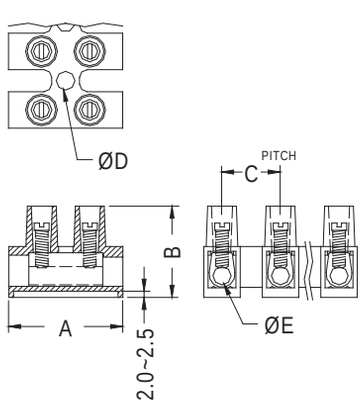


Part No.	mm² 線徑	Amp 安培	Volt 電壓	Screw 螺絲	A	B	C	D	E	Poles
PA16-H	16.0	76.0	500V	M4.0X9P	28.1	23.0	14.5	4.2	6.0	1~12

端子台 TERMINAL BLOCK

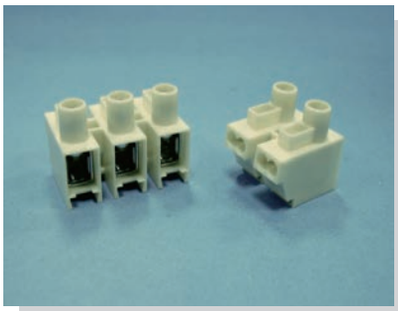


- Housing Material: Nylon 66 (UL) 94V-2
- Working Temperature: 105˚C
- Color: Natural
- Unit: mm

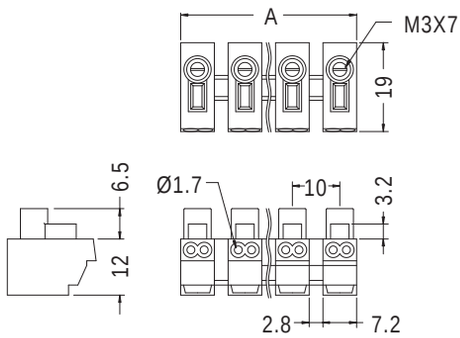


Part No.	A
PA11-2P	17.3
PA11-3P	27.5

端子座 TERMINAL BLOCK


用途：用於大電流機器接線。

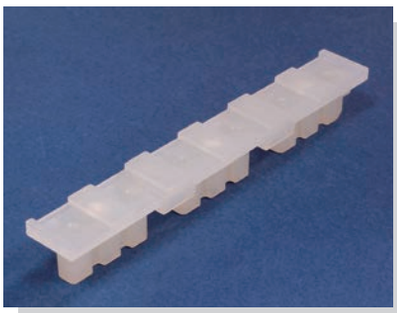


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm



Part No.	Package
TERBL-6	50

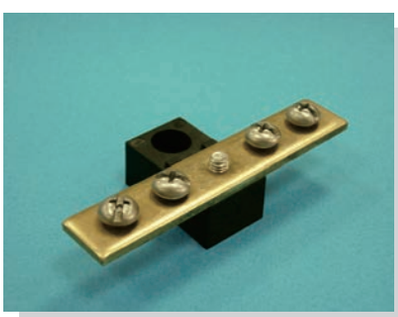


- Material: PBT(UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm

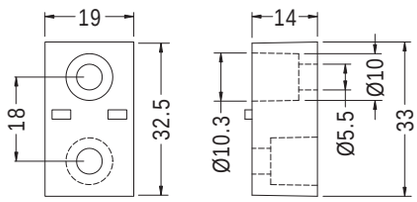


Part No.	Package
TERBL-33	200

彈簧螺紋端子 SCREW-ON CONNECTOR

用途：連接電線，內附彈簧，旋轉時彈簧則夾緊電線不易脫落。

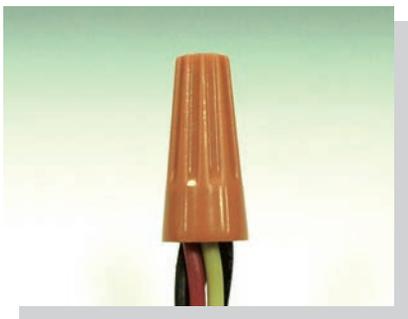


- Material: PP
- Color: Orange
- Unit: mm
- Wire Spring Insert

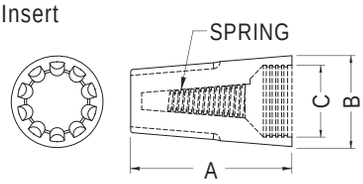

Part No.	Wire Size Range		A	B	C	Package
	Max.	Min.				
P1	#18X2	#24X2	15.2	8.6	6.5	1000
P2	#16X3	#20X3	17.7	9.9	7.1	
P3	#14X3	#18X3	22.0	12.4	9.8	500
P4		#16X3	24.6	14.0	11.0	


- Material: PBT(UL) 94V-0
- Color: Black
- Unit: mm
- Wire Spring Insert

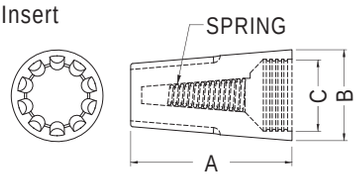


Part No.	A	B	螺紋內徑 C	適用電線範圍 Suitable Wires A.W.G	Package
P1B	15.2	8.6	6.5	22-18	1000
P3B	21.8	12.7	9.6	22-14	500

閉端端子 CLOSE END CONNECTOR


用途：電線剝去外皮插入端子內，用工具壓著即可，接觸良好不脫落。

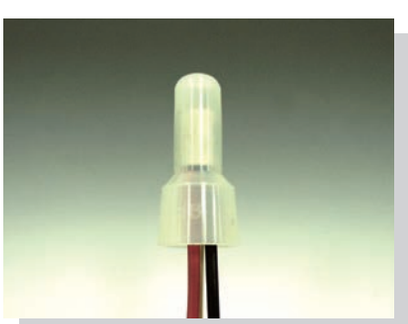

- Housing Mat'l: Nylon 66 (UL) 94V-2
- Metal Mat'l: Aluminum/
  Tin Plated Copper
- Color: Natural
- Unit: mm



Part No.	Wire Range	A	B	C	Package
CE1	#22-18	2.6	7.8	18.0	1000
CE2	#22-14	3.1	9.5	20.0	
CE5	#22-10	4.4	12.5	25.2	
CE8	#16-10	5.3	14.2	27.7	500

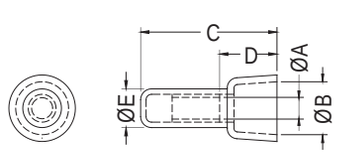


Part No.	Wire Range	A	B	C	D	E	Package
C3	#22-16 1.25 mm^2	2.5	7.9	19.2	7.2	5.1	1000
C4	#16-14 2 mm^2	3.2	8.2	20.7	8.5	5.7	
C5	#12-10 5.5 mm^2	4.2	10.6	24.8	10.7	7.3	
C8	#8 8 mm^2	5.0	12.2	27.1	12.5	9.2	500

電線固定夾片 WIRE CLAMP

用途：使用於電子、電腦產品內部電線之固定，可彎曲打開重覆使用，維修方便。




- Metal Mat'l: Steel
- Plastic Mat'l: PVC Tube (UL)
- Color: Black
- Unit: mm



Part No.	A	B	C	Package
WL3-32T	7.5	3.3	32.0	1000
WL3-52T	7.5	3.3	52.0	
WL3-60T	8.0	3.6	62.0	
WL4-35T	8.5	4.2	35.0	
WL4-50T	8.0	4.1	52.0	
WL4-70T	7.5	4.2	74.5	
WL4-78T	8.0	4.1	78.5	500
WL5-70T	8.4	5.1	60.0	
WL6-78T	10.0	6.0	78.0	


- Metal Mat'l: Steel
- Plastic Mat'l: Polyolefin(UL)



Part No.	A	B	C	Package
WL3-12H	7.5	3.3	12.0	1000
WL3-32H	7.5	3.3	32.0	
WL3-35H	5.6	3.5	29.9	
WL3-52H	7.5	3.2	52.0	
WL3-60H	8.0	3.6	62.0	
WL4-35H	8.5	4.2	35.0	
WL4-50H	8.0	4.1	52.0	
WL4-56H	8.0	4.1	48.2	
WL4-70H	7.5	4.2	74.5	
WL4-78H	8.0	4.1	78.5	500
WL4-90H	7.5	4.2	94.5	
WL5-70H	8.4	5.1	60.0	
WL6-78H	10.0	6.0	78.0	




- Metal Material: Steel
- Plastic Mat'l: PVC Tube (UL)
- Color: Black
- Unit: mm




Part No.	Package
WLC-1	500



- Metal Material: Steel
- Metal Finish: Tin Plated
- Plated Mat'l: Polyolefin (UL)/ PVC Tube (UL)
- Color: Black
- Unit: mm

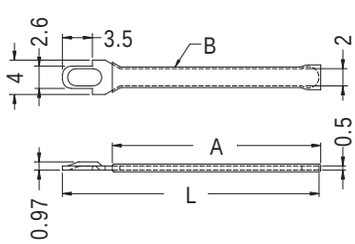




HOLE IN P.C.B


Part No.	A	B	L	Package
WLD-30H	24.0	1.5 HEAT SHIRNKING	30.0	1000
WLD-50H	47.0		50.0	
WLD-30T	25.0	1.93 PVC TUBE	30.0	
WLD-50T	45.0		50.0	

測試點 TEST PIN

用途：焊於電子，電腦 PC 板上重要測試端點，可勾掛探棒不虞短路，鍍金接觸良好，不氧化。

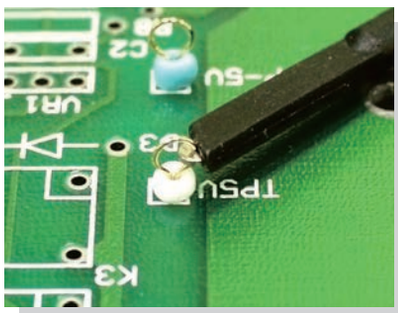


- Material: PBT (UL)
- Flame Class: 94V-0
- Finish: Phosphor Bronze
  Gold Plated
- Unit: mm




Part No.	Color	Package
TEST-1(R)	Red	1000
TEST-1(GR)	Green	
TEST-1(BU)	Blue	
TEST-1(BK)	Black	
TEST-1(Y)	Yellow	
TEST-1(W)	White	

◆ TEST-1 HOLE IN P.C.B Ø0.8~Ø1.0

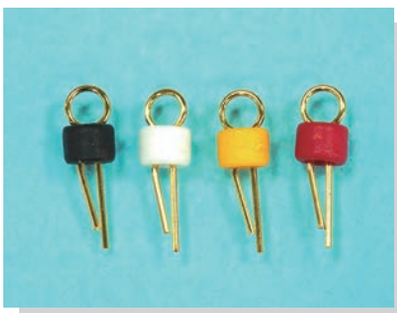


- Finish: Phosphor Bronze
  Gold Plated
- Unit: mm



Part No.	Color	Package
TEST-3(R)	Red	1000
TEST-3(GR)	Green	
TEST-3(BU)	Blue	
TEST-3(BK)	Black	
TEST-3(Y)	Yellow	
TEST-3(W)	White	

◆ TEST-3 HOLE IN P.C.B Ø0.8~Ø1.0




Part No.	Color	Package
TEST-3S	Black	500

◆ TEST-3S HOLE IN P.C.B Ø0.8~Ø1.0




- Material: PBT (UL)
- Flame Class: 94V-0
- Finish: Phosphor Bronze
  Gold Plated
- Unit: mm




Part No.	Color	Package
TEST-7(R)	Red	1000
TEST-7(G)	Green	
TEST-7(BU)	Blue	
TEST-7(BK)	Black	
TEST-7(Y)	Yellow	
TEST-7(W)	White	

◆ TEST-7 HOLE IN P.C.B Ø0.8~Ø1.0

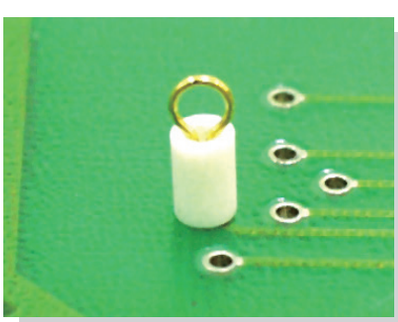

- Material: Ceramic
- Finish: Phosphor Bronze
  Gold Plated
- Unit: mm




Part No.	Package
TEST-7CN	1000


◆ TEST-7 HOLE IN P.C.B Ø0.8~Ø1.0

測試點 TEST PIN

用途：焊於電子，電腦 PC 板上重要測試端點，可勾掛探棒不虞短路，鍍金鍍錫接觸良好，不氧化。

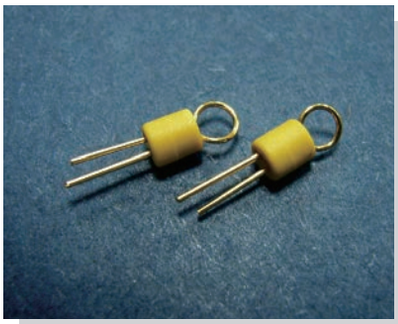

- Material: PBT (UL)
- Flame Class: 94V-0
- Pin Material: Phosphor Bronze
- Finish: Gold Plated
- Unit: mm




Part No.	Color	Package
TEST-55R	Red	1000
TEST-55GR	Green	
TEST-55BU	Blue	
TEST-55(B)	Black	
TEST-55Y	Yellow	
TEST-55W	White	

◆ TEST-55N HOLE IN P.C.B Ø0.9~Ø1.0



- Material: PBT (UL)
- Flame Class: 94V-0
- Pin Material: Phosphor Bronze
- Pin Finish: Tin Plated
- Unit: mm




Part No.	Color	Package
TEST-87	White	1000
TEST-87(R)	Red	
TEST-87(GR)	Green	
TEST-87(BU)	Blue	
TEST-87(B)	Black	
TEST-87(Y)	Yellow	

◆ TEST-87A HOLE IN P.C.B Ø1.5




- Material: PBT (UL)
- Flame Class: 94V-0
- Pin Material: Phosphor Bronze
- Pin Finish: Tin Plated
- Color: White
- Unit: mm




Part No.	Package
TEST-129	1000

◆ TEST-129A HOLE IN P.C.B Ø1.0

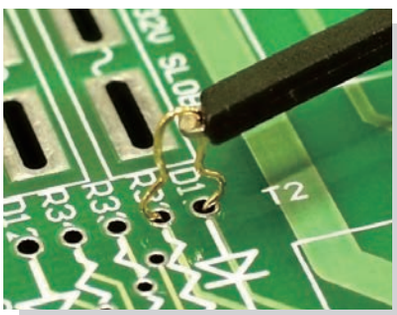

- Pin Material: Phosphor Bronze
- Pin Finish: Gold Plated
- Unit: mm




MOUNTING HOLES
HOLE IN P.C.B Ø0.8~Ø1.0


Part No.	Package
TEST-2	1000

測試針 TEST PIN

用途：焊於電子，電腦 PC 板上重要測試端點，鍍金接觸良好，不氧化。

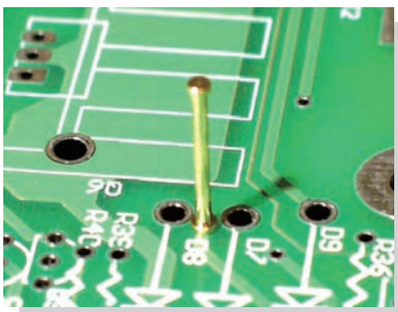


- Material: Brass
- Finish: Gold Plated
- Unit: mm

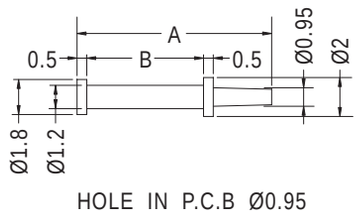


HOLE IN P.C.B Ø0.95

Part No.	A	B	Package
TEST-4	14.0	10.0	1000
TEST-5	10.0	6.0	2000

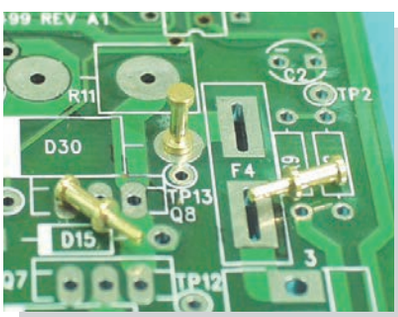

- Material: Brass
- Finish: Gold Plated
- Unit: mm




HOLE IN P.C.B Ø1.0

Part No.	A	B	C	D	E	Package
TEST-22	7.9	3.5	2.2	1.0	2.5	2000
TEST-34	8.0	3.8	1.6	0.8	1.6	



- Material: Brass
- Finish: Gold Plated
- Unit: mm



HOLE IN P.C.B Ø1.0


Part No.	Package
TEST-8	2000

測試針 TEST PIN

用途：焊於電子，電腦 PC 板上重要測試端點，鍍鎳接觸良好，不氧化。



- Material: Nickel Plated Brass
- Unit: mm



HOLE IN P.C.B Ø2.0


Part No.	Package
TEST-6	2000

測試針 TEST PIN

用途：焊於電子，電腦 PC 板上重要測試端點，接觸良好，不氧化。




- Material: Gold Plated Brass
- Unit: mm



Part No.	Package
TEST-31	2000



- Material: Copper
- Finish: Tin Plated
- Unit: mm

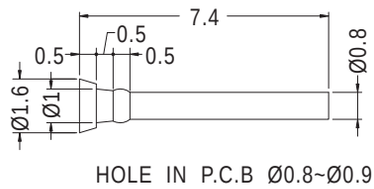


HOLE IN P.C.B Ø0.8~Ø0.9

Part No.	Package
TEST-10	2000




- Material: Tin Plated Brass
- Unit: mm




HOLE IN P.C.B: ØF

Part No.	A	B	C	D	E	F	Package
TEST-9	16.0	10.0	3.0	1.5	1.0	1.0	2000
TEST-23	18.0	10.0	3.0	2.5	1.6	1.7	
TEST-136	19.5	16.5	3.0	2.5	1.6	1.7	

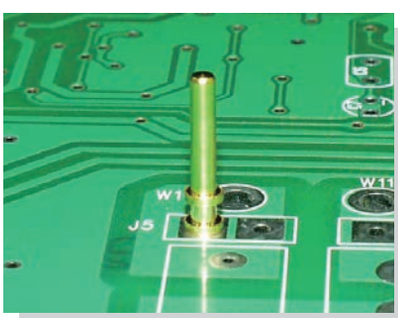

- Material: Brass
- Finish: Gold Plated
- Unit: mm

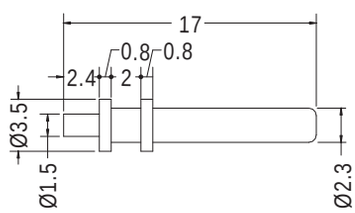


Part No.	Package
TEST-27	2000

測試針 TEST PIN

用途：焊於電子，電腦 PC 板上重要測試端點，接觸良好，不氧化。



- Material: Tin Plated Brass
- Unit: mm




HOLE IN P.C.B Ø0.9

Part No.	A	Package
TEST-24	15.0	2000
TEST-25	6.0	
TEST-26	8.5	
TEST-28	10.0	



- Material: Tin Plated Brass
- Unit: mm




Part No.	Package
TEST-140	1000

測試針 TEST PIN

用途：焊於電子，電腦 PC 板上重要測試端點，可勾掛探棒不虞短路，接觸良好，不氧化。



- Material: Tin Plated Brass
- Unit: mm




HOLE IN P.C.B Ø0.8


Part No.	Package
TEST-12	2000



- Material: Tin Plated Copper
- Unit: mm




Part No.	Package
JUMP-21	1000




Part No.	Package
JUMP-26	1000

測試座 TEST HOLDER


用途：做為電路板電氣連接或測試端點。

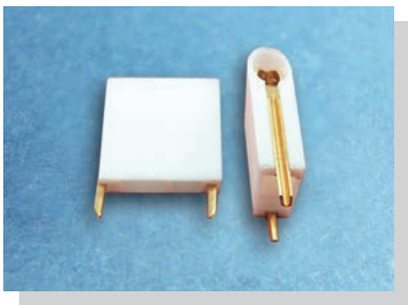


- Material: Nylon 66 (UL)
- Material: Gold Plated Brass
- Flame Class: 94V-0
- Color: Natural
- Unit: mm

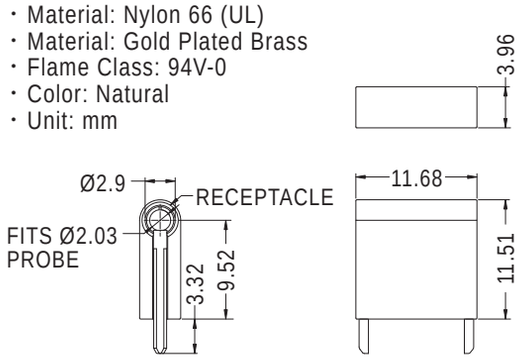


RECOMMENDED
MOUNTING HOLE PARTERN



Part No.	Package
TEST-114	1000

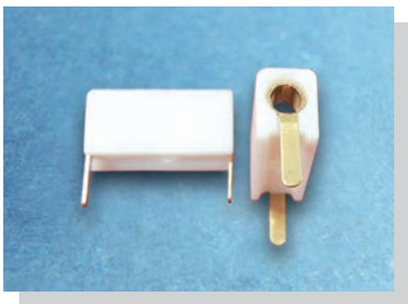

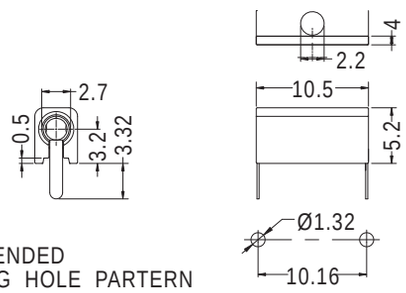

RECOMMENDED
MOUNTING HOLE PARTERN


Part No.	Package
TEST-115	1000

跳線 JUMPER WIRE

用途：做為跳線使用。




- Material: Tin Plated Copper
- Plastic Material: Polyolefin (UL)
- Color: Black
- Unit: mm

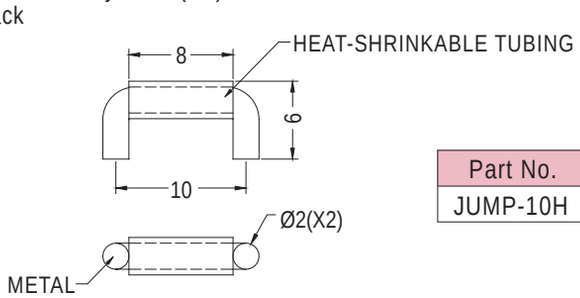


Part No.	Package
JUMP-10H	1000

保險絲座 FUSE HOLDER

用途：用於保險絲之絕緣與間隔。

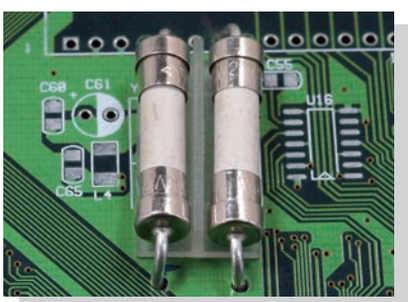


- Material: PC (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm




Part No.	Package
FHBBU-22	1000

保險絲座 FUSE HOLDER

用途：將保險絲固定於P.C.B板座上，拆卸方便。

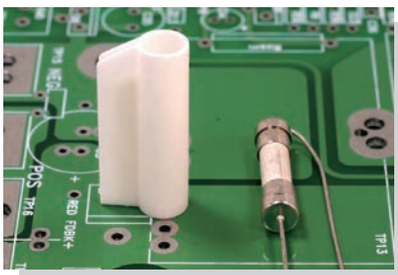


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FUSCV-1	500




- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm






MOUNTING HOLES

Part No.	Package
FUSCV-3	500

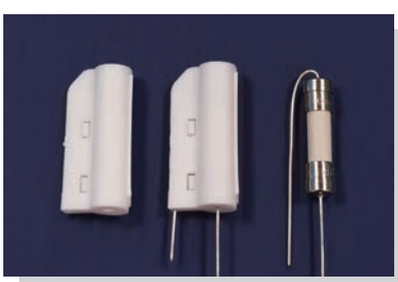

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

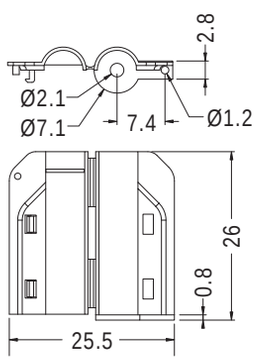


NEW


Part No.	Package
FUSCV-10	500



- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm




Part No.	Package
FUSCV-2	500




Part No.	Package
FUSCV-4	500

保險絲座 FUSE HOLDER

用途：將保險絲固定於板座上，拆裝方便。

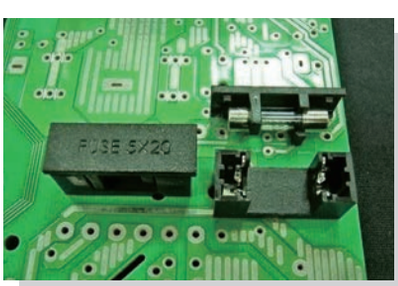


- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Black
- Unit: mm




裝配Ø5X20保險絲

◆ FUSEC-1B



◆ FUSEC-1E




MOUNTING HOLES


Part No.	Package
FUSEC-1	500

保險絲座 FUSE HOLDER

用途：將保險絲固定於 PC 板上，拆裝方便。

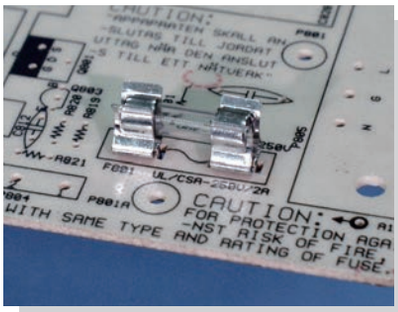

- Material: Brass
- Finish: Bright Tin Plated
- Unit: mm

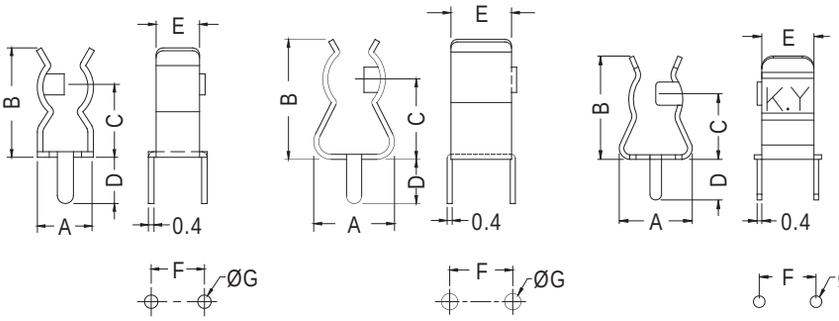


MOUNTING HOLES ◆ FUC-01


MOUNTING HOLES ◆ FUC-02

MOUNTING HOLES ◆ FUC-17A

Part No.	A	B	C	D	E	F	G	適用保險絲	Package
FUC-01	4.0	7.8	5.2	3.3	3.1	3.8	1.2	Ø3.6	1000
FUC-02	6.4	9.5	6.5	3.5	4.8	5.1	1.3	Ø5.2	
FUC-17A	6.3	8.9	5.65	3.5	4.5	4.9	1.1	Ø5.2	

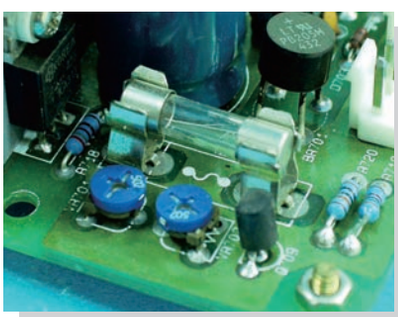


- Material: Brass
- Finish: Bright Tin Plated
- Unit: mm

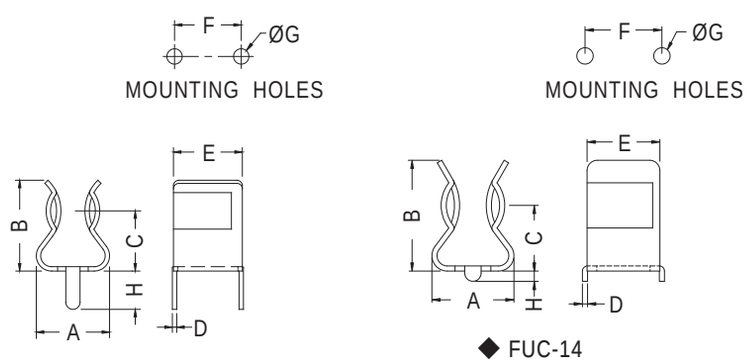

◆ FUC-14



- Material: Phosphor Bronze
- Finish: Nickel Plated
- Unit: mm

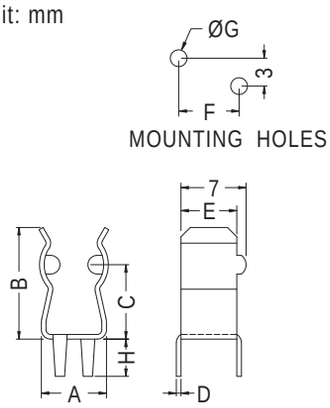


◆ FUC-09


Part No.	A	B	C	D	E	F	G	H	適用保險絲	Package
FUC-03	6.8	8.3	5.5	0.4	6.3	6.0	1.4	3.6	Ø5.2	1000
FUC-03A	6.4	8.8	5.5	0.5	6.3	6.7	1.7	3.6		
FUC-04	8.1	10.9	6.8	0.5	7.0	7.5	1.7	3.5	Ø6.3	
FUC-09	7.0	12.0	8.0	0.5	6.0	6.5	1.8	4.0	Ø5.2	
FUC-14	8.1	10.9	6.8	0.5	7.0	7.5	1.7	1.0	Ø6.3	


保險絲座 FUSE HOLDER

用途：將保險絲固定於板座上，拆卸方便。

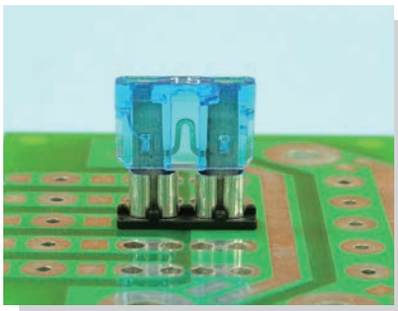


- Body Material: Nylon 66 (UL)
- Terminal Material: Tin Plated Brass
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm

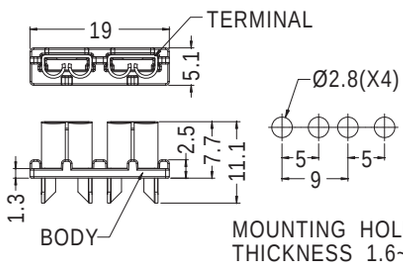

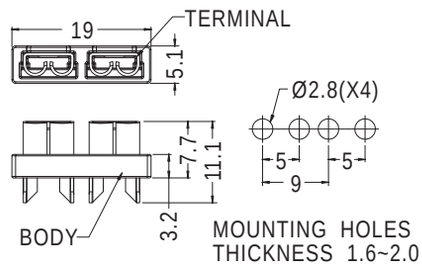



Part No.	Package
FUSCV-6F	1000

Part No.	Package
FUSCV-7F	1000

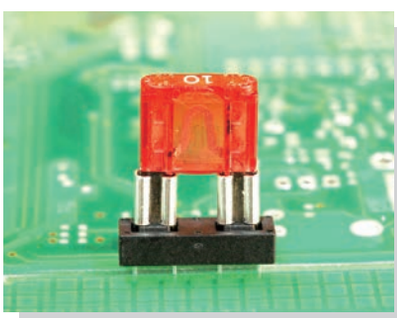

- Body Material: Nylon 66 (UL)
- Terminal Material: Tin Plated Brass
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm







Part No.	Package
FUSCV-8F	1000

保險絲座 FUSE HOLDER

用途：用於汽車保險絲。

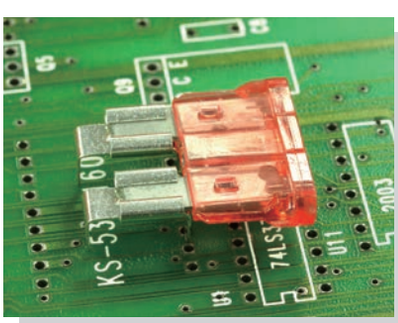


- Material: Brass
- Finish: Tin Plated
- Unit: mm

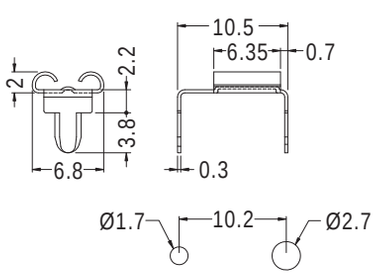


Part No.	Package
FUC-5A	1000

保險絲座 FUSE HOLDER

用途：用於汽車保險絲之間隔、墊高作用。

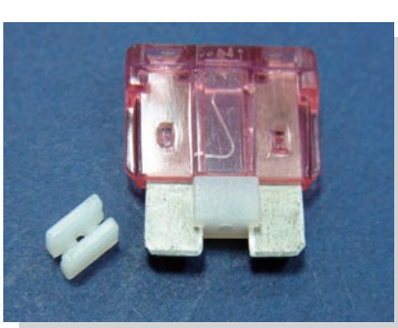

- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm




Part No.	Package
FUA-1	2000

PC 板焊接端子 P.C.B TERMINAL


用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。




- Material: Nickel Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

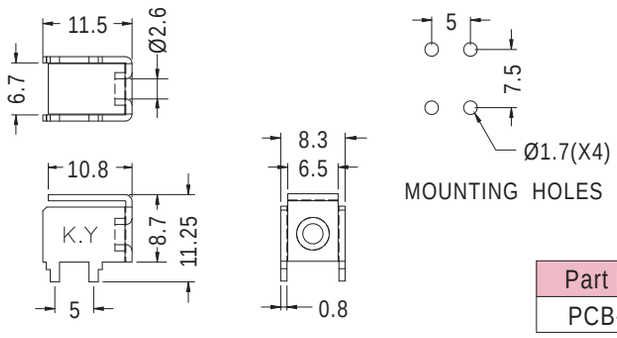


Part No.	Package
PCB-34	1000

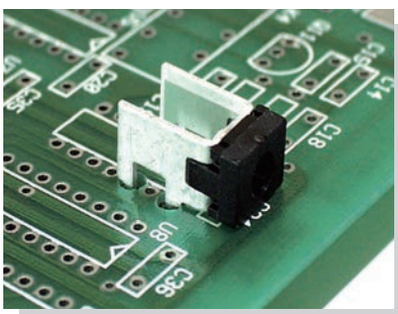


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

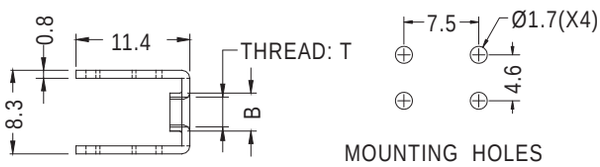

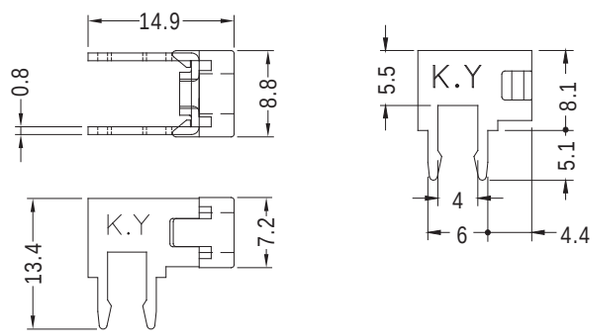


Part No.	B	T	Package
PCB-4	3.5	M3X0.5P	1000
PCB-4(M4)	4.4	M4X0.7P	
PCB-4(632)		6-32 UNC	
組合件 (ASSY)			
PCB-4(M3)F	PCB-4+PCB-4CV		
PCB-4(M4)F	PCB-4(M4)+PCB-4CV		
PCB-4(632)F	PCB-4(632)+PCB-4CV		

- Material: Nylon 66 (UL)
- Flame Class: 94V-2
- Color: Black
- Unit: mm

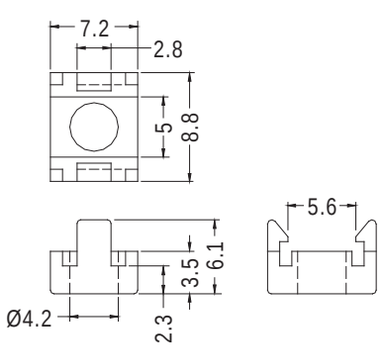

Part No.	Package
PCB-4CV	1000


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

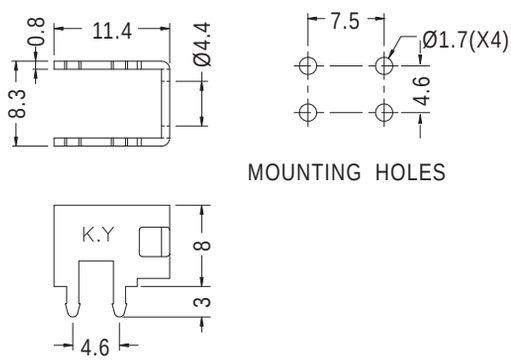


Part No.	Package
PCB-21(4.4)	1000
組合件 (ASSY)	
PCB-21(4.4)F	PCB-21(4.4)+PCB-4CV

PC 板焊接端子 P.C.B TERMINAL


用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。

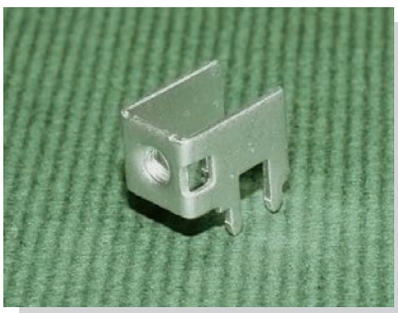


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

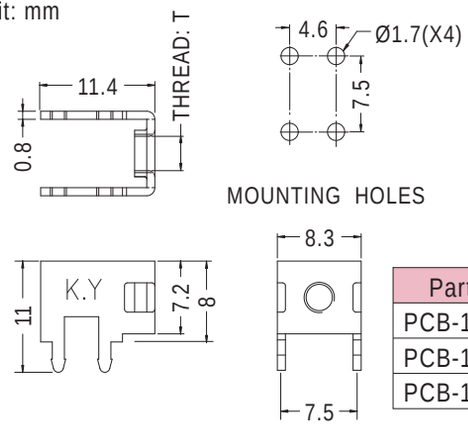

Part No.	T	Package
PCB-12	M3X0.5P	1000
PCB-12(M4)	M4X0.7P	
PCB-12(632)	6-32 UNC	

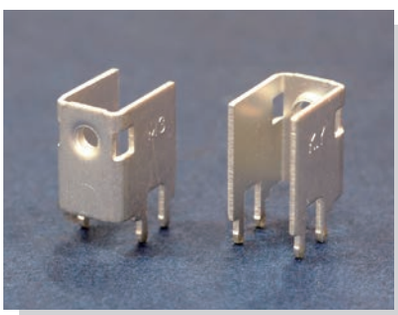


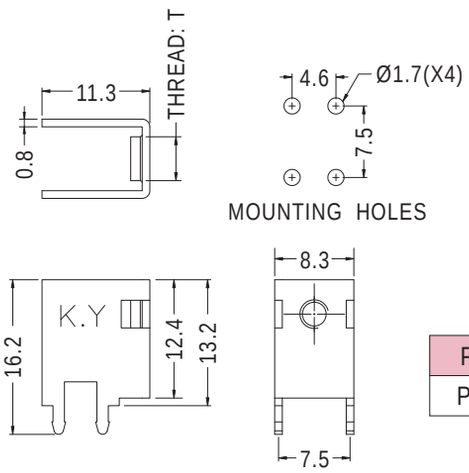


Part No.	T	Package
PCB-102	M3X0.5P	1000




- Material: Brass
- Finish: Tin Plated
- Suggested Current: 15 Amps
- Unit: mm

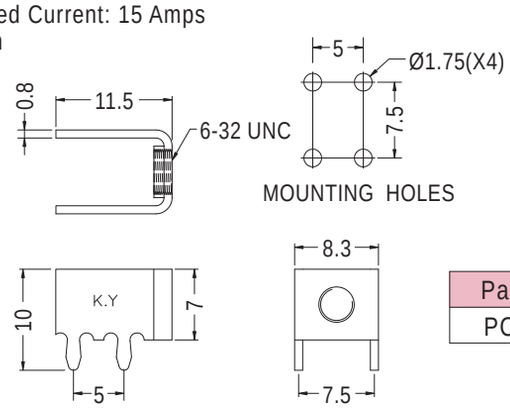

Part No.	Package
PCB-70	1000

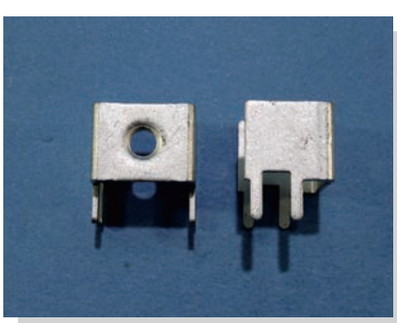


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

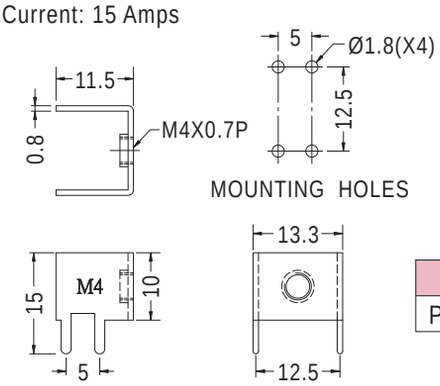


Part No.	Package
PCB-15(M4)	1000


PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。

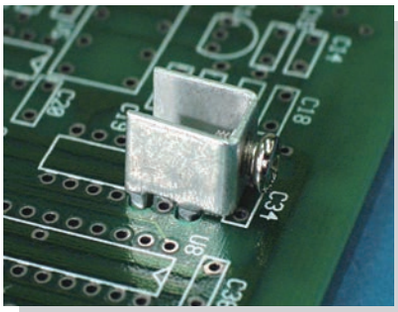

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







MOUNTING HOLES

Part No.	T	Package
PCB-2	M3X0.5P	1000
PCB-2(M4)	M4X0.7P	
PCB-2(6-32)	6-32 UNC	



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

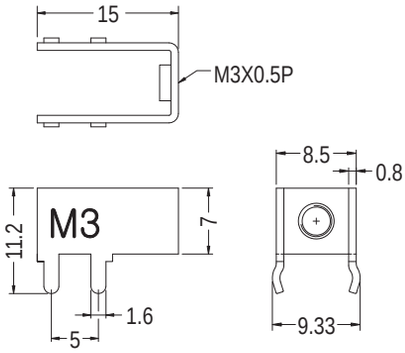





MOUNTING HOLES

Part No.	Package
PCB-78	1000



- Material: Tin Plated Steel
- Suggested Current: 15 Amps
- Unit: mm





MOUNTING HOLES


Part No.	Package
PCB-47ST(440)	1000

PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

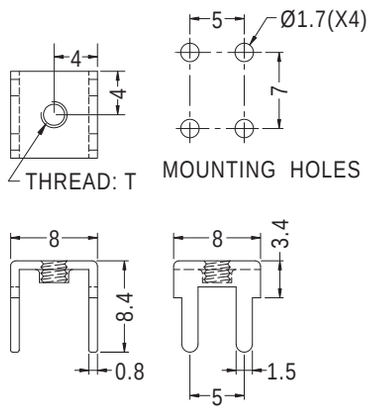


Part No.	T	Package
PCB-1	M3X0.5P	1000
PCB-1(M4)	M4X0.7P	
PCB-1(6-32)	6-32 UNC	




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

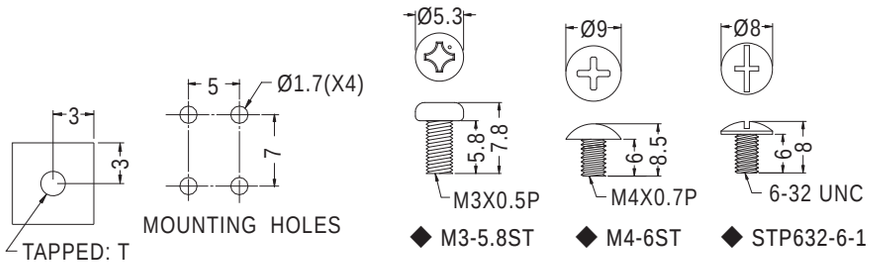





Part No.	T	Package
PCB-11	M3X0.5P	1000
PCB-11(M3.5)	M3.5X0.6P	
PCB-11(M4)	M4X0.7P	
PCB-11(632)	6-32 UNC	
組合件 (ASSY)		
PCB-11M3-5.8F	PCB-11+M3-5.8ST	
PCB-11M4-6F	PCB-11(M4)+M4-6ST	
PCB-11(632)F	PCB-11(632)+STP632-6-1	

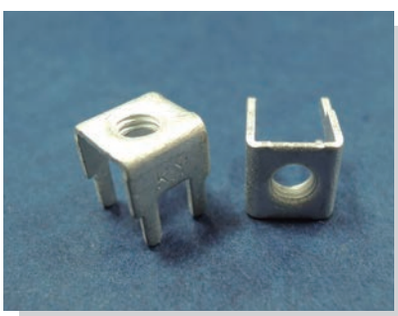

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

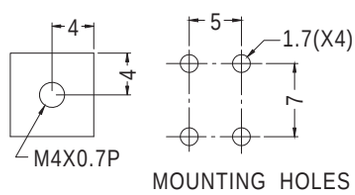




Part No.	Package
PCB-66	1000

PC 板焊接端子 P.C.B TERMINAL


用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

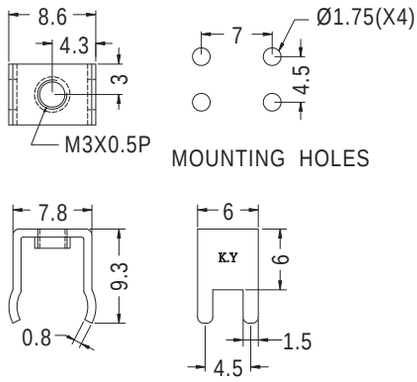


Part No.	Package
PCB-17	1000

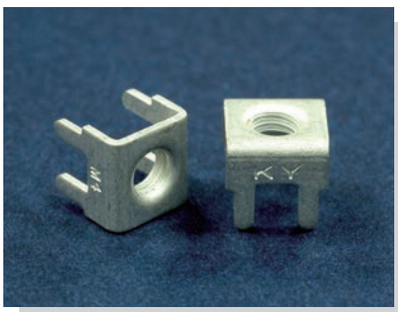

- Material: Brass
- Finish: Tin Plated
- Suggested Current: 15 Amps
- Unit: mm

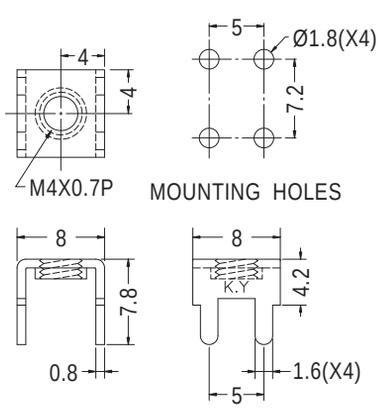


Part No.	Package
PCB-71	1000

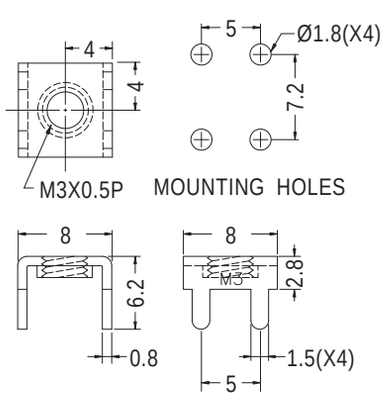

Part No.	Package
PCB-75	1000



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

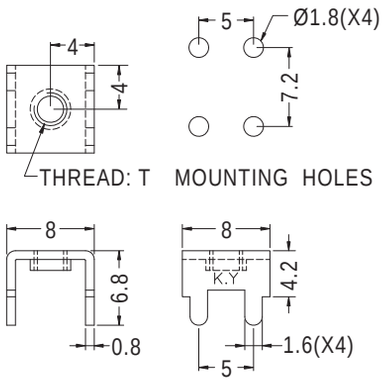


Part No.	T	Package
PCB-9	M3X0.5P	1000
PCB-9(M4)	M4X0.7P	
PCB-9(632)	6-32 UNC	

PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

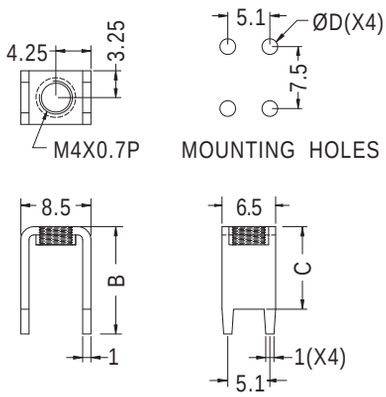

Part No.	B	C	D	Package
PCB-37M4	8.0	5.0	1.7	1000
PCB-58M4	13.0	10.0	1.9	




- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

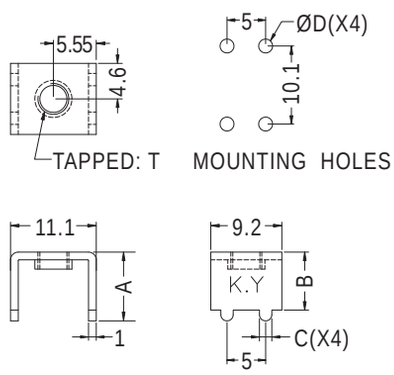

Part No.	A	B	C	D	T	Package
PCB-18	8.9	7.5	1.6	1.8	M3X0.5P	1000



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

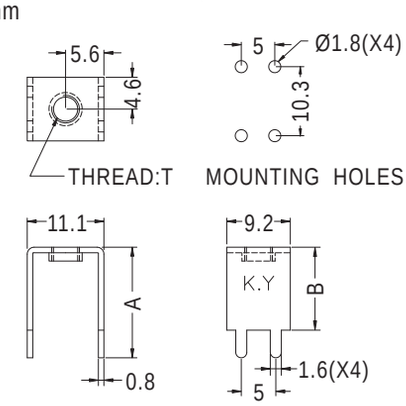


Part No.	A	B	T	Package
PCB-27(M3)	16.0	12.0	M3X0.5P	1000
PCB-27(M4)	16.0	12.0	M4X0.7P	
PCB-28(M3)	18.8	14.8	M3X0.5P	
PCB-28(M4)	18.8	14.8	M4X0.7P	


PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。



- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

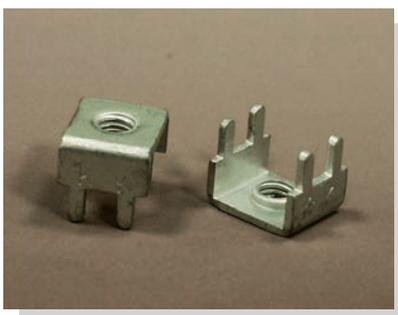

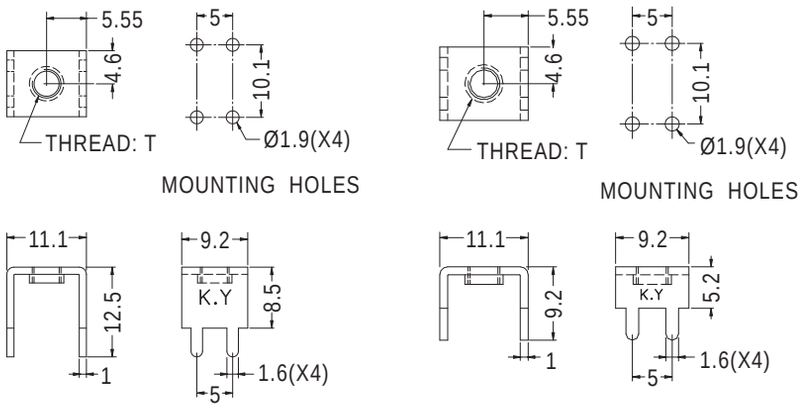

Part No.	T	Package
PCB-7	M3X0.5P	1000
PCB-7(M4)	M4X0.7P	
PCB-7(632)	6-32 UNC	


Part No.	T	Package
PCB-8	M3X0.5P	1000
PCB-8(M4)	M4X0.7P	
PCB-8(632)	6-32 UNC	

PC 板焊接端子加螺絲(附四角華司) P.C.B TERMINAL


用途：PC 板上焊之接電線端子，耐大電流，配合螺絲固定端子。



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

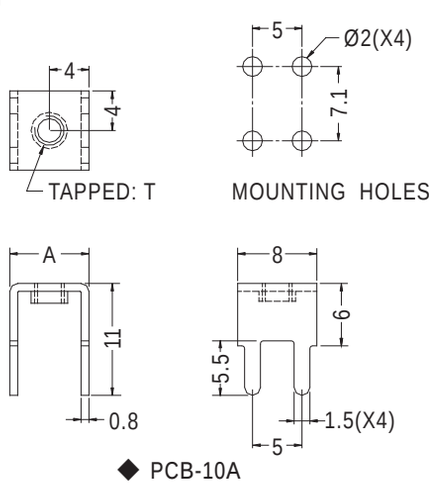

◆ PCB-10A

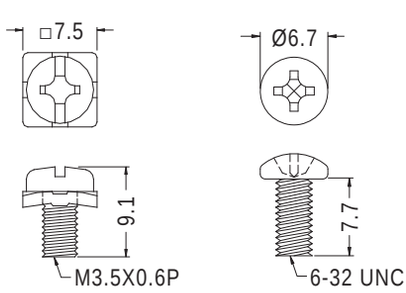


◆ PCB-10B　◆ 632-8ST


Part No.	A	T	Package
PCB-10A(M3)	8.0	M3X0.5P	1000
PCB-10A	7.9	M3.5X0.6P	
PCB-10AM4	7.9	M4X0.7P	
PCB-10A(632)	8.0	6-32 UNC	
組合件 (ASSY)			
PCB-10	PCB-10A+PCB-10B		
PCB-10M4F	PCB-10AM4+PCB-10BM4		
PCB-10(632)F	PCB-10A(632)+632-8ST		

PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。

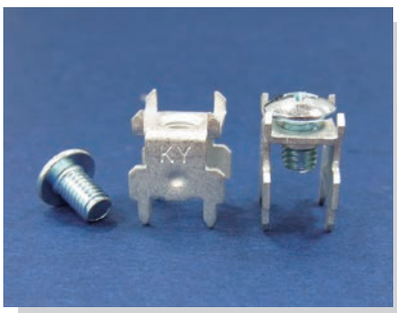


- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

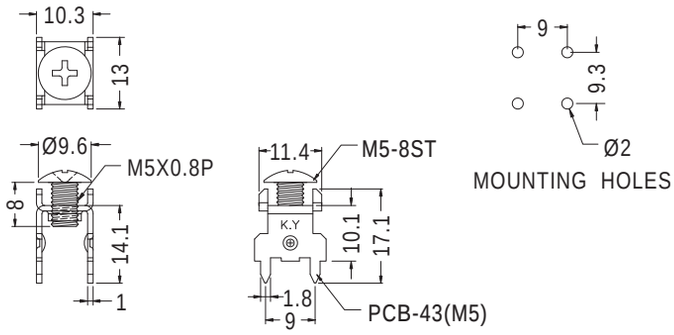

Part No.	組合件 (ASSY)	Package
PCB-43(M5)F	PCB-43(M5)+M5-8ST	500




- Material: Nickel Plated Brass
- Suggested Current: 30 Amps
- Unit: mm

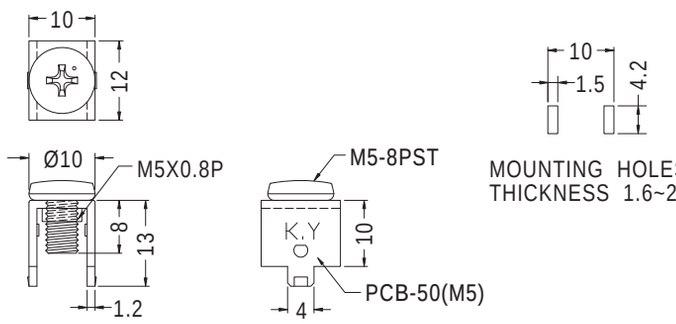

Part No.	組合件 (ASSY)	Package
PCB-50M5F	PCB-50(M5)+M5-8PST	500




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

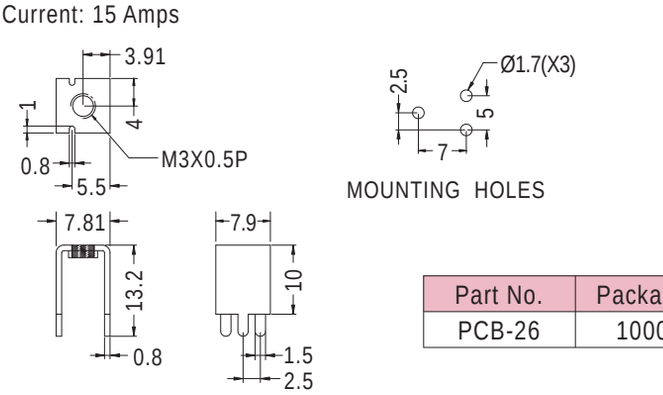

Part No.	Package
PCB-26	1000



- Material: Tin Plated SPCC
- Suggested Current: 15 Amps
- Unit: mm

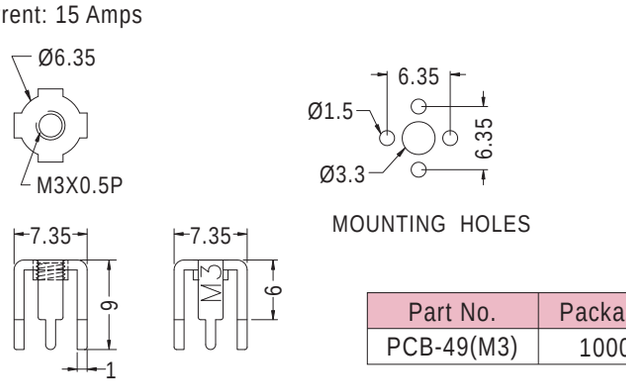


Part No.	Package
PCB-49(M3)	1000

PC 板焊接端子 P.C.B TERMINAL


用途：PC 板上之焊接電線端子，耐大電流，配合螺絲固定端子。




- Material: Tin Plated Brass
- Screw Material: Nickel Plated
- Suggested Current: 30 Amps
- Unit: mm

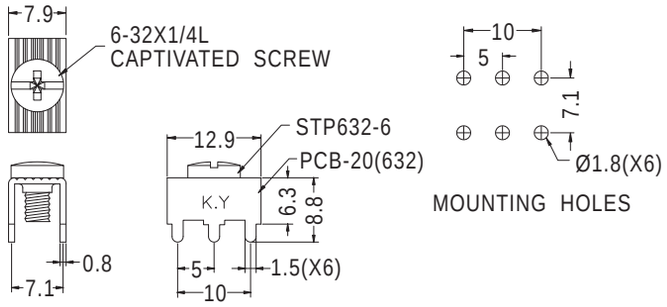


Part No.	組合件(ASSY)	Package
PCB-20(632)F	PCB-20(632)+STP632-6	1000

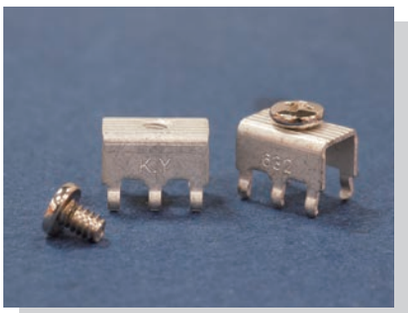


- Material: Brass
- Finish: Tin Plated
- Suggested Current: 30 Amps
- Unit: mm

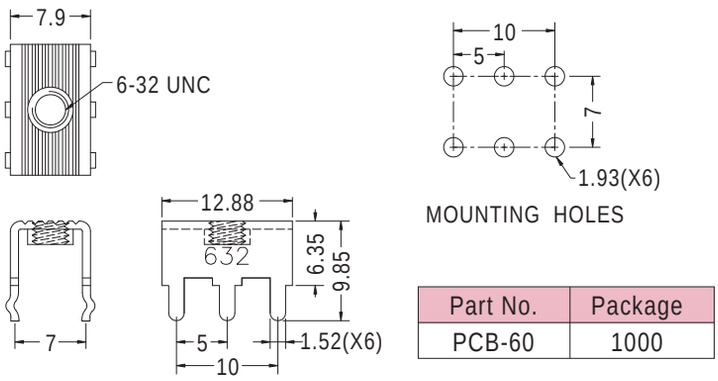


Part No.	Package
PCB-60	1000

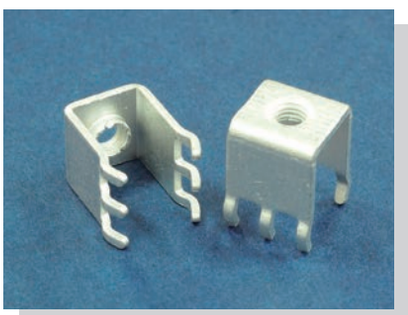


- Material: Brass
- Finish: Tin Plated
- Suggested Current: 30 Amps
- Unit: mm

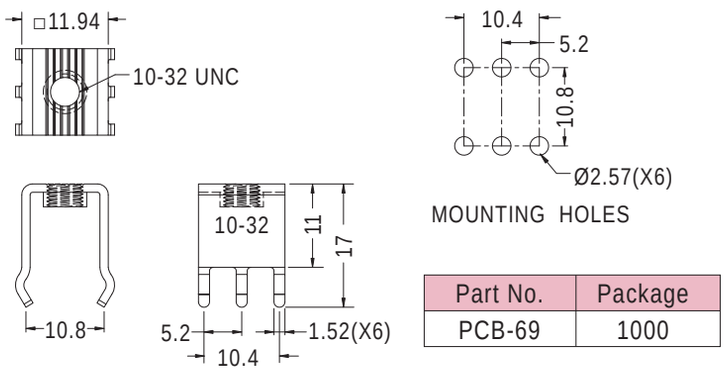

Part No.	Package
PCB-69	1000

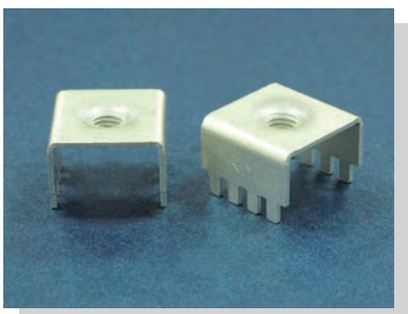

- Material: Tin Plated Copper
- Suggested Current: 50 Amps
- Unit: mm

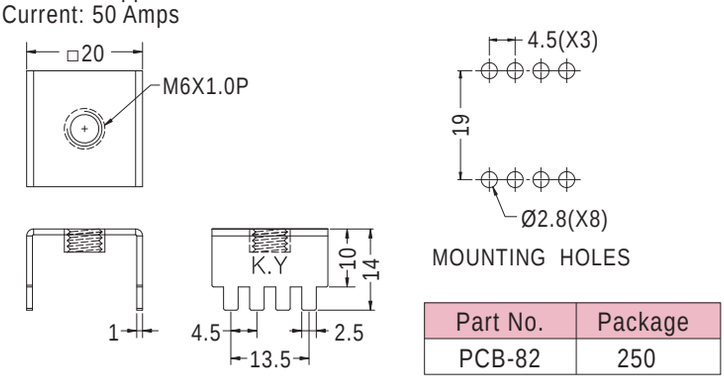


Part No.	Package
PCB-82	250


PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

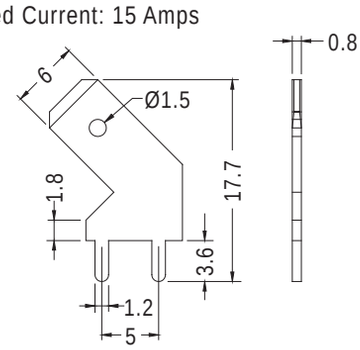





MOUNTING HOLES

Part No.	Package
PCRL250	1000

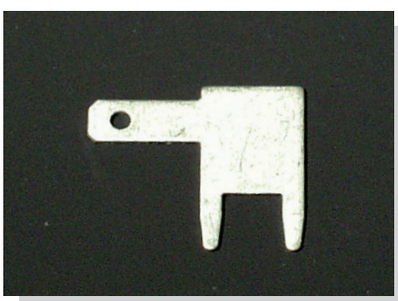

- Material: Tin Plated Brass
- Unit: mm







MOUNTING HOLES

Part No.	I	Suggested Current	Package
PCF110	0.5	10 Amps	1000
PCF1108	0.8	15 Amps	




- Material: Tin Plated Brass
- Unit: mm

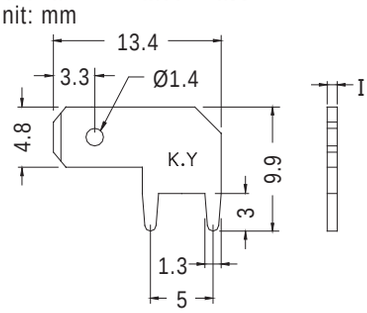





MOUNTING HOLES

Part No.	I	Suggested Current	Package
PCF187(5)	0.5	10 Amps	1000
PCF187	0.8	15 Amps	

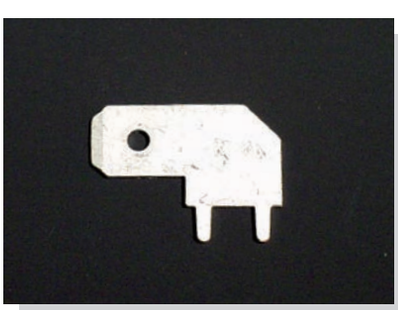


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

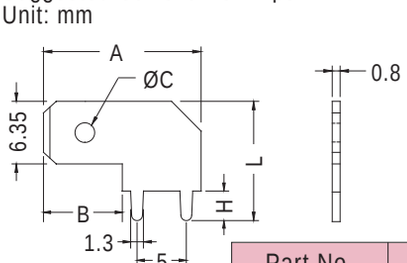





MOUNTING HOLES

Part No.	A	B	C	H	L	Package
PCF250	16.0	5.0	2.0	3.0	12.1	1000
PCF250-11	20.0	12.3	1.7	3.8	12.7	

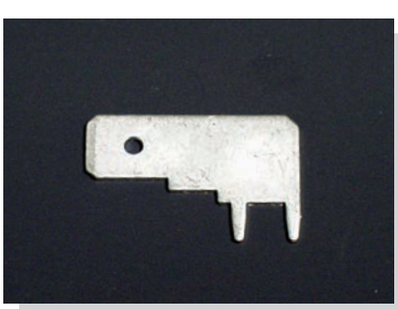

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

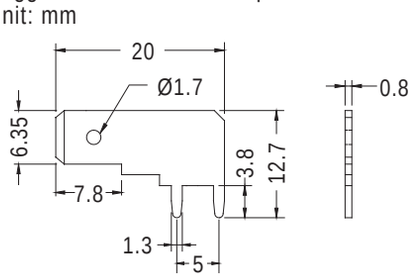



MOUNTING HOLES


Part No.	Package
PCFL250	1000


PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

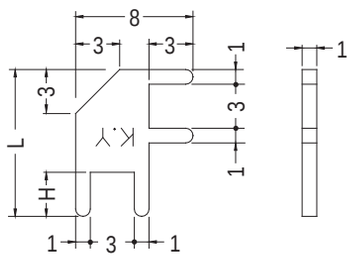





MOUNTING HOLES

Part No.	H	L	Package
PCLT-10	3.0	10.0	1000
PCLT-11	4.0	11.0	

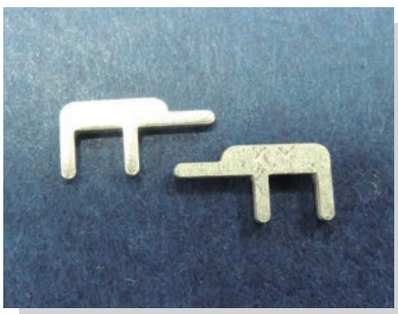

- Material: Brass
- Finish: Tin Plated
- Suggested Current: 15 Amps
- Unit: mm

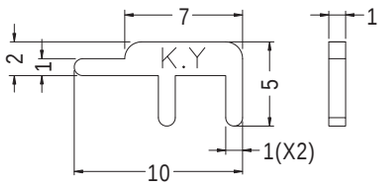




MOUNTING HOLES


Part No.	Package
PCLTA-1	1000

PC 板焊接端子 P.C.B TERMINAL


用途：PC 板上之焊接電線端子，美觀、牢固、耐電流大，配合螺絲固定端子。

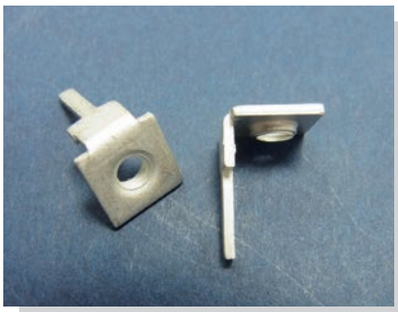

- Material: Tin Plated Brass
- Suggested Current: 25 Amps
- Unit: mm




HOLE IN P.C.B Ø2.5




Part No.	Package
PCB-22(M4)	1000



- Material: Tin Plated Brass
- Unit: mm

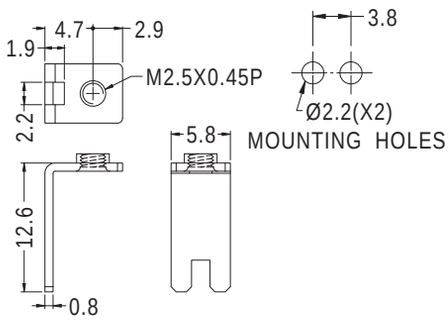

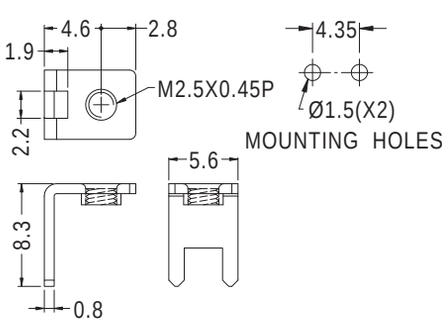


Part No.	Suggested Current	Package
PCB-73	20 Amps	1000


Part No.	Suggested Current	Package
PCB-74	15 Amps	1000


PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之插接電線端子，美觀、牢固、耐電流大，配合螺絲固定端子。

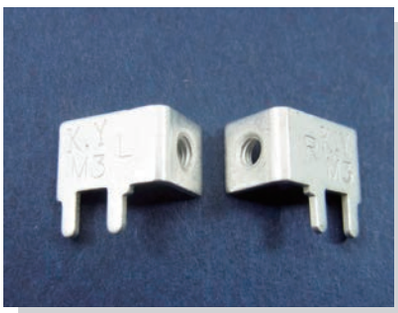


- Material: Brass
- Finish: Tin Plated
- Suggested Current: 15 Amps
- Unit: mm

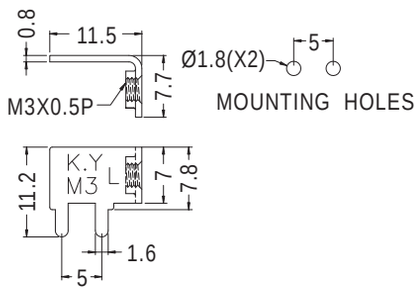

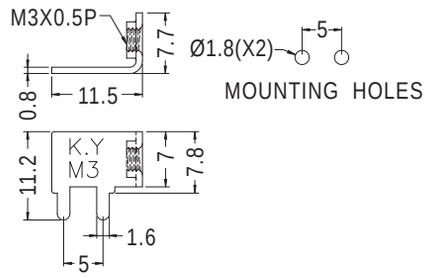


Part No.	Package
PCB-54L(M3)	1000


Part No.	Package
PCB-54R(M3)	1000

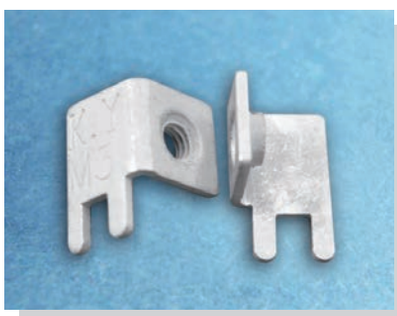


- Material: Brass
- Finish: Nickel Plated
- Suggested Current: 15 Amps
- Unit: mm

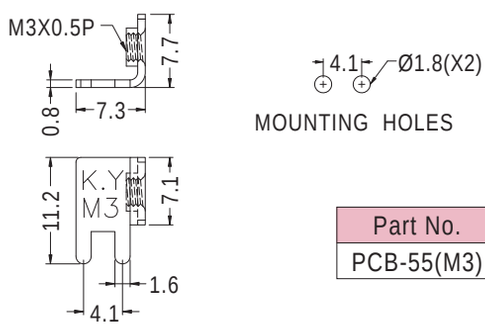

Part No.	Package
PCB-55(M3)	1000

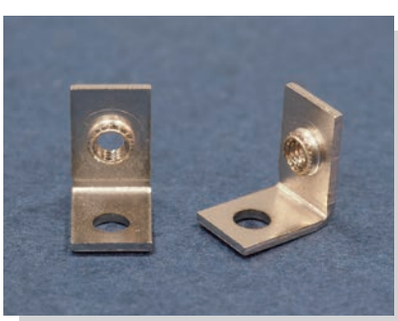


- Material: Steel
- Finish: Nickel Plated
- Unit: mm

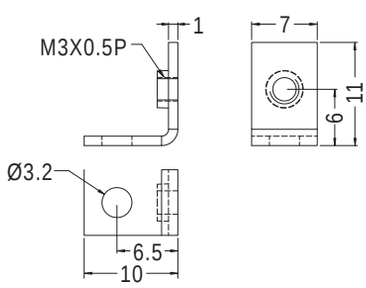

Part No.	Package
PCB-99	1000




- Material: Tin Plated Brass
- Unit: mm



Part No.	Package
PCB-25(3.2)	1000


PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子，美觀、牢固、耐電流大，配合螺絲固定端子。

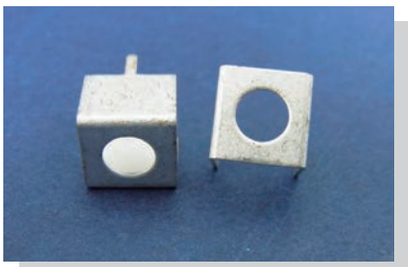




- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm

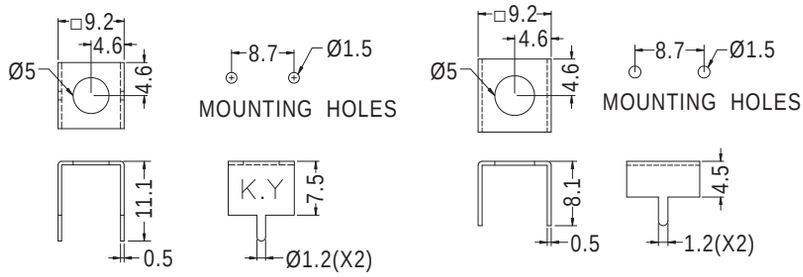


Part No.	Package
PCB-29	1000

Part No.	Package
PCB-44	1000

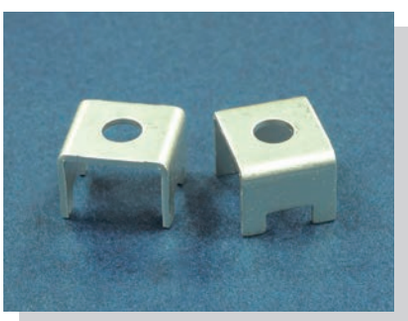


- Material: Tin Plated Brass
- Suggested Current: 30 Amps
- Unit: mm

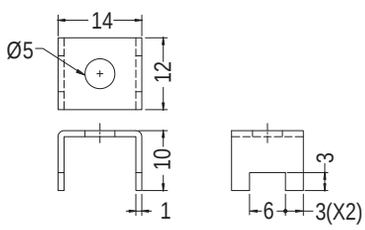

Part No.	Package
PCB-77	1000



- Material: Phosphor Bronze
- Finish: Tin Plated
- Suggested Current: 30 Amps
- Unit: mm

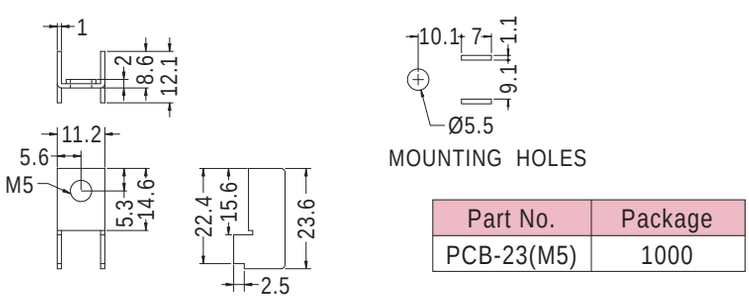


Part No.	Package
PCB-23(M5)	1000

PC 板焊接端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子或汽車保險絲，耐電流大。




- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm

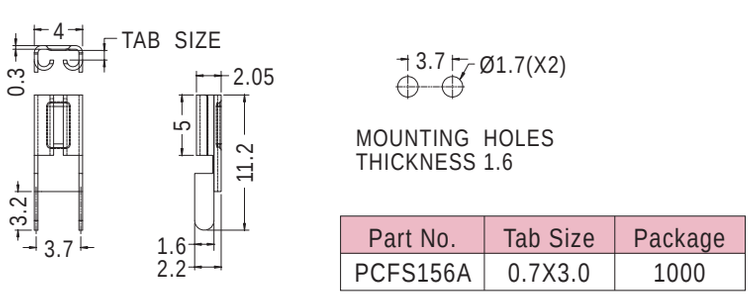


Part No.	Tab Size	Package
PCFS156A	0.7X3.0	1000


PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接公端，耐電流大。

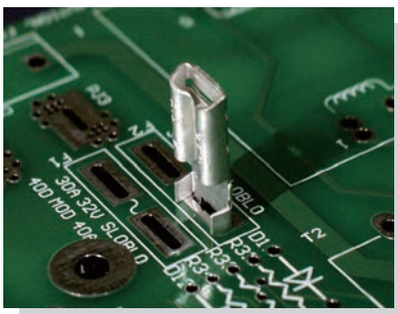

- Material: Tin Plated Brass
- Suggested Current: 10 Amps @ 500V AC
- Unit: mm






MOUNTING HOLES
THICKNESS 0.45


Part No.	Tab Size	Package
PCFS250L	0.8X6.35	1000


PC 板焊接端子 P.C.B TERMINAL

用途：PC板上之焊接電線端子或汽車保險絲，耐電流大。

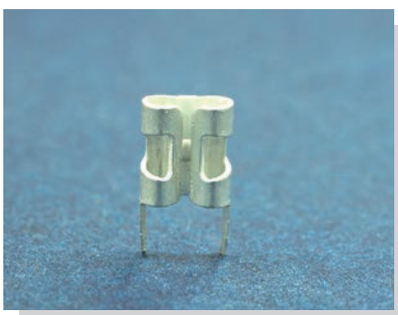

- Material: Tin Plated Brass
- Suggested Current: 10 Amps @ 500V AC
- Unit: mm







MOUNTING HOLES

Part No.	Tab Size	Package
PCFS187	0.81X4.8	1000



- Material: Bright Tin Plated Brass
- Suggested Current: 30 Amps @ 500V AC
- Unit: mm







MOUNTING HOLES

Part No.	Tab Size	Package
PCFS2509A	0.6X6	1000



- Material: Tin Plated Brass
- Suggested Current: 30 Amps @ 500V AC
- Unit: mm



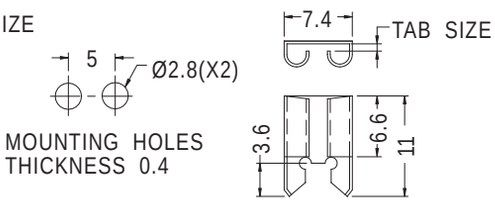


Part No.	Tab Size	Package
PCFS2505	0.5X6.35	1000
PCFS2508	0.8X6.35	


Part No.	Tab Size	Package
PCFS2505A	0.5X6.35	1000
PCFS2508A	0.8X6.35	


PC 板焊接端子 P.C.B TERMINAL

用途：兩個端子對接焊於 PC 板上，牢固，不動搖。

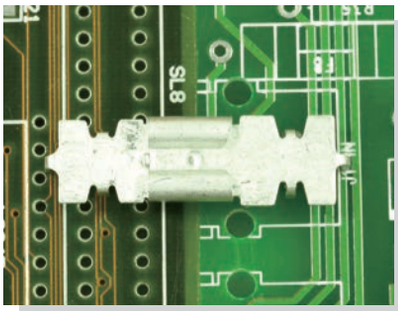


- Material: Brass
- Finish: Tin Plated
- Suggested Current: 10 Amps
- Unit: mm

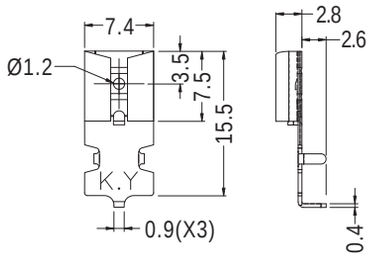

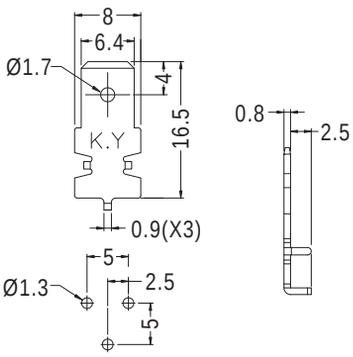


MOUNTING HOLES



COMBINATION ILLUSTRATION DWG
MOUNTING HOLES

Part No.	Package
PCLTM-250	1000




COMBINATION ILLUSTRATION DWG
MOUNTING HOLES


Part No.	Package
PCLT-250	1000

焊接端子 PIN TERMINAL

用途：PC 板上之焊接電線端子，美觀、牢固。

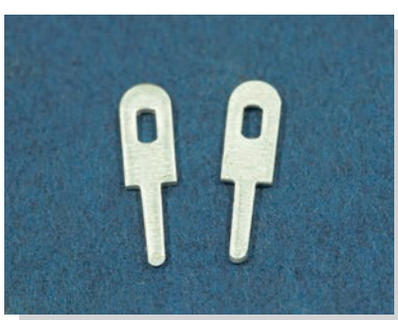

- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm




HOLE IN P.C.B Ø1.2~Ø1.3

Part No.	Package
PIN-1	2000



- Material: Tin Plated Brass
- Suggested Current: 30 Amps
- Unit: mm




HOLE IN P.C.B Ø3.0

Part No.	Package
PIN-2	2000



- Material: Nickel Plated Brass
- Suggested Current: 15 Amps
- Unit: mm




HOLE IN P.C.B Ø1.7


Part No.	Package
PIN-9	1000

PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子。

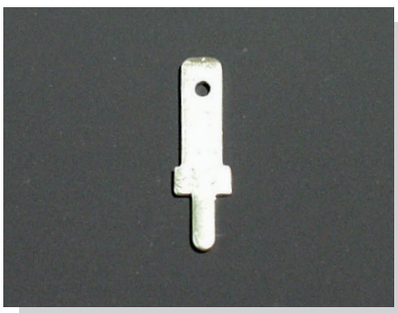

- Material: Tin Plated Brass
- Suggested Current: 10 Amps
- Unit: mm





HOLE IN P.C.B Ø1.7

Part No.	Package
PC110	2000



- Material: Plated Nickel Brass/Plated Tin Brass
- Suggested Current: 15 Amps
- Unit: mm







MOUNTING HOLES

Part No.	A	Package
PC110-1	13.1	2000
PC110-4	12.1	



- Material: Tin Plated Brass
- Unit: mm







MOUNTING HOLES

Part No.	D	I	M	Suggested Current	Package
PC110D5	1.0	0.5	1.3	10 Amps	2000
PC110D5-1	1.3	0.5	1.3		
PC110D8	0.8	0.8	1.5	15 Amps	



- Material: Tin Plated Brass
- Unit: mm





MOUNTING HOLES


Part No.	A	B	I	M	Suggested Current	Package
PC187	13.0	3.4	0.5	1.4	10 Amps	2000
PC187(0.8)	13.0	3.4	0.8	1.5	15 Amps	
PC187-16-1	11.9	2.3	0.8	1.4		


PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







MOUNTING HOLES

Part No.	Package
PC205	2000

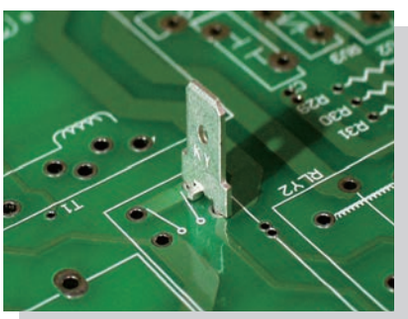

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm





MOUNTING HOLES


Part No.	A	B	Package
PCH250		1.4	1000
PCH250-1	1.1	1.4	


PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子。



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







MOUNTING HOLES

Part No.	Package
PC250	1000



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm





MOUNTING HOLES


Part No.	Package
PC250-8	1000


PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子。




- Material: Nickel Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

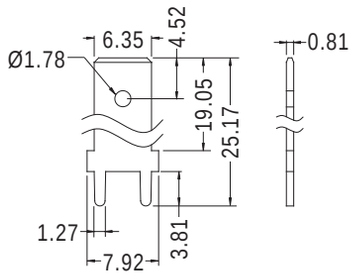





MOUNTING HOLES

Part No.	Package
PC250-4	1000

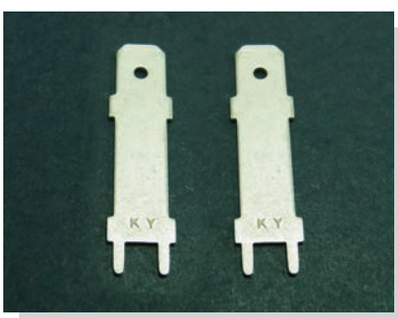


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

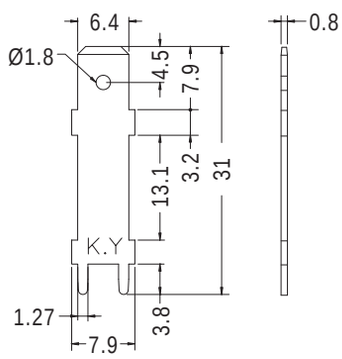





MOUNTING HOLES

Part No.	Package
PC250-11	1000

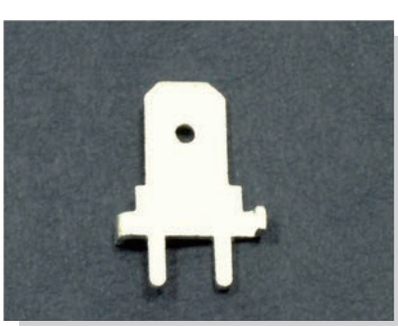


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm







MOUNTING HOLES

Part No.	Package
PCR250	1000

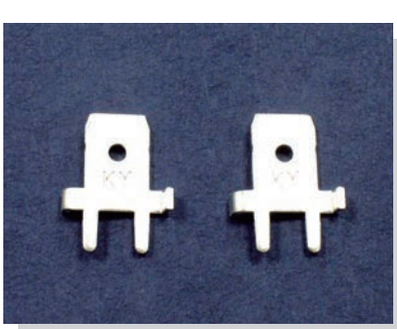

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

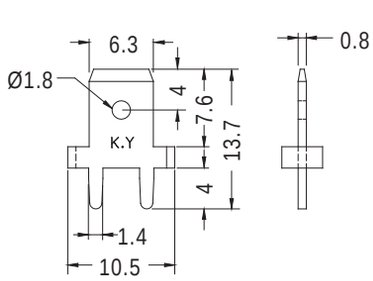



MOUNTING HOLES


Part No.	Package
PCR250-S	1000


PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子。




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

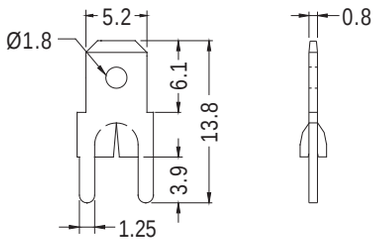





MOUNTING HOLES

Part No.	Package
PCRS205	1000

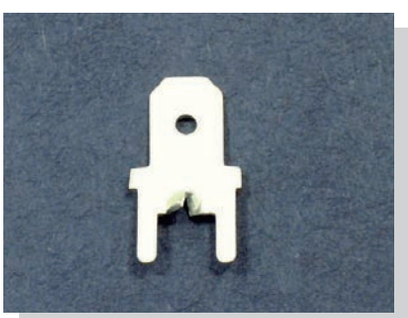

- Material: Tin Plated Brass
- Unit: mm

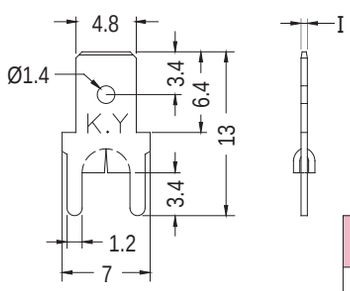





MOUNTING HOLES

Part No.	I	Suggested Current	Package
PCR187	0.5	10 Amps	1000
PCR187(0.8)	0.8	15 Amps	



- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

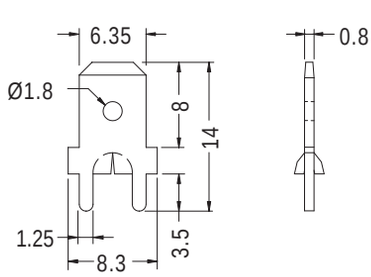




MOUNTING HOLES

Part No.	Package
PCRS250	1000




- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

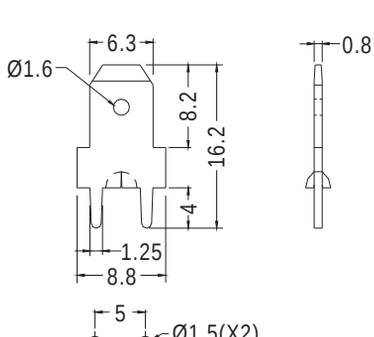

MOUNTING HOLES

Part No.	Package
PCRS250-1	1000

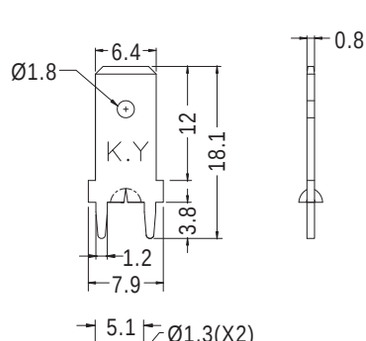


MOUNTING HOLES


Part No.	Package
PCRS250-2	1000


PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子，牢固不動搖。

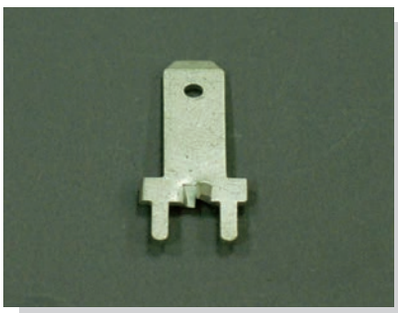

- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

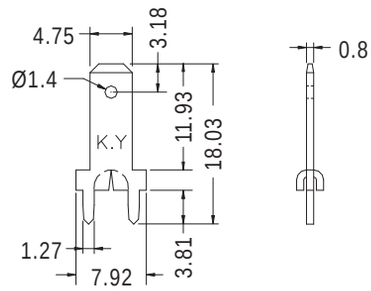





MOUNTING HOLES

Part No.	Package
PCRS187A	1000




- Material: Tin Plated Brass
- Suggested Current: 35 Amps
- Unit: mm

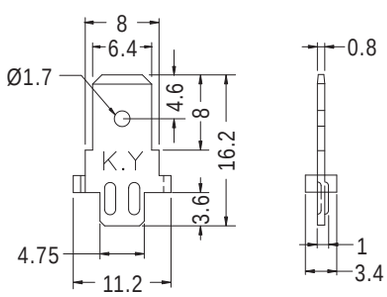





MOUNTING HOLE

Part No.	Package
PCRN250	1000

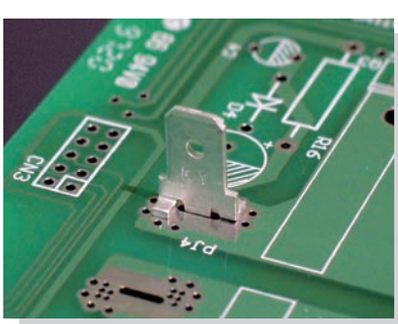

- Material: Tin Plated Brass
- Suggested Current: 25 Amps
- Unit: mm

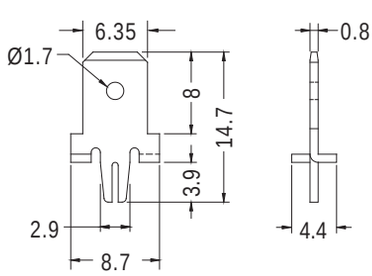




MOUNTING HOLE


Part No.	Package
PCK250	1000

PC 板焊接端子 P.C.B TERMINAL


用途：PC 板上之焊接端子，美觀，牢固。

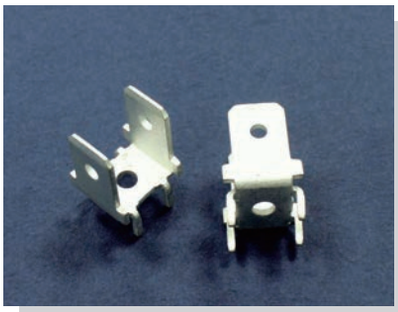


- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

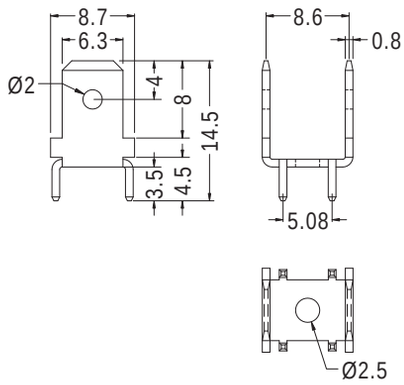

Part No.	Package
PCU250	1000

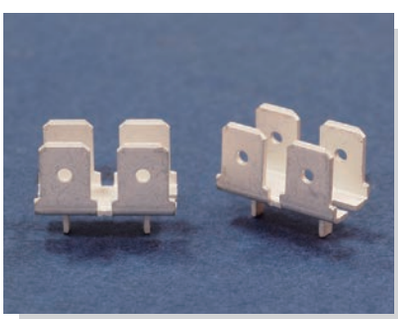


- Material: Tin Plated Brass
- Suggested Current: 20 Amps
- Unit: mm

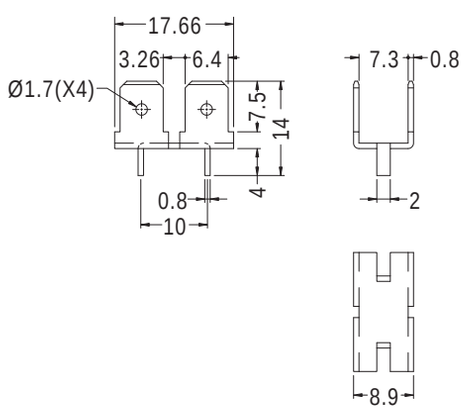


Part No.	Package
PCB-100	1000

PC 板焊接端子 P.C.B TERMINAL

用途：焊接於 PC 板上，另一端插接端子。

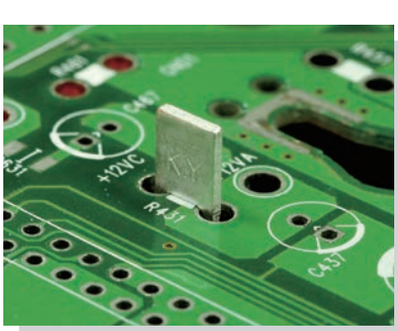


- Material: Brass
- Finish: Tin Plated
- Unit: mm



Part No.	Package
PCLTA-2	1000




- Material: Tin Plated Brass
- Unit: mm

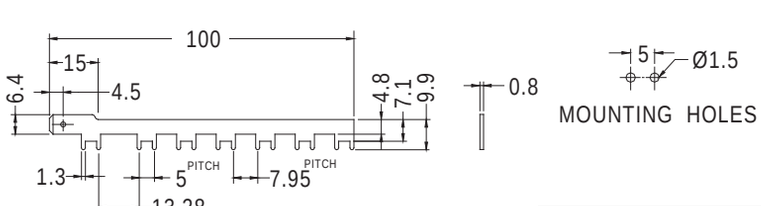


Part No.	Package
PCF250-7	500


PC 板焊接端子 P.C.B TERMINAL

用途： PC 板上之焊接電線端子，耐大電流。

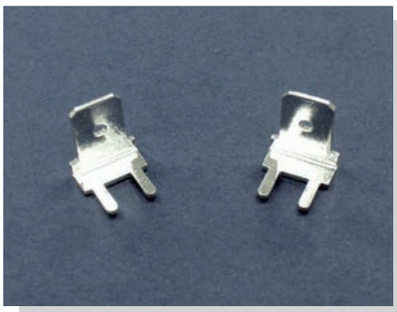


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

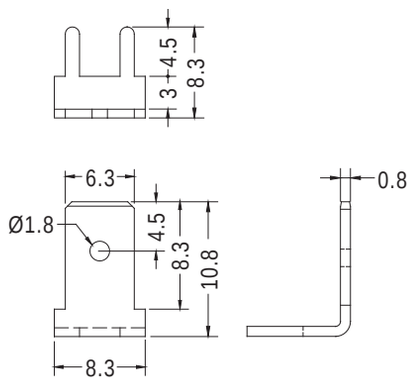




MOUNTING HOLES

Part No.	Package
PC1L250-1A	1000

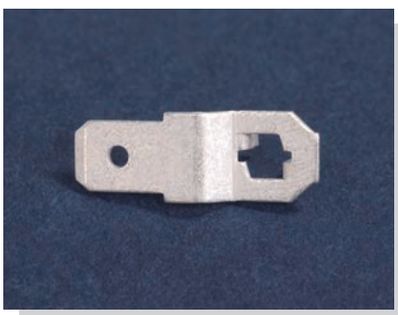


- Material: Tin Plated Brass
- Suggested Current: 15 Amps
- Unit: mm

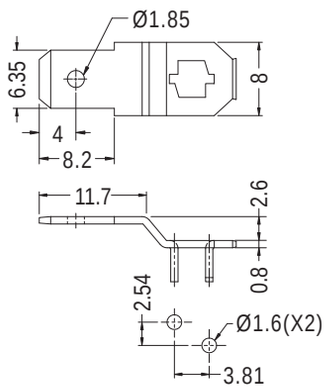


MOUNTING HOLES

Part No.	Package
PC1L250-7	1000

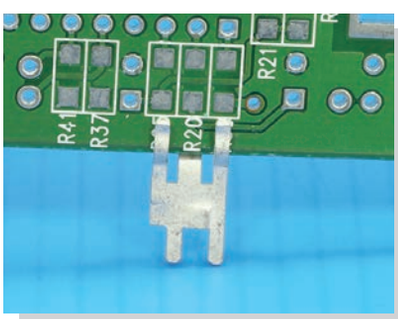

- Material: Tin Plated Brass
- Suggested Current: 5 Amps
- Unit: mm

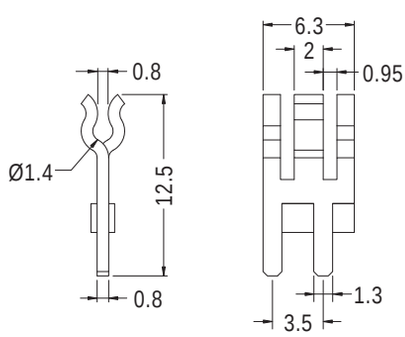


Part No.	Package
EM-408	1000

PC 板端子 P.C.B TERMINAL

用途：可用螺絲鎖於 PC 板上，另一端插接端子。




- Material: Tin Plated Brass
- Unit: mm



Part No.	A	Package
PC1V187	3.7	1000
PC1V18704	4.3	
PC1V18705	5.3	




- Material: Tin Plated Brass
- Unit: mm



Part No.	A	Package
PC1L250	4.3	1000
PC1L25005	5.3	




- Material: Tin Plated Brass
- Unit: mm

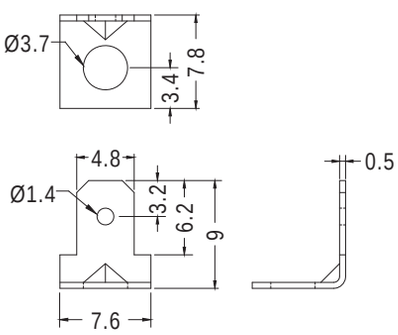

Part No.	Package
PC1L187	1000



- Material: Tin Plated Brass
- Unit: mm

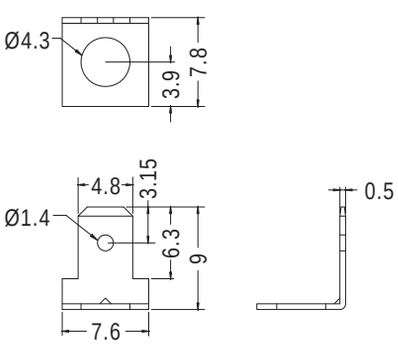


Part No.	Package
PC3L18704	1000

PC 板端子 P.C.B TERMINAL

用途：可用螺絲鎖於 PC 板上，另一端插接端子。




- Material: Tin Plated Brass
- Unit: mm

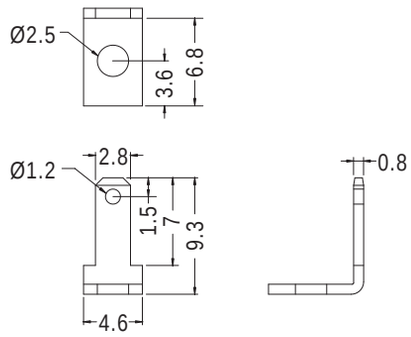

Part No.	Package
PC3L110028	1000




- Material: Tin Plated Brass
- Unit: mm

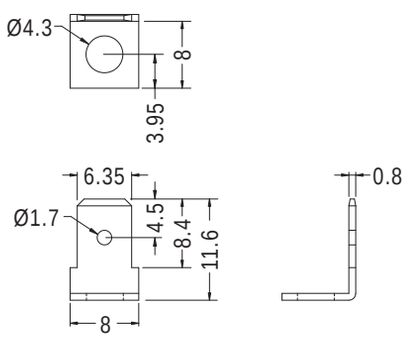

Part No.	Package
PC3L25004	1000




- Material: Tin Plated Brass
- Unit: mm

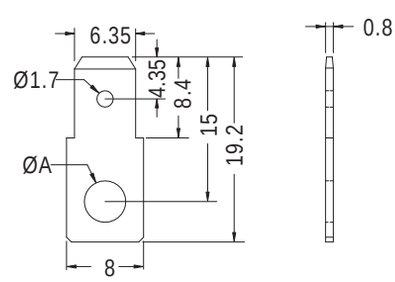

Part No.	A	Package
PC11250	4.3	1000
PC1125003	3.2	
PC1125035	3.5	
PC1125005	5.3	




- Material: Tin Plated Brass
- Unit: mm

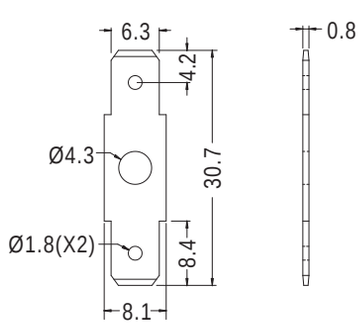


Part No.	Package
PC12250	1000


用途：可用螺絲鎖於 PC 板上，另一端插接端子。

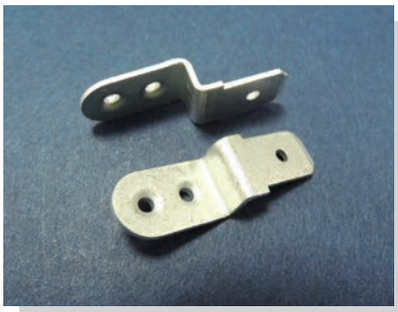


- Material: Brass
- Finish: Tin Plated
- Unit: mm



Part No.	Package
PC1L250-4	1000

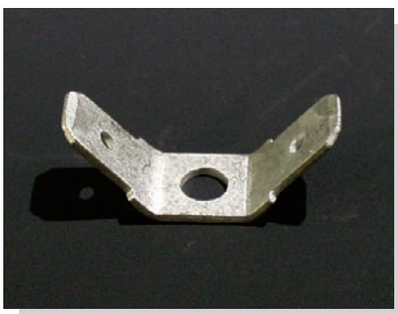


- Material: Tin Plated Brass
- Unit: mm

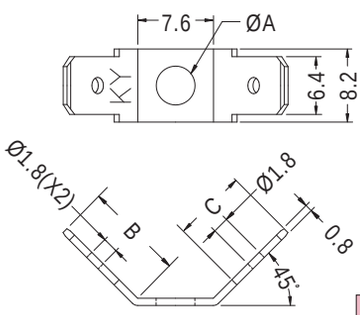


TAB SIZE 0.8X6.35


Part No.	A	B	C	Package
PC2L250	4.3	11	8.4	1000
PC2L25005	5.3	10.6	8.5	

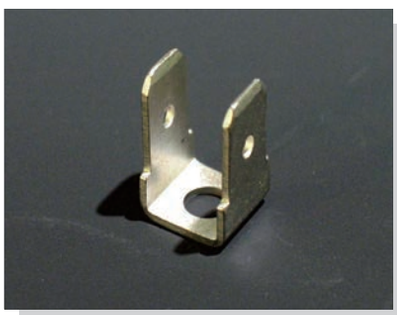


- Material: Tin Plated Brass
- Unit: mm

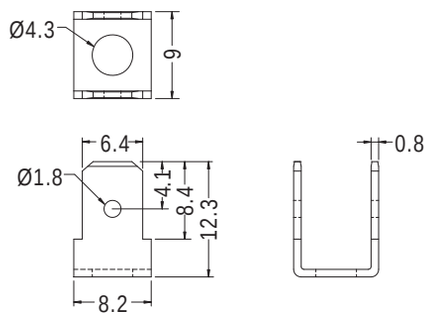

Part No.	Package
PC2L250-90	1000

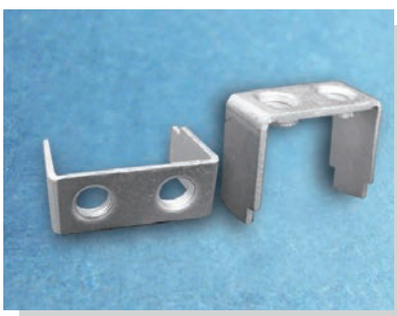


- Material: Phosphor Bronze
- Finish: Tin Plated
- Suggested Current: 25 Amps
- Unit: mm

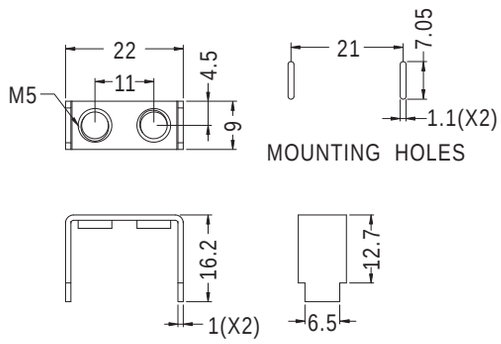

Part No.	Package
PCB-36	500

- Material: Tin Plated Brass
- Unit: mm

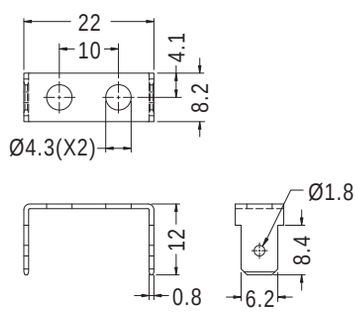


Part No.	Package
PCB-93	500

PC 板端子 P.C.B TERMINAL

用途：PC 板上之焊接電線端子，美觀、牢固，耐電流大，配合螺絲固定端子。



・Material: Tin Plated Brass
・Unit: mm

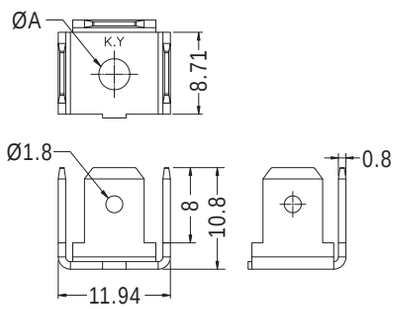


Part No.	A	Package
PC3L250-3	3.3	1000
PC3L250-4	4.3	

PC 板端子 P.C.B TERMINAL


用途：PC 板上之螺絲端子，美觀，牢固。




・Material: SUS
・Unit: mm



Part No.	Package
PCTL-2	1000

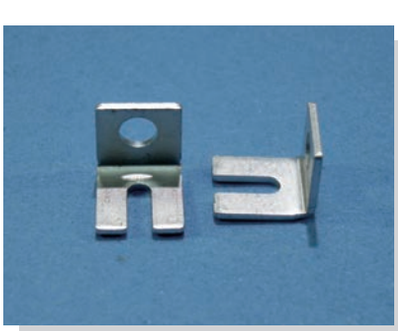

・Material: Tin Plated Brass
・Unit: mm

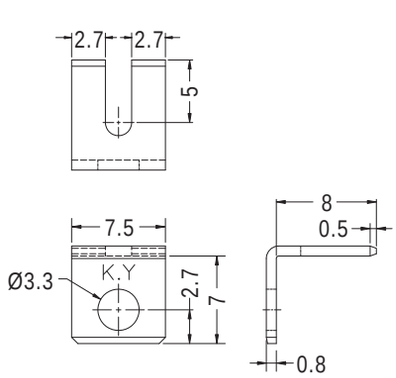


Part No.	Package
PCTL-3.5	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於接地線，另一端用螺絲鎖於機殼。




- Material: Tin Plated Brass
- Unit: mm



Part No.	Package
GND-24	1000




- Material: Nickel Plated Brass
- Unit: mm




Part No.	A	B	C	D	Package
GND-1	3.2	1.6	5.5	14.3	2000
GND-3A	4.1	2.4	6.5	15.5	




- Material: Nickel Plated Brass
- Unit: mm



Part No.	A	B	C	D	E	F	Package
GND-2	3.2	2.1	6.4	12.6	4.0	0.25	2000
GND-3	4.3	2.0	8.0	17.7	4.6	0.3	
GND-4	5.2	2.1	9.9	19.6	5.1		1000
GND-5	8.3	1.9	10.0	15.0	4.0		
GND-6	9.7	2.0	13.0	21.5	4.0	0.4	
GND-10	6.3	2.1	10.0	19.9	5.1	0.3	2000
GND-11	9.0	2.0	13.0	30.0	4.0		1000
GND-17	4.2	1.6	6.8	12.9	3.2	0.4	2000
GND-21	3.7	1.6	6.3	12.6	3.2		
GND-41	3.2	1.5	4.5	12.6	3.0	0.25	
GND-42	2.2	1.5	4.5	12.6	3.0	0.25	

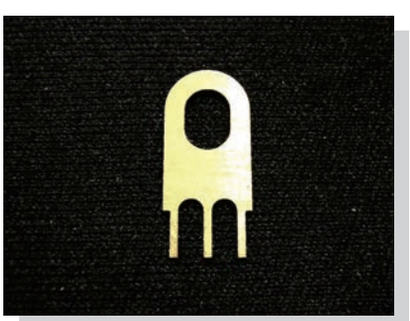

- Material: Tin Plated Brass
- Unit: mm



HOLE IN P.C.B


Part No.	Package
GND-34	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於 PC 板上，再用螺絲固定，接地效果佳。




- Material: Tin Plated Brass
- Unit: mm

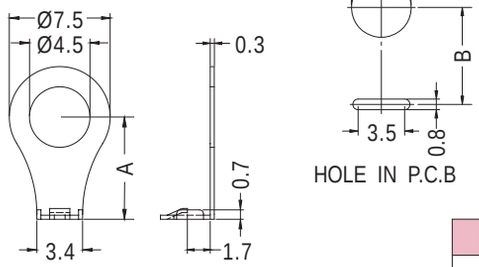

Part No.	A	B	Package
GND-32	7.9	7.6	1000
GND-51	7.6	7.3	




- Material: SPCC
- Finish: Tin Plated Over Brass Base
- Unit: mm

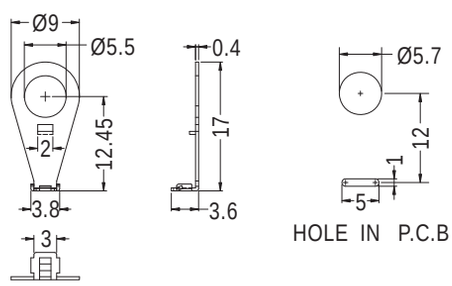

Part No.	Package
GND-96	1000




- Material: Phosphor Bronze With Nickel Plated
- Unit: mm

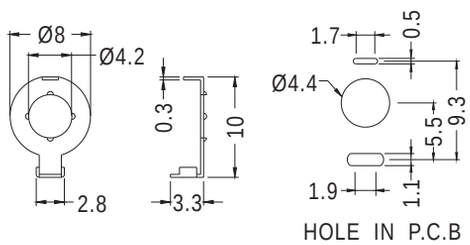

Part No.	Package
GND-7	1000


- Material: Nickel Plated Brass
- Unit: mm

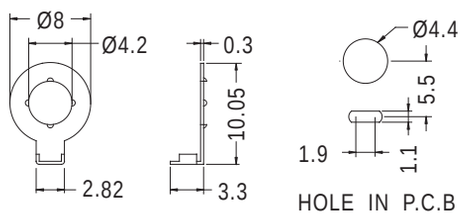

Part No.	Package
GND-14	1000




- Material: Brass With Tin Plated/Nickel Plated
- Unit: mm

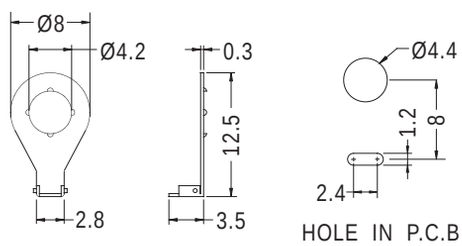


Part No.	Package
GND-8	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於 PC 板上，再用螺絲固定，接地效果佳。

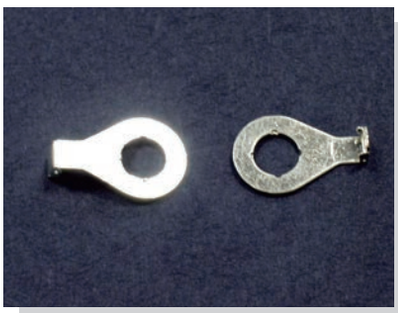


- Material: Phosphor Bronze
- Finish: Nickel Plated
- Unit: mm

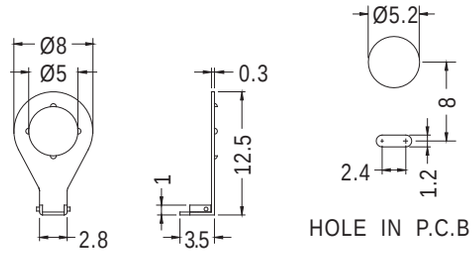

Part No.	Package
GND-20	2000




- Material: Nickel Plated Brass
- Unit: mm

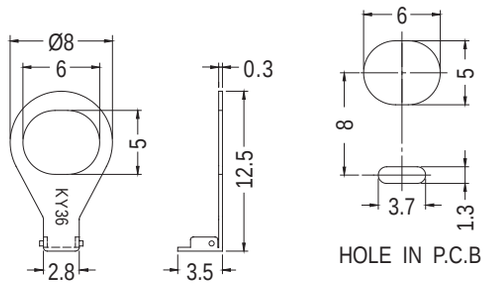

Part No.	Package
GND-36	1000




- Material: Nickel Plated Brass
- Unit: mm

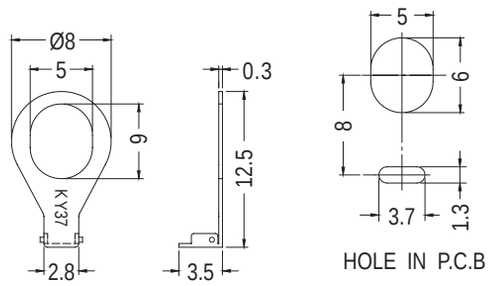

Part No.	Package
GND-37	1000



- Material: Tin Plated Brass
- Unit: mm

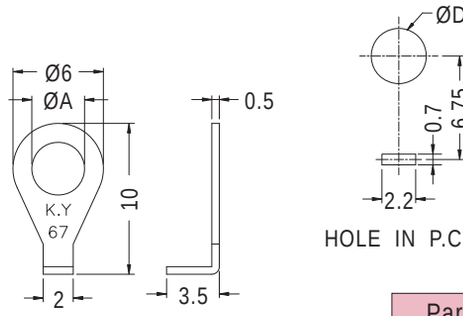


Part No.	A	D	Package
GND-67	3.5	3.6	1000
GND-67(4.0)	4.0	4.1	

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於 PC 板上，再用螺絲固定，接地效果佳。




- Material: Tin Plated Brass
- Unit: mm

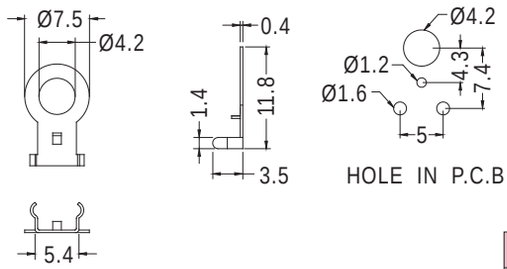

Part No.	Package
GND-13	1000




- Material: Tin Plated Brass
- Unit: mm

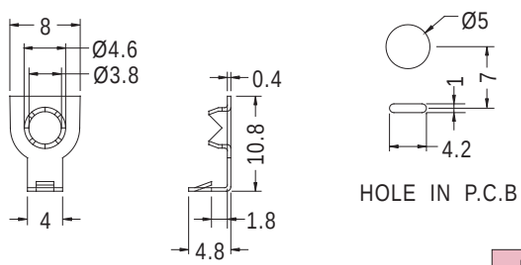

Part No.	Package
GND-12	1000




- Material: Tin Plated Brass
- Unit: mm

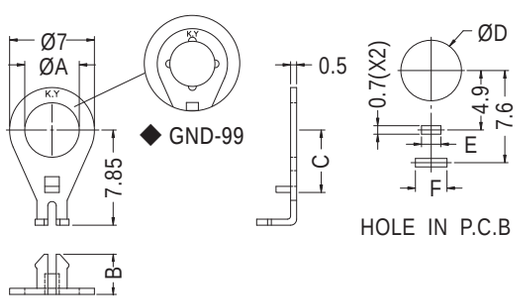

Part No.	A	B	C	D	E	F	Package
GND-15	3.5	4.6	5.1	4.0	1.5	2.7	2000
GND-35	4.5	4.6	5.1	4.5	1.5	2.7	
GND-39	4.5	3.3	5.15	5.0	1.6	2.6	1000
GND-99	4.5	3.3	5.15	5.0	1.6	2.6	



- Material: Tin Plated Brass
- Unit: mm

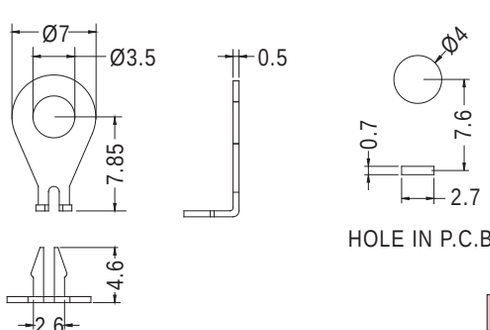


Part No.	Package
GND-23	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於 PC 板上，再用螺絲固定，接地效果佳。




- Material: Tin Plated SPTE
- Unit: mm

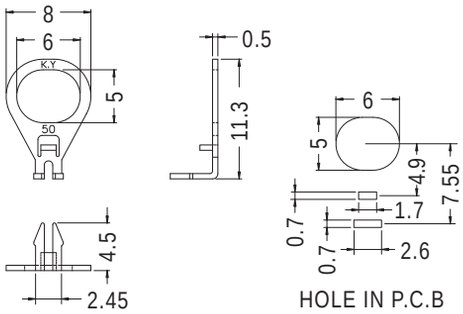

Part No.	Package
GND-50	1000


- Material: Tin Plated Brass
- Unit: mm

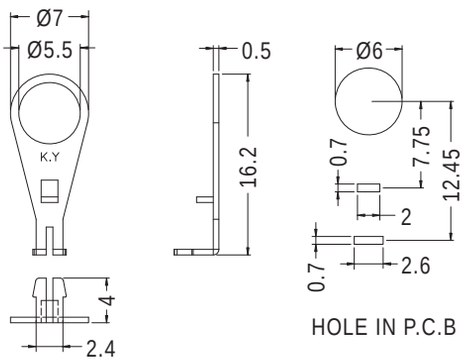


Part No.	Package
GND-55	1000



- Material: Phosphor Bronze
- Finish: Tin Plated
- Unit: mm

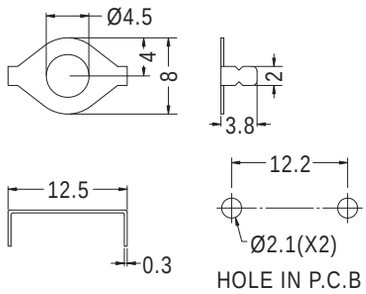


Part No.	Package
GND-44	1000

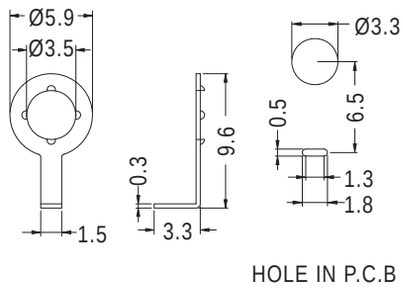


Part No.	Package
GND-49	1000

- Material: Phosphor Bronze
- Finish: Nickel Plated

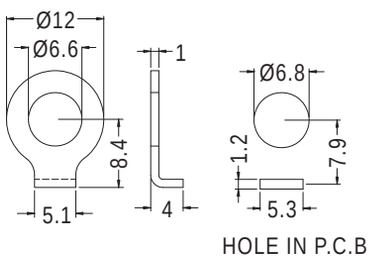


Part No.	Package
GND-52	1000

- Material: Tin Plated Brass



Part No.	Package
GND-54	1000

- Material: Tin Plated SPCC

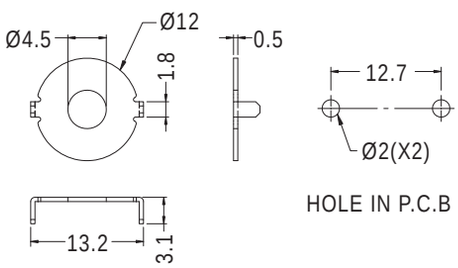


Part No.	Package
GND-56A	1000


接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於 PC 板上，再用螺絲固定，接地效果佳。



- Material: Phosphor Bronze
- Finish: Tin Plated
- Unit: mm






Part No.	Package
GND-74	1000

接地片 GROUND TERMINAL

用途：用於電子、電腦儀器接地端點，一端焊於接地線，另一端用螺絲鎖於機殼。



- Material: Nickel Plated Bronze
- Unit: mm

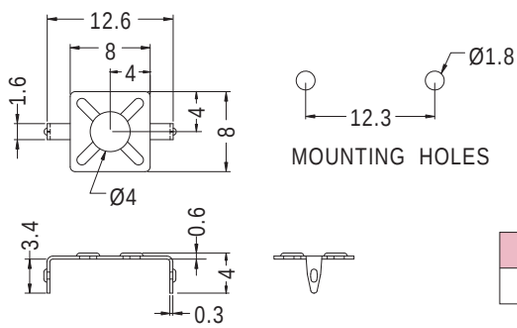


Part No.	Package
PCB-41A	1000

熱敏電阻座 GROUND TERMINAL


用途：用於熱敏電阻之固定。



- Material: Nickel Plated Brass
- Unit: mm




Part No.	Package
GND-27	1000



Part No.	Package
GND-48	1000




- Material: Brass
- Finish: Bright Tin Plated
- Unit: mm

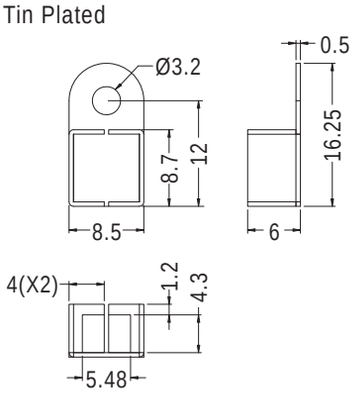


Part No.	Package
GND-75	1000

電晶體夾 TRANSISTOR CLIP

用途：用於零件之夾持。

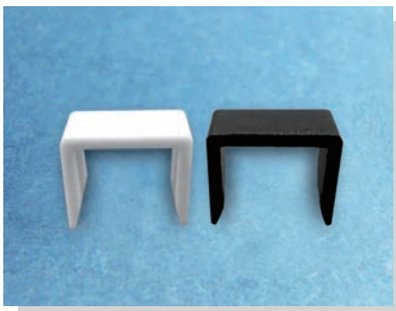


- Material: PBT (UL)
- Flame Class: 94V-0
- Color: Natural/Black
- Unit: mm




Part No.	A	Package
TRCMP-3	7.9	1000
TRCMP-4	8.6	

電晶體夾 TRANSISTOR CLIP


用途：用於功率晶體及散熱片之固定，可配合灌膠使用。

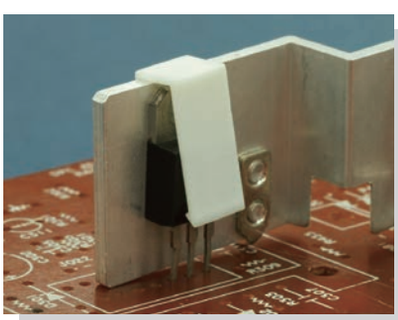

- Material: Nylon 66 (UL)/PBT (UL)
- Flame Class: 94V-0
- Color: Natural
- Unit: mm



Part No.	A	B	C	D	Package
TRCMP-1	7.8	13.62	7.3	5.5	1000




Part No.	A	B	C	D	E	Package
TRCMP-2	8.0	12.55	7.0	5.2	10.0	1000
TRCMP-5	8.0	12.6	7.5	5.7	10.0	
TRCMP-6	8.0	17.25	6.8	5.0	14.7	

電晶體固定彈片 TR. CLAMP


用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。




- Material: SUS
- Unit: mm




Part No.	Package
TRMC-7	1000




Part No.	Package
TRMC-154	1000




Part No.	Package
TRMC-20	1000




Part No.	Package
TRMC-23	1000




Part No.	Package
TRMC-26	1000




Part No.	Package
TRMC-34	1000




Part No.	Package
TRMC-35	1000



Part No.	Package
TRMC-40	1000




Part No.	Package
TRMC-49	1000




Part No.	A	B	C	D	E	Package
TRMC-76	8.0	6.1	3.5	3.5	13.0	1000
TRMC-77	6.9	7.5	4.5	4.0	11.0	
TRMC-78	6.9	8.5	5.8	4.0	11.0	

電晶體固定彈片 TR. CLAMP


用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。

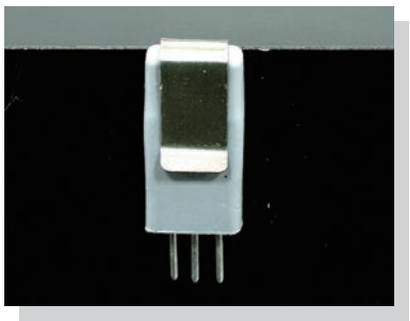


- Material: SUS
- Unit: mm




Part No.	Package
TRMC-59	1000




Part No.	Package
TRMC-61	1000




Part No.	Package
TRMC-9	1000




Part No.	Package
TRMC-17	1000




Part No.	Package
TRMC-30	1000




Part No.	Package
TRMC-1	1000




Part No.	Package
TRMC-2	1000




Part No.	Package
TRMC-5	1000




Part No.	Package
TRMC-6	1000



Part No.	Package
TRMC-122	1000




Part No.	A	B	Package
TRMC-123	7.1	5.3	1000
TRMC-124	7.22	5.35	




Part No.	Package
TRMC-141	1000

電晶體固定彈片 TR. CLAMP

用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。

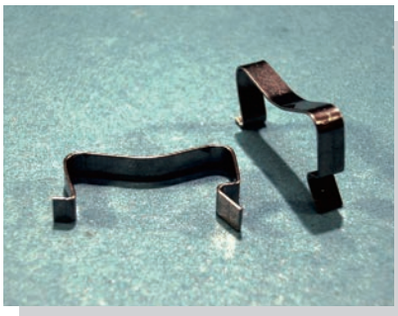


・Material: SUS
・Unit: mm

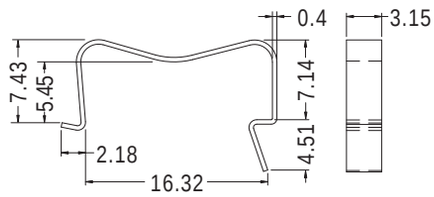


Part No.	Package
TRMC-8	1000




・Material: SUS
・Unit: mm



Part No.	A	Package
TRMC-121	5.0	1000
TRMC-126	4.72	

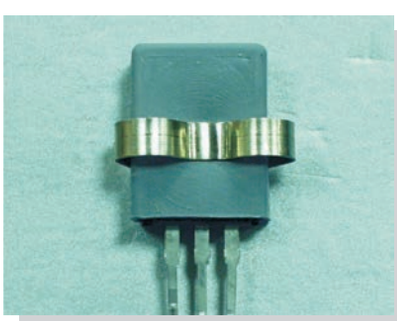

・Material: SUS
・Unit: mm

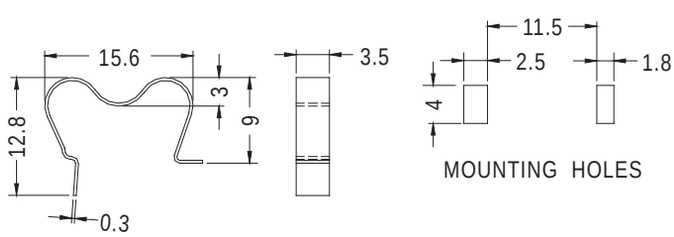


Part No.	Package
TO-220ST	1000

電晶體固定彈片 TR. CLAMP

用途：可將功率晶體快速固定於散熱片上，方便。



・Material: SUS
・Unit: mm

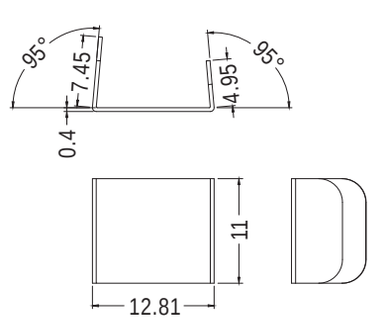


Part No.	Package
TRMC-135	1000

彈片 CLAMP

用途：做為彈片。




- Material: SK7
- Finish: Zinc Plated
- Unit: mm




Part No.	Package
TRMC-68	1000

彈片 CLAMP


用途：做為導電彈片。

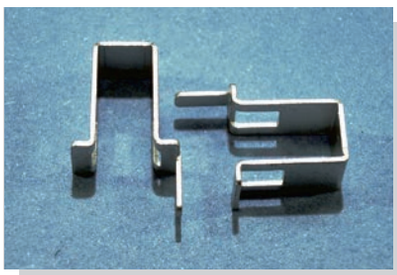


- Material: Tin Plated SPCC
- Unit: mm



Part No.	Package
TRMC-10	1000

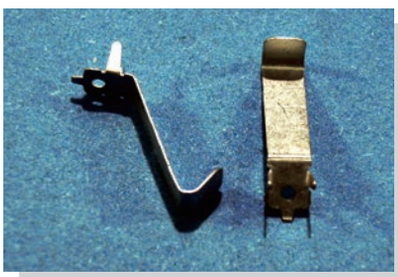


- Material: Tin Plated Phosphor Bronze
- Unit: mm

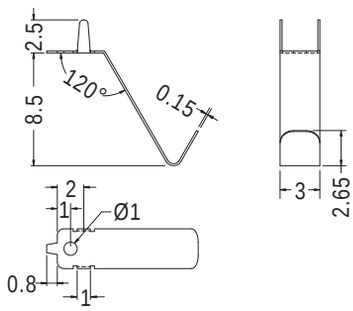


Part No.	Package
TRMC-11	2000

彈片 CLAMP

用途：做為彈片使用，彈性佳。

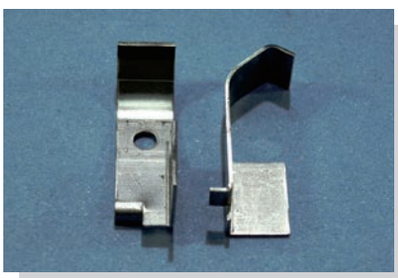

- Material: SUS
- Unit: mm

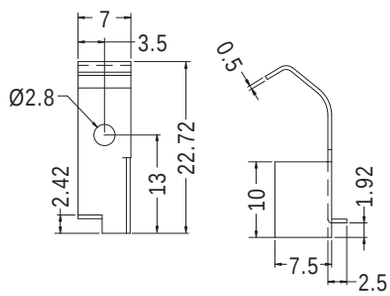


Part No.	Package
TRMC-12	1000

彈片 CLAMP

用途：做為插梢彈片。




- Material: Tin Plated Brass
- Unit: mm




Part No.	Package
TRMC-53	1000


AAA電池彈片 POSITIVE AAA BATTERY CONTACT


用途：用於3號電池的彈片。

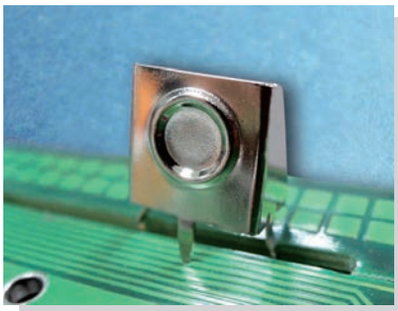

- Material: Spring Steel
- Finish: Nickel Plated
- Unit: mm









Part No.	Package
PCB-67	1000


AAA電池彈片 NEGATIVE AAA BATTERY CONTACT


用途：用於3號電池的彈片。

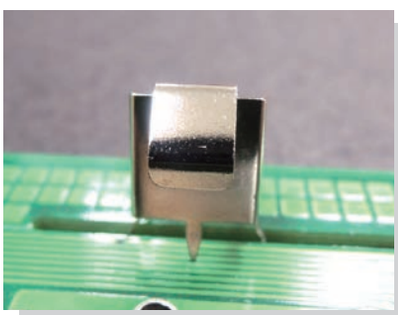

- Material: Spring Steel
- Finish: Nickel Plated
- Unit: mm









Part No.	Package
PCB-68	1000

功率晶體壓板 POWER TRANSISTOR CLAMP DEPRESSOR


用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。

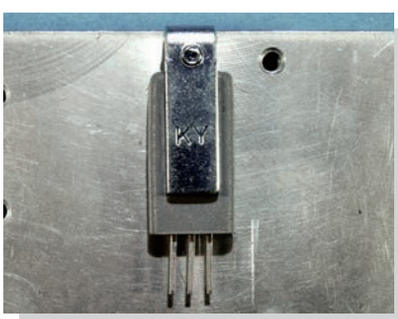


- Material: Zinc Plated SPCC
- Unit: mm




Part No.	Package
TRK-11	500




Part No.	Package
TRK-54	500

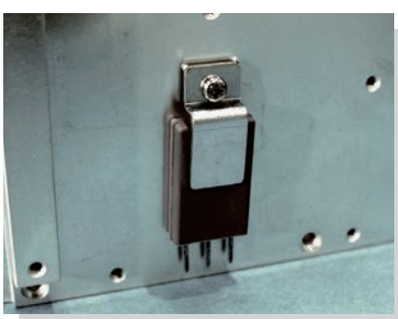

- Material: Zinc Plated Steel
- Unit: mm



Part No.	Package
TRK-1	250




Part No.	Package
TRK-2	250


功率晶體壓板 POWER TRANSISTOR CLAMP DEPRESSOR

用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。




- Material: SUS
- Unit: mm






Part No.	Package
TRK-6	1000


Part No.	Package
TRK-67	1000

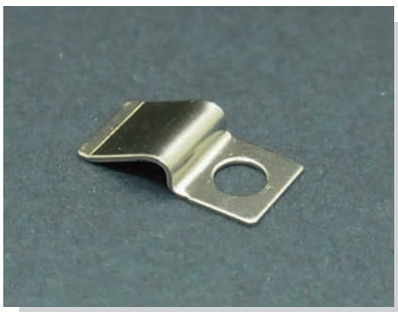

- Material: SUS
- Unit: mm




- Material: Zinc Plated Steel





◆ TRK-56

Part No.	A	B	C	D	E	Package
TRK-24	12.33	6.35	6.0	2.8	3.2	2000
TRK-52	12.73	6.35	6.8	3.2	3.4	
TRK-56	26.0	15.0	10.0	5.0	3.2	1000

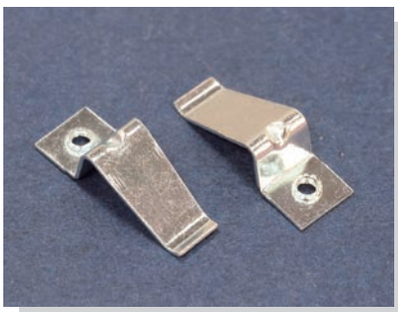

- Material: Spring Stainless
- Finish: Zinc Plated
- Unit: mm







Part No.	Package
TRK-40	500



- Material: SUS
- Unit: mm






Part No.	Package
TRK-22	1000

功率晶體壓板 POWER TRANSISTOR CLAMP DEPRESSOR


用途：可將功率晶體快速固定於散熱片上，方便、耐高壓。




- Material: Zinc Plated K5
- Unit: mm




Part No.	Package
TRK-12	1000

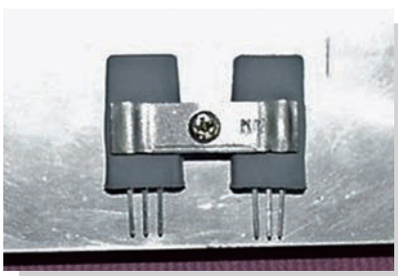


- Material: Steel
- Unit: mm




Part No.	Package
TRK-8	500



Part No.	Package
TRK-9	500

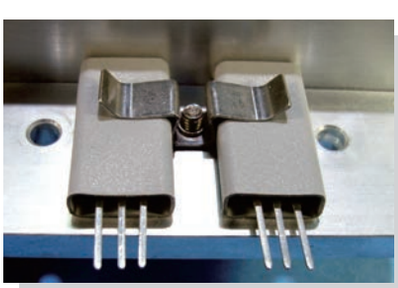

- Material: Steel
- Unit: mm




Part No.	T	Package
TRK-10	M3X0.5P	1000
TRK-10(M4)	M4X0.8P	
TRK-10(632)	6-32 UNC	

壓板 DEPRESSOR

用途：用於壓著電子零件或功率晶體。




- Material: Nylon 66 (UL) 94V-2
- Metal Material: SUS
- Color: Black
- Unit: mm



Part No.	Package
TRK-17AF	1000



- Material: Nylon 66 (UL) 94V-2
- Metal Material: SUS
- Color: Black
- Unit: mm




Part No.	Package
TRK-16F	1000

阻尼齒輪 DAMPER GEAR

用途：用於音響或電腦外殼使開關門平順緩慢，增加質感。



- Gear Material: POM (UL) 94HB
- Body Material: PC (UL) 94V-2
- Color: Black
- Unit: mm




Part No.	Package
DP023A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20°




- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm



Part No.	Package
DP016A	500

DP016A Module	0.7
Pitch Circle Diameter	Ø9.1
Teeth Number	13
Pressure Angle	20º




Part No.	Package
DP019A	500

DP019A Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20º



- Gear Material: POM(UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm



Part No.	Package
DP028A	500


Module	1.0
Pitch Circle Diameter	Ø12.0
Teeth Number	12
Pressure Angle	20°

阻尼齒輪 DAMPER GEAR

用途：用於音響或電腦外殼使開關門平順緩慢，增加質感。




- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

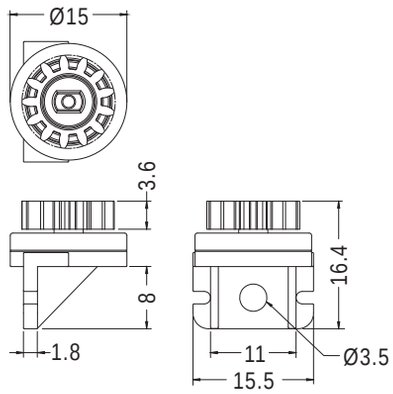

Part No.	Package
DP025A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	14.5°

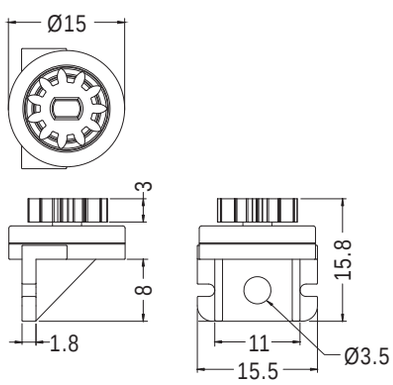


Part No.	Package
DP026A	500

Module	0.8
Pitch Circle Diameter	Ø8.8
Teeth Number	11
Pressure Angle	20°



- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

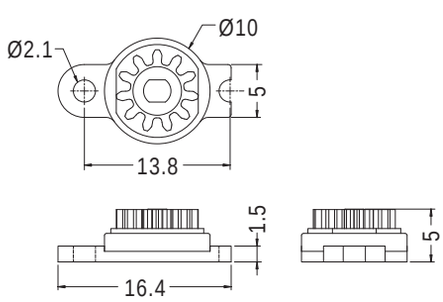

Part No.	Package
DP006A	500


Module	0.6
Pitch Circle Diameter	Ø6.6
Teeth Number	11
Pressure Angle	20°

阻尼齒輪 DAMPER GEAR

用途：用於音響或電腦外殼使開關門平順緩慢，增加質感。



- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

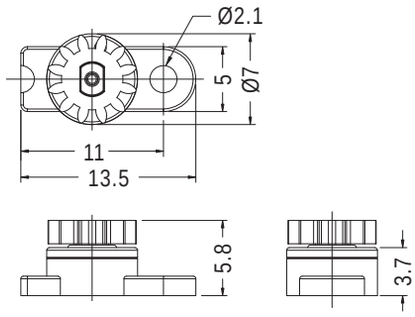


Part No.	Package
DP032A	500

Module	0.5
Pitch Circle Diameter	Ø6.0
Teeth Number	12
Pressure Angle	20°




- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

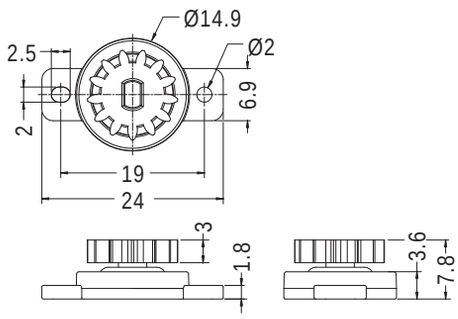


Part No.	Package
DP008A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20°

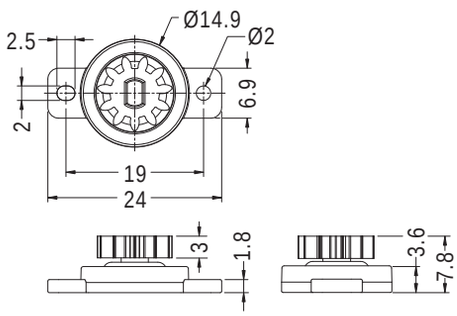

Part No.	Package
DP018A	500

Module	0.8
Pitch Circle Diameter	Ø8.8
Teeth Number	11
Pressure Angle	20°

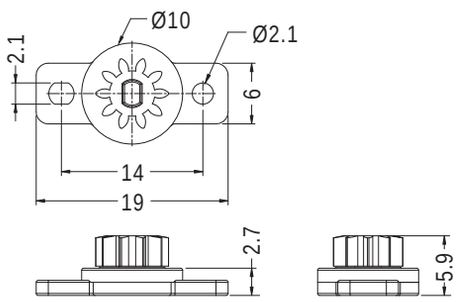

Part No.	Package
DP030A	500


Module	0.6
Pitch Circle Diameter	Ø6.0
Teeth Number	10
Pressure Angle	20°

阻尼齒輪 DAMPER GEAR

用途：用於音響或電腦外殼，使開關門平順緩慢，增加質感。




- Gear Material: POM (UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

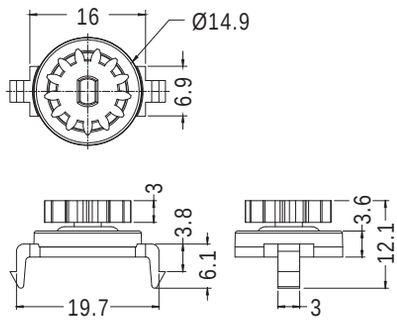

Part No.	Package
DP007A	500

Module	0.8
Pitch Circle Diameter	Ø10.4
Teeth Number	13
Pressure Angle	20°

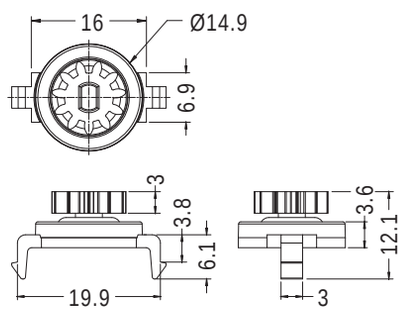


Part No.	Package
DP017A	500

Module	0.8
Pitch Circle Diameter	Ø8.8
Teeth Number	11
Pressure Angle	20°



- Gear Material: POM(UL) 94HB
- Body Material: ABS (UL) 94HB
- Color: Black
- Unit: mm

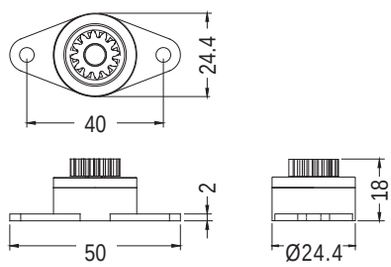


Part No.	Package
DP010A	500

Module	1.0
Pitch Circle Diameter	Ø12.0
Teeth Number	12
Pressure Angle	20°



- Gear Material: POM (UL) 94HB
- Body Material: PC (UL) 94V-2
- Color: Black
- Unit: mm

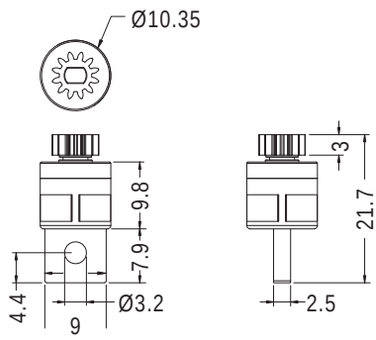


Part No.	Package
DP013A	500


Module	0.5
Pitch Circle Diameter	Ø6.0
Teeth Number	12
Pressure Angle	20°

塑膠齒輪 PLASTIC GEAR

用途：做為齒輪使用。

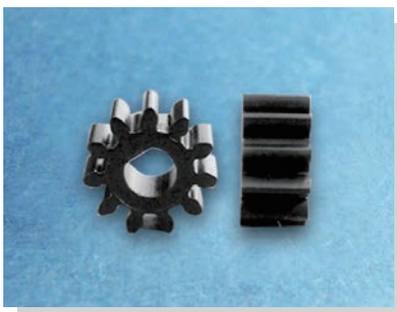

- Material: POM
- Color: Black
- Unit: mm

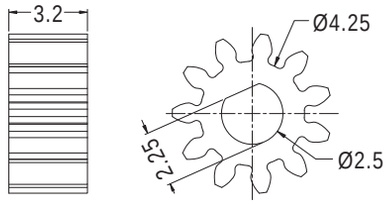


Part No.	Package
GRAP-1	1000

連接器 MINI JUMP

用途：讓連接器兩個端點導通。




- Housing Material: PBT
- Terminal Material: Brass
- Finish: Gold Plated
- Unit: mm



Part No.	Color	Package
MINI-1	Black	1000
MINI-1(R)	Red	
MINI-1(Y)	Yellow	
MINI-1(G)	Green	
MINI-1(BU)	Blue	



- Material: Nylon 66
- Terminal Material: Brass
- Unit: mm



Part No.	Package
MINI-2	1000

	Part No.	Page
0	1216	5-1
	0.7-	1-117
	010406	5-7
	012-958	7-42
	0609C	5-2
	0811	5-1
	0813	5-1
	0813C	5-2
1	1.2-	1-117
	1.4-3	1-117
	1.6-	1-117
	1.7-11.3	1-117
	1012-26	1-118
	10459	5-29
	10-6	1-118
	12.4-5	1-118
	12.8-35	1-118
	1216C	5-2
	13-5	1-118
	1419C	5-2
2	2-	1-118
	2.05-3.5	1-117
	2.1-2.1	1-117
	2.2-	1-117
	2.3-	1-117
	2.4-9.4	1-117
	2.5-	1-117
	2.6-	1-118
	2.7-	1-117
	2.73-2.3	1-117
	2.8-3.8	1-117
	2.95-8	1-117
	20.5-9.5	1-118
	2-3-1.9	1-117
	29-16	1-118
	2L-10	4-128
	2L-7	4-128
	2L-8	4-128
	2P-1	5-33
	2P-4	5-34
	2WCA-2	4-150
3	3-	1-119
	3.1-	1-117
	3.2-	1-117
	3.35-5	1-117
	3.5-	1-120
	3.55-	1-117
	3.5-5.5	1-117
	3.6-	1-117
	3.7-10	1-117
	3.9-5.3	1-117
	3.95-3.8	1-117
	312-3	5-1
	3-5.8	1-117
	375-4	5-1
	3MB	10-1
	3MR	10-1
	3MY	10-1
	3P-4	5-34
	3W-1	5-34

	Part No.	Page
3	3WC-2	4-150
	3WC-4	4-150
4	4-	1-120
	4.1-2.5	1-117
	4.2-	1-117
	4.4-	1-117
	4.5-	1-117
	4.7-3.5	1-117
	4.9-	1-117
	4K-4	5-34
	4N-4	5-34
	4WC-4	4-150
5	5-	1-117
	5.1-12.7	1-117
	5.2-	1-117
	5.4-122	1-117
	5.5-4	1-117
	5.55-11.8	1-117
	5.7-	1-117
	5N-4	5-34
	5P-4	5-34
	5WC-3	4-151
	5WC-3.5	4-151
6	6-	1-117
	6-	1-118
	6.2-	1-117
	6.3-	1-117
	6.4-	1-117
	6.5-3	1-118
	6.8-5	1-118
	6.9-12.7	1-118
	6-13A	1-114
	6432-6.4	1-117
	6N3-4	5-34
	6N-4	5-34
	6P3-4	5-34
	6P-4	5-34
7	7-	1-118
	7.5-	1-118
	7N-2	5-34
	7P-2	5-34
8	8.2-5.5	1-118
	8.4-5	1-118
	8.5-	1-118
	8-16	1-118
9	9.1-7.5	1-118
	9.25-4	1-118
	9.5-34	1-118
	9-15	1-114
A	ABSC-2318	6-101
	ACB-	1-71
	ACB-2.3	1-71
	ACB-2.5	1-71
	ACB-3	1-71
	ACBR-6	1-71
	ACBW-6.8	1-80
	ACSR-7	7-84
	ACSRA-4	5-29
	ACSRA-4.4	5-28
	ACSRB-6	5-28

	Part No.	Page
A	ACSRC-4.1	5-28
	ACSRD-6.2	5-29
	AIM25071	4-52
	ALACO-01	4-37
	ALACO-02	4-37
	ALUCA-	1-110
	ANTCA-1	5-18
	ANTCA-2	5-19
	ANTCV-2	5-18
	ANTL-1	5-19
	ASFF-1A	9-19
	ASFF-1B	9-19
	ASID-	7-17
	ASR-	1-92
	ASS-	1-94
	ASS-12.7L	1-94
	ASS-15.3S	1-94
	ASUS-1	5-63
	ASUS-3	5-63
	ATFF-1	8-13
	AWC-	4-25
	AWC-2A	4-25
	AWCA-1N	4-26
	AWCB-1	4-26
	AWD-	4-92
	AWE-1	4-25
	AWK-10	4-92
	AWK-16	4-92
	AWKA-1	4-92
	AWKA-2	4-92
B	BASE-L5	7-51
	BCB-16	6-85
	BCB-30	6-85
	BCC-	6-85
	BCC-16S	6-85
	BCG-250	8-32
	BCG-450	8-32
	BGCA-22	6-52
	BGCB-30	6-52
	BGCV-15	6-51
	BGCV-22	6-51
	BGCV-23	6-52
	BGCV-30	6-51
	BNC-2	7-17
	BNC-4	7-17
	BNCH-1	7-17
	BPLT-13	1-163
	BPLT-9	1-163
	BPLTA-3	7-84
	BRP1-	7-75
	BS-	1-75
	BS-15S	1-75
	BSB-6	1-75
	BSB632-15.9	1-78
	BSB-8.5	1-75
	BSC632-	1-79
	BSCB-10	1-78
	BSCB-12	1-78
	BSCB-15	1-78
	BSCB-20	1-78

	Part No.	Page
B	BSCB4-10	1-78
	BSCB4-8	1-78
	BSCB-6	1-78
	BSCL-9.5	1-76
	BSCM4-	1-79
	BSD632-	1-79
	BSDM4-	1-79
	BSE-2.2	1-85
	BSE-2.2L	1-85
	BSS-12	1-93
	BSS-6	1-93
	BSS-9	1-93
	BUB-	7-86
	BUB-	7-88
	BUB-124	7-91
	BUB-126	7-87
	BUB-127	7-89
	BUB-130I	7-86
	BUB-132	7-93
	BUB-133	7-93
	BUB-136	7-91
	BUB-138	7-91
	BUB-139	7-92
	BUB-152	7-87
	BUB-155	7-91
	BUB-159	7-90
	BUB-16.7	7-93
	BUB-161I	7-89
	BUB-171	7-93
	BUB-172	7-91
	BUB-175L	7-90
	BUB-177	7-93
	BUB-179	7-90
	BUB-180	7-87
	BUB-182	7-87
	BUB-189	7-85
	BUB-194	7-87
	BUB-196	7-91
	BUB-202	7-87
	BUB-205	7-87
	BUB-209	7-86
	BUB-213	7-86
	BUB-217	7-92
	BUB-218	7-87
	BUB-23I	7-86
	BUB-25.5I	7-86
	BUB-26	7-88
	BUB-29	7-85
	BUB-30	7-85
	BUB-30L	7-85
	BUB-32	7-87
	BUB-4	7-88
	BUB-45	7-89
	BUB-45I	7-89
	BUB-65-1	7-88
	BUB-66	7-89
	BUB-68	7-88
	BUB-72	7-88
	BUB-79	7-89
	BUB-7I	7-86

	Part No.	Page
B	BUB-85I	7-89
	BUB-86I	7-92
	BUB-90	7-91
	BUB-95	7-91
	BUB-96	7-87
	BUB-96-1	7-87
	BUB-97	7-87
	BUC-2	7-85
	BW-1	6-34
	BW-2	6-34
	BWC-1	6-52
	BWC-2	6-52
C	C3	10-4
	C4	10-4
	C5	10-4
	C8	10-4
	CABOX-1	5-89
	CABOX-2	5-89
	CABOX-3	5-89
	CABOX-5	5-89
	CABOX-6	5-90
	CABOX-7	5-90
	CAM-12	8-5
	CAPH-10	6-80
	CAPI-18	6-80
	CAPJ-18	6-80
	CAPL-3.5	6-80
	CAPR-10	7-61
	CAPX-6	6-81
	CAV-1	7-114
	CBCS-14	1-40
	CBLSS-	1-44
	CBS-	1-45
	CBSA-13	1-39
	CBSS-	1-43
	CC-	4-139
	CC-1S	4-139
	CC-1SS	4-139
	CC-21	4-139
	CC-23	4-139
	CC-24	4-139
	CC-25	4-139
	CC-26	4-139
	CC-28	4-140
	CC-29	4-140
	CC-42	4-140
	CC-45	4-139
	CC-46	4-140
	CC-49	4-140
	CC-4L	4-139
	CC-53	4-140
	CC-54	4-140
	CC-55	4-141
	CC-56	4-141
	CC-5L	4-139
	CC-7S	4-139
	CCA-1	4-144
	CCA-2	4-144
	CCB-	4-144
	CCE-1	4-44

	Part No.	Page
	CCF-1	4-140
	CCHD-172	4-128
	CCHD-175	4-128
	CCHD-210	4-128
	CCHD-220	4-128
	CCHD-231	4-128
	CCM-1	4-135
	CCMA-30	4-19
	CCMA-40	4-19
	CCMB-10	4-19
	CCMB-15	4-19
	CCMB-30	4-19
	CCMB-31	4-19
	CCMC-1	4-20
	CCMD-1	4-20
	CCME-1	4-136
	CCMF-1	4-135
	CCMF-2	4-134
	CCMF-3	4-134
	CCMF-5	4-135
	CCMF-7	4-135
	CCMG-1	4-145
	CCMH-12	4-18
	CCMH-15.1	4-18
	CCMH-50	4-19
	CCMH-7.5	4-18
	CCMHA-6	4-19
	CCMI-1	4-90
	CCMJ-1	4-149
C	CCMK-1	4-90
	CCMK-2	4-90
	CCMT-2	4-136
	CCMV-1	4-136
	CCMW-1	4-137
	CCMW-2	4-137
	CCMW-3	4-136
	CCO-1	4-141
	CCO-2	4-141
	CCO-4	4-141
	CCO-5	4-141
	CCO-6	4-141
	CCP-2	4-140
	CCU-1	4-138
	CCU-2	4-138
	CCU-3	4-138
	CCU-4	4-138
	CD-	4-143
	CD-12.7-3.2	4-143
	CD-16-1	4-143
	CD-3.4	4-142
	CD-5	4-142
	CD-6	4-142
	CD-6S	4-142
	CD-9.2	4-142
	CD-9.2S	4-142
	CDELT-1	5-23
	CDELT-11	5-23
	CDELT-12	5-24
	CDELT-2	7-47
	CDELT-3	7-47

	Part No.	Page
	CDELT-4	5-23
	CDELT-6	5-23
	CDELT-7	5-23
	CDK-1	4-146
	CDK-2	4-147
	CDK-3	4-146
	CDK-3-1	4-146
	CDK-5	4-146
	CDK-6	4-147
	CDKW-6	4-142
	CDKW-6-3	4-142
	CDKW-9.2	4-142
	CDMCV-1	7-22
	CDMCV-2	7-22
	CDV-2.3	4-143
	CDV-3.2	4-143
	CE1	10-4
	CE2	10-4
	CE5	10-4
	CE8	10-4
	CFC-1	7-9
	CFMG-1	4-52
	CG-	8-29
	CG-	8-31
	CG-10A	8-27
	CG-110	8-30
	CG-120	8-30
	CG-140	8-33
	CG-15	8-28
C	CG-153	8-29
	CG-191	8-30
	CG-218	8-30
	CG-26	8-28
	CG-280	8-34
	CG-30	8-37
	CG-300L	8-31
	CG-38	8-28
	CG-38L	8-28
	CG-45	8-32
	CG-450S	8-31
	CG-50	8-28
	CG-50S	8-28
	CG-63	8-29
	CG-77	8-29
	CG-9A	8-26
	CG-9AL	8-26
	CG-9B	8-27
	CG-9D	8-28
	CGA-	8-34
	CGA-102	8-33
	CGA-140	8-35
	CGA-178S	8-34
	CGB-	8-26
	CGB-100L	8-26
	CGB-2	8-43
	CGB-6	8-43
	CGBB-100	8-26
	CGBC-89	8-25
	CGC-1	8-41
	CGC-43	8-28

	Part No.	Page
	CGDLA-102	8-33
	CGDLA-102L	8-33
	CGDLA-350	8-33
	CGDLA-57	8-36
	CGDLB-57	8-36
	CGE-169	8-27
	CGF-218	8-30
	CGH-1	8-38
	CGH-130	8-42
	CGH-31	8-41
	CGH-31L	8-41
	CGH-37	8-41
	CGH-37L	8-41
	CGH-90	8-42
	CGHA-65	8-42
	CGHB-65	8-42
	CGHB-90	8-42
	CGHC-	8-40
	CGHE-	8-40
	CGHI-1	8-40
	CGL-4	8-35
	CGL-8	8-35
	CGLA-	8-35
	CGLA-10	8-35
	CGLA-11	8-35
	CGLC-120	8-37
	CGLC-120S	8-37
	CGLC-153	8-37
	CGLC-30	8-36
C	CGLC-32-1	8-36
	CGLC-32-2	8-36
	CGLC-50.8	8-37
	CGLC-8	8-36
	CGLD-50	8-38
	CGLE-18	1-110
	CGLF-32	1-110
	CGLG-47	8-38
	CGLI-100	8-38
	CGLJ-110	8-32
	CGLM-1	8-39
	CGLM-113	8-39
	CGLM-113-M2	8-39
	CGLN-113	8-39
	CGLN-113-M2	8-39
	CGLN-2	8-39
	CGLN-2-M2	8-39
	CGLN-3	8-39
	CGS-280	8-33
	CG-XXXA	8-31
	CH-	4-72
	CH-1	4-105
	CH-12	4-88
	CH-14	4-72
	CH-15	4-73
	CH-15L	4-73
	CH-9	4-88
	CHA-	4-69
	CHA-10	4-70
	CHA-1L	4-69
	CHA-2L	4-69

	Part No.	Page
	CHA-6L	4-69
	CHA-8	4-69
	CHAA-1	4-76
	CHAA-3	4-76
	CHAB-1	4-66
	CHAB-1L	4-66
	CHAB-2	4-66
	CHAB-3	4-66
	CHAC-	4-103
	CHAC-1L	4-103
	CHAC-4	4-103
	CHAC-5-1	4-104
	CHACA-1	4-104
	CHACB-1	4-104
	CHAD-1	4-71
	CHAE-1	4-65
	CHAE-1S	4-65
	CHAF-3	4-76
	CHAH-1	4-74
	CHAH-2	4-74
	CHAU-1	4-78
	CHAW-1	4-66
	CHBA-1	4-64
	CHBA-2	4-64
	CHBB-1.6	4-54
	CHBB-1.7	4-54
	CHBB-2	4-54
	CHBB-2-0.8	4-54
	CHBB-2-1	4-54
C	CHBB2-2	4-54
	CHBB2-2-0.8	4-54
	CHBB2-2-1.2	4-54
	CHBB-5	4-54
	CHBB-5-0.8	4-54
	CHBB-5-1	4-54
	CHBD-1	4-55
	CHC-	4-107
	CHC-4	4-107
	CHC-6	4-107
	CHCA-1	4-109
	CHCK-1	4-102
	CHCK-2	4-102
	CHCS-1	4-107
	CHD15-34	4-75
	CHD-18	4-75
	CHD-19	4-75
	CHD-20	4-76
	CHD35-40	4-75
	CHE-1	4-74
	CHE-2	4-74
	CHE-3	4-74
	CHF-1	4-73
	CHF-2	4-73
	CHF-3	4-73
	CHH-1	4-107
	CHH-2	4-107
	CHH-3	4-106
	CHI-3	4-101
	CHI-6	4-101
	CHJ-3	4-105

	Part No.	Page
	CHK-12	4-101
	CHK-13	4-101
	CHK-14	4-101
	CHK-15	4-101
	CHK-6	4-101
	CHK-8	4-101
	CHKA-1	4-108
	CHKC-1	4-109
	CHL-3	4-104
	CHLB-1	4-109
	CHM-10	4-106
	CHM-20	4-106
	CHMK-1	4-110
	CHMK-2	4-110
	CHMK-3	4-110
	CHN-10	4-91
	CHN-12	4-91
	CHN-7.6	4-91
	CHO-10	4-22
	CHO-12	4-22
	CHO-7.6	4-22
	CHP-1	4-69
	CHP-2	4-69
	CHP-3	4-69
	CHPA-1	4-70
	CHPB-1	4-71
	CHQ-4	4-88
	CHQ-4.5	4-88
	CHQ-4L	4-88
C	CHQC-1	4-89
	CHQC-1L	4-89
	CHQE-1	4-89
	CHQF-1	4-89
	CHR-11	4-70
	CHS-	6-74
	CHSA-	6-86
	CHSA-1	6-86
	CHT-42	4-77
	CHU-1	4-43
	CHUA-1	4-43
	CHUA-2	4-43
	CHUB-1	4-43
	CHUC-1	4-44
	CHUE-1	4-44
	CHUK-1	4-137
	CHV-59	4-78
	CHV-59K	4-78
	CHW-1	4-110
	CHW-1T	4-111
	CHW-2	4-110
	CHWA-2	4-102
	CHWB-1	4-10
	CHWB-2	4-10
	CHWB-4	4-10
	CHWC-1	4-9
	CHWC-2	4-9
	CHWC-3	4-9
	CHWC-6	4-9
	CHWE-1	4-109
	CHWE-1M	4-109

	Part No.	Page
C	CHWE-1S	4-109
	CHWK-1	4-102
	CHWS-	4-103
	CHWT-	4-105
	CHWT-3.4S	4-105
	CHX-1	4-70
	CHY-1	4-62
	CHY-1S	4-62
	CHZ-	4-108
	CHZA-	4-108
	CHZB-1	4-108
	CHZC-	4-73
	CJCV-1	7-7
	CJCV-11	7-8
	CJCV-2	7-7
	CJCV-3	7-6
	CJCV-4	7-7
	CJCV-6	7-8
	CJCV-7	7-6
	CKS-	4-91
	CKS-20-H	4-91
	CKSA-20-L	4-91
	CKS-XX-L	4-91
	CL-	4-55
	CLB-1	4-56
	CLDK-1	6-83
	CLE-1	4-56
	CLE-3	4-56
	CLF-2	4-57
	CLF-3	4-57
	CLF-4	4-57
	CLG-1	4-57
	CLH-6	4-147
	CLI-4	4-148
	CLI-5	4-148
	CLI-6	4-148
	CLIA-3	4-146
	CLM-7.5	4-155
	CLS-1	4-156
	CLS-2	4-156
	CLT-1	4-152
	CLT-10	4-154
	CLT-14	4-154
	CLT-18	4-153
	CLT-19	4-153
	CLT-2	4-152
	CLT-20	4-154
	CLT-4	4-152
	CLT-5	4-153
	CLT-6	4-153
	CLT-7	4-155
	CLT-8	4-154
	CLT-9	4-155
	CLU-1	4-148
	CM-	4-129
	CM-1	4-129
	CM-18	4-129
	CM-19L	4-129
	CM-19S	4-130
	CM-25	4-130

	Part No.	Page
C	CM-28	4-130
	CM-28S	4-129
	CM-29	4-130
	CM-30	4-131
	CMG-1	4-51
	CMG-2	4-52
	CMKB-1	4-77
	CNPS8000	7-84
	COC2-0.5	6-70
	COC3-1	6-70
	COC5-4	6-70
	COC8-5	2-5
	COCA3.5-2.3	6-70
	COCA3-0.6	6-70
	COCA4-0.6	6-70
	COCE-1	6-70
	COCF-1	6-69
	COILC-21	6-76
	COVER-1	7-6
	COVER-11	7-25
	COVER-12	7-25
	COVER-14	7-34
	COVER-3	7-25
	COVER-4	7-34
	COVER-5	6-15
	COVER-6	7-34
	COVER-7	7-34
	CP-15	8-22
	CP-20	8-22
	CP-25	8-22
	CP-30	8-22
	CP-35	8-25
	CP-37	8-23
	CP-38	8-23
	CP-38L	8-23
	CP-47	8-23
	CP-50	8-24
	CP-70	8-24
	CP-72	8-24
	CP-76	8-25
	CP-77	8-25
	CP-82	8-24
	CP-84	8-25
	CP-90	8-23
	CPU140920A	6-87
	CR32-	7-82
	CR40-	7-82
	CR48-	7-82
	CR56-	7-82
	CRCAM-1	7-13
	CRDCV-56	7-49
	CRG	9-31
	CRJ-11	7-18
	CRJ-11-2	7-18
	CRJ-11-2S	7-18
	CRJ-11-3	7-18
	CRJ-11-4I	7-18
	CRJ-11-5	7-19
	CRJ-11-6	7-18
	CRJ-11-7	7-19

	Part No.	Page
C	CRJ-11S	7-18
	CRJ-12	7-19
	CRK5-15	7-65
	CSATA-1	7-26
	CSS-	1-93
	CSSA-2	1-93
	CTBX-1	5-63
	CTBXA-1	5-63
	CUS-5	1-88
	CV145107	7-50
	CVA-5	7-33
	CVA-8	7-41
	CVER-1	6-93
	CVP-250	7-34
	CVR-	7-49
	CVR-1394	7-35
	CVR-1394-1	7-35
	CVR-1394-2	7-35
	CVR-1394-3	7-35
	CVR-1394S	7-35
	CVR-2508	7-40
	CVR-3213	7-41
	CVR-3318	7-40
	CVR-3325	7-40
	CVR-3413	7-41
	CVR-3421	7-40
	CVR-3423	7-40
	CVR-3912	7-49
	CVR-4098	7-40
	CVR-4415	7-40
	CVR-6118	7-41
	CVRB-1394	7-35
	CVRD-1394	7-35
	CVSATA-15	7-27
	CVSATA-15S	7-27
	CVSATA-7	7-27
	CVSATAA-15	7-27
	CW-	6-84
	CW-10S	6-84
	CW-2	6-84
	CW-25S	6-84
	CW-3	6-84
	CW-35L	6-84
	CWCA-10	6-85
	CWCA-16	6-85
	CWCD-2	6-84
	CWCD-3	6-84
	CWCD-5	6-84
	CWCD-6	6-84
	CWCD-7	6-84
	CWCK-10	6-81
	CWK-1	4-5
	CWL-15	6-79
	CWL-22	6-79
	CWT-10	6-77
	CWT-11	6-77
	CWT-5	6-77
	CWT-8	6-77
	CXP-1	7-24
	CXP-2	7-24

	Part No.	Page
D	DC-1	4-100
	DC-1.5	4-100
	DCB-	1-66
	DCB-15L	1-66
	DCB-15S	1-66
	DCB-8(2)	1-66
	DCBA-3.5	1-66
	DCBA-8	1-66
	DCB-XXD	1-66
	DCC-	1-60
	DCC-9.5L	1-60
	DCCA-4.3	1-61
	DCCB-4.1	1-61
	DCE-4	1-60
	DCVER-1	7-6
	DDMC-5.5	1-163
	DELT-19	1-108
	DELT-20	6-83
	DELT-21	9-15
	DELT-25	1-108
	DELTA-3	1-114
	DGB-19	5-26
	DGB-19A	5-26
	DGB-25	5-26
	DGB-26	5-26
	DGB-40	5-26
	DGBB-1	5-27
	DKCV-1	7-33
	DKHR-1	5-15
	DKHR-7	5-15
	DKHR-9	5-15
	DL-	7-57
	DLB-1	7-61
	DMSA-9	1-33
	DMSB-5	1-28
	DMSB-8	1-28
	DMSC-4.5	1-30
	DMSP-11.1	1-31
	DMSP-4.8	1-31
	DMSP-6.4	1-31
	DMSPS-	1-31
	DMSPS-17.5S	1-31
	DMSS-28	1-28
	DMSS-38	1-28
	DP006A	10-56
	DP007A	10-58
	DP008A	10-57
	DP010A	10-58
	DP013A	10-58
	DP016A	10-55
	DP017A	10-58
	DP018A	10-57
	DP019A	10-55
	DP023A	10-55
	DP025A	10-56
	DP026A	10-56
	DP028A	10-55
	DP030A	10-57
	DP032A	10-57
	DPC-1	7-28

	Part No.	Page
D	DPC-2	7-28
	DPC-3	7-28
	DPC-3L	7-28
	DRAMCV-2	7-49
	DRAMCV-4	7-49
	DRCB-18	1-13
	DT-1	7-103
	DT-10	7-106
	DT-11	7-106
	DT-12	7-105
	DT-14	7-105
	DT-16	7-103
	DT-18	7-103
	DT-19	7-104
	DT-21	7-104
	DT-22	7-104
	DT-4	7-103
	DT-42	7-107
	DT-43A	7-108
	DT-43B	7-108
	DT-45A	7-107
	DT-45B	7-107
	DT-45BL	7-107
	DT-46A	7-107
	DT-46B	7-107
	DT-47B	7-108
	DT-48A	7-106
	DT-48B	7-106
	DT-49	7-106
	DT-50	7-105
	DTA-1	7-105
	DTA-3	7-105
	DTA-4	7-104
	DTA-42	7-107
	DTB-1F	7-108
	DTC-20	7-31
	DTC-26	7-31
	DTC-37M	7-31
	DTC-37ML	7-32
	DTC-50M	7-31
	DTC-50S	7-31
	DTC-68M	7-31
	DTC-9MS	7-31
	DTC-XXF	7-31
	DTC-XXM	7-31
	DTM-1	7-108
	DTM-2	7-109
	DTTL-1A	7-101
	DTTL-1B	7-101
	DTTL-3A	7-101
	DTTL-3B	7-101
	DTTL-4	7-101
	DTTL-5B	7-101
	DVDS-12	1-89
	DVDS-5	1-89
	DVDS-9	1-89
	DVI-1	5-25
	DVI-2	5-25
	DVIC-1	7-32
	DVIC-2-N	7-32

	Part No.	Page
D	DVT-1	6-74
E	EDC-	1-2
	EDGE-1	4-76
	ELED-1	2-22
	ELH2-27	2-21
	EM-18-	6-41
	EM-19	6-105
	EM-303	7-7
	EM-303-1	7-7
	EM-40-	6-41
	EM-408	10-36
	EM-45	2-24
	EM-45-	2-24
	EM-51	6-37
	EM-514H	4-156
	EM-528	8-13
	EM-535	6-41
	EM-550	4-55
	EM-551	4-55
	EM-552	4-55
	EM-579	6-31
	EM-580	6-32
	EM-581	6-32
	EM-582	6-32
	EM-583	6-32
	EM-63	6-37
	EM-646	4-156
	EM-682	1-109
	EMAC-463	6-105
	EMC-1	7-7
	EMC-40	8-4
	EMC-41	8-4
	EMD-10	6-41
	EMD-106	6-37
	EMD-108	6-37
	EMD-109	6-37
	EMD-118	6-39
	EMD-129	6-40
	EMD-131	6-40
	EMD-136	6-39
	EMD-14	6-39
	EMD-140	6-40
	EMD-141	2-36
	EMD-142	6-37
	EMD-147	6-40
	EMD-203	6-39
	EMD-25	6-39
	EMD-260	6-37
	EMD-29	6-40
	EMD-42	6-37
	EMD-78-	6-41
	EMF-6	4-90
	EML-10	6-38
	EML-13	6-38
	EML-22	6-38
	EML-23	6-38
	EML-52	6-38
	EML-7	6-38
	EMP1-6	2-51

	Part No.	Page
E	EMP1-XX-F	2-51
	EMP2-	2-53
	EMP5-29.3	2-51
	EMS-1	7-114
	EMU-5	7-102
	ES-1	1-82
	ES-2	1-83
	ESATA-7	7-27
	ESATA-7-1	7-27
	ESS-1	1-83
	ESS-19	1-85
	ESS-2	1-84
	ESS-3	1-83
	ESS6-2.5	1-84
	ESS-7.6	1-84
	ETS-	1-84
	ETS-3.2-	1-84
	ETS-3-1	1-84
	ETS-7M	1-84
	ETSA-3.5	1-84
	ETSB-6	1-85
	ETSS-6.5	1-84
	EVA120430	9-29
	EVA862	9-29
F	F8040	6-93
	FANCS-3	7-115
	FANCV-1	7-115
	FANCV-3	7-116
	FANCV-5	7-116
	FANCV-9	7-116
	FBT-	4-163
	FC-19	4-1
	FC-19L	4-1
	FCA-	4-2
	FCAB-1	4-2
	FCAB-2	4-3
	FCAB-3	4-3
	FCAB-7	4-2
	FCAM-1	4-15
	FCB-1	4-14
	FCB-40	4-14
	FCB-40M	4-14
	FCB-40MT	4-14
	FCB-50	4-14
	FCC-15	4-1
	FCC-20	4-1
	FCC-25	4-1
	FCCA-1	4-83
	FCCB-1	4-83
	FCCD-1	4-84
	FCCT-12	4-84
	FCD-1	4-18
	FCD-2	4-18
	FCD-35	4-18
	FCD-40	4-18
	FCD-50	4-18
	FCE-1	4-15
	FCE-2	4-15
	FCE-3	4-16
	FCE-30	4-4

	Part No.	Page
F	FCE-40	4-4
	FCG-15	4-84
	FCH-29	4-6
	FCH-30	4-6
	FCH-30-1	4-6
	FCH-50	4-6
	FCH-80	4-6
	FCHA-1	4-6
	FCI-1	4-14
	FCI-2	4-15
	FCJ-30	4-16
	FCJ-30S	4-16
	FCJ-40	4-4
	FCJA-1	4-10
	FCK-50	4-15
	FCL-33	4-13
	FCN-	4-1
	FCP-22	4-35
	FCP-22SN	4-35
	FCP-25	4-35
	FCPT-1	4-85
	FCS-15	4-13
	FCS-20	4-13
	FCS-31	4-4
	FCSA-2	4-7
	FCSA-3	4-7
	FCSA-6	4-7
	FCSA-7	4-7
	FCT-1	4-11
	FCT-11	4-12
	FCT-12	4-12
	FCT-1L	4-11
	FCT-2	4-11
	FCT-3	4-11
	FCT-4	4-11
	FCT-4M	4-11
	FCT-4S	4-11
	FCT-5	4-11
	FCT-6	4-12
	FCT-6L	4-12
	FCT-7	4-12
	FCT-8	4-12
	FCT-9	4-12
	FCTB-1	4-12
	FCTB-2	4-12
	FCTC-1	4-13
	FCU-	4-3
	FCUA-1	4-4
	FCUA-2	4-5
	FCUA-4	4-5
	FCUB-1	4-16
	FCUB-2	4-16
	FCUT-1	4-10
	FDT-2	4-17
	FDT-2-1.6	4-17
	FDT-3	4-17
	FDT-4	4-17
	FF-	9-1
	FF-15	9-2
	FF-37	9-2

	Part No.	Page
F	FF-40F	9-2
	FF-46F	9-3
	FF-47F	9-3
	FF-52F	9-3
	FF-55F	9-3
	FFDA-10AY	9-19
	FFDA-9AY	9-19
	FFG-1	9-6
	FFG-1A	9-5
	FFG-1G(RU)	9-6
	FFG-1N	9-6
	FFG-2(S)	9-7
	FFG-2A	9-7
	FFG-2AS(RU)	9-7
	FFG-2N	9-7
	FFG-3	9-6
	FFG-30(S)	9-6
	FFG-3A	9-7
	FFG-3AN	9-7
	FFH-30S(RU)	9-5
	FFK-1	9-7
	FFK-1P	9-7
	FFK-2	9-7
	FFK-2P	9-7
	FFK-3	9-7
	FFK-3P	9-7
	FFK-4P	9-7
	FFK-5	9-5
	FFK-6	9-6
	FFP-40	9-4
	FFQ-1	9-5
	FFQ-2	9-5
	FFR-1	9-4
	FFS-1	9-4
	FFS-2	9-4
	FFS-5	9-4
	FFT-	9-1
	FFT-15	9-1
	FH-1	6-89
	FH-13	6-89
	FH-17	6-90
	FH-1L	6-89
	FH-1S	6-89
	FH-3	6-89
	FH-3A	6-89
	FH-4UL	6-89
	FHBBU-22	10-11
	FHC-1	7-46
	FHC-2	7-46
	FHC-3	7-47
	FHC-4	7-47
	FHC-5	6-89
	FHCA-1	7-47
	FHCV-52	7-46
	FIXE-1	5-23
	FR-1300	8-34
	FR-190	8-32
	FR-250	8-32
	FR2515N	7-50
	FSB-1	4-163

	Part No.	Page
F	FSB-1A	4-163
	FSB-2	4-163
	FSL-25	1-94
	FSP-1	7-94
	FSP-10	7-94
	FSP-2	7-94
	FSP-3	7-94
	FSP-4	7-94
	FSP-5	7-94
	FSP-6	7-94
	FSP-9	7-95
	FSS-	1-93
	FSSA-15	1-93
	FUA-1	10-14
	FUC-	10-13
	FUC-01	10-13
	FUC-02	10-13
	FUC-03A	10-13
	FUC-17A	10-13
	FUC-5A	10-14
	FUG-1	6-23
	FUG-3	6-23
	FUSCV-1	10-12
	FUSCV-10	10-12
	FUSCV-2	10-12
	FUSCV-4	10-12
	FUSCV-6F	10-14
	FUSCV-7F	10-14
	FUSCV-8F	10-14
	FUSE-1	6-89
	FUSE-2	6-89
	FUSE-3	6-89
	FUSE-5	7-46
	FUSE-6	7-46
	FUSEA-1	6-89
	FUSEC-1	10-12
	FWAS-	4-24
	FWC-	4-25
	FWD-1	4-26
	FWK-5	4-93
	FWKA-1	4-93
	FWS-	4-25
	FWT-25	4-91
	FWT-30	4-91
	FWU-	4-24
G	GDBB-1	5-26
	GDFC-13	7-44
	GDFC-14	7-44
	GDFC-17	7-44
	GDFC-18	7-44
	GDFC-18N	7-46
	GDFC-20	7-44
	GDFC-39	7-45
	GDFC-40	7-44
	GDFC-51	7-45
	GDFC-53	7-45
	GDFC-83	7-45
	GDFC-84	7-45
	GDFC-84-2N	7-45
	GL-4	9-18

	Part No.	Page
	GLIN-10	6-29
	GM-	5-8
	GM-	5-10
	GM-131	5-10
	GM-137	5-9
	GM-138	5-9
	GM-139	5-9
	GM-140	5-9
	GM-140	5-13
	GM-141	5-13
	GM-147	5-9
	GM-149	5-13
	GM-14NP	5-8
	GM-152	5-13
	GM-154	5-10
	GM-158	5-9
	GM-159	5-9
	GM-25	5-17
	GM-26	5-17
	GM-27	5-17
	GM-28	5-17
	GM-31	5-17
	GM-32	5-17
	GM-33	5-17
	GM-34	5-17
	GM-69	5-9
	GM-92	5-10
	GM-XA	5-8
G	GND-	10-41
	GND-1	10-41
	GND-12	10-44
	GND-13	10-44
	GND-14	10-42
	GND-15	10-44
	GND-20	10-43
	GND-23	10-44
	GND-24	10-41
	GND-27	10-46
	GND-32	10-42
	GND-34	10-41
	GND-35	10-44
	GND-36	10-43
	GND-37	10-43
	GND-39	10-44
	GND-3A	10-41
	GND-44	10-45
	GND-48	10-46
	GND-49	10-45
	GND-50	10-45
	GND-51	10-42
	GND-52	10-45
	GND-54	10-45
	GND-55	10-45
	GND-56A	10-45
	GND-67	10-43
	GND-67(4.0)	10-43
	GND-7	10-42
	GND-74	10-46
	GND-75	10-46
	GND-8	10-42

	Part No.	Page
	GND-96	10-42
	GND-99	10-44
	GPE2.6-6	8-17
	GPE2-24	8-17
	GPE2-30	8-17
	GPE3-	8-18
	GPE4-12-1	8-19
	GPE4-12L	8-19
	GPE4-13.5	8-19
	GPE44-1	8-20
	GPE4-42	8-20
	GPE4-8	8-19
	GPE4-8L	8-19
	GPE5-20	8-20
	GPE632-5	8-21
	GPE632-6	8-20
	GPE632-9	8-21
	GPE8-21	8-19
	GPE8-32	8-19
	GPEA3-6	8-18
	GPEA3-8	8-18
	GPED3-6	8-18
	GPM3-20	8-17
	GPM4-20	8-17
	GPM632-20	8-17
	GPR3-5.5	8-18
	GPR632-6	8-21
	GRAP-1	10-59
	GSS-	1-92
G	GTB-100	5-58
	GTB-103	5-58
	GTB-70	5-58
	GTB-85	5-58
	GTBA-273	5-58
	GTBA-457	5-58
	GTP-110M	5-55
	GTP-110MA	5-55
	GTP-130I	5-55
	GTP-150I	5-55
	GTP-200ST	5-55
	GTP-XXXST	5-55
	GTRP-130I	5-55
	GT-XXXHD	5-50
	GT-XXXI	5-50
	GT-XXXM	5-50
	GT-XXXST	5-50
	GULY-10-XXF	4-162
	GULY-11-XXF	4-162
	GULY-13AB-XXF	4-160
	GULY-15AB-XXF	4-160
	GULY-19-XXF	4-162
	GULY-1AB-XXF	4-157
	GULY-1CDE-XXF	4-161
	GULY-2AB-XXF	4-157
	GULY-3AB-XXF	4-157
	GULY-3CDE-XXF	4-161
	GULY-3FG-XXF	4-158
	GULY-3HI-XXCF	4-160
	GULY-3JK-XXCF	4-161
	GULY-5AB-XXF	4-158

	Part No.	Page
	GULY-6AB-XXF	4-158
G	GULY-7AB-XXF	4-159
	GULY-8AB-XXF	4-159
	GULY-9AB-XXF	4-159
	HAND-1	5-69
	HAND-10	5-73
	HAND-12	5-69
	HAND-13	5-69
	HAND-14A	5-70
	HAND-14B	5-70
	HAND-2	5-69
	HAND-23A	5-70
	HAND-23B	5-70
	HAND-25	5-72
	HAND-25-1	5-72
	HAND-26B	5-71
	HAND-27	5-72
	HAND-29	5-75
	HAND-30	5-75
	HAND-31	5-75
	HAND-34	5-72
	HAND-38	5-72
	HAND-40	5-71
	HAND-41	5-72
	HAND-47	5-72
	HAND-50	5-74
	HAND-51	5-74
	HAND-51L	5-74
	HAND-53	5-73
	HAND-54	5-74
	HAND-55	5-74
H	HAND-65	5-69
	HAND-7	5-69
	HAND-70	5-71
	HAND-71	5-75
	HAND-73	5-71
	HAND-74	5-73
	HAND-75A	5-70
	HAND-75B	5-71
	HAND-79	5-74
	HAND-80-1	5-74
	HAND-82	5-73
	HAND-84	5-75
	HAND-87	5-72
	HAND-99	5-74
	HANDN26A	5-71
	HANE18	5-82
	HANE18LV	5-82
	HANE-21	5-82
	HANE-21L	5-82
	HANE-22	5-87
	HANE-23	5-84
	HANE-24	5-83
	HANE-26	5-85
	HANE-27	5-86
	HANE29	5-82
	HANE-30	5-87
	HANE-32	5-83
	HANE-33	5-84
	HANE-34	5-87

	Part No.	Page
	HANE-35	5-82
	HANE-36	5-84
	HANE-37	5-84
	HANE-38	5-85
	HANE-40	5-83
	HANE-41	5-87
	HANE-46	5-86
	HANE-48	5-84
	HANE-53	5-88
	HANE-55	5-84
	HANE-58	5-86
	HANE-59	5-82
	HANE-63	7-45
	HANE-64	5-88
	HANE-67	5-88
	HANE-69	5-84
	HANE-72	5-86
	HANE-74	5-85
	HANE-75	5-85
	HANE-76	5-86
	HANE-77	5-83
	HANE-86	5-88
	HANE-97	5-85
	HANE-98	5-86
	HANI-119	5-81
	HANI-90	5-81
	HANI-96	5-81
	HANT-1	5-89
	HANU-	5-78
H	HANU-102	5-80
	HANU-102-1	5-80
	HANU-103	5-80
	HANU-108	5-79
	HANU-113	5-80
	HANU-114	5-79
	HANU-117	5-80
	HANU-137	5-79
	HANU-138	5-76
	HANU-139	5-76
	HANU-142	5-79
	HANU-27U	5-77
	HANU-30PN	5-78
	HANU-30PVB	5-78
	HANU-32PVB	5-78
	HANU-32VB	5-78
	HANU-34	5-76
	HANU-71	5-76
	HANU-73	5-77
	HANU-80	5-80
	HANU-83	5-75
	HANU-91	5-77
	HANU-92	5-73
	HANUL-2F	5-81
	HANUL-3NF	5-81
	HASW3-	8-16
	HASW4-	8-16
	HASW5-	8-16
	HDMIC-1	7-29
	HDMIC-10	7-29
	HDMIC-11	7-29

	Part No.	Page
	HDMIC-2	7-29
	HDMIC-3	7-30
	HDMIC-4	7-30
	HDMIC-8	7-30
	HDMIT-1	7-30
	HFCC-12	4-86
	HLCS-	1-51
	HLS-1	6-53
	HLS-2	6-53
	HP-	1-126
	HP-12A	1-126
	HP2-	1-124
	HP2.5-10	1-124
	HP2.5-31	1-124
	HP2050	1-133
	HP256-16	1-133
	HP4-	1-129
	HP440-15.9S	1-131
	HP440-18	1-131
	HP440-7.9S	1-131
	HP440-9.5	1-131
	HP44L-	1-131
	HP48-20	1-132
	HP48-32	1-132
	HP6-25	1-130
	HP632-	1-132
	HP632-64	1-132
	HPB2.5-10	1-142
H	HPC-11.9	1-128
	HPC-15	1-128
	HPC-19	1-128
	HPC-21	1-129
	HPC-30	1-128
	HPC4-30	1-129
	HPC4-35	1-129
	HPC4-40	1-129
	HPC44-21	1-131
	HPC-45	1-128
	HPC-73	1-129
	HPCA-21	1-128
	HPH-10	1-126
	HPH-12	1-126
	HPH-15	1-126
	HPH-34	1-127
	HPI3-	1-146
	HPI4-	1-146
	HPIA4-2	1-146
	HPIB4-18.5	1-146
	HPL-100	1-127
	HPL-30	1-127
	HPL-40	1-127
	HPL4-37	1-130
	HPP10-64	1-134
	HPP25-14.5	1-125
	HPP25-20	1-125
	HPP3-25	1-127
	HPP3-9	1-127
	HPP3-9.5	1-127
	HPP4-4.5	1-133
	HPP440-11.2	1-134

	Part No.	Page
H	HPP440-17.4	1-134
	HPP440-6.35	1-134
	HPP632-14	1-134
	HPP632-51	1-134
	HPR-20	1-128
	HPR3-30	1-128
	HPR3-7	1-128
	HPR4-10	1-129
	HPR4-15	1-129
	HPR4-70L	1-130
	HPR5-25	1-130
	HPR5-45	1-130
	HPS-	1-125
	HPS2-	1-123
	HPS2.5-11	1-124
	HPS2.5-16.5	1-124
	HPS2.6-18	1-125
	HPS2.6-19	1-125
	HPS2.6-31.75	1-125
	HPS632-12	1-131
	HPS632-19.1	1-131
	HSR-	7-96
	HSR-	7-97
	HSR-1	7-98
	HSR-103	7-97
	HSR-12.7	7-97
	HSR-14	7-97
	HSR-2	7-98
	HSR-29	7-97
	HSR-36	7-98
	HSR-38	7-97
	HSR-55	7-97
	HSR-58	7-99
	HSR-60	7-97
	HSR-74-201	7-98
	HSR-8A	7-70
	HSR-90	7-98
	HSR-91	7-97
	HSRA-1	7-71
	HSRD-2	7-99
	HU-	6-90
	HU-14	6-90
	HU-16	6-90
	HW2839	7-110
I	ICV-1	6-35
	ICV-2	6-35
	IMN-1	4-43
	INTEC-1	8-43
	IPOD-1	7-10
	IPOD-2	7-10
	IPOD-3	7-10
	IPOD-4	7-10
	IPWC-1	7-10
	IPWC-2	7-10
	IRCV-1	2-42
	IRCV-2	2-42
	ISS-	1-92
J	JETM-1	4-51
	JETM-2	4-51
	JETM-7	4-51

	Part No.	Page
J	JKCV-1	7-15
	JKCV-4	7-15
	JPC-1	6-74
	JSS-	1-94
	JUMP-10H	10-11
	JUMP-21	10-10
	JUMP-26	10-10
	JYCE-1	1-110
	JYCE-2	1-111
K	KE3.5-2	1-114
	KE4.1-8	1-114
	KEML-12	1-104
	KEML-4	1-104
	KEMS-11.3	1-104
	KES-15	1-100
	KESS-19	1-105
	KG-	5-91
	KG-014N-290	5-91
	KG-016C	5-91
	KG-016LN	5-91
	KG-016S	5-91
	KGA13-185	5-90
	KGA13-260	5-90
	KGB12-07	5-37
	KGB12-07-ST	5-37
	KGB12-08	5-37
	KGB16-10	5-37
	KGB16-10-ST	5-37
	KGB16S-8.5-ST	5-37
	KGB20-14	5-37
	KGB20-14-ST	5-37
	KGB25-16	5-37
	KGB25-16-ST	5-37
	KGB32-25	5-37
	KGB32-25-ST	5-37
	KGC-013-45	5-90
	KGC-013-70	5-90
	KGC-025-8	5-91
	KG-XXXN	5-91
	KL-	4-126
	KL-2L	4-126
	KLB-1	4-126
	KLC-1	4-126
	KLCBL-	1-49
	KLCBM-	1-49
	KLCBS-	1-49
	KLF-11	4-125
	KLH-330	3-10
	KLH-331	3-10
	KLH-340	3-12
	KLH-341	3-12
	KLH-342	3-12
	KLR-1	4-127
	KLS-1	4-125
	KMCC-1	4-144
	KMCC-2	4-144
	KPGB11-7	5-37
	KPGB13.5-8	5-37
	KPGB7-5	5-37
	KPGB7-5-1	5-37

	Part No.	Page
K	KPGB9-9	5-37
	KPS-	7-12
	KPS-12	7-14
	KPS-13	7-15
	KPS-15	7-14
	KPS-16	7-12
	KPS-18	7-15
	KPS-20	7-11
	KPS-21	7-11
	KPS-24	7-11
	KPS-29	7-14
	KPS-31	7-14
	KPS-32	7-5
	KPS-36	5-29
	KPS-37	7-28
	KPS-39	7-5
	KPS-4	7-13
	KPS-42	7-34
	KPS-5	7-12
	KPS-6	7-12
	KPS-9	7-13
	KPSA-1	7-13
	KPSA-3	7-13
	KSC256-8.4F	8-14
	KSK040130	6-92
	KSK070105	6-92
	KSK070130	6-92
	KSK070180	6-92
	KSM-1A	8-14
	KSM-1B	8-14
	KSM4-5M	8-14
	KSM4-6F	8-14
	KST-08	5-92
	KST-15	5-92
	KST-20	5-92
	KST-25	5-92
	KTCC-	4-145
	KTCC-12	4-145
	KTCC-16	4-145
	KVD-05	1-24
	KVD-10	1-24
	KVLM3-	1-69
	KVLM4-10	1-69
	KVLMA-10	1-69
	KVM-1	7-9
	KVM-2	7-9
	KVM-3	7-9
	KWA3-0.7	6-67
	KWH2-	1-121
	KWH3-	1-121
	KWH3.5-	1-122
	KWH4-	1-122
	KWH440-	1-123
	KWH4-9.5L	1-122
	KWS-	6-67
	KWS2-	6-64
	KWS-2	6-68
	KWS-2.6	6-67
	KWS-2.6-08	6-67
	KWS-2.6-1	6-67

	Part No.	Page
K	KWS-3.6	6-68
	KWS-3.8	6-68
	KWS3-0.8	6-65
	KWS-3S	6-67
	KWS4-4	6-71
	KWS5-1.6	6-66
	KWS-5S	6-68
	KWS-6-1	6-68
	KWS-6L	6-68
	KWS-8	6-68
	KWS8-1.6	6-66
	KWSA-5	6-69
	KWSP-2.5	6-64
	KWSP-2.6	6-64
	KWSP2-1	6-64
	KWSP2-1.1	6-64
	KWSP2-1.5	6-64
	KWSP4-1.4	6-65
	KWSP4-2.3	6-65
	KWSP5-1	6-65
	KWSP5-15	6-65
	KWSP6-2	6-65
	KWSP-9	6-64
	KYCB-129	5-51
	KYPC-40	6-82
	KYST-08	5-92
	KYST-15	5-92
	KYST-20	5-92
	KYST-25	5-92
	KYWS-3	6-67
L	LAS-	1-56
	LAS-6A	1-56
	LASA-9.5	1-56
	LASB-3.7	1-54
	LASD-8.3	1-54
	LASE-12	1-55
	LASE-4.5	1-55
	LASE-7	1-55
	LASF-18	1-56
	LASH-22	1-55
	LASJ-14	1-55
	LASJ-18	1-55
	LASK-4	1-113
	LASK-5	1-113
	LASK-6	1-113
	LASY-12.6	1-55
	LASY-4.6	1-55
	LASY-9.3	1-55
	LBS-	1-54
	LC3-1	2-39
	LC3-12	2-42
	LC3-13	2-39
	LC3-1T	2-39
	LC3-2	2-42
	LC3-2T	2-39
	LC3-3T	2-39
	LC3-6	2-39
	LC3-7	2-42
	LC3-8	2-41
	LC5-1	2-39

	Part No.	Page
L	LC5-1T	2-39
	LC5-2	2-40
	LC5-2T	2-39
	LC5-3	2-41
	LC5-4	2-40
	LC5-5	2-40
	LC5-6	2-40
	LC5-7	2-42
	LC5-8	2-41
	LC5-9	2-40
	LCA-	1-43
	LCAB-14	1-46
	LCB-	1-44
	LCBA-5.6	1-50
	LCBA-7.6	1-50
	LCBC-8	1-49
	LCBD-12.7	1-42
	LCBJ-9	1-41
	LCBL-8	1-105
	LCBM-	1-36
	LCBM-19L	1-36
	LCBS-	1-45
	LCBSA-20L	1-44
	LCBSA-28.5	1-44
	LCBT-	1-48
	LCBU-	1-48
	LCBUA-13.9	1-47
	LCBY-	1-42
	LCBYR-4.8	1-42
	LCBZ-4.8	1-42
	LCBZ-6.4	1-42
	LCC-	1-36
	LCC-10S	1-36
	LCC-12S	1-36
	LCC-3S	1-36
	LCC-6S	1-36
	LCD-	1-40
	LCDCM-1	4-148
	LCDS3-	1-50
	LCDS4-	1-50
	LCEO-	1-41
	LCF-	1-39
	LCFB-8	1-40
	LCFO-	1-39
	LCG-	1-47
	LCGA-14	1-39
	LCGA-14S	1-39
	LCGB-17.5	1-48
	LCH-	1-43
	LCI-	1-35
	LCI-15(2)	1-35
	LCI-30L	1-35
	LCIA-3.5	1-35
	LCJ-	1-34
	LCK-1	1-35
	LCL-3.2	1-43
	LCMA-	1-46
	LCMB-8	1-23
	LCMC-7	1-24
	LCMD-	1-47

	Part No.	Page
	LCMM-12	1-103
	LCMM-18	1-103
	LCMM-4	1-103
	LCMM-8	1-103
	LCO-	1-40
	LCOA-28.8	1-38
	LCP-	1-52
	LCPA-8.2	1-52
	LCPL-6.4	1-38
	LCPLB-11	1-38
	LCS-	1-52
	LCS-6A	1-52
	LCSA-6.4	1-51
	LCSA-9.5	1-51
	LCSD-12.7	1-52
	LCSD-4.8	1-52
	LCSD-9.5	1-52
	LCSE-	1-51
	LCSF-15	1-38
	LCSL-4.8	1-52
	LCSLR-9.5	1-51
	LCT-9	1-41
	LCTA-12.7	1-41
	LCTA-4.8	1-41
	LCU-18	1-105
	LCUA-11	1-99
	LCUAC-11L	1-102
	LCUAC-11R	1-102
	LCUAC-2L	1-101
L	LCUAC-2R	1-101
	LCUAC-3L	1-101
	LCUAC-3R	1-101
	LCUAC-7L	1-101
	LCUAC-7R	1-101
	LCUAC-8L	1-101
	LCUAC-8R	1-101
	LCUAC-9L	1-102
	LCUAC-9R	1-102
	LCUAD-1	1-100
	LCUAE-12L	1-102
	LCUAE-12R	1-102
	LCUAE-16L	1-103
	LCUAE-8L	1-102
	LCUAE-8R	1-102
	LCUE-3.3	1-98
	LCV-	1-34
	LCVA-	1-34
	LCVU-	1-34
	LCX-31	1-34
	LCY-4.8	1-53
	LD54-10.5	2-17
	LDD-10	1-91
	LDD-10(2)	1-91
	LDE-33	1-35
	LEAH-4.5	3-6
	LEAK-17.5	3-34
	LEAK3-17.5	3-34
	LEC-1	2-21
	LECC-8.5	2-14
	LED-	2-1

	Part No.	Page
	LED-1.5L	2-1
	LED101	3-29
	LED1L-	3-33
	LED1L-2.5	3-4
	LED-208	2-20
	LED2M-3.6	2-4
	LED2X7.5	2-19
	LED3-	2-32
	LED-301	3-1
	LED-301(B)	3-1
	LED-301A	3-1
	LED-305	3-7
	LED-306	3-6
	LED-306(A)	3-6
	LED-306(B)	3-6
	LED-307	3-7
	LED-307(A)	3-7
	LED-308	3-7
	LED3-1	2-25
	LED-310	3-8
	LED-312	3-1
	LED-313	3-1
	LED-314	3-2
	LED3-14-3S	2-37
	LED3-16	2-32
	LED-316	3-2
	LED3-16M	2-32
	LED3-17	2-33
	LED-317	3-7
L	LED3-17-0.6	2-33
	LED3-18	2-33
	LED3-19	2-27
	LED-319	3-3
	LED3-1B	2-24
	LED3-2	2-24
	LED3-20	2-25
	LED3-21	3-3
	LED3-22	2-26
	LED-322	3-8
	LED3-23	2-26
	LED-323	3-8
	LED3-24	2-33
	LED-324	3-8
	LED3-25	2-33
	LED-325	3-3
	LED-326	3-2
	LED3-28	2-26
	LED-328	3-2
	LED3-29	2-26
	LED3-3	2-28
	LED3-30	2-33
	LED-330	3-9
	LED3-31	2-33
	LED-331	3-10
	LED3-33	2-32
	LED3-34	2-26
	LED3-35	2-33
	LED3-37	2-27
	LED3-38	2-27
	LED3-4	2-25

	Part No.	Page
	LED3-40	2-34
	LED-340	3-11
	LED3-40S	2-34
	LED3-41	2-34
	LED-341	3-12
	LED3-42	2-34
	LED-342	3-9
	LED3-43	2-33
	LED-343	3-3
	LED3-44	2-27
	LED-344	3-13
	LED3-45	2-27
	LED-345	3-11
	LED3-46	2-27
	LED3-47	2-36
	LED3-48	2-36
	LED3-49	2-34
	LED3-5	2-25
	LED3-50	2-34
	LED3-53	2-28
	LED3-55	2-33
	LED3-6	2-25
	LED3-7	2-25
	LED3-8	2-25
	LED3A-9	2-19
	LED3X	2-18
	LED3X1.5R	2-18
	LED3X13-1	2-18
	LED3X16-1	2-18
L	LED3X6-1	2-18
	LED3X8R	2-18
	LED3-XXM	2-32
	LED4AX5	2-19
	LED4X7	2-20
	LED5-	2-32
	LED-501	3-6
	LED-502	3-4
	LED-502S	3-4
	LED-503	3-5
	LED-504	3-5
	LED-505	3-4
	LED5-1	2-28
	LED5-10	2-31
	LED5-11	2-30
	LED5-13	2-30
	LED5-14	2-31
	LED5-16S	2-30
	LED5-1S	2-28
	LED5-2	2-29
	LED-521	3-9
	LED5-24	2-34
	LED5-24L	2-34
	LED5-24M	2-34
	LED5-25	2-31
	LED-525	3-9
	LED5-27T	2-30
	LED5-28	2-29
	LED-528	3-5
	LED5-29	2-29
	LED5-3	2-31

	Part No.	Page
	LED-535	3-5
	LED54-	2-17
	LED5-4	2-31
	LED-542	3-4
	LED5-5	2-29
	LED5-5T	2-29
	LED5-6	2-29
	LED5-8	2-30
	LED5-8T	2-30
	LED5-9	2-30
	LED5-9S	2-30
	LED5L-	3-23
	LED5L-10	3-24
	LED5L-12	3-23
	LED5L-13	3-24
	LED5L-18	3-25
	LED5L-7	3-24
	LED5-XXM	2-32
	LED-6301	3-13
	LED-6302	3-13
	LED-6303	3-13
	LED-6501	3-13
	LEDA-15	3-35
	LEDA-17	3-32
	LEDA-17-1	3-32
	LEDA-2	3-31
	LEDA-2S	3-31
	LEDA-4	3-30
	LEDA-5	3-30
	LEDA-6	3-30
L	LEDA-7	3-31
	LEDAA-22	2-8
	LEDAC-14.5	2-13
	LEDAC-18	2-13
	LEDAJ-1.3	2-9
	LEDAJ-7.9	2-9
	LEDAK-9.5	2-12
	LEDBA-2.5	2-9
	LEDBB-3	2-10
	LEDBC-1.6	2-10
	LEDBD-4.8	2-10
	LEDBF-10	2-7
	LEDBJ-10	2-21
	LEDBJ-3	2-21
	LEDBJ-9	2-21
	LEDD-12	2-5
	LEDE-17.5	2-3
	LEDEW-	2-2
	LEDF-2	2-5
	LEDF-3	2-5
	LEDG-10	2-11
	LEDG-3	2-11
	LEDG-4	2-11
	LEDH-	2-11
	LEDHA-4	2-11
	LEDHB-2.3	2-9
	LEDHC-4	2-10
	LEDI3-3	2-24
	LEDJ-4	2-21
	LEDJ-4.5	2-21

	Part No.	Page
	LEDJ-7.5	2-21
	LEDJ-8	2-21
	LEDJ-8.5	2-21
	LEDK-	2-13
	LEDK-4S	2-13
	LEDKB-17.7	2-15
	LEDKU-2	2-13
	LEDL-3	2-4
	LEDL-5.5	2-4
	LEDLA-9.8	2-2
	LEDM-	2-8
	LEDMK-1	2-35
	LEDMK-3	2-35
	LEDMK-5	2-35
	LEDMU-	2-16
	LEDMU-9	2-17
	LEDO-	2-7
	LEDP-	2-20
	LEDP3-6.4	2-20
	LEDQ-5	2-9
	LEDR-1	2-15
	LEDS-	2-2
	LEDSA-6	2-12
	LEDSB-11	2-3
	LEDSC-2	2-19
	LEDSH-	2-12
	LEDSS-	2-24
	LEDSW-18.5	2-2
	LEDS-XXS	2-3
L	LEDT-	2-12
	LEDT-5S	2-12
	LEDT-6.4S	2-12
	LEDU-	2-16
	LEDU-1.5	2-16
	LEDU-2	2-16
	LEDUA-5.4	2-22
	LEDUA-6.5	2-22
	LEDUA-8	2-22
	LEDV-42	2-11
	LEDV-5.5	2-11
	LEDW-	2-1
	LEDW-20	2-1
	LEDWA-23.7	2-14
	LEDWK-	2-14
	LEDX3-1	2-7
	LEDX3-3	2-7
	LEDX5-1	2-6
	LEDX5-2	2-6
	LEDXA-15.6	2-8
	LEDXA5-2	2-6
	LEDXB-7.5	2-7
	LEDXK3-4.5	2-15
	LEDXK3-5.5	2-15
	LEDXV-	2-8
	LEDZ3-9	2-6
	LEDZ5-	2-6
	LEF-1	2-22
	LEFS-2	7-71
	LEH3-16	2-4
	LEJ-	3-14

	Part No.	Page
L	LEJ3-5	3-14
	LEJ-4M	3-14
	LEJ-4S	3-14
	LEJA-5	3-14
	LEJB-4	3-21
	LEJN-4	3-14
	LEJT-4	3-14
	LEK-301	3-15
	LEK-302	3-15
	LEK-303	3-16
	LEK-303L	3-16
	LEK-304	3-18
	LEK-307	3-26
	LEK-310	3-18
	LEK-311	3-15
	LEK-3111	3-17
	LEK-312	3-18
	LEK-314	3-15
	LEK-315	3-29
	LEK-316	3-25
	LEK-320	3-27
	LEK-323	3-26
	LEK-325	3-27
	LEK-327	3-26
	LEK-330	3-28
	LEK-331	3-28
	LEK-340	3-28
	LEK-345	3-27
	LEK-348	3-25
	LEK3X5.3	2-18
	LEK-501	3-22
	LEK-502	3-19
	LEK-503	3-22
	LEK503-18	3-22
	LEK503-7	3-22
	LEK-505	3-21
	LEK-506	3-24
	LEK-507	3-21
	LEK-508	3-23
	LEK-509	3-31
	LEK-512	3-28
	LEK-513	3-32
	LEK-515	3-28
	LEK-516	3-18
	LEK-517	3-24
	LEK-518	3-29
	LEK-520	3-29
	LEK-525	3-16
	LEK-526	3-16
	LEK-528	3-22
	LEK-530	3-31
	LEK-531	3-31
	LEK-533	3-19
	LEK-534	3-19
	LEK-535	3-19
	LEK-539	3-20
	LEK-541	3-16
	LEK54-17	3-18
	LEK-545	3-32
	LEK-546	3-17

	Part No.	Page
L	LEK-547	3-20
	LEK-548	3-17
	LEK-549	3-21
	LEK-551	3-17
	LEK-555	3-20
	LEK-556	3-20
	LEKC-5.8	2-15
	LEKC-7	2-15
	LEKH-	3-33
	LEKH-12	3-34
	LEKH-4.5	3-33
	LEKH-4.5S	3-33
	LEKH-6301	3-13
	LEKHA-1	2-36
	LEKHD-1	2-36
	LEKHD-2	2-36
	LELG-1F	2-35
	LEM-1	2-45
	LEM-103	2-50
	LEM-106	2-62
	LEM-107	2-58
	LEM-108	2-47
	LEM-11	2-48
	LEM-110	2-58
	LEM-113	2-62
	LEM-114	2-51
	LEM-115	2-58
	LEM-12	2-46
	LEM-122	2-48
	LEM-123	2-41
	LEM-13	2-52
	LEM-131	2-46
	LEM-132	2-53
	LEM-133	2-55
	LEM-135	2-55
	LEM-135-4.8	2-55
	LEM-136	2-63
	LEM-136-F	2-63
	LEM-137	2-48
	LEM-141	2-53
	LEM-144	2-52
	LEM-145	2-63
	LEM-149	2-41
	LEM-150	2-54
	LEM-150-	2-54
	LEM-151	2-45
	LEM-156	2-53
	LEM-16	2-45
	LEM-161	2-43
	LEM-166	2-66
	LEM-167	2-55
	LEM-167-11	2-55
	LEM-18	2-49
	LEM-180	2-61
	LEM-184	2-61
	LEM-185	2-57
	LEM-188	2-58
	LEM-188-17	2-58
	LEM-189	2-55
	LEM-191	2-54

	Part No.	Page
L	LEM-191-	2-54
	LEM-192	2-54
	LEM-193	2-53
	LEM-195	2-63
	LEM-196	2-55
	LEM-197	2-55
	LEM-198	2-54
	LEM-199	2-53
	LEM-2	2-45
	LEM-20	2-50
	LEM-200	2-57
	LEM-202	2-54
	LEM-203	2-54
	LEM-205	2-48
	LEM-207	2-63
	LEM-207B	2-63
	LEM-208	2-56
	LEM-210	2-46
	LEM-212	2-49
	LEM-213	2-49
	LEM-221	2-57
	LEM-223	2-56
	LEM-225	2-63
	LEM-225-F	2-63
	LEM-23	2-52
	LEM-233	2-56
	LEM-235	2-53
	LEM-235-7.2	2-53
	LEM-24	2-50
	LEM-240	2-54
	LEM-244	2-44
	LEM-248	2-56
	LEM2-5.5	2-52
	LEM-253	2-57
	LEM-28	2-62
	LEM-29	2-43
	LEM-3	2-46
	LEM-30	2-43
	LEM-33	2-50
	LEM-36	2-46
	LEM-3L	2-46
	LEM-4	2-48
	LEM-40	2-47
	LEM4W-	2-59
	LEM-5	2-51
	LEM-52	2-50
	LEM-53	2-54
	LEM-53-	2-54
	LEM-54	2-43
	LEM-55	2-44
	LEM-5-57	2-51
	LEM-6	2-47
	LEM-61	2-62
	LEM-62	2-45
	LEM-63	2-47
	LEM-67	2-52
	LEM-67-	2-52
	LEM-69	2-61
	LEM-7	2-43
	LEM-70	2-58

	Part No.	Page
L	LEM-72	6-101
	LEM-73	2-47
	LEM-79	2-44
	LEM-7S	2-43
	LEM-87	2-53
	LEM-88	2-55
	LEM-9	2-45
	LEM-90	2-54
	LEM-91	2-54
	LEM-92	2-49
	LEM-93	2-51
	LEM-95	2-58
	LEM-96	2-44
	LEM-97	2-54
	LEM-97S	2-54
	LEM-98	2-54
	LEM-99	2-58
	LEMA-1	2-42
	LEMA-2	2-37
	LEMA-2F	2-37
	LEMA-3A	2-37
	LEMA-3F	2-37
	LEMA-5	2-43
	LEMA-6F	2-38
	LEMB1-XX-F	2-60
	LEMB2-XX-F	2-60
	LEMB3.5-2-F	2-60
	LEMB3-XX-F	2-60
	LEMC1-	2-59
	LEMC2-	2-59
	LEMD1-	2-59
	LEMD2-	2-59
	LEQ-1	2-22
	LEQ-2	2-23
	LEQ-2T	2-23
	LEQ-3	2-23
	LEQU3-1	2-28
	LEQU3-2	2-28
	LEU-1	2-69
	LEU-2	2-69
	LEU-4	2-69
	LGT-2	5-18
	LGT-6G	5-18
	LH-330	3-10
	LH-340	3-11
	LHC-12	1-85
	LHC-8	1-85
	LIES-1	1-90
	LIH-8	1-106
	LIJ-4	1-82
	LIO-10	1-82
	LIO-10.5	1-82
	LIO-8	1-82
	LLCB3-15	1-163
	LMSA-6	1-37
	LMSB-4	1-37
	LMSP-16	1-37
	LMSP-8	1-37
	LO-6052A	7-102
	LO-6052B	7-102

	Part No.	Page
L	LO-6053A	7-102
	LO-6055A	7-102
	LO-6055B	7-102
	LO-6056A	7-102
	LO-6057A	7-102
	LO-6057B	7-102
	LOCK-145	5-62
	LOCK-150	5-62
	LOCK-200	5-62
	LP-2	2-66
	LP-3V0F	2-66
	LPE1-10-	2-68
	LPE1-15-	2-68
	LPE1-5-	2-68
	LPE1-5-20.5	2-64
	LPE2-10-	2-68
	LPE2-15-	2-68
	LPE2-5-	2-68
	LPE2-5-19C	2-67
	LPE3-10-	2-68
	LPE3-15-	2-68
	LPE3-5-	2-68
	LPE3-5-22C	2-67
	LPE3-7.8	2-64
	LPE4-10-	2-68
	LPE4-15-	2-68
	LPE4-3.6	2-65
	LPE4-5-	2-68
	LPEB4-1	2-65
	LPED2-1	2-65
	LPED4-1	2-66
	LPED4-2	2-65
	LPF1-517	2-64
	LPF1-518	2-64
	LPG-1	2-67
	LPG-2	2-67
	LPG-3	2-67
	LPH-2B	2-66
	LPH-4	2-67
	LPZ-1	1-109
	LPZ-2	1-109
	LPZ-5	4-138
	LPZ-6	1-109
	LSF-002	9-26
	LUCE-1	1-109
	LUS-10	1-115
	LUS-2.7	1-115
	LUS-2.9	1-115
	LUS2-8.2	1-116
	LUS-3.85	1-115
	LUS-9.1	1-115
	LUSA-11	1-116
	LUSB-10	1-116
	LUSS-	1-116
M	M-	8-6
	M04	5-24
	M05	5-24
	M06	5-24
	M07	5-24
	M07S	5-24

	Part No.	Page
M	M08	5-24
	M09	5-24
	M09A	5-24
	M09S	5-24
	M1.6-	8-8
	M10	5-24
	M-10	8-6
	M11	5-24
	M11U	5-24
	M12	5-24
	M12-2	8-6
	M12U	5-24
	M13	5-24
	M13.5	5-24
	M14	5-24
	M14U	5-24
	M15	5-24
	M16	5-24
	M16S	5-24
	M16U	5-24
	M17	5-24
	M19	5-24
	M19U	5-24
	M2-	8-9
	M2.5-	8-9
	M2.5L-13	8-9
	M2.6-	8-9
	M20	5-24
	M22	5-24
	M22U	5-24
	M25	5-24
	M28	5-24
	M-2L	8-6
	M2-XF	8-10
	M3-	8-9
	M3.5-	8-10
	M-3/8-27	1-133
	M30	5-24
	M30L	5-24
	M32	5-24
	M35	5-24
	M38	5-24
	M-3S	8-6
	M3-XXF	8-10
	M4-	8-9
	M44	5-24
	M4-8L	8-11
	M4-9NBD	8-11
	M-4F	8-6
	M4-XXF	8-10
	M50	5-24
	M5-15F	8-10
	M5-20	8-9
	M53	5-24
	M63	5-24
	M6-4	8-12
	M6-8F	8-12
	M8-7	8-13
	M9.5U	5-24
	MA-	1-57

	Part No.	Page
M	MA-2.5L	1-57
	MA-2.5S	1-57
	MA-2.8S	1-57
	MA-2L	1-57
	MA-3.5L	1-57
	MA-3S	1-57
	MA-3S-1	1-57
	MA-3SA	1-57
	MAB-4	1-59
	MAC-40	1-20
	MAC-40S	1-20
	MAD-	1-16
	MAD1.2-12.9	1-15
	MAD1.2-6	1-15
	MAD1.2-8	1-15
	MAD1.7-9.8	1-15
	MAD-10S	1-16
	MAD1-19	1-15
	MAD1-3	1-15
	MAD3.5-12	1-22
	MADA-	1-18
	MADA-18S	1-17
	MADAA-14	1-18
	MADAB-4.3	1-20
	MADB-3.5	1-16
	MADB-6	1-16
	MADD-2	1-21
	MADE-2.8	1-19
	MADG-5.4	1-42
	MADJ-6	1-17
	MADL-27.8	1-21
	MADM-	1-19
	MADM-10A	1-19
	MADM1-2.2	1-20
	MADM-2.7S	1-19
	MADM-3S	1-19
	MADMK-5	1-24
	MADN-24	1-21
	MADS-19.2	1-14
	MADS-6.5	1-14
	MADSA-3	1-14
	MADSB-3	1-14
	MADX-9.5	1-16
	MAE-	1-63
	MAE2.5-6.5	1-63
	MAE4-	1-64
	MAE43-	1-65
	MAE43-4.8LT	1-65
	MAE43-XXT	1-65
	MAE4D-6	1-64
	MAE4D-6T	1-64
	MAE4-XXT	1-64
	MAE-7-440	1-64
	MAE-7-440T	1-64
	MAEA-3.5	1-23
	MAEA-3.5L	1-23
	MAEA-3.5LS	1-23
	MAEA-3.5M	1-23
	MAEB-3.2	1-23
	MAEE-4.5	1-23

	Part No.	Page
M	MAE-XXT	1-63
	MAF-	1-22
	MAFA-6	1-22
	MAFB5-0.8	1-23
	MAFB5-9.7	1-23
	MAHA-7	1-17
	MAHC-14.3	1-20
	MAL-34	1-59
	MAL-8	1-59
	MAM-	1-58
	MAM-	1-59
	MAM-1.5L	1-58
	MAMA-3.5	1-58
	MAMDA-	1-17
	MAMDC-12	1-21
	MAMDD-6	1-24
	MAMDF-7	1-19
	MAMDL-9	1-18
	MAMS-1.5	1-58
	MAMS-1.7	1-58
	MAMS-5	1-58
	MAMS-7.5	1-59
	MAS-9	1-14
	MASD-0.8	1-57
	MASD-2	1-57
	MASL-5.4	1-62
	MASS-	1-57
	MASSD-14	1-14
	MASSD-18	1-14
	MAST-18	1-61
	MAST-6	1-61
	MA-XXDL	1-58
	MB-1	7-66
	MB-1(B)	7-66
	MB-10	7-72
	MB-12	7-72
	MB-14	7-73
	MB-16	7-68
	MB-18	7-67
	MB-19	7-67
	MB-1N	7-66
	MB-2	7-66
	MB-2(B)	7-66
	MB-20	7-72
	MB-21	7-68
	MB-23	7-68
	MB-27	7-67
	MB-28	7-68
	MB-2N	7-66
	MB-30	7-69
	MB-32	7-71
	MB-33	7-71
	MB-34	7-69
	MB-36	7-67
	MB-39	7-68
	MB-3N	7-66
	MB-3N(B)	7-66
	MB-4	7-66
	MB-43	7-67
	MB-44	7-69

	Part No.	Page
M	MB-45	7-72
	MB-48	7-69
	MB-5	7-66
	MB-50	7-69
	MB-52	7-67
	MB-53	7-71
	MB-55	7-67
	MB-56	7-68
	MB-57	7-68
	MB-6	7-66
	MB-7	7-66
	MB-8	7-73
	MBB-6	7-95
	MBB-6A	7-95
	MBB-7	7-95
	MBB-8	7-95
	MBC-11	1-72
	MBD-10	1-72
	MBE4-1.2	7-74
	MBG2-8.7	7-75
	MBH-1	5-21
	MBL3-	7-71
	MBL4.8-	7-72
	MBP-	5-22
	MBPP-12	5-22
	MBS-	1-74
	MBS3-3	7-70
	MBS3-4	7-70
	MBS-8.9S	1-74
	MBS-9.5L	1-74
	MBT-1	7-69
	MBT-10	7-73
	MBT-11	7-74
	MBT-12	7-74
	MBT-13	7-74
	MBT-14	5-23
	MBT-2	7-70
	MBT2.3-1.6	7-73
	MBT3.1-0.8	7-74
	MBT3-2	7-73
	MBT4-2	7-73
	MBT6.2-3	7-74
	MBT6-2	7-74
	MBT-7	7-73
	MBTA-1	7-99
	MBU3-3	7-70
	MBW-14	7-76
	MBW-17	7-76
	MBW-18	7-79
	MBW-21	7-79
	MBW-22	7-81
	MBW-23	7-76
	MBW-24	7-76
	MBW-27	7-77
	MBW-28	7-76
	MBW-29	7-78
	MBW-31	7-77
	MBW-32	7-78
	MBW-33	7-78
	MBW-34	7-81

	Part No.	Page
M	MBW-36	7-80
	MBW3-8	7-81
	MBW-38	7-80
	MBW-40	7-80
	MBW-41	7-81
	MBW-42	7-76
	MBW-42S	7-76
	MBW-43	7-79
	MBW-46	7-82
	MBW-47	7-79
	MBW-48	7-80
	MBW-49	7-78
	MBW-50	7-79
	MBW-51	7-76
	MBW5-12	7-77
	MBW-52	7-78
	MBW-55	7-76
	MBW6-11	7-77
	MBW-7	7-75
	MBW7-20	7-77
	MBW-9	7-75
	MBWB-1	7-81
	MBWB-2	7-82
	MBWC-	7-80
	MBWK-1	5-22
	MBWK-2	5-22
	MBWK4-1	5-22
	MBWK-7	5-22
	MBWK-8	5-22
	MC-	1-67
	MCB-6	1-72
	MCC-	7-95
	MCE-1.9	1-68
	MCEA-1.9	1-68
	MCF-1	1-153
	MCF-2310	1-151
	MCF-2908	1-153
	MCF-3305	1-151
	MCF-3308	1-151
	MCF-4213	1-151
	MCF-428	1-153
	MCFA-2508	1-151
	MCFA-2511	1-151
	MCFC-2508	1-151
	MCFD-1	1-152
	MCFD-2810	1-151
	MCFD-3210	1-151
	MCFF-	1-153
	MCFF-11	1-152
	MCFF-12	1-156
	MCFF-13	1-155
	MCFF-15	1-155
	MCFF-16	1-155
	MCFF-17	1-155
	MCFF-5	1-154
	MCFF-6	1-154
	MCFF-7	1-156
	MCFG-3010	1-151
	MCFG-35810	1-151
	MCFJ-	1-152

	Part No.	Page
M	MCFJ-1	1-154
	MCFJ-2	1-154
	MCFL-3310	1-151
	MCFM-2807	1-153
	MCFO-	1-152
	MCFP-12	1-157
	MCFP-5	1-156
	MCFP-7	1-157
	MCFP-9	1-157
	MCH-10	1-68
	MCH-12	1-68
	MCH-6	1-68
	MCI-4.7	1-65
	MCIA-12	1-70
	MCL-16	1-68
	MCL-9	1-68
	MCM-14.5	1-60
	MCM-8	1-60
	MCN-10	1-68
	MCO-16	1-61
	MCSH-7.2	1-65
	MDLS-4.5	1-22
	MEA-2.5-6.5T	1-63
	MEE-1	7-95
	MEE-2	7-95
	MGFA-2	9-18
	MGFF-4	9-18
	MGM-	5-1
	MHC-1	5-21
	MHCA5.5-5.6	5-19
	MHCA8.5-6.9	5-20
	MHD-	5-20
	MHD-5.5I	5-20
	MHD-5L	5-20
	MHD-6.3I	5-20
	MHD-7.5I	5-20
	MHD-7S	5-20
	MHE-11	5-21
	MHF-1	5-21
	MHF-2	5-21
	MHSC-1	7-43
	MHSC-2	7-43
	MHSC-3	7-43
	MHSC-4	7-43
	MHSC-4-1	7-43
	MHSC-5	7-43
	MHSC-6	7-43
	MI1.2-	8-8
	MI2-	8-8
	MI2.5-12	8-9
	MI2.5-5	8-9
	MI2-14.8F	8-8
	MI3-XXN	8-9
	MI4-XXN	8-9
	MIA6-16	8-14
	MIA8-20	8-14
	MIB-	4-48
	MIB-10	4-46
	MIB-11	4-46
	MIB-15	4-47

	Part No.	Page
M	MIB-16	4-47
	MIB-17	4-46
	MIB-21	4-46
	MIB-27	4-47
	MIB-28	4-48
	MIB-31	4-47
	MIB-32	4-7
	MIB-33	4-47
	MIB-34	4-47
	MIB-35	4-47
	MIB-9	4-46
	MIBA-1	4-86
	MIBA-2	4-86
	MIBA-3	4-86
	MIBA-4	4-8
	MIBB-	4-8
	MIC-	6-103
	MIC-10	6-103
	MIC-1A	6-103
	MIC-3	6-103
	MIC-31	6-105
	MIC-39	6-104
	MIC-5	6-103
	MIC-6	6-103
	MIDP-2	7-28
	MIHDMI-2	7-29
	MIHDMI-3	7-29
	MIL4-20	8-11
	MINI-1	10-59
	MINI-2	10-59
	MIOSD-1	7-50
	MIS-10	4-81
	MIS-11	4-79
	MIS-11L	4-79
	MIS-14	4-80
	MIS-17	4-81
	MIS-18	4-85
	MIS-2	4-79
	MIS-20	4-80
	MIS-21	4-81
	MIS-23	4-82
	MIS-3	4-80
	MIS-4	4-82
	MIS-5	4-80
	MIS-6	4-82
	MIS-7	4-81
	MIS-8	4-81
	MIS-8L	4-81
	MIS-8M	4-81
	MIS-9	4-79
	MISA-1	4-82
	MISA-2	4-83
	MISA-3	4-24
	MISA-4	4-87
	MISB-1	4-82
	MISB-2	4-82
	MISD-1	4-23
	MISE-1	4-83
	MO-	8-8
	MO-13	8-7

	Part No.	Page
M	MO-25.4	8-7
	MO-3	8-5
	MO-4	8-5
	MO-632	8-5
	MO-6-68	8-5
	MO-8-85	8-5
	MOA3	8-5
	MOB-2.5	8-7
	MOB-2.6	8-7
	MOC-12	8-7
	MOPG-	8-7
	MOR12-12	5-38
	MOR-6.4	5-38
	MOTA-12	5-30
	MOTA-16	5-30
	MOTA-20	5-30
	MOU-01	1-106
	MOUC-1	7-15
	MP-12	8-3
	MP-2.5	8-2
	MP-26	8-2
	MP-3	8-2
	MP-4	8-2
	MP-4-1	8-2
	MP-5	8-2
	MP5-1	8-3
	MP-6	8-3
	MP6-1	8-3
	MP-632	8-3
	MR4-	8-12
	MRL4-3	8-12
	MS-10	1-62
	MS-4	1-62
	MS-5	1-62
	MSA-14.1	1-56
	MSA-24.3	1-56
	MSB-2.8	1-62
	MSM-2.5	1-62
	MSMA-3.5	1-63
	MSP-	1-31
	MSP1-	1-32
	MSP-15.9S	1-31
	MSP3-	1-29
	MSP3-8L	1-29
	MSPA-1.6	1-36
	MSPA3-9.7	1-148
	MSPA-6.3L	1-37
	MSPB3.2-6.4	1-26
	MSPB-8	1-26
	MSPC3-3.2	1-25
	MSPC3-3.2L	1-25
	MSPC3-3.2M	1-25
	MSPCA-16	1-26
	MSPCA3.3-12	1-26
	MSPCA3.3-12S	1-26
	MSPD-	1-30
	MSPD-7.9L	1-30
	MSPD-7.9S	1-30
	MSPE-7	1-33
	MSPF3-	1-25

	Part No.	Page
M	MSPF3.3-17.5	1-26
	MSPF3.3-8	1-26
	MSPF3.3-8L	1-27
	MSPG3-	1-148
	MSPG4-	1-148
	MSPH-7.5	1-30
	MSPK4.8-	1-32
	MSPK45-	1-32
	MSPL-11	1-29
	MSPM-24	1-32
	MSPM-5	1-32
	MSPMA-12	1-30
	MSPN-12	1-30
	MSPN-9	1-30
	MSPO-1216	1-27
	MSPP-5	1-25
	MSPR-3	1-107
	MSPS-	1-148
	MSPS-2S	1-148
	MSPS3-	1-29
	MSPS3S-7.5	1-28
	MSQ-	5-25
	MSQ-14	5-25
	MSQ-8	5-26
	MTAB-10	6-83
	MTAB-5	6-83
	MTAB-6	6-83
	MTAC-1	6-83
	MTD-11	1-74
	MTP4-12.7	1-143
	MTPA4-15	1-143
	MTPA4-15-1	1-143
	MTPA4-15L	1-143
	MTPA4-3-20	1-142
	MTPA5-4-50	1-143
	MTPA6-5-30	1-143
	MTPC4-20	1-142
	MTPC4-57	1-142
	MTPD632-11.9	1-143
	MTPE3-12	1-142
	MU-01-8	4-49
	MU-02-10	4-49
	MU-03-3	4-49
	MU-03-4	4-49
	MU-03-5	4-49
	MU-05-2	4-49
	MU-05-3	4-49
	MU-05-4	4-49
	MU-07-2	4-50
	MUA-1	4-50
	MUB-1	4-151
	MUB-2	4-151
	MUC-1	4-50
	MUS2-10	8-15
	MUT-1	4-53
	MUT-10	4-53
	MUT-11	4-53
	MUT-2	4-53
	MUT-3	4-53
	MUT-4	4-53

	Part No.	Page
M	MUT-5	4-53
	MUT-6	4-53
	MUT-8	4-53
	MWA-1	4-46
	MWC-10	4-68
	MWC-2	4-68
	MWC-3	4-68
	MWC-6	4-68
	MWCA-1	4-72
	MWS-1	4-63
	MWS-10	4-60
	MWS-11	4-60
	MWS-11S	4-60
	MWS-12	4-59
	MWS-13	4-61
	MWS-13L	4-61
	MWS-14	4-61
	MWS-15	4-60
	MWS-15S	4-60
	MWS-16	4-62
	MWS-17	4-62
	MWS-19	4-61
	MWS-2	4-32
	MWS-20	4-61
	MWS-22	4-33
	MWS-24	4-62
	MWS-25	4-61
	MWS-26	4-125
	MWS-27	4-33
	MWS-28	4-64
	MWS-2D	4-33
	MWS-3	4-32
	MWS-30	4-31
	MWS-31	4-60
	MWS-32	4-33
	MWS-33	4-34
	MWS-34	4-71
	MWS-37	4-28
	MWS-38	4-61
	MWS-4	4-85
	MWS-41	4-60
	MWS-42	4-33
	MWS-43	4-34
	MWS-44	4-62
	MWS-45	4-33
	MWS-46	4-33
	MWS-47	4-63
	MWS-49	4-34
	MWS-50	4-62
	MWS-52	4-33
	MWS-53	4-59
	MWS-54	4-34
	MWS-55	4-63
	MWS-6	4-60
	MWS-7	4-60
	MWS-8	4-63
	MWS-9	4-42
	MWSA-17.2	4-67
	MWSA-2	4-67
	MWSB-1	4-71

	Part No.	Page
M	MWSC-	4-66
	MWSC-1	4-65
	MWSC-2	4-65
	MWSC-2L	4-65
	MWSC-7	4-64
	MWSD-3	4-63
	MWSD-4	4-63
	MWSE-1	4-64
	MWSE-2	4-64
	MWSL-6	4-68
N	NB-	5-1
	NB-	5-2
	NB-1215	5-2
	NB-19.5T	5-4
	NB-22J	5-4
	NB-22T	5-4
	NB-22U	5-4
	NB-25T	5-4
	NB-25TS	5-4
	NB-27C	5-4
	NB-29C	5-4
	NB-32C	5-4
	NBA-0309C	5-3
	NBA-0611C	5-3
	NBR-	5-6
	NBR-5030S	5-6
	NBR-7530	5-6
	NBR-7530-2	5-6
	NBS-6423	5-7
	NB-XXA	5-3
	NC-28A	5-5
	NC-7	5-4
	NF-	9-2
	NF-002ST	9-15
	NF-004ST	9-17
	NF-005ST	9-17
	NF-007I	9-2
	NF-008A	9-2
	NF-011ST	9-15
	NF-012	9-16
	NF-012ST	9-16
	NF-015ST	9-16
	NF-016ST	9-16
	NF-030IST	9-17
	NF-031	9-18
	NF-035IST	9-17
	NF-039ST	9-17
	NF-045	9-18
	NF-047ST	9-17
	NF-050ST	9-17
	NF-051ST	9-16
O	OCC-10	4-112
	OCC-4	4-111
	OCC-5	4-112
	OCC-6	4-112
	OCC6.5-5	4-112
	OCC-8	4-112
	OCCB-15	4-112
	OCCB-20	4-113
	OCCB-6.5	4-112

	Part No.	Page
O	OCSH-14	4-111
	OPC-1	7-22
	OPC-2	7-22
	OR-	9-23
	OR10.5-1	9-23
	OR15-1.5	9-23
	OR2.4-1.9	9-23
	OR2.6-1.1	9-23
	OR5.5-11.8	9-23
	OR6.07-1.63	9-23
	OR7-2	9-23
	OR8-1.5	9-23
P	P004	9-28
	P005	9-28
	P1	10-4
	P1B	10-4
	P2	10-4
	P3	10-4
	P3B	10-4
	P4	10-4
	PA11-2P	10-3
	PA11-3P	10-3
	PA12H-	10-2
	PA14-H	10-2
	PA14H-DS	10-2
	PA16-H	10-2
	PA7-	10-2
	PA7F-	10-2
	PA9-	10-2
	PA9F-H	10-2
	PAA-11	1-81
	PAD-1	6-79
	PC110	10-30
	PC110-1	10-30
	PC110-4	10-30
	PC110D5	10-30
	PC110D5-1	10-30
	PC110D8	10-30
	PC11250	10-38
	PC1125003	10-38
	PC1125005	10-38
	PC1125035	10-38
	PC12250	10-38
	PC187	10-30
	PC187(0.8)	10-30
	PC187-16-1	10-30
	PC1L187	10-37
	PC1L250	10-37
	PC1L25005	10-37
	PC1L250-1A	10-36
	PC1L250-4	10-39
	PC1L250-7	10-36
	PC1V187	10-37
	PC1V18704	10-37
	PC1V18705	10-37
	PC205	10-31
	PC250	10-31
	PC250-11	10-32
	PC250-4	10-32
	PC250-8	10-31

	Part No.	Page
P	PC252	10-1
	PC253	10-1
	PC254	10-1
	PC255	10-1
	PC2L250	10-39
	PC2L25005	10-39
	PC2L250-90	10-39
	PC3L110028	10-38
	PC3L18704	10-37
	PC3L25004	10-38
	PC3L250-3	10-40
	PC3L250-4	10-40
	PCA-1	7-110
	PCA-2	7-110
	PCA-4	7-110
	PCA-5	7-111
	PCA-6	7-110
	PCA-7	7-111
	PCA-8	7-110
	PCA-9	7-111
	PCB-1	10-18
	PCB-100	10-35
	PCB-102	10-16
	PCB-10A	10-21
	PCB-10AM4	10-21
	PCB-11	10-18
	PCB-12	10-16
	PCB-15(M4)	10-16
	PCB-17	10-19
	PCB-18	10-20
	PCB-2	10-17
	PCB-20(632)F	10-23
	PCB-21(4.4)	10-15
	PCB-22(M4)	10-25
	PCB-23(M5)	10-27
	PCB-25(3.2)	10-26
	PCB-26	10-22
	PCB-27	10-20
	PCB-28	10-20
	PCB-29	10-27
	PCB-34	10-15
	PCB-36	10-39
	PCB-37M4	10-20
	PCB-4	10-15
	PCB-41A	10-46
	PCB-43(M5)F	10-22
	PCB-44	10-27
	PCB-47ST(440)	10-17
	PCB-49(M3)	10-22
	PCB-4CV	10-15
	PCB-50M5F	10-22
	PCB-54L(M3)	10-26
	PCB-54R(M3)	10-26
	PCB-55(M3)	10-26
	PCB-58M4	10-20
	PCB-60	10-23
	PCB-66	10-18
	PCB-67	10-52
	PCB-68	10-52
	PCB-69	10-23

	Part No.	Page
P	PCB-7	10-21
	PCB-70	10-16
	PCB-71	10-19
	PCB-73	10-25
	PCB-74	10-25
	PCB-75	10-19
	PCB-77	10-27
	PCB-78	10-17
	PCB-8	10-21
	PCB-82	10-23
	PCB-9	10-19
	PCB-93	10-39
	PCB-99	10-26
	PCBS-	1-10
	PCBS-3	1-10
	PCBS-6.4	1-10
	PCBT-10	1-10
	PCBT-4.8	1-10
	PCBTA-4.8	1-10
	PCC-11	1-81
	PCC-6	1-81
	PCF110	10-24
	PCF1108	10-24
	PCF187	10-24
	PCF250	10-24
	PCF250-11	10-24
	PCF250-7	10-35
	PCFL250	10-24
	PCFS156A	10-27
	PCFS187	10-28
	PCFS2505	10-28
	PCFS2505A	10-28
	PCFS2508	10-28
	PCFS2508A	10-28
	PCFS2509A	10-28
	PCFS250L	10-28
	PCH250	10-31
	PCH250-1	10-31
	PCIE-1	7-41
	PCIE-2	7-41
	PCIEC-1	7-32
	PCK250	10-34
	PCLS-25	1-62
	PCLT-10	10-25
	PCLT-11	10-25
	PCLT-250	10-29
	PCLTA-1	10-25
	PCLTA-2	10-35
	PCLTM-250	10-29
	PCMIC-1	7-48
	PCMIC-2	7-48
	PCMIC-3	7-48
	PCMIC-4	7-48
	PCR187	10-33
	PCR187(0.8)	10-33
	PCR250	10-32
	PCR250-S	10-32
	PCRL250	10-24
	PCRN250	10-34
	PCRS187A	10-34

	Part No.	Page
P	PCRS205	10-33
	PCRS250	10-33
	PCRS250-1	10-33
	PCRS250-2	10-33
	PCTL-2	10-40
	PCTL-3.5	10-40
	PCTT-1	6-93
	PCTT-2	6-93
	PCTT-3	6-93
	PCU250	10-35
	PDC-	1-66
	PDC-10	1-67
	PDC-4.5D	1-66
	PDC-5	1-67
	PDC-9	1-67
	PDC-XXD	1-67
	PEB3-25	7-111
	PEB4-20	7-112
	PEB4-29	7-112
	PEB4-30	7-112
	PEB5-40.5	7-112
	PEB6-	7-112
	PEB8-38	7-112
	PEBR-1	7-112
	PEC5-28	7-111
	PEC5-30	7-111
	PENCOMC-1	6-99
	PH-1	6-9
	PH-11	6-9
	PH-12	6-10
	PH-13	6-11
	PH-14	6-10
	PH-15	6-16
	PH-16	6-10
	PH-18	6-11
	PH-1A	6-9
	PH-2	6-9
	PH-20	6-11
	PH-21	6-11
	PH-22	6-12
	PH-23	6-12
	PH-23L	6-12
	PH-24	6-9
	PH-25	6-15
	PH-26	6-75
	PH-27	6-12
	PH-28	6-14
	PH-2A	6-9
	PH-3	6-9
	PH-30	6-13
	PH-31	6-12
	PH-34	6-16
	PH-37	6-13
	PH-40	6-12
	PH-41	6-15
	PH-43	6-16
	PH-44	6-6
	PH-46	6-10
	PH-47	6-9
	PH-48	6-14

	Part No.	Page
P	PH-49	6-12
	PH-5	6-10
	PH-50	6-10
	PH-7	6-10
	PHC-1	6-76
	PHC-11	6-75
	PHC-12	6-75
	PHC-13	6-76
	PHC-14	6-75
	PHC-2	6-75
	PHC8NNHA	6-76
	PHG-10	6-14
	PHG-11	6-13
	PHG-12	6-14
	PHG-14	6-14
	PHG-15	6-15
	PHG-2	6-13
	PHG-3	6-13
	PHG-4	6-13
	PHG-6	6-14
	PHG-7	6-15
	PHG-8	6-14
	PHK-1	6-9
	PIC-10	7-61
	PIC-14	7-61
	PIN-1	10-29
	PIN-2	10-29
	PIN2-3.3	7-84
	PIN2-3.6	7-84
	PIN3.3-7.5	7-84
	PIN4.4-3	7-84
	PIN-9	10-29
	PJB-45	7-20
	PJBA-45	7-20
	PJC-45	7-20
	PJC-45L	7-20
	PJCV-1	7-11
	PJCV-11	7-11
	PJD-45	7-21
	PJD-45-1	7-21
	PJR-45	7-21
	PJRA-45	7-21
	PJS-45	7-20
	PJSA-45	7-20
	PJT-45	7-21
	PJU-45	7-21
	PJV-45	7-22
	PL1-	2-60
	PL2-XX-F	2-61
	PLC-1	7-39
	PLC-2	7-39
	PLC-3	7-39
	PLCC-1	7-36
	PLCC-10	7-36
	PLCC-11	7-36
	PLCC-13	7-36
	PLCC-14	7-36
	PLCC-15	7-36
	PLCC-16	7-38
	PLCC-2	7-38

	Part No.	Page
P	PLCC-3	7-38
	PLCC-5	7-38
	PLCC-7	7-39
	PLCC-8	7-36
	PLCC-9	7-36
	PLCD-1	7-37
	PLCD-2	7-37
	PLCD-3	7-37
	PLCD-4	7-37
	PLT130T	3-35
	PMB-1	1-108
	PMB-2	1-108
	PMR-1	2-69
	PMR-10	2-70
	PMR-11	2-71
	PMR-12F	2-38
	PMR-13	2-70
	PMR-14	2-71
	PMR-2	2-69
	PMR-3	2-70
	PMR-6	2-70
	PMR-7	2-71
	PMR-8	2-71
	PNL-1	7-83
	PNL-17.8	7-83
	PNL-18	7-83
	PNL-7.8	7-83
	PNL-8	7-82
	PNLA-5.2	7-83
	PNLS-	7-83
	PNLSA-8	7-83
	PR-1	7-60
	PR-2	7-60
	PR-5	7-60
	PR-6	7-60
	PS-16	1-103
	PSR-1	7-61
	PSR-2	7-61
	PSR-3	7-61
	PSR3-5.5	7-64
	PSR-4	7-61
	PSR4-12	7-63
	PSR4-12L	7-63
	PSR4-7.5	7-64
	PSR4-8	7-65
	PSR48-10	7-65
	PSR-5	7-62
	PSR5.1-7	7-62
	PSR5.5-	7-63
	PSR5-7	7-63
	PSR-6	7-62
	PSR6-1	7-63
	PSR6-10	7-64
	PSR6-11	7-64
	PSR6-14	7-64
	PSR6-14L	7-64
	PSR6-15	7-64
	PSR64-25	7-65
	PSR-7	7-62
	PSR-8	7-63

	Part No.	Page
P	PSRB-1	7-65
	PT	9-28
	PT-1762	9-28
	PUCP-1	2-23
	PVC套管	5-68
	PW-	6-73
	PW-1A	6-73
	PWIC-6	7-42
	PWIC-8	7-42
Q	QCL-1	6-77
	QCL-3	6-77
	QW-1	6-78
	QW-2	6-78
	QW-3	6-78
	QW-4	6-79
	QW-5	6-78
	QW-6	6-78
	QW-7	6-78
	QW-8	6-78
R	R4028/38	6-92
	R440-	8-9
	R440-4S	8-9
	R5025	6-92
	R5028	6-92
	R5030	6-92
	R5035	6-92
	R5040	6-92
	R632-	8-9
	R7-13	6-31
	RA-35	9-9
	RA-40	9-9
	RA-40S(RU)	9-9
	RA-45	9-10
	RA-45-1(RU)	9-10
	RA-45S	9-10
	RA-45S-1	9-10
	RA45S-1(RU)	9-10
	RA-45S-3	9-10
	RA-57	9-9
	RA-57S(RU)	9-9
	RAD-	1-1
	RAFF-40	9-10
	RAM-	1-1
	RAM-12A	1-1
	RAM-13.5L	1-1
	RAMA-	1-1
	RAMB-9	1-3
	RAMC-	1-3
	RAMD-15.5	1-3
	RAML-11	1-2
	RAML-12	1-2
	RAS-	1-2
	RBS-	1-12
	RBT-16L	1-12
	RBT-19	1-12
	RBT-25L	1-12
	RBT-28.2	1-12
	RCA-	1-4
	RCA-2.5U	1-4
	RCA-8L	1-4

	Part No.	Page
R	RCAB-	1-13
	RCAB-4.5S	1-13
	RCAC-	1-13
	RCB-	1-6
	RCBL-6	1-7
	RCBS-12.7	1-8
	RCBS-6.5	1-8
	RCBS-9.5	1-8
	RCC-	1-4
	RCD-	1-6
	RCEA-	6-58
	RCEA-10	6-58
	RCEA-2	6-57
	RCEA-4	6-57
	RCEA-9	6-58
	RCEB-	6-59
	RCEB-15	6-59
	RCEB-15.7	6-60
	RCEB-3.5D	6-59
	RCEB-4.5	6-59
	RCEB-6	6-59
	RCEB-7	6-59
	RCEC-2	6-58
	RCEE-7	6-60
	RCEF-1	6-58
	RCEH-1	6-60
	RCF-	1-8
	RCF-5S	1-8
	RCFA-7	1-11
	RCFL-	1-11
	RCG-	1-5
	RCH-	1-5
	RCI-2.6	1-3
	RCI-5	1-7
	RCJ-	1-12
	RCM-	1-7
	RCM-12A	1-7
	RCM-5SP	1-7
	RCM-6L	1-7
	RCMA-3	1-5
	RCMB-2.8	1-5
	RCMD-6	1-8
	RCO-2.5	1-4
	RCO-2.5L	1-4
	RCQC-7	1-28
	RCR-12.7	1-9
	RCRA-9.5	1-9
	RCS-13.8	1-6
	RCS-16	1-6
	RCS-6	1-6
	RCSL5-10	1-113
	RCSL6-8.5	1-113
	RCT-4.5	1-11
	RCT-8	1-11
	RCTA-4.5	1-11
	RCTL-12	1-12
	RCTL-6	1-12
	RCTL-6S	1-12
	RCV-11.1	1-8
	RCW-	1-9

	Part No.	Page
R	RCWA-	1-9
	RCXL-1	1-113
	RCXL-14	1-113
	RECA-	6-54
	RECC-	6-55
	RECD-1	6-60
	RECD-3	6-54
	RECE-	6-55
	RECG-	6-54
	RECI-1	6-55
	RF	9-24
	RF-	9-21
	RF-	9-24
	RF-004	9-20
	RF-016	9-22
	RF-017	9-22
	RF-018	9-22
	RF-019A	9-21
	RF-029	9-22
	RF-031	9-22
	RF10-	9-24
	RF10.5-	9-24
	RF-1094A	9-21
	RF11-3.2A	9-21
	RF11-5	9-21
	RF12-	9-24
	RF12.5-1	9-24
	RF12-27A	9-21
	RF13-	9-24
	RF14.5-4	9-24
	RF14-4	9-24
	RF14-5A	9-20
	RF14-8A	9-21
	RF15.5-5A	9-20
	RF15-11A	9-21
	RF16.5-3	9-24
	RF17-11A	9-21
	RF18-	9-24
	RF18-5A	9-20
	RF19-	9-24
	RF19-4A7	9-20
	RF20-	9-24
	RF20-10	9-22
	RF20-5	9-21
	RF21-	9-21
	RF21.6-11A	9-21
	RF22-	9-20
	RF22-	9-24
	RF22.1-10.4	9-24
	RF22.8-5	9-20
	RF24.6-3	9-24
	RF24-8	9-21
	RF25-2.3	9-24
	RF27-3	9-24
	RF27-7AC-1	9-20
	RF28-3.2	9-24
	RF3.8-2	9-24
	RF30-2	9-24
	RF4-	9-24
	RF4.5-	9-24

	Part No.	Page
R	RF4.8-1	9-24
	RF40-1	9-24
	RF5-	9-24
	RF5.3-0.7	9-24
	RF5.5-1.6	9-24
	RF5.6-2	9-24
	RF5.8-4A	9-20
	RF58-	9-24
	RF6-	9-24
	RF6.4-2.6	9-24
	RF6.5-	9-24
	RF6.6-	9-24
	RF64.7-2.5S	9-24
	RF6-5	9-21
	RF7-	9-24
	RF7.2-1.5	9-24
	RF7.5-2	9-24
	RF7.8-2.9A	9-21
	RF7-3.2A	9-21
	RF8-	9-24
	RF8.2-5	9-20
	RF8.5-	9-24
	RF8.8-2.9A	9-21
	RF8-3.5	9-20
	RF8-6.5A	9-21
	RF8-XA	9-21
	RF9-	9-24
	RF9.5-	9-24
	RF9.5-3.9A	9-21
	RF9.7-4.2A	9-20
	RF9-3.5	9-20
	RJ-22	7-19
	RJ-45	7-20
	RLA-1	1-111
	RLA-12.7	1-111
	RLL-	1-112
	RML-1	1-112
	RML-25	1-112
	RMM-	1-112
	ROFF-10F	1-107
	RPCL-11	6-74
	RPCL-9	6-74
	RR-1	1-115
	RS-28	9-8
	RS-28(N)N	9-8
	RS-28N	9-8
	RS-28S(RU)	9-8
	RS-40	9-8
	RS-40S(RU)	9-8
	RS-45	9-8
	RS-45(S)I	9-8
	RS-45S(RU)	9-8
	RS-50	9-8
	RS-50-2	9-8
	RS-50N	9-8
	RS-50S(RU)	9-8
	RS-55	9-8
	RS-55S(RU)	9-8
	RS-60	9-8
	RS-60N	9-8

	Part No.	Page
R	RS-61N	9-6
	RS-61S	9-6
	RSS-	1-112
	RSUA-1A	6-29
	RSUA-1B	6-29
	RSUS632	8-21
	RSUS632-6	8-21
	RWF10.2-2	9-22
	RWF18-8.5-1.5	9-22
	RWF20-1.5	9-22
	RWF25-2	9-22
	RWF3.5-	9-22
	RWF4.5-	9-22
	RWF40-2	9-22
	RWF43-2	9-22
	RWF8.5-3N	9-23
	RXL-	1-112
	RXS-1	1-111
	RXS-13.5	1-111
S	S	6-92
	S440-	8-10
	S4-40	8-6
	S632-	8-10
	S6-32	8-6
	SATAC-1	7-26
	SATAC-15	7-26
	SATAC-2	7-26
	SATAC-3	7-26
	SATAC-7	7-26
	SB-2	5-3
	SB4F-2	5-31
	SB4F-4	5-35
	SB4F-6	5-35
	SB4F-8	5-35
	SB4F-9	5-31
	SB4L-4	5-33
	SB4L-6	5-31
	SB5F-4	5-32
	SB5F-6	5-32
	SB5L-4	5-33
	SB5P-2	5-31
	SB5R-2	5-31
	SB5R-4	5-32
	SB5R-5	5-35
	SB6L-6	5-33
	SB6P4-4	5-32
	SB6R-6	5-32
	SB7L-2	5-33
	SB7R-7	5-34
	SB7R-7SP	5-34
	SB8R-2	5-32
	SB9R-2	5-32
	SBA-1	5-7
	SBB-1	5-36
	SBCR-7	5-37
	SBCR-9	5-37
	SBQC-1	5-36
	SBU-1	5-36
	SBU-2	5-36
	SBU4-4	5-35

	Part No.	Page
S	SBU4-4-1	5-35
	SBUT-1	5-46
	SC-	5-5
	SC-1216	5-5
	SC-1319A	5-5
	SC-1422S	5-5
	SC-1925A	5-5
	SC-1925S	5-5
	SCAB-12	7-51
	SCAB-2F	7-51
	SCAB-7	7-51
	SCB-	1-149
	SCB-10SA	1-149
	SCB-15A	1-149
	SCB3-38	1-149
	SCB4-	1-150
	SCB4-6A	1-150
	SCB-6SM3	1-149
	SCB-8.5S	1-149
	SCB832-15.9	1-149
	SCBA-	1-147
	SCBA-3S	1-147
	SCBA-6S	1-147
	SCBB-3	1-147
	SCBC-3	1-147
	SCBC-4.75	1-147
	SCBC-5.5	1-147
	SCBS632-	1-147
	SCB-XXS	1-149
	SCCVA-3	7-35
	SCCVA-4	7-35
	SCD-	6-94
	SCD-10	6-95
	SCD-12	6-95
	SCD-5	6-94
	SCD-6	6-94
	SCD-7	6-94
	SCD-9	6-94
	SCMB-	1-107
	SCT-0726	6-88
	SCT-1615	6-88
	SCT-1825	6-88
	SCW-1	8-1
	SCW-2	8-1
	SCW-3	8-1
	SCW-5	8-1
	SCWA-6	8-1
	SD-24	7-50
	SD-25	7-50
	SF	9-25
	SF	9-26
	SF	9-27
	SF-	9-25
	SF-	9-26
	SF-	9-27
	SF141410	9-29
	SF14722	9-28
	SF202013	9-28
	SF28722	9-28
	SFA-1	5-62

	Part No.	Page
S	SFPC-	7-24
	SFPC-1	7-23
	SFPC-10	7-23
	SFPC-13	7-23
	SFPC-15	7-25
	SFPC-17	7-23
	SFPC-19	7-24
	SFPC-2	7-23
	SFPC-3	7-23
	SFPC-7	7-23
	SFPC-8	7-23
	SFPC-9	7-25
	SI	9-30
	SI12243H6A	9-30
	SI30172H	9-30
	SI-3030-1	9-30
	SI335125H2	9-30
	SI34132H	9-30
	SI8925H5	9-30
	SLC-	4-118
	SLC-17	4-117
	SLC-19	4-116
	SLC-26L	4-118
	SLCA-15	4-116
	SLCB-8	4-115
	SLCC-	4-116
	SLCD-9.5	4-117
	SLCE-13	4-117
	SLCPA-1	4-116
	SLCPA-2	4-116
	SLP-3	2-64
	SM3-	8-15
	SM4-	8-15
	SM632-	8-15
	SMAP-	4-162
	SMAP-24S	4-162
	SMHC-1	1-107
	SMO-	8-6
	SOR-1	1-89
	SOR-2	1-89
	SOR-3	1-89
	SP1-4.8	1-31
	SPK-1	7-100
	SPK-2	7-100
	SPLK-1FA	7-100
	SPLK-1FB	7-100
	SPLK-2FA	7-100
	SPLK-2FB	7-100
	SPM-16	5-30
	SPMA-	5-30
	SPMB-	5-30
	SQA-1	5-41
	SQA-2	5-43
	SQA-3	5-43
	SQB-1	5-40
	SQB-2	5-40
	SQB-3	5-40
	SQB-4	5-41
	SQB-5	5-41
	SQCP-3.4	6-73

	Part No.	Page
S	SQD-1	5-40
	SQE-1	5-38
	SQE-2	5-38
	SQE-2-1	5-38
	SQE-3	5-38
	SQE-5	5-39
	SQF-1	5-39
	SQF-2	5-39
	SQF-4	5-39
	SQF-5	5-39
	SQF-6	5-39
	SQF-7	5-39
	SQF-8	5-39
	SQG-1	5-44
	SQG-10	5-45
	SQG-12	5-45
	SQG-13	5-45
	SQG-14	5-45
	SQG-15	5-44
	SQG-3	5-44
	SQG-4	5-44
	SQG-5	5-44
	SQG-6	5-44
	SQG-8	5-44
	SQG-9	5-44
	SQH-1	5-46
	SQH-2	5-46
	SQH-2L	5-46
	SQHB-1	5-47
	SQHB-10	5-48
	SQHB-13	5-48
	SQHB-14	5-47
	SQHB-3	5-47
	SQHB-5	5-47
	SQHB-6	5-48
	SQHB-7	5-47
	SQHB-8	5-48
	SQHB-9	5-48
	SQI-1	5-41
	SQJ-1	5-42
	SQJ-2	5-42
	SQJ-3	5-43
	SQJA-1	5-42
	SQJA-2	5-42
	SQK-1	5-40
	SQL-1	5-41
	SQM-1	5-46
	SQM-1L	5-46
	SQN-1	5-46
	SQN-2	5-46
	SQR-1	5-43
	SQS-1	5-49
	SQS-2	5-49
	SQS-3	5-49
	SQS-4	5-49
	SR2-	7-52
	SR2.5-5.8	7-52
	SR2.6-	7-52
	SR2.8-24	7-52
	SR3-	7-52

	Part No.	Page
S	SR3.2-4.5	7-52
	SR3.5-	7-52
	SR3.8-6.5	7-52
	SR4-	7-53
	SR4.3-5	7-53
	SR5-	7-53
	SR6-	7-53
	SRB-1	7-56
	SRCC-11	7-58
	SRCC-12F	7-58
	SRCC-13	7-58
	SRCC-4	7-59
	SRCC-5	7-59
	SRCC-7	7-59
	SRCC-7-1	7-59
	SRCC-9	7-59
	SRE3-4.5	7-54
	SRE3-5.5	7-54
	SRF3.5-	7-54
	SRF3.5-65	7-55
	SRF4-	7-56
	SRF4-4.6F	7-55
	SRF4-8	7-55
	SRFA3-3.5	7-53
	SRFA3-4	7-53
	SRH4.2-8	7-57
	SRLA-29.5	1-76
	SRLA-31.5	1-76
	SRLCB-	1-76
	SRMA-	1-106
	SRMA-2	1-106
	SRMK-11.5	7-99
	SRMK-8.5	7-99
	SRMKA-8	7-93
	SRR3.5-7.5	7-56
	SRR4.5-	7-56
	SRS3.5-4.5P	7-55
	SRS3.5-5P	7-58
	SRS3.5-7P	7-55
	SRS3-13P	7-54
	SRS4-7P	7-58
	SRS4-9K	7-58
	SRT	6-88
	SRT-111758	6-88
	SRT-182864	6-88
	SRT-203464	6-88
	SRU3.5-4.5	7-60
	SS-	1-87
	SS1-	1-86
	SS-10A	1-87
	SS-12A	1-87
	SS1-XXL	1-86
	SS1-XXS	1-86
	SS2-2.5U	1-86
	SS2-XXS	1-86
	SS3.5-	1-88
	SS3-7(1.3)	1-86
	SS4-	1-88
	SS4-12S	1-88
	SS4-16L	1-88

	Part No.	Page
S	SS-5A	1-87
	SSA-12.7	1-87
	SSA4-5.5	1-87
	SSDU1-3.5	1-33
	SSDU-9.2	1-33
	SSDU-9.6	1-33
	SSDUA-16.5	1-33
	SSU4-6.3	1-88
	SSUL-8	1-89
	ST-	5-56
	ST-11N	5-56
	ST-13	5-56
	ST-15	5-56
	ST-19	5-57
	ST-1SN	5-56
	ST-5NS	5-56
	ST-6	5-56
	ST-7	5-56
	ST-8	5-57
	ST-9	5-57
	STAT-CV24	7-42
	STB-XXXL	5-65
	STB-XXXM	5-65
	STB-XXXS	5-65
	STC-115	5-59
	STC-121	5-60
	STC-171	5-59
	STC-172	5-60
	STC-173	5-59
	STC-174	5-60
	STC-175	5-59
	STC-176	5-60
	STC-180	5-59
	STC-180L	5-59
	STCA-161	5-60
	STCA-172	5-60
	STCA-224	5-61
	STCA-225	5-61
	STCA-235	5-61
	STCB-110	5-61
	STCC-123	5-55
	STCL-100	5-61
	STL-XXXM	5-66
	STL-XXXS	5-66
	STM3-	8-11
	STM4-	8-11
	STM5-	8-11
	STM6-12	8-13
	STM632-	8-11
	STO-166	5-57
	STP-3.5	7-110
	SUM-6	6-51
	SUMA-6	6-51
	SUS632	8-21
	SUS832	8-21
	SVDOC-1	7-16
	SVDOC-1S	7-16
	SVDOC-2	7-16
	SVDOC-3	7-16
	SWB-	5-92

	Part No.	Page
S	SWB-4S	5-92
	SWC-1	6-95
	SWC-2	6-95
	SWCL-10	6-101
	SWCL-7	6-101
	SWCM-1	4-100
	SWKL-1	4-99
	SWKL-2	4-99
	SWPC-1	4-100
	SWPC-2	4-100
	SWPK-15F	5-62
	SWPL-	4-94
	SWPL-11	4-94
	SWPL-15S	4-96
	SWPL-16	4-97
	SWPL-18H	4-97
	SWPL-19H	4-96
	SWPL-2	4-94
	SWPL-20H	4-97
	SWPL-21	4-97
	SWPL-22	4-94
	SWPL-23	4-98
	SWPL-25H	4-95
	SWPL-27	4-94
	SWPL-3	4-94
	SWPL-37-1	4-96
	SWPL-37S-1	4-96
	SWPL-43	4-98
	SWPL-46	4-98
	SWPL-50	4-99
	SWPL-52	4-99
	SWPL-53	4-95
	SWPL-55	4-99
	SWPL-57	4-94
	SWPL-58	4-94
	SWPL-59	4-99
	SWPL-64	4-98
	SWPL-65	4-95
	SWPL-66	4-95
	SWPL-67	4-95
	SWPL-69	4-97
	SWPL-72	4-96
	SWPL-73	4-95
	SWPL-76	4-96
	SWPL-78	4-98
	SWPL-82	4-97
	SWPL-87	4-99
	SWPL-88	4-95
	SWPL-94	4-96
	SWS311030	6-78
	SWV-4	8-4
	SWVB-1	8-4
T	TC-	6-1
	TC-1A	6-1
	TC-1C	6-1
	TC-21	6-2
	TC-24	6-7
	TC-25	6-7
	TC-26	6-6
	TC-28-1	6-7

	Part No.	Page
T	TC-28-2	6-7
	TC-29	6-3
	TC-30	6-7
	TC-31	6-6
	TC-39	6-2
	TC-41	6-2
	TC-42	6-6
	TC-47	6-6
	TC-48	6-4
	TC-49	6-4
	TC-50	6-3
	TC-51	6-3
	TC-52	6-4
	TC-53	6-3
	TC-54	6-7
	TC-58	6-4
	TC-59	6-3
	TC-5A	6-1
	TC-60	6-5
	TC-61	6-5
	TC-62	6-5
	TC-63	6-6
	TC-65	6-7
	TC-67	6-5
	TC-68	6-5
	TCBA-10.5	1-60
	TCBA-10.5L	1-60
	TCBA-10.5S	1-60
	TCBC-13.7	1-70
	TCBC-8.7	1-70
	TCBD-4.8	1-70
	TCBE-13.7	1-70
	TCBE-8.7	1-70
	TCBS-	1-73
	TCBS-18	1-73
	TCBS-6A	1-73
	TCBT-	1-73
	TCBT-19	1-74
	TCBT-3.6	1-73
	TCEA-1	1-108
	TCEB3-	1-77
	TCEB3-11.1	1-77
	TCEB3-9.5	1-77
	TCEB4-	1-77
	TCEB4-11.1	1-77
	TCEB4-9.5	1-77
	TCEB632-	1-77
	TCEB632-11.1	1-77
	TCEB632-9.5	1-77
	TCEH-	1-150
	TCEP4-	1-150
	TCP-1	6-16
	TCSE-1	6-8
	TCSE-2F	6-8
	TCSE-3F	6-8
	TCSE-7	6-8
	TCSE-8F	6-8
	TERBL-33	10-3
	TERBL-6	10-3
	TEST-1	10-6

	Part No.	Page
T	TEST-10	10-9
	TEST-114	10-11
	TEST-115	10-11
	TEST-12	10-10
	TEST-129	10-7
	TEST-136	10-9
	TEST-140	10-10
	TEST-2	10-7
	TEST-22	10-8
	TEST-23	10-9
	TEST-24	10-10
	TEST-25	10-10
	TEST-26	10-10
	TEST-27	10-9
	TEST-28	10-10
	TEST-3	10-6
	TEST-31	10-9
	TEST-34	10-8
	TEST-3S	10-6
	TEST-4	10-8
	TEST-5	10-8
	TEST-55	10-7
	TEST-6	10-8
	TEST-7	10-6
	TEST-7CN	10-6
	TEST-8	10-8
	TEST-87	10-7
	TEST-9	10-9
	TF-017	9-11
	TF-018	7-117
	TF-039	5-27
	TF-041	9-13
	TF-1	7-109
	TF-1198	6-104
	TF-1298	3-30
	TF-1333	5-9
	TF-140	5-27
	TF-143	7-117
	TF-144	7-117
	TF-147	7-117
	TF-1556	6-103
	TF-1575	6-104
	TF-1596	9-29
	TF-1627	9-28
	TF-1639	6-104
	TF201113	9-29
	TF-222	5-28
	TF-246	7-33
	TF-250	8-4
	TF-263	2-35
	TF-268I	7-90
	TF-283	9-15
	TF-346	5-9
	TF-356	9-19
	TF-395I	5-18
	TF-444	2-35
	TF-448	9-11
	TF-461	5-28
	TF-546	9-13
	TF-561	9-11

	Part No.	Page
T	TF-568	7-114
	TF-589	7-12
	TF-605	9-4
	TF-618	5-27
	TFA-2	7-109
	TFF-	9-11
	TGM-	5-11
	TGM-	5-12
	TGM-10SW	5-16
	TGM-11	5-11
	TGM-112	5-15
	TGM-117	5-14
	TGM-123	5-13
	TGM-124	5-13
	TGM-126	5-14
	TGM-128A	5-16
	TGM-132	5-14
	TGM-13SW	5-16
	TGM-164	5-11
	TGM-166	5-13
	TGM-17	5-11
	TGM-17SW	5-16
	TGM-18	5-11
	TGM-21	5-11
	TGM3-10	5-16
	TGM3-11SW	5-16
	TGM-36	5-11
	TGM-38	5-11
	TGM3-8SW	5-16
	TGM3-9.8SW	5-16
	TGM-40	5-11
	TGM-41	5-11
	TGM4-11SW	5-16
	TGM4-13ST-1	5-16
	TGM4-13SW	5-16
	TGM-45	5-11
	TGM-49	5-12
	TGM-51	5-12
	TGM-58	5-15
	TGM632-10	5-16
	TGM-64	5-12
	TGM-65	5-12
	TGM-67	5-12
	TGM-68	5-12
	TGM-69	5-15
	TGM-69-1	5-15
	TGM-71	5-12
	TGM-73	5-14
	TGM-74	5-14
	TGM-76	5-12
	TGM-83	5-12
	TGM-88	5-12
	TGM-96	5-13
	TGU-1	5-13
	TH-1	4-131
	TH-2	4-133
	TH-2S	4-133
	TH-3	4-131
	TH-3L	4-131
	TH-4	4-132

	Part No.	Page
T	TH-5	4-132
	TH-5-1	4-132
	TH-6	4-132
	TH-7	4-132
	TH-8	4-132
	TH-9	4-133
	THA-	4-119
	THC-	4-120
	THC-1S	4-120
	THC-5	4-120
	THC-6	4-120
	THCA-1	4-122
	THCC-1	4-65
	THD-1	4-121
	THD-2	4-121
	THD-3	4-121
	THD-4	4-121
	THE-	4-119
	THE-11	4-118
	THE-38	4-118
	THE-39	4-118
	THEL-41	4-123
	THF-1	4-123
	THFA-1	4-123
	THG-12	4-122
	THG-13	4-122
	THG-14	4-122
	THH-8	4-123
	THH-9	4-123
	THI-4	4-121
	THJ-15	4-122
	THJA-1	4-127
	THL-4.8	4-121
	THM-1	4-128
	THMA-1	4-134
	THMB-1	6-82
	THMB-2	6-82
	THMB-3	6-82
	THMC-1	6-82
	THMK-1	6-82
	THN-1	4-120
	THP-1	4-77
	THR5-8	8-16
	THRI3-6	8-15
	THRI4-7	8-15
	THRI6-	8-16
	THRIA3-2.4	8-15
	THU-1	4-134
	THU-2	4-134
	THV-	4-113
	THV-11	4-113
	THV-14	4-115
	THV-5	4-113
	THV-6	4-114
	THV-8	4-114
	THV-9	4-114
	THVA-1	4-111
	THVB-1	4-111
	THVC-1	4-45
	THVD-1	4-114

	Part No.	Page
T	THW-1	4-115
	THW-2	4-115
	TL-	4-127
	TL-3A	4-127
	TM-2S6	4-133
	TM-2S8	4-133
	TM-3S10	4-133
	TM-3S25	4-133
	TM-3S8	4-133
	TNF-1	9-13
	TNF-15	9-14
	TNF-19	9-14
	TNF-2	9-13
	TNF-3	9-13
	TNF-41	9-13
	TNF-44	9-13
	TNF-46	9-14
	TNF-47	9-14
	TNF-5	9-13
	TNF-6	9-13
	TNF-7	9-13
	TNF-9	9-14
	TNFF-1	9-12
	TNFF-2	9-12
	TNFF-3	9-12
	TNFF-4	9-12
	TO-05	6-32
	TO-05-1	6-32
	TO-05S	6-32
	TO-18	6-33
	TO-18M	6-33
	TO-18S	6-33
	TO-220	6-87
	TO-220AWO	6-86
	TO-220CV	6-88
	TO-220ST	10-50
	TO-3	6-87
	TO-3APF	6-36
	TO-3P	6-87
	TO-3PAWO	6-86
	TO-3PCV	6-88
	TO-3PCV-C	6-88
	TO-5	6-35
	TO-5-1	6-35
	TO-92	6-33
	TO-92-4	6-33
	TO-92-9	6-33
	TOA-92-9.5	6-33
	TP-	1-137
	TP-10.8	1-138
	TP-10.8L	1-137
	TP-10BA	1-144
	TP-11.2	1-138
	TP-12A	1-137
	TP-18SUS	1-144
	TP2-	1-135
	TP2.5-	1-136
	TP2.5-2-6	1-136
	TP2.6-	1-136
	TP-25ST	1-144

	Part No.	Page
T	TP2L-4	1-135
	TP2-XXS	1-135
	TP-30SUS	1-144
	TP3-10.4	1-138
	TP3-10L	1-138
	TP3-12L	1-138
	TP3-2.5-6	1-137
	TP-32.7L	1-137
	TP3-45LST	1-144
	TP3-45ST	1-144
	TP3-6L	1-138
	TP3-7.5	1-137
	TP3-9ST	1-144
	TP4-	1-140
	TP4-10L	1-140
	TP4-10LS	1-140
	TP440-	1-141
	TP440-25.4	1-140
	TP440-25.4	1-141
	TP440-6.4-4.8	1-141
	TP440-8S	1-141
	TP4-XXL	1-140
	TP4-XXR	1-140
	TP-55SUS	1-144
	TP-5S	1-138
	TP-5SM	1-138
	TP632-	1-141
	TP632-17.5L	1-141
	TP632-19.05BA	1-145
	TP632-25.4BA	1-145
	TP632-M310	1-141
	TP632-XXS	1-141
	TP-6S	1-138
	TP-6ST	1-145
	TP-6ST-1	1-145
	TP-7-4	1-138
	TP-8L	1-138
	TP-9-4	1-138
	TPA-4	1-135
	TPB3-20NI	1-144
	TPB3-40NI	1-144
	TPD-19	1-138
	TPIM2.5-3-42	1-145
	TPIM4-90	1-145
	TPR4-15	1-139
	TPS-	1-137
	TPS-10S	1-137
	TPS3-7ST	1-144
	TPS4-13	1-139
	TPS4-30	1-139
	TPS44-11	1-139
	TPS4-55	1-139
	TPS632-6	1-139
	TP-XXS	1-138
	TR-1	6-42
	TR-10	6-43
	TR-10A	6-43
	TR-10S	6-43
	TR-11	6-43
	TR-12	6-49

	Part No.	Page
T	TR-13	6-43
	TR-14	6-43
	TR-16	6-43
	TR-17	6-43
	TR-18	6-43
	TR-19	6-49
	TR-2	6-42
	TR-21	6-44
	TR-22	6-44
	TR-23	6-44
	TR-23S	6-44
	TR-24	6-44
	TR-25	6-44
	TR-26	6-44
	TR-29	6-44
	TR3-	6-49
	TR-30	6-42
	TR-31	6-49
	TR3-11-1	6-50
	TR-32	6-50
	TR-33	6-50
	TR-34	6-45
	TR-35	6-45
	TR-36	6-45
	TR-37	6-45
	TR-38	6-45
	TR-4	6-36
	TR-41	6-50
	TR-42	6-51
	TR-43	6-50
	TR-45	6-45
	TR-5	6-42
	TR-50	6-49
	TR-6	6-36
	TR-7	6-43
	TR-8	6-43
	TR-9	6-48
	TRA-1	6-55
	TRAB-1	6-56
	TRAC-1.2	6-56
	TRAC-10.8L	6-57
	TRAC-2	6-56
	TRAC-5.3	6-56
	TRAC-9	6-57
	TRAD-0.9	6-56
	TRAE-2.35	6-56
	TRB-1	6-34
	TRB-12	6-80
	TRB-2	6-34
	TRB-3	6-81
	TRB-4	6-81
	TRC-1	6-36
	TRCMP-1	10-47
	TRCMP-2	10-47
	TRCMP-3	10-47
	TRCMP-4	10-47
	TRCMP-5	10-47
	TRCMP-6	10-47
	TRD-1	6-47
	TRE-1-1	6-53

	Part No.	Page
T	TRF-1	6-48
	TRG-	6-46
	TRGB-1	6-51
	TRGL-1	6-47
	TRGS-9	6-46
	TRGV-5	6-46
	TRGV-6.7	6-46
	TRGV-7	6-46
	TRK-1	10-52
	TRK-10	10-54
	TRK-11	10-52
	TRK-12	10-54
	TRK-16F	10-54
	TRK-17AF	10-54
	TRK-2	10-52
	TRK-22	10-53
	TRK-24	10-53
	TRK-35	6-8
	TRK-40	10-53
	TRK-52	10-53
	TRK-54	10-52
	TRK-56	10-53
	TRK-6	10-53
	TRK-67	10-53
	TRK-8	10-54
	TRK-9	10-54
	TRMC-1	10-49
	TRMC-10	10-51
	TRMC-11	10-51
	TRMC-12	10-51
	TRMC-121	10-50
	TRMC-122	10-49
	TRMC-123	10-49
	TRMC-124	10-49
	TRMC-126	10-50
	TRMC-135	10-50
	TRMC-141	10-49
	TRMC-17	10-49
	TRMC-2	10-49
	TRMC-20	10-48
	TRMC-23	10-48
	TRMC-26	10-48
	TRMC-30	10-49
	TRMC-34	10-48
	TRMC-35	10-48
	TRMC-40	10-48
	TRMC-49	10-48
	TRMC-5	10-49
	TRMC-53	10-51
	TRMC-59	10-49
	TRMC-6	10-49
	TRMC-61	10-49
	TRMC-68	10-51
	TRMC-7	10-48
	TRMC-7	10-48
	TRMC-76	10-48
	TRMC-77	10-48
	TRMC-78	10-48
	TRMC-8	10-50
	TRMC-9	10-49

	Part No.	Page
T	TRMH-20	7-115
	TRO-7.5	6-46
	TRS-5	6-47
	TRS-6.5	6-47
	TRU-6.5	6-47
	TRU-6.5PV05	6-47
	TRW-10	6-48
	TRW3-2	6-49
	TRW3-3	6-49
	TRW3-4	6-49
	TRW3-5	6-49
	TRW-8	6-48
	TRWF-10	6-48
	TRWF-8	6-48
	TSC-1	6-96
	TSC-10	6-97
	TSC-11	6-97
	TSC-18	6-100
	TSC-19	6-97
	TSC-2	6-96
	TSC-20	6-100
	TSC-22	6-96
	TSC-23	6-96
	TSC-24	6-102
	TSC-25	6-98
	TSC-26	6-98
	TSC-27	6-102
	TSC-28	6-99
	TSC-29	7-51
	TSC-2A	6-96
	TSC-3	6-100
	TSC-32	6-97
	TSC-33	6-97
	TSC-36	6-100
	TSC-38	6-101
	TSC-4	6-98
	TSC-40	6-98
	TSC-42	6-99
	TSC-45	6-98
	TSC-46	6-97
	TSC-5	6-98
	TSC-6	6-98
	TSC-7	6-102
	TSC-7L	6-102
	TSC-7T	6-102
	TSC-7Y	6-102
	TSC-8	6-97
	TSC-9	6-100
	TW-	6-17
	TW-	6-18
	TW-	6-19
	TW-	6-20
	TW-	6-23
	TW-	6-25
	TW-124	6-23
	TW-125	6-22
	TW-133	6-21
	TW-147	6-21
	TW-178	6-22
	TW-180	6-24

	Part No.	Page
T	TW-190	6-26
	TW-191	6-26
	TW-210	6-22
	TW-236	6-24
	TW-241	6-21
	TW-277	6-24
	TW-297	6-21
	TW-298	6-21
	TW-299	6-21
	TW-312	6-24
	TWC-	6-22
	TWC-1	6-26
	TWC-14	6-28
	TWC-15	6-27
	TWC-17	6-31
	TWC-19	6-27
	TWC-2	6-27
	TWC-4	6-28
	TWC-8	6-27
	TWU-1	6-28
	TWU-2	6-28
	TWU-3	6-28
U	U-	6-30
	UB-14D	1-91
	UB-3S	1-90
	UB-6	1-90
	UB-6D	1-91
	UB-6E	1-90
	UBD-1	1-90
	UB-XXA	1-90
	UCBS-	1-53
	UCBS-5A	1-53
	UCBSL-10	1-53
	UCBSL-9	1-53
	ULCB-	1-100
	ULCB-15	1-100
	ULCB-38	1-100
	ULCB-9S	1-100
	ULCBA-5	1-97
	ULCBA-7.8	1-99
	ULCBB-7.9	1-99
	ULCBM4-9.5	1-96
	ULCC-	1-96
	ULCD-7.8	1-95
	ULCE-9	1-99
	ULCF-	1-91
	ULCF-8S	1-91
	ULCG-1	8-43
	ULCG-2	8-43
	ULCH-1	1-96
	ULCH-2	1-96
	ULCH-2S	1-96
	ULCI-11	1-95
	ULCIJ-4	1-95
	ULCK-6.4	1-95
	ULCKA-15.6	1-105
	ULCN-1	1-158
	ULCN1.7-2.4	1-158
	ULCN2.2-1.2	1-158
	ULCN2.5-	1-158

	Part No.	Page
U	ULCN2.5-1.2	1-158
	ULCN3.4-	1-158
	ULCN6.3-1.6	1-158
	ULCNA2.5-1.8	1-159
	ULCNA4-1.8	1-159
	ULCND1.5-11	1-159
	ULCND2.5-1.6	1-161
	ULCO2.4-	1-157
	ULCO2.5-	1-157
	ULCO6.6-	1-157
	ULCO6.6-	1-158
	ULCO6.6-3.1S	1-158
	ULCOA5-1.6	1-159
	ULCOB-1	1-158
	ULCOB-2	1-158
	ULCOB3.3-2.3	1-158
	ULCOB3.4-1.6	1-159
	ULCOB6-2.3	1-158
	ULCOC-1	1-160
	ULCOC-2	1-160
	ULCOC2.2-1.6	1-161
	ULCOC2.4-2.6	1-161
	ULCOC-4	1-161
	ULCOC-8	1-161
	ULCOC-9	1-160
	ULCOD-1	1-161
	ULCOD1.5-1.6	1-161
	ULCOE-1	1-160
	ULCOE-3	1-160
	ULCOE-4	1-160
	ULCOF-2F	1-162
	ULCOG2.5-1.6	1-158
	ULCOG6.3-1.6	1-158
	ULCOI-1	1-162
	ULCOI-2.4	1-162
	ULCOI-6.6	1-162
	ULCOJ-1	1-158
	ULCSA-16	1-97
	ULCSA-16S	1-97
	ULCSA-28.8S	1-97
	ULCSA-8	1-97
	ULCSA-8S	1-97
	ULCSD-5	1-98
	ULCSE-7	1-98
	ULCSF-6.6	1-98
	ULCW2.5-1.6	1-158
	ULCY-1	1-159
	ULCY3.9-1.6	1-159
	ULCZ-1.6	7-54
	ULD-1	1-162
	UNCV-1	1-163
	UPA-1	6-31
	UPA-2	6-31
	UPC-	6-29
	UPD-1	6-26
	USB3C-1	7-8
	USB3C-2	7-8
	USB3C-3	7-8
	USB3C-4	7-8
	USBC-1	7-3

	Part No.	Page
U	USBC-10	7-4
	USBC-11	7-2
	USBC-13	7-4
	USBC-14	7-1
	USBC-15	7-3
	USBC-16	7-4
	USBC-17	7-5
	USBC-2	7-1
	USBC-21	7-9
	USBC-24	7-1
	USBC-25	7-4
	USBC-3	7-3
	USBC-30	7-5
	USBC-31	7-3
	USBC-31-1	7-3
	USBC-33	7-1
	USBC-34	7-2
	USBC-37	7-1
	USBC-4	7-2
	USBC-6	7-1
	USBC-7	7-2
	USBC-8	7-2
	USBC-9	7-4
	USBH-1	7-9
	UT-	6-24
	UT-11	6-26
	UT-14	6-30
	UT-17	6-25
	UT-2	6-25
	UT-4	6-26
	UT-7	6-26
	UT-8	6-25
V	V-	6-91
	VC0707008	6-90
	VC907413	6-90
	VCBA-14.4F	1-46
	VCBS-	1-45
	VCBSL-	1-46
	VCO15023	5-64
	VCO19812	5-64
	VCO25020	5-64
	VCO-7NL	5-64
	VCO-888	5-64
	VCP	6-91
	VGAB-1	7-33
	VGAB-2	7-33
	VGAC-1	7-32
	VRCV-1	6-53
	VRCVA-18	6-95
	VRCVA-21.4	6-95
	VRCVA-27.5	6-95
	VRCVA-33	6-95
W	W2LK-1	4-59
	WAK-1	4-149
	WAL-1	4-149
	WAL-2	4-149
	WAS-1	4-79
	WBH-	1-80
	WBHB-1.8	1-80
	WBHC-6.4	1-80

	Part No.	Page
W	WC-1	4-27
	WC-10	4-28
	WC-12	4-27
	WC-4	4-32
	WC-5	4-28
	WC-6	4-27
	WC-7	4-27
	WCA-1	4-22
	WCC-1	4-22
	WCC-1S	4-22
	WCC-2	4-22
	WCC-3	4-22
	WCC-5	4-23
	WCC-6	4-23
	WCC-7	4-23
	WCC-8	4-22
	WCC-9	4-23
	WCD-1	4-21
	WCD-2	4-21
	WCD-3	4-21
	WCL-	4-30
	WCL-1	4-29
	WCL-10	4-30
	WCL-11	4-28
	WCL-12	4-28
	WCL-13	4-29
	WCL-15	4-29
	WCL-18	4-30
	WCL-2	4-147
	WCL-24	4-31
	WCL-25	4-31
	WCL-26	4-31
	WCL-3	4-147
	WCL-8	4-30
	WCL-9	4-30
	WCLA-1	4-32
	WCLL-1	4-36
	WCM-1	4-36
	WCM-10	4-37
	WCM-11	4-37
	WCM-2	4-36
	WCM-5L	4-37
	WCM-9A	4-37
	WCS-1	4-35
	WCS-2	4-35
	WCS-3	4-36
	WCS-4	4-36
	WCT-4	4-29
	WCT-5	4-29
	WCT-6	4-29
	WDF-1	4-20
	WDF-10	4-21
	WDF-2	4-20
	WDF-3	4-20
	WDF-4	4-20
	WDF-6	4-21
	WDF-7	4-21
	WDF-8	4-21
	WDF-9	4-21
	WDT-20	4-17

	Part No.	Page
W	WKA-1	4-87
	WKL-10	4-124
	WKL-10A	4-124
	WKM-10	4-87
	WKM-2	4-87
	WL-	4-93
	WL3-XXH	10-5
	WL3-XXT	10-5
	WL4-XXH	10-5
	WL4-XXT	10-5
	WL5-70H	10-5
	WL5-70T	10-5
	WL6-78H	10-5
	WL6-78T	10-5
	WLC-1	10-5
	WLCF-	1-91
	WLD-XXH	10-5
	WLF-1	4-57
	WLF-2	4-57
	WLF-3	4-58
	WLF-4	4-58
	WLF-5	4-58
	WLL-	4-39
	WLL-1	4-38
	WLL-10	4-41
	WLL-11	4-42
	WLL-12	4-42
	WLL-13	4-38
	WLL-14	4-39
	WLL-16	4-38
	WLL-17	4-40
	WLL-18	4-40
	WLL-19	4-40
	WLL-1S	4-38
	WLL-2	4-39
	WLL-20	4-41
	WLL-24	4-39
	WLL-6	4-40
	WLL-6L	4-40
	WLL-8	4-42
	WLL-9	4-40
	WLLC-1	6-82
	WLLD-14	4-42
	WLLT-1	4-44
	WLLT-3	4-45
	WLM-1	4-58
	WLN-	4-58
	WLN-1S	4-58
	WLN-6	4-58
	WLO-1	4-89
	WLO-1-2.5	4-89
	WLO-2	4-89
	WLO-2-2.5	4-89
	WLO-3	4-90
	WLT-1	4-59
	WLT-2	4-59
	WLU-1	4-41
	WLU-2	4-41
	WLU-3	4-41
	WMEA-1	7-113

	Part No.	Page
	WMEZ-1	7-113
	WMEZ-2	7-113
	WMEZ-3	7-113
	WMEZ-4	7-113
	WPBT-1	6-73
	WPEG-1	4-85
	WPEG-2	4-85
	WPEG-3	4-85
	WPEM-1	4-84
	WPEM-1S	4-84
	WPEM-2	4-84
	WRA-18	4-27
	WRA-6	4-26
	WS	6-61
	WS	6-62
	WS	6-63
	WSA6-1.5	6-63
	WSA6-6.3	6-63
	WSB-	4-32
	WSBC-1	4-86
	WSBH-	4-67
	WSBH-13	4-67
	WSC-1	6-72
	WSF-3	6-28
	WSG-1	6-72
	WSH-1	6-66
	WSK-1	4-22
W	WSQ4-2	6-73
	WSR9.1-8.6-1	6-66
	WSRA3.2-1	6-61
	WSS-1	4-31
	WSS-2	4-79
	WSS-2L	4-79
	WSSA-1	4-77
	WSU-1	6-72
	WSU-515	6-72
	WSUA-1	6-71
	WSUA-2	6-71
	WSUB-1	6-71
	WSUB-4	6-71
	WSUC-1	6-71
	WSUC-2	6-71
	WSW8-3.4-0.5	6-69
	WT-	4-38
	WT-2	4-38
	WT-2L	4-38
	WTC-2	4-45
	WTC-3	4-45
	WTL-	4-124
	WTL-11	4-124
	WTL-19	4-124
	WUCD-100	4-78
	WUCD-36	4-74
	WUCDF-100	4-78
	WUD-1	4-45
X	XLR-1	7-16
	XLR-2	7-16
Y	YES-08	1-83
	YES-3	1-83
	YES-32	1-83

	Part No.	Page
Y	YES-48	1-83
	YJ-	5-52
	YJ-	5-54
	YJ-123	5-51
	YJ-98X	5-54
	YJECL-1	4-138
	YJECL-2	4-138
	YJHH-4.8	5-63
	YJ-R150	5-52
	YJ-R151	5-51
	YJ-R191	5-51
	YJ-R200	5-52
	YJ-R231	5-51
	YJ-R250	5-52
	YJ-RXXX	5-53
	工具	5-93
	熱縮套管	5-67
	黏貼標誌貼紙	5-92
	織布管	5-68

MEMO

MEMO

合格證書


Certificate of Registration

The Governing Board of
ARES INTERNATIONAL CERTIFICATION CO., LTD.
hereby grants to :

康揚企業股份有限公司

新北市汐止區環河街 187 號
台中市潭子區豐興路二段 338 巷 13-5 號

Has been assessed and found to be in accordance with the requirements of standard detailed below

ISO 9001:2015

Scope

塑膠射出電子零件之製造

Authorized by :

Certificate Number: ARES/TW/19103310 Certificate Renewal Date: 2019-11-09
Initial Certificate Date: 2017-11-10 Registration Expiration Date: 2020-11-09

ARES INTERNATIONAL CERTIFICATION CO., LTD.

IAF TAF


Certificate of Registration

The Governing Board of
ARES INTERNATIONAL CERTIFICATION CO., LTD.
hereby grants to :

康揚塑胶（东莞）有限公司

中国广东省东莞市
长安镇上角社区虹梯路 2 号

质量管理体系符合

GB/T19001-2016/ISO9001:2015

认证范围

塑胶射出电子零件之制造

ARES INTERNATIONAL CERTIFICATION CO., LTD.

IAF


Certificate of Registration

The Governing Board of
ARES INTERNATIONAL CERTIFICATION CO., LTD.
hereby grants to :

康哲电脑配件（吴江）有限公司

注册地址：中国江苏省苏州市吴江区松陵镇花港路
经营地址：中国江苏省苏州市吴江区松陵镇花港路 877 号

质量管理体系符合

GB/T19001-2016/ISO9001:2015

认证范围

塑胶射出电子零件之制造

ARES INTERNATIONAL CERTIFICATION CO., LTD.

IAF


Certificate of Registration

The Governing Board of
ARES INTERNATIONAL CERTIFICATION CO., LTD.
hereby grants to :

康揚企業股份有限公司

新北市汐止區環河街 187 號
台中市潭子區豐興路二段 338 巷 13-5 號

Has been assessed and found to be in accordance with the requirements of standard detailed below

ISO 14001:2015

Scope

塑膠射出電子零件之製造

Authorized by :

Certificate Number: ARES/TW/19103310 Certificate Renewal Date: 2019-11-09
Initial Certificate Date: 2017-11-10 Registration Expiration Date: 2020-11-09

ARES INTERNATIONAL CERTIFICATION CO., LTD.

IAF TAF


Certificate of Registration

The Governing Board of
ARES INTERNATIONAL CERTIFICATION CO., LTD.
hereby grants to :

康揚塑胶（东莞）有限公司

中国广东省东莞市
长安镇上角社区虹梯路 2 号

环境管理体系符合

GB/T24001-2016/ISO14001:2015

认证范围

塑胶射出电子零件之制造相关环境管理活动

ARES INTERNATIONAL CERTIFICATION CO., LTD.

IAF


Certificate of Registration

The Governing Board of
ARES INTERNATIONAL CERTIFICATION CO., LTD.
hereby grants to :

康哲电脑配件（吴江）有限公司

注册地址：中国江苏省苏州市吴江区松陵镇花港路
经营地址：中国江苏省苏州市吴江区松陵镇花港路 877 号

环境管理体系符合

GB/T24001-2016/ISO14001:2015

认证范围

塑胶射出电子零件之制造相关环境管理活动

ARES INTERNATIONAL CERTIFICATION CO., LTD.

IAF


ASR American Systems Registrar

American Systems Registrar, LLC. 证書編號: IAOB-1021

康揚企業股份有限公司

42744 臺灣台中市潭子區豐興路二段338巷13-5號

驗證範圍:

塑膠件射出電子零件之製造

IATF 16949:2016

IATF 證書編號:	0281655
ASR 證書編號:	6904
排除條款:	8.3 產品設計
證書發佈日期:	2017年12月12日
證書有效日期:	2020年12月11日

This is only a translation for the English certificate; it must be used with English version in the same time, or it will be no longer in force.

頁次 1 / 2

CERTIFICATE OF REGISTRATION


ASR American Systems Registrar

American Systems Registrar, LLC. Certificate Number: IAOB-1021

KANG YANG HARDWARE ENTERPRISES CO., LTD.
NO. 13-5, LANE 338, SEC. 2, FENG-HSING ROAD
TANZI DISTRICT, TAICHUNG CITY, 42744, TAIWAN

with a scope of:

THE MANUFACTURING OF PLASTIC INJECTION PARTS FOR ELECTRONIC PRODUCTS

American Systems Registrar issues this certificate and applicable appendices to KANG YANG Hardware Enterprises Co., Ltd. after assessing their quality system and find it in compliance with the first edition of:

IATF 16949:2016

IATF Certificate Number:	0281655
ASR Certificate Number:	6904
Exclusions:	8.3 Product Design
Date of Certification:	December 12, 2017
Date of Certification Expiration:	December 11, 2020
Revision:	

President

Page 1 of 2

CERTIFICATE OF REGISTRATION


Certificate of Registration

nqa

证书

康哲电脑配件（吴江）有限公司

的职业健康安全管理体系适用于

电子产品用注塑件的生产

已经 NQA 根据标准

OHSAS18001:2007

审核和注册

Managing Director

Certificate Number 44938

Date: 19 June 2018
Valid Until: 19 June 2021
EAC Code: 14

UKAS

合格證書


Certificate of Registration

The Governing Board of ARES INTERNATIONAL CERTIFICATION CO., LTD. hereby grants to :

Kang Yang Hardware Enterprises Co., Ltd.

No.157, Huanhe St., Xizhi Dist., New Taipei City 22154, Taiwan (R.O.C.)
NO. 13-5, LN.338, SEC.2, FENG-HSING ROAD, TANZI DISTRICT, TAICHUNG CITY, 42744, TAIWAN (R.O.C.)

Has been assessed and found to be in accordance with the requirements of standard detailed below

ISO 9001:2015

Scope

The Manufacture of Plastic Injection Parts for Electronic Products

Authorized by : Chiou Guyuwen

Certificate Number: ARES/TW/19103010Q
Initial Certificate Date: 2017-11-10
Certificate Renewal Date: 2019-13-09
Registration Expiration Date: 2020-11-09

ARES INTERNATIONAL CERTIFICATION CO., LTD.


Certificate of Registration

The Governing Board of ARES INTERNATIONAL CERTIFICATION CO., LTD. hereby grants to :

Kang Yang Hardware Enterprises Co., Ltd.

No.157, Huanhe St., Xizhi Dist., New Taipei City 22154, Taiwan (R.O.C.)
No.13-5, Ln. 338, Sec. 2, Feng-Hsing Rd., Tanzi Dist., Taichung City 42744, Taiwan (R.O.C.)

Has been assessed and found to be in accordance with the requirements of standard detailed below

ISO 14001:2015

Scope

The Manufacture of Plastic Injection Parts for Electronic Products

Authorized by : Chiou Guyuwen

Certificate Number: ARES/TW/19110910
Initial Certificate Date: 2017-11-10
Certificate Renewal Date: 2019-13-09
Registration Expiration Date: 2020-11-09

ARES INTERNATIONAL CERTIFICATION CO., LTD.


Certificate of Registration

The Governing Board of ARES INTERNATIONAL CERTIFICATION CO., LTD. hereby grants to :

KANG CHE COMPUTER COMPONENTS (WU JIANG) CO., LTD.
(Organization Credit Code: 91320509724441303J)
Registered Address: Huagang Road, Songling Town, Wujiang District, Suzhou City, Jiangsu Province, P.R.China
Business Address: No.877, Huagang Road, Songling Town, Wujiang District, Suzhou City, Jiangsu Province, P.R.China

Has been assessed and found to be in accordance with the requirements of standard detailed below

GB/T19001-2016/ISO9001:2015

Scope

The Manufacture of Plastic Injection Parts for Electronic Products.

Authorized by : Chiou Guyuwen

Certificate Number: ARES/CN/Q1710010Q
Initial Certificate Date: 2017-10-17
Certificate Renewal Date:2019-10-11
Registration Expiration Date: 2020-10-16

ARES INTERNATIONAL CERTIFICATION CO., LTD.


IEC QUALITY ASSESSMENT SYSTEM (IECQ) covering Electronic Components, Assemblies, Related Materials and Processes

IECQ Certificate of Conformity
Hazardous Substance Process Management

IECQ Certificate No.: IECQ-H ARES 18.0011 | Issue No.: 2 | Status: Current
Supersedes: IECQ-H ARES 18.0011 Issue 1 | Issue Date: 2018/12/12 | Org Issue: 2018/01/04
CB Reference No.: ARES/TW/1801035HSPM | Expiration: 2021/01/23

Applicable to:

- European Directive 2011/65/EU ("RoHS – Restriction of the use Of certain Hazardous Substances") in electrical and electronic equipment. Including all published amendments

KANG YANG HARDWARE ENTERPRISES CO., LTD.
NO. 187, HUANHE STREET, XIZHI DISTRICT,
NEW TAIPEI CITY, 22154
Taiwan

The organization has developed and implemented Hazardous Substance Process Management procedures and related processes which have been assessed and found to comply with the applicable requirements for IECQ HSPM organization approval which is in accordance with the Basic Rules IECQ 01 and Rules of Procedure IECQ 03-5 "IECQ Hazardous Substances Process Management" of the IEC Quality Assessment System for Electronic Components (IECQ), and with respect to the IECQ Specification:

- IECQ QC 080000:2017 - Hazardous Substance Process Management System Requirements

This Certificate is applicable to all electronic components, assemblies, related materials and processes for the following scope of activities:
The manufacturing of plastic injection parts for electronic products.

Issued by the Certification Body: ARES International Certification Co., Ltd.
No.13-2, Ln. 187, Wenqing Rd.,
Anping Dist., Tainan City 708,
Taiwan
Authorized person:
CHOU Giuyuwen


IEC QUALITY ASSESSMENT SYSTEM (IECQ) covering Electronic Components, Assemblies, Related Materials and Processes

IECQ Certificate of Conformity
Hazardous Substance Process Management

IECQ Certificate No.: IECQ-H ARES 18.0003 | Issue No.: 1 | Status: Current
Supersedes: | Issue Date: 2018/01/05 | Org Issue: 2018/01/05
CB Reference No.: ARES/CN/1811030HSPM | Expiration: 2022/01/24

Applicable to:

- European Directive 2011/65/EU ("RoHS – Restriction of the use Of certain Hazardous Substances") in electrical and electronic equipment. Including all published amendments

KANG YANG PLASTIC (DONG GUAN) CO., LTD.
No.2, Hongmian Road, Shangjiao Community, Chang'an Town, Dongguan City, Guangdong Province, China

The organization has developed and implemented Hazardous Substance Process Management procedures and related processes which have been assessed and found to comply with the applicable requirements for IECQ HSPM organization approval which is in accordance with the Basic Rules IECQ 01 and Rules of Procedure IECQ 03-5 "IECQ Hazardous Substances Process Management" of the IEC Quality Assessment System for Electronic Components (IECQ), and with respect to the IECQ Specification.

- IECQ QC 080000:2017 - Hazardous Substance Process Management System Requirements

This Certificate is applicable to all electronic components, assemblies, related materials and processes for the following scope of activities:
The Manufacture of Plastic Injection Parts for Electronic Products.

Issued by the Certification Body: ARES International Certification Co. Ltd.
No.13-2, Ln. 187, Wenqing Rd.,
Anping Dist., Tainan City 708
Taiwan
Authorized person:
CHOU Giuyuwen


IEC QUALITY ASSESSMENT SYSTEM (IECQ) covering Electronic Components, Assemblies, Related Materials and Processes

IECQ Certificate of Conformity
Hazardous Substance Process Management

IECQ Certificate No.: IECQ-H ARES 18.0008 | Issue No.: 1 | Status: Draft
Supersedes: | Issue Date: 2018/12/19 | Org Issue: 2018/12/19
CB Reference No.: ARES/CN/1811002HSPM | Expiration: 2021/12/18

Applicable to:

- European Directive 2011/65/EU ("RoHS – Restriction of the use Of certain Hazardous Substances") in electrical and electronic equipment. Including all published amendments

KANG CHE COMPUTER COMPONENTS (WU JIANG) CO., LTD.
No.877, Huagang Road, Songling Town, Wujiang District, Suzhou City, Jiangsu Province
China

The organization has developed and implemented Hazardous Substance Process Management procedures and related processes which have been assessed and found to comply with the applicable requirements for IECQ HSPM organization approval which is in accordance with the Basic Rules IECQ 01 and Rules of Procedure IECQ 03-5 "IECQ Hazardous Substances Process Management" of the IEC Quality Assessment System for Electronic Components (IECQ), and with respect to the IECQ Specification.

- IECQ QC 080000:2017 - Hazardous Substance Process Management System Requirements

This Certificate is applicable to all electronic components, assemblies, related materials and processes for the following scope of activities:
The Manufacture of Plastic Injection Parts for Electronic Products.

Issued by the Certification Body: ARES International Certification Co. Ltd.
No.12-2, Ln. 187, Wenqing Rd.,
Anping Dist., Tainan City 708
Taiwan
Authorized person:
CHOU Giuyuwen


BUREAU VERITAS Certification

Kang Che Computer Components (Wujiang) Co., Ltd.

NO.877,HUAGANG ROAD, SONGLING TOWN, SUZHOU CITY, JIANGSU PROVINCE, P. R. CHINA, Post Code:215200

Bureau Veritas Certification Holding SAS certify that the Management System of the above organization has been audited and found to be in accordance with the requirements of the management system standard detailed below

Standard

SA 8000:2014

Scope of certification

Manufacture of Plastic Injection Parts and Metal Parts for Electronic Products

Certification cycle start date: 22 Oct 2010

Subject to the continued satisfactory operation of the organization's Social Accountability Management System, this certificate expires on: 21 Oct 2021

Original certification date: 05 May 2009

Certificate No. IND18.9584 | Version : 1 | Revision date: 22 Oct 2010

Signed on behalf of Bureau Veritas Certification Holding SAS


Certificate CN09/23308

SGS

The management system of

Kang Yang Plastic (Dongguan) Co., Ltd.

No. 2, Hongmian Road, Shangjiao Management District, Chang'an Town, Dongguan City, Guangdong Province, P.R. China

has been assessed and certified as meeting the requirements of

SA 8000:2014

For the following activities

Manufacture, selling and supply of plastic injection parts

This certificate is valid from 09/05/2018 until 05/05/2021 and remains valid subject to satisfactory surveillance audits. Recertification audit due a minimum of 90 days before the expiration date. Issue 1. Certified since 05/05/2009.

This is a multi-site certification
Additional site details are listed on the subsequent page.

SGS ITALIA S.p.A.
Via Caldera, 21 - 20153 MILANO - Italy
t +39 02 73 91 1 f +39 02 70 10 94 99 www.sgs.com


Certificate CN09/20768

SGS

The management system of

Kang Yang Plastic (Dongguan) Co., Ltd.

No. 2 Hongmian Road, Shangjiao Management District, Chang'an Town, Dongguan City, Guangdong Province, P.R. China

has been assessed and certified as meeting the requirements of

OHSAS 18001:2007

For the following activities

Manufacture of injection plastic parts for electronical & electrical products

Further clarifications regarding the scope of this certificate and the applicability of OHSAS 18001:2007 requirements may be obtained by consulting the organization.

This certificate is valid from 23 April 2018 until 12 March 2021 and remains valid subject to satisfactory surveillance audits. Recertification audit due a minimum of 90 days before the expiration date. Issue 4. Certified with SGS since 23 April 2008

Authorised by

SGS CSTC Standards Technical Services Co., Ltd.
10F Cantian Yunfu Mansion, No. 73 Fuhang Road, Beijing, P.R. China 100160
t +86 (0) 10 6845 0359 f +86 (0) 10 6845 8727 www.sgsgroup.com.cn



台北總公司 Taipei Headquarters
22154 新北市汐止區環河街187號
No.187, Huanhe St., Xizhi Dist.,
New Taipei City 22154, Taiwan
TEL：+886-2-26921498 FAX：+886-2-26922498
E-mail：kangyang@kangyang.com.tw

中國東莞廠 Dong Guan Factory, China
523878 廣東省東莞市長安鎮上角社區紅棉路2號
No.2, Hong Mian Rd., Shang Jiao Management Dist.,
Chang An Town, Dong Guan City,
Guang Dong Province 523878
TEL：+86-769-85305187 FAX：+86-769-85305190
E-mail：kysales@dg-kangyang.com

中國蘇州廠 Suzhou Factory, China
215200 江蘇省蘇州市吳江區松陵鎮花港路877號
No.877, Hua Gang Rd., Song Ling Town, Wujiang Dist.,
Suzhou City, Jiang Su Province, 215200
TEL：+86-512-80670100 FAX：+86-512-63434598~9
E-mail：kywj@kangyang.net.cn

美國 USA
Kang Yang International
TEL：+1 847-258-3339
E-mail：solutions@kangyang-usa.com

荷蘭 The Netherlands
Kang Yang Europe B.V.
TEL：+31 (0)345 65 1937
E-mail：info@kangyang-europe.com

KANG YANG ENTERPRISES

www.kangyang.com.tw

ASR American Systems Registrar IATF 16949
EMS 99628 ISO 14001
FM 46072 ISO 9001
IEC IECQ QC 080000
OHSAS 18001 SGS