



## Self-closing braided wrap

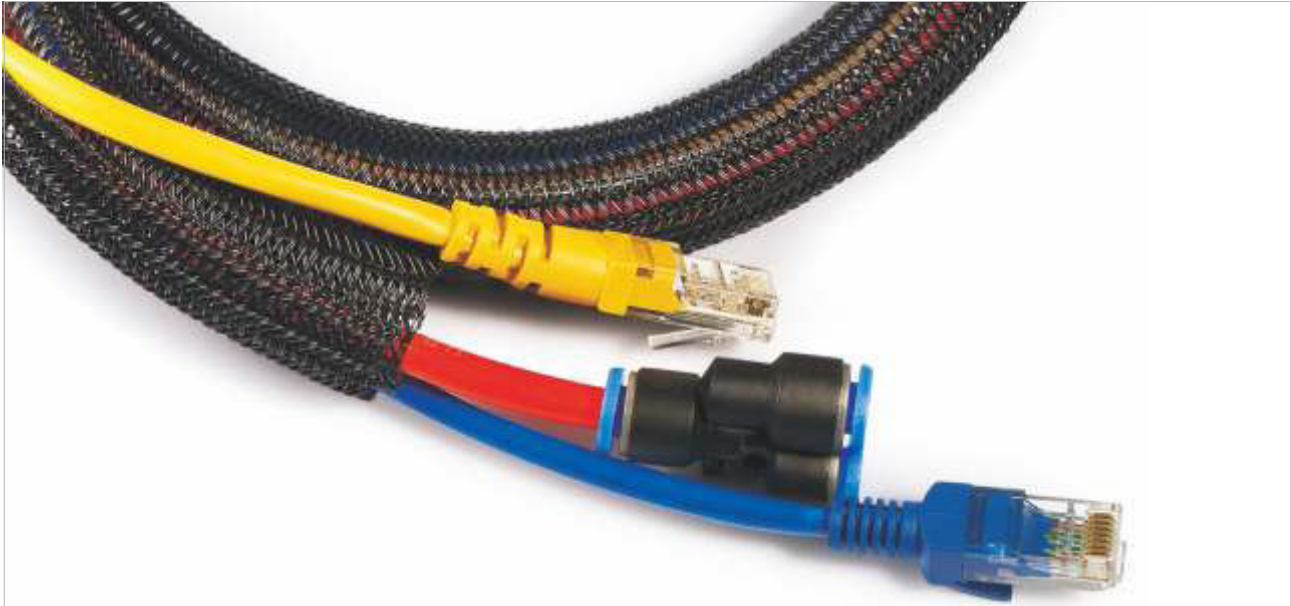

SCW Self-closing braided wrap offers innovative solutions for the protection of breakout areas and provides easy removal when an inspection or maintenance of cables is necessary. The special open structure allows to be installed after other components, for example copper terminals and connectors.

### Drawing

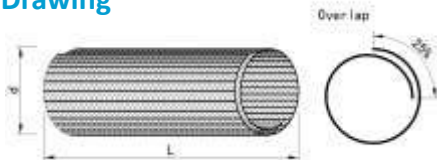

It is ideal application in wire harness, automatic equipments, railways, general manufacturing industry where wires and tubes need a tough and durable protection.

### Application



### Technical Data

Material	Polyester
Operating range	-50°C- +150°C
Melt point	240±10°C
Flammability	UL94-V2
Standard color	Black
Certificate	RoHS, Halogen Free
Cutting tool	Hot knife Scissors



### DATA SHEET

Part No.	I.D. (d)	Overlap (%)	Max. bundle dia.	Packing (m)
KYSCW-020XX	19	25%	20	25

Unit: mm

### Composition/information on ingredients

Composition	Chemical name	Chemical formula	CAS NO.	Substance percentage
PET multifilament	PET	(C <sub>10</sub> H <sub>8</sub> O <sub>4</sub> ) <sub>n</sub>	25038-59-9	18.0%
PET monofilament	PET	(C <sub>10</sub> H <sub>8</sub> O <sub>4</sub> ) <sub>n</sub>	25038-59-9	80.0%
Black master batch	C	C	7440-44-0	1.8%
Fire retardant	CEPPA	C <sub>9</sub> H <sub>11</sub> O <sub>4</sub> P	14657-64-8	0.2%

### Notes:

The part no. will be followed by BLK (Black), W (White) or S (Silver) to indicate the color of the Braided Wrap.