


REVISIONS			
REV	DESCRIPTION	DATE	BY

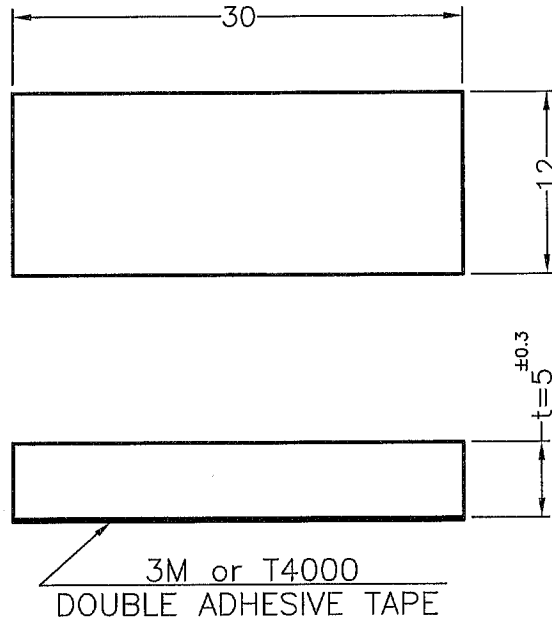

NOTE: Height include adhesive tape , not include release paper,
there might be a waist shrink in cutting process, it is a normal phenomenon.

QMFZ2 Component - Plastics

Tuesday, February 15, 2005

E174951

SHIN-ETSU SILICONE TAIWAN CO LTD

SHIN CHU IND PARK NO 25 KUANG FU S RD SHIN CHU TW

Material Designation: KB-9X1**

Product Description: Silicone (SI), furnished as uncured w/one or two catalysts.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI			
ALL	0.75	HB	-	-	150	150	150	-	-			
IEC CTI: -												
CTI: -	-	HVTR: -		D495: -				IEC Ball Pressure (C): -				
Dielectric Strength (kV/mm): -	Volume Resistivity (10 ⁹ ohm-cm): -		Dimensional Stability(%): -				ISO Heat Deflection (°C): -					
ISO Tensile Strength (MPa): -	ISO Flexural Strength (MPa): -		ISO Heat Deflection (°C): -				ISO Charpy Impact (kJ/m ²): -					
ISO Tensile Impact (kJ/m ²): -	ISO Izod Impact (kJ/m ²): -											
** May be followed by the suffix U												
X One digit, maybe 3 ~ 8												

Report Date: 1/20/1999

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE RUBBER FOOT		SPEC. DWG.	
				MATERIAL SILICON RUBBER or EQUIVALENT		DATE 2007.02.07	
				HARDNESS 60°±10°		DRAWN FRANK	
				COLOR BLACK		CHECK 	
PART NUMBER SF301250I		DRAWING NUMBER SF301250I		UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.4		APPROVED 	
SIZE A4	SCALE 2:1	UNIT mm	REV A				