


REVISIONS			
REV	DESCRIPTION	DATE	BY

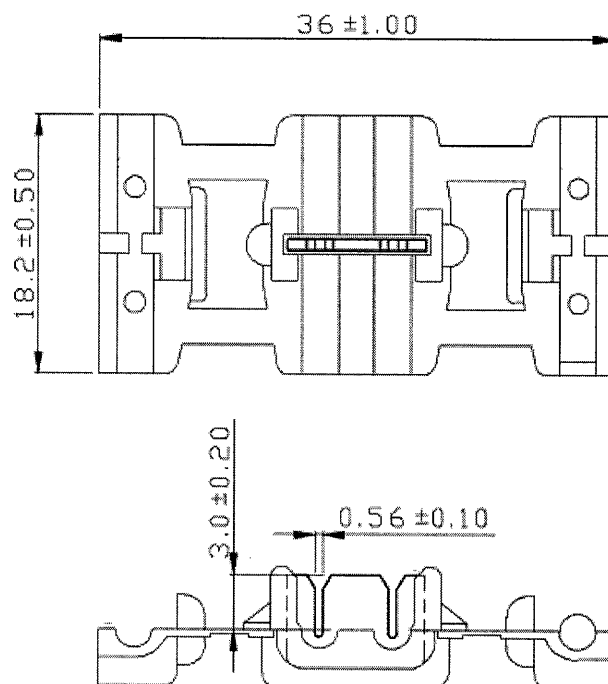

- NOTE: 1. MAXIMUM ELECTRIC CURRENT :

A. W. G.	20	18
AMP.	4	7
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX .
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 20-18 A. W. G. (0.5 - 0.75 mm²)
7. TERMINAL THICKNESS : 0.8 mm
7. PLATING : TIN PLATED

符合歐盟ROHS規範 (RoHS Compliant)	
★ 鉛Pb	<1000PPM
★ 鎘Cd	< 100PPM
★ 汞Hg	<1000PPM
★ 六價鉻Cr6+	<1000PPM
★ 多溴聯苯類PBBs	<1000PPM
★ 多溴聯苯醚類PBDEs	<1000PPM

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN)CO.,LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.		TITLE	QUICK SPLICE CONNECTORS	SPEC. DWG.
		MATERIAL	SEE ABOVE	DATE
		FINISH	SEE ABOVE	DRAWN
		COLOR	SEE ABOVE	CHECK
PART NUMBER	878008	DRAWING NUMBER	878008	UNLESS OTHERWISE SPECIFIED TOLERANCE
SIZE	A4	SCALE	2:1	UNIT
			mm	REV
			A	APPROVED

薛梅

Kang