




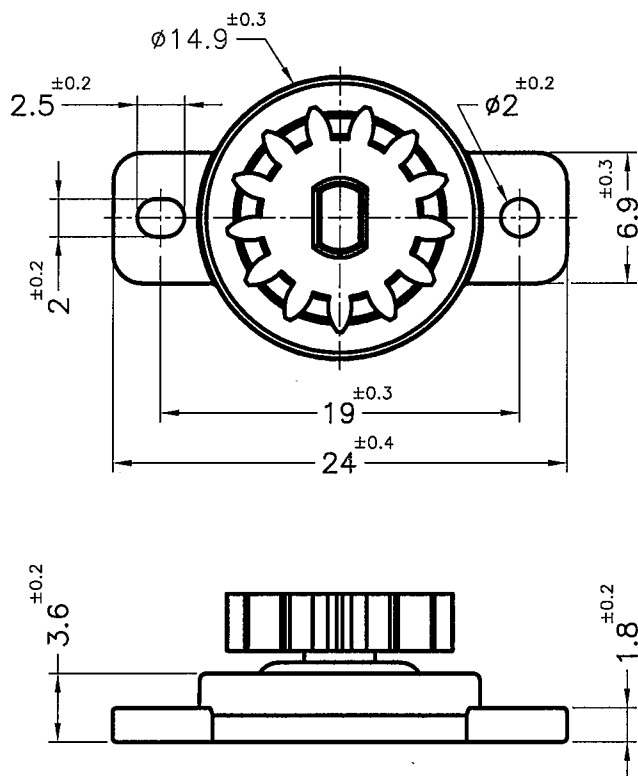

REVISIONS			
REV	DESCRIPTION	DATE	BY

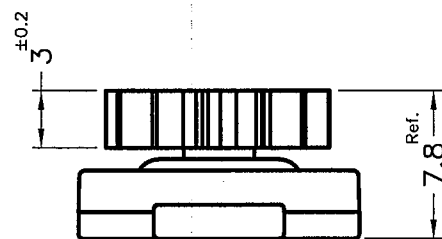

PART NO.	TORQUE
DP008A(25)	25±15 gf/cm
DP008A(50)	50±15 gf/cm
DP008A(80)	80±20 gf/cm
DP008A(100)	100±20 gf/cm
DP008A(120)	120±20 gf/cm
DP008A(150)	150±20 gf/cm

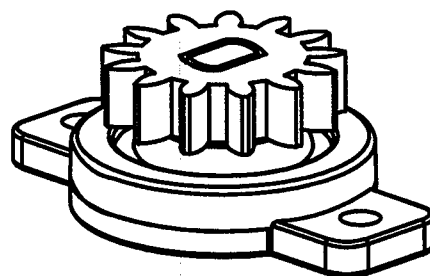

- NOTE: 1. MODULUS(模數): 0.8
 2. PITCH DIAMETER(節圓直徑): $\phi 10.4$
 3. NUMBER OF TEETH(齒數): 13
 4. PRESSURE ANGLE(壓力角): 20°
 5. TORQUE(扭力): SEE ABOVE(見上表)
 6. PLACE IN ROOM TEMPERATURE, THE TORQUE AT 20rpm/min SHALL BE WITHIN UPPER TABLE.
 標準室溫底下, 20轉/分鐘 扭力須符合上表。
 7. SPECIAL COMMENTS(特別條件)
 7-1 "ROOM TEMPERATURE" IN THIS DRAWING MEANS THE SAME DEFINED.
 (TEMPERATURE: $23 \pm 2^{\circ} \text{C}$, RELATIVE HUMIDITY: $50 \pm 10\%$)
 圖面上指的室溫為 $23 \pm 2^{\circ} \text{C}$, 濕度 $50 \pm 10\%$
 7-2 TORQUE WILL BE CHANGED BY TEMPERATURE AND RPM.
 扭力會隨溫度及轉速而有所差異。
 8. MADE OF EQUIVALENT MATERIAL.
 均可使用同等材質

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHEE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE		SPEC. DWG.	
				BODY MATERIAL		DATE	
				GEAR MATERIAL		DRAWN	
				COLOR		CHECK	
				PART NUMBER		DRAWING NUMBER	
SEE ABOVE		DP008A		ABS UL94HB		2005.04.08	
POM UL94HB		BLACK		UNLESS OTHERWISE SPECIFIED TOLERANCE		APPROVED	
SIZE		SCALE		UNIT		REV	
A4		2.5:1		mm		C	