





PART NO.	A	B	C	D	E	F	G	H	FOR FUSE
FUC-03	6.8	8.3	5.5	0.4	6.3	6.0	1.4	3.6	Ø5.2
FUC-03A	6.4	8.8	5.5	0.5	6.3	6.7	1.7	3.6	Ø5.2

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間, 為製造日起3個月內.
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫, 未使用完畢時, 產品請密封.

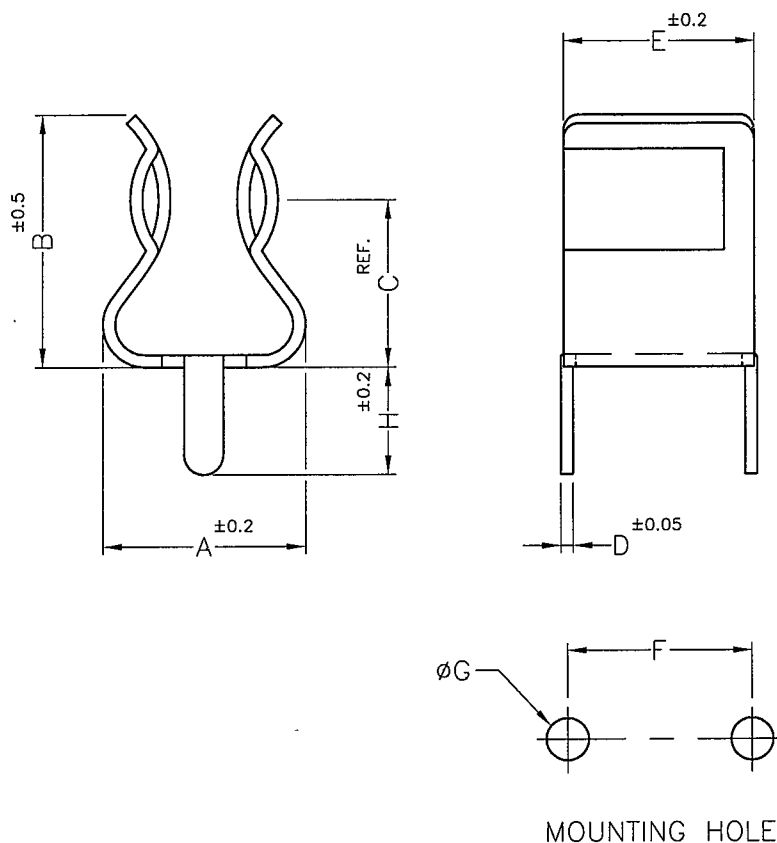

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	TITLE	DWG. NO.		PART NO.	
	2005.09.27	FUSE HOLDER	FUC-03H		SEE ABOVE	
	DRAWN	MATERIAL				
	JASON	BRASS				
	CHECKED	FINISH	SIZE	SPEC. DWG.		REV
		BRIGHT TIN PLATED	A4			D
APPROVED	UNLESS OTHERWISE SPECIFIED					
	TOLERANCE:	SEE ABOVE	SCALE: NONE		UNIT	SHEET 1 OF 1
			mm			