
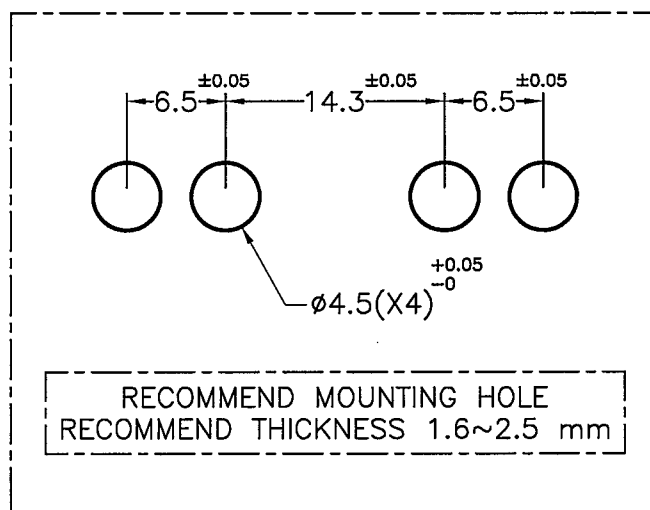


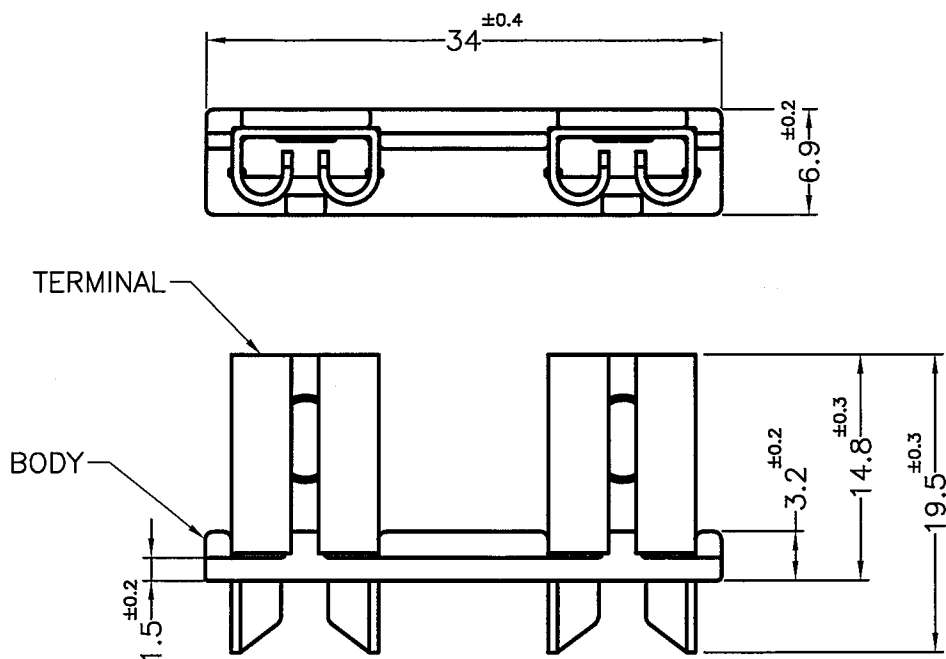

NOTE:1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起3個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. USE WITH A FUSE TERMINAL WITH A THICKNESS OF 0.8mm. 搭配厚度0.8mm的保險絲端子使用。

4. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質。

5. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.

色母環保檢測報告，僅提供原始測試報告。

6. LOAD CURRENT:100A.

負載電流值100A.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2021.01.11

DRAWN
Y.C.P

CHECKED
林洪翔

APPROVED
Kang

TITLE
FUSE HOLDER
BODY MAT / COLOR
NYLON 66 UL94V-0+GF / BLACK

TERMINAL MAT / FINISH
BRASS / TIN PLATED

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.
FUSCV-12

SIZE
A4

SCALE: 2:1

PART NO.
FUSCV-12V0(B)F

SPEC. DWG

REV
A

UNIT mm

SHEET 1 OF 1