


REVISIONS			
REV	DESCRIPTION	DATE	BY

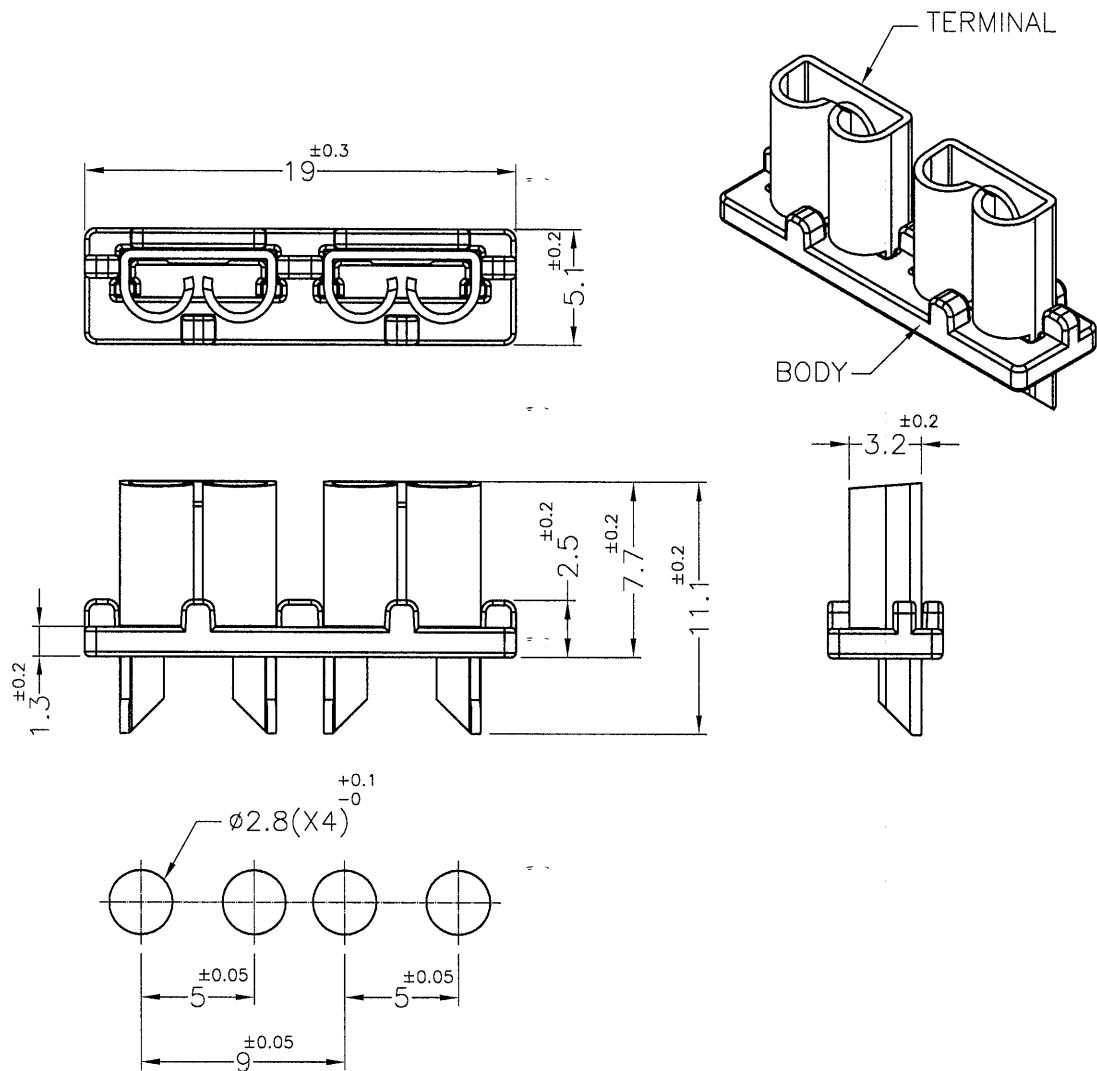

RECOMMEND MOUNTING HOLE
RECOMMEND THICKNESS:1.6~2.0mm

符合歐盟ROHS規範 (RoHS Compliant)

★ 鉛Pb	<1000PPM
★ 鎘Cd	< 100PPM
★ 汞Hg	<1000PPM
★ 六價鉻Cr6+	<1000PPM
★ 多溴聯苯類PBBs	<1000PPM
★ 多溴聯苯醚類PBDEs	<1000PPM

NOTE:1. USE WITH A FUSE TERMINAL WITH A THICKNESS OF 0.6mm
搭配厚度0.6mm的保險絲端子使用.
2. MADE OF EQUIVALENT MATERIAL.
均可使用同等材質.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN)CO.,LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.				TITLE FUSE HOLDER		SPEC. DWG.	
				BODY MATERIAL NYLON 66 UL94V-0	DATE 2015.11.18		
				TERMINAL MATERIAL / FINISH BRASS / TIN PLATED	DRAWN K. W		
				BODY COLOR - BLACK	CHECK Will		
				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED Kang		
PART NUMBER FUSCV-6V0(B)F		DRAWING NUMBER FUSCV-6					
SIZE A4	SCALE 3:1	UNIT mm	REV A				