
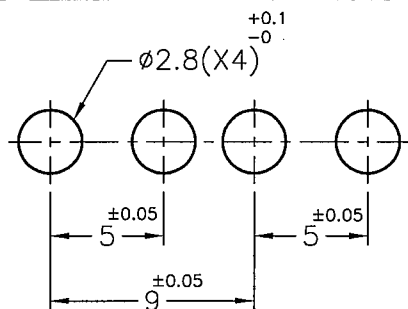

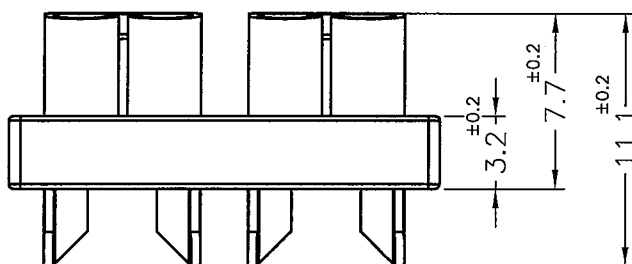
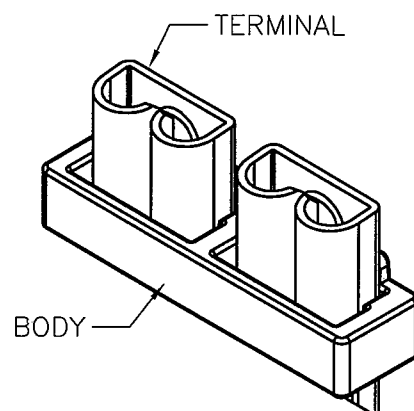


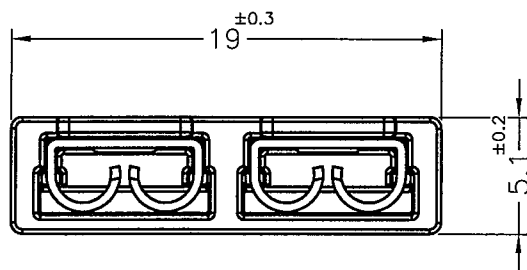

RECOMMEND MOUNTING HOLE
RECOMMEND THICKNESS: 1.6~2.0mm

NOTE: 1. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質。

2. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起3個月內。

3. FINISHTIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

4. SUGGEST RATED CURRENT: 30A/500V (MAX.)

建議額定電流：30A/500V(最大值)



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2015.11.18	TITLE	FUSE HOLDER	DWG. NO.	FUSCV-7	PART NO.	FUSCV-7V0(B)F
	DRAWN	K.W	MATERIAL	NYLON 66 UL94V-0				
	CHECKED	李柏育	COLOR	BLACK	FINISH	TIN PLATED	SIZE	A4
	APPROVED		UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SCALE: 3:1	UNIT	mm	SHEET 1 OF 1

SPEC. DWG.

REV A