
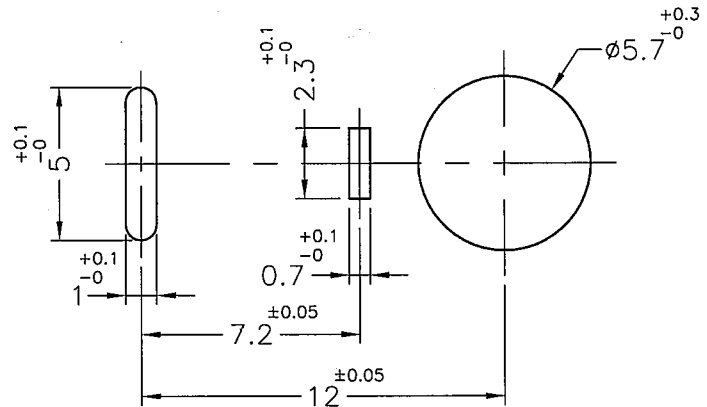

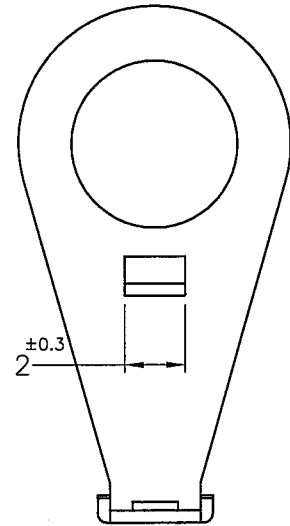
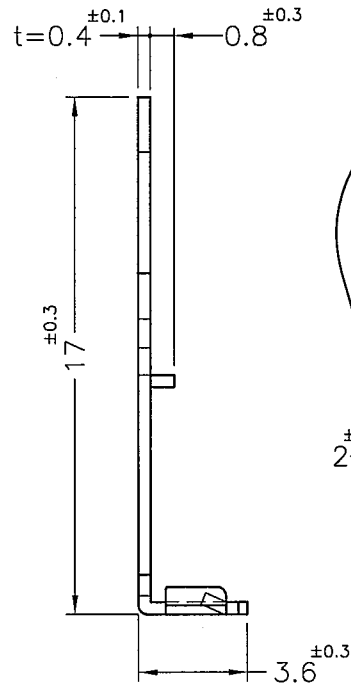


REVISIONS			
REV	DESCRIPTION	DATE	BY

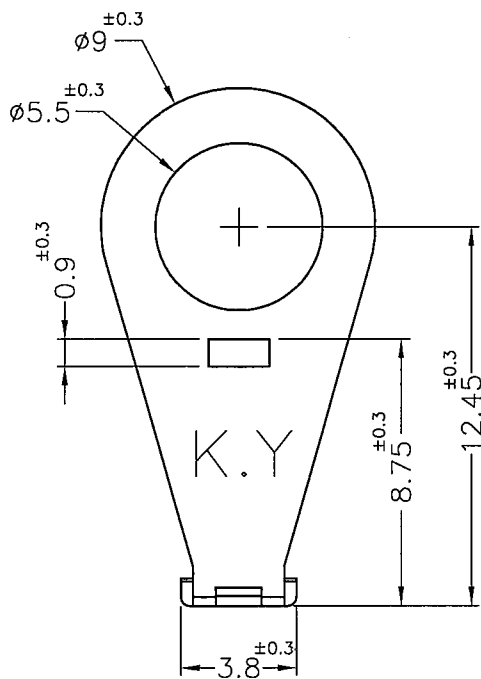

MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起3個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封。

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE GROUND TERMINAL		SPEC. DWG.	
				MATERIAL SPCC		DATE 2014.09.26	
PART NUMBER GND-96STA				FINISH TIN PLATED OVER BRASS BASE		DRAWN Lyu	
DRAWING NUMBER GND-96				COLOR		CHECK 	
SIZE A4	SCALE 4:1	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 