


MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間, 為製造日起3個月內。
 2. FINISH: TIN PLATED.
 IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫, 未使用完畢時, 產品請密封。
 3. LOAD CURRENT: 10A.
 負載電流值10A.

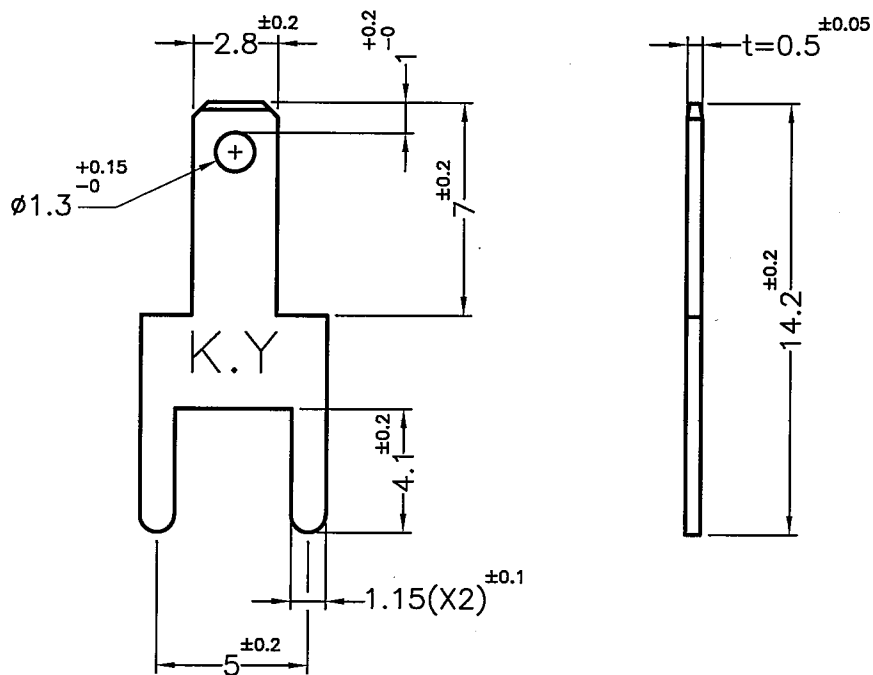

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE	2016.05.31	TITLE	P.C.B TERMINAL	DWG. NO.	PC110D5-1	PART NO.	PC110D5-1
	DRAWN	Y.C.P	MATERIAL	BRASS	SPEC. DWG		REV A	
	CHECKED	林祺翔	COLOR		SIZE	A4		
	APPROVED	Kang	FINISH	TIN PLATED	SCALE: 4:1	UNIT	mm	SHEET 1 OF 1
DO NOT SCALE DRAWING			UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE					