
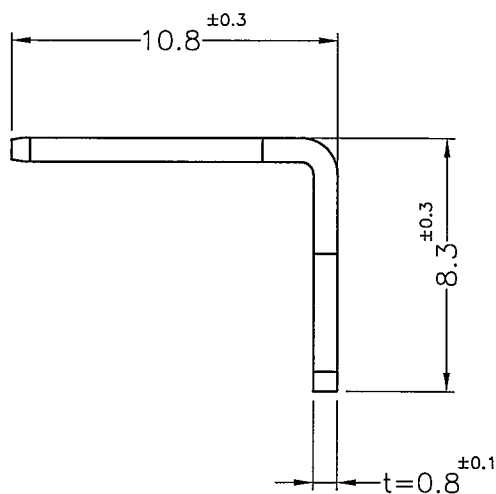
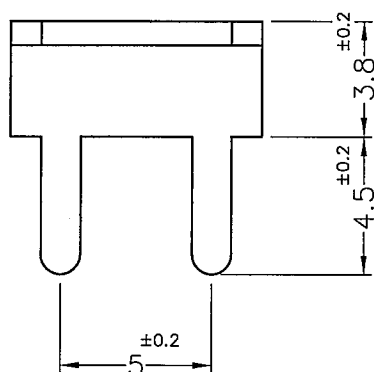


MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起3個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封。
 3. SUGGEST RATED CURRENT: 15A
 建議額定電流：15A

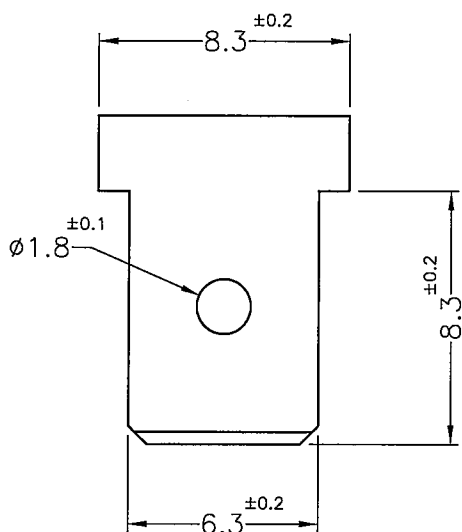

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE 2001.11.15

DRAWN JASON

CHECKED 林祺翔

APPROVED Kang

TITLE P.C.B TERMINAL

MATERIAL BRASS

FINISH BRIGHT-TIN PLATED

UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE

DWG. NO.

PC1L250-1A

PART NO.

PC1L250-1A

SIZE A4

SPEC. DWG

REV A

SCALE: 4:1

UNIT mm

SHEET 1 OF 1