


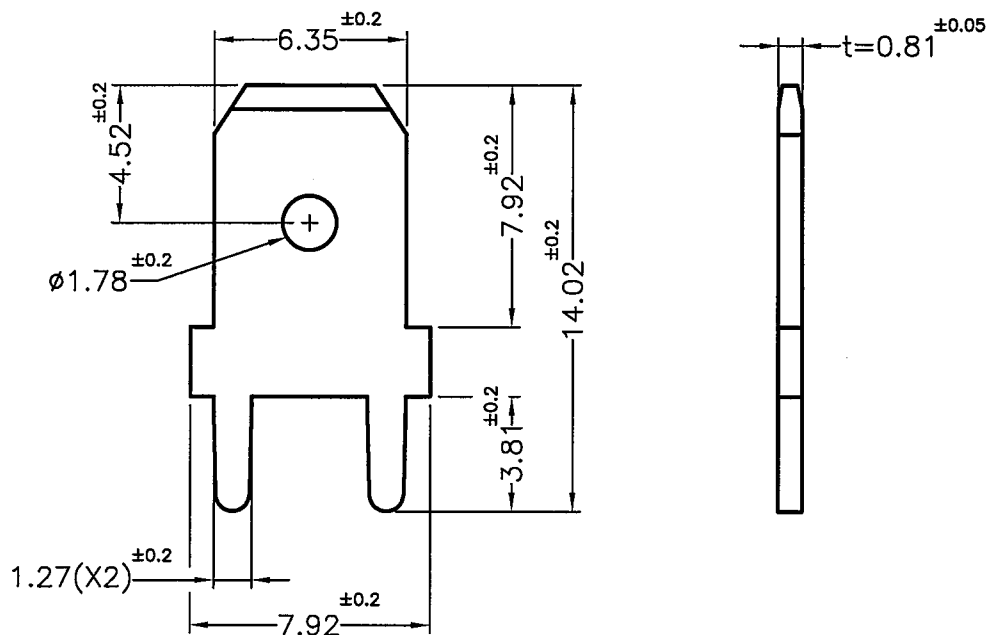

NOTE: 1. BEST USE DATE FOR TIN PLATED PARTS ARE WITHIN THREE MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日期三個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. HIGH TEMP MATTE TIN PLATING OVER NICKEL.

高溫鍍底鍍霧錫



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2009.06.22

DRAWN
SAI

CHECKED
林祺翔

APPROVED
[Signature]

TITLE
P.C.B TERMINAL

MATERIAL
BRASS

FINISH HIGH TEMPERATURE MATTE
TIN BASED ON NICKLE PLATING

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.

PC250-8

SIZE
A4

SCALE: 4:1

PART NO.

PC250-8HNT

SPEC. DWG

REV
D

MOUNTING HOLE

SHEET 1 OF 1