


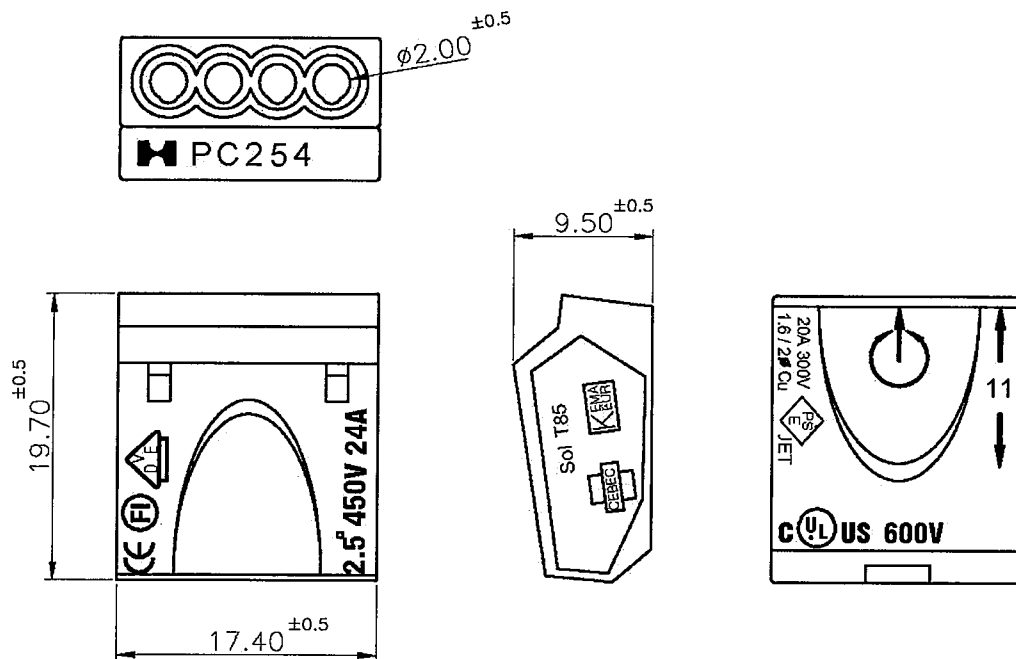

NOTE: Current: 24A (IEC)
 Voltage: 450V (IEC), 600V (UL)
 Working Temp: T85 (IEC), 105°C (UL)
 Stripping Length: 11 mm (0.43 inch)
 Wire Range: 1.0~2.5mm², Sol (IEC)
 #22-#12 AWG, Sol Cu (UL)

NOTE: THIS PART IS SUPPLIED BY OTHER VENDOR THROUGH KY,
 QUALITY INSPECTION AND MANUFACTURE CONTROL CAN NOT BE GUARANTEED,
 IF THERE IS ANY QUESTIONS, PLEASE CONTACT THE ORIGINAL MANUFACTURER.
 此為現規品，無法確保供應商品質檢驗及製程控管，
 如有任何問題請與原生產廠商連絡。

K
 ISO 9001
 ISO 14001
 QC 080000
 IATF 16949

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2001.11.20	TITLE PUSH-IN WIRE CONNECTOR	DWG. NO. PC254		PART NO. PC254	
	DRAWN SCOTT	MATERIAL PC UL94V-0	SIZE A4		SPEC. DWG.	
	CHECKED 李柏育	COLOR TRANSPARENT + YELLOW				
	APPROVED 	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE	SCALE: NONE		UNIT mm	REV B
					SHEET 1 OF 1	