

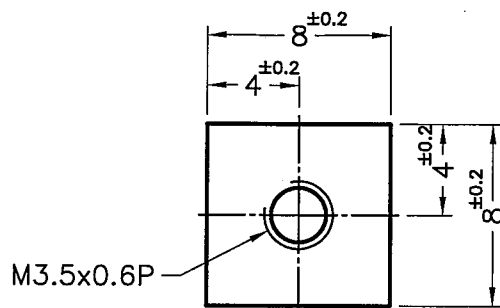
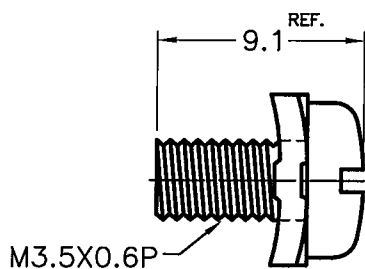
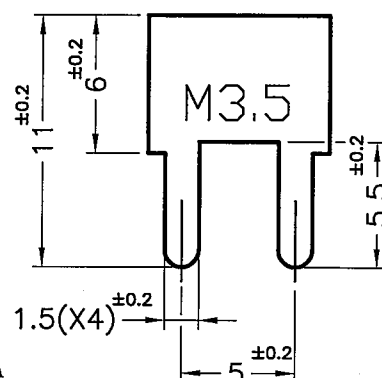
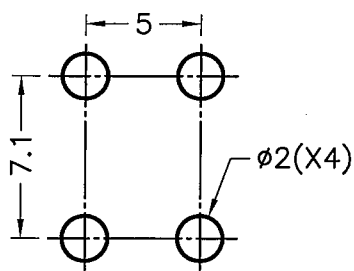


(BODY)PCB-10A

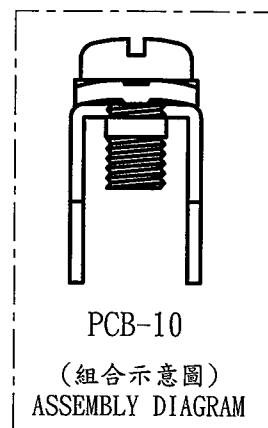

(SCREW)PCB-10B

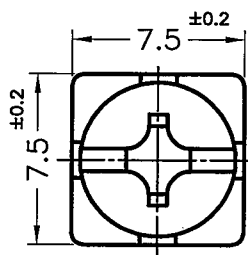

MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
鍍錫最佳使用時間, 為製造日起3個月內。
2. THE BEST USE TIME FOR NICKEL PLATED PARTS ARE WITHIN 6 MONTHS SINCE MFG DATE.
鍍鎳最佳使用時間, 為製造日起6個月內。
3. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
未使用完畢時, 產品請密封。
4. SUGGEST RATED CURRENT: 15A.
建議額定電流: 15A。



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	TITLE	DWG. NO.		PART NO.	
	2008.04.25	P.C.B TERMINAL	PCB-10		PCB-10	
	DRAWN	BODY MATERIAL / SCREW'S MATERIAL				
	BUNNY	BRASS / STEEL				
	CHECKED	BODY FINISH / SCREW'S FINISH	SIZE	SPEC. DWG.		REV
		TIN PLATED / NI PLATED	A4			E
	APPROVED	UNLESS OTHERWISE SPECIFIED TOLERANCE:	SCALE: 3:1		UNIT	SHEET 1 OF 1
		SEE ABOVE	mm			