

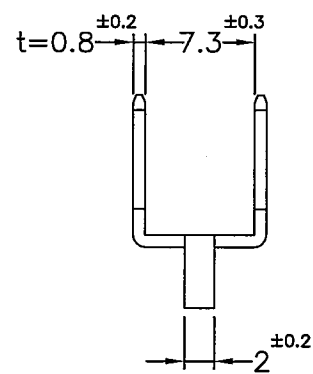


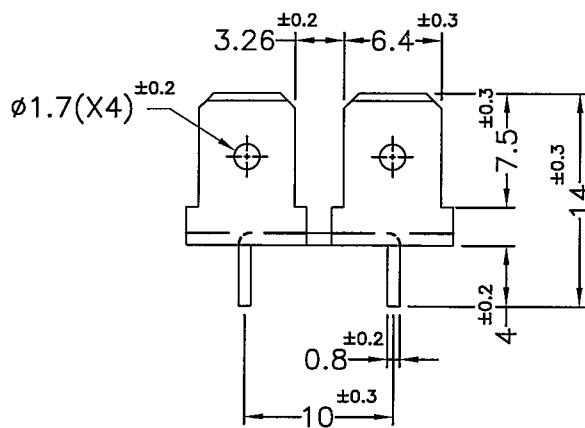

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為出貨日起 3 個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封保存。
 3. LOAD CURRENT: 18A.
 負載電流值 18A.



康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2018.09.28		TITLE	PCB TERMINAL		DWG. NO.		PART NO.	
	DRAWN	GINA		MATERIAL	BRASS		PCB-100		PCB-100	
	CHECKED	李柏育		COLOR	FINISH	TIN PLATED		SIZE A4	SPEC. DWG.	REV A
	APPROVED	Kang		UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE						
	SCALE: 2:1		UNIT mm		SHEET 1 OF 1					