


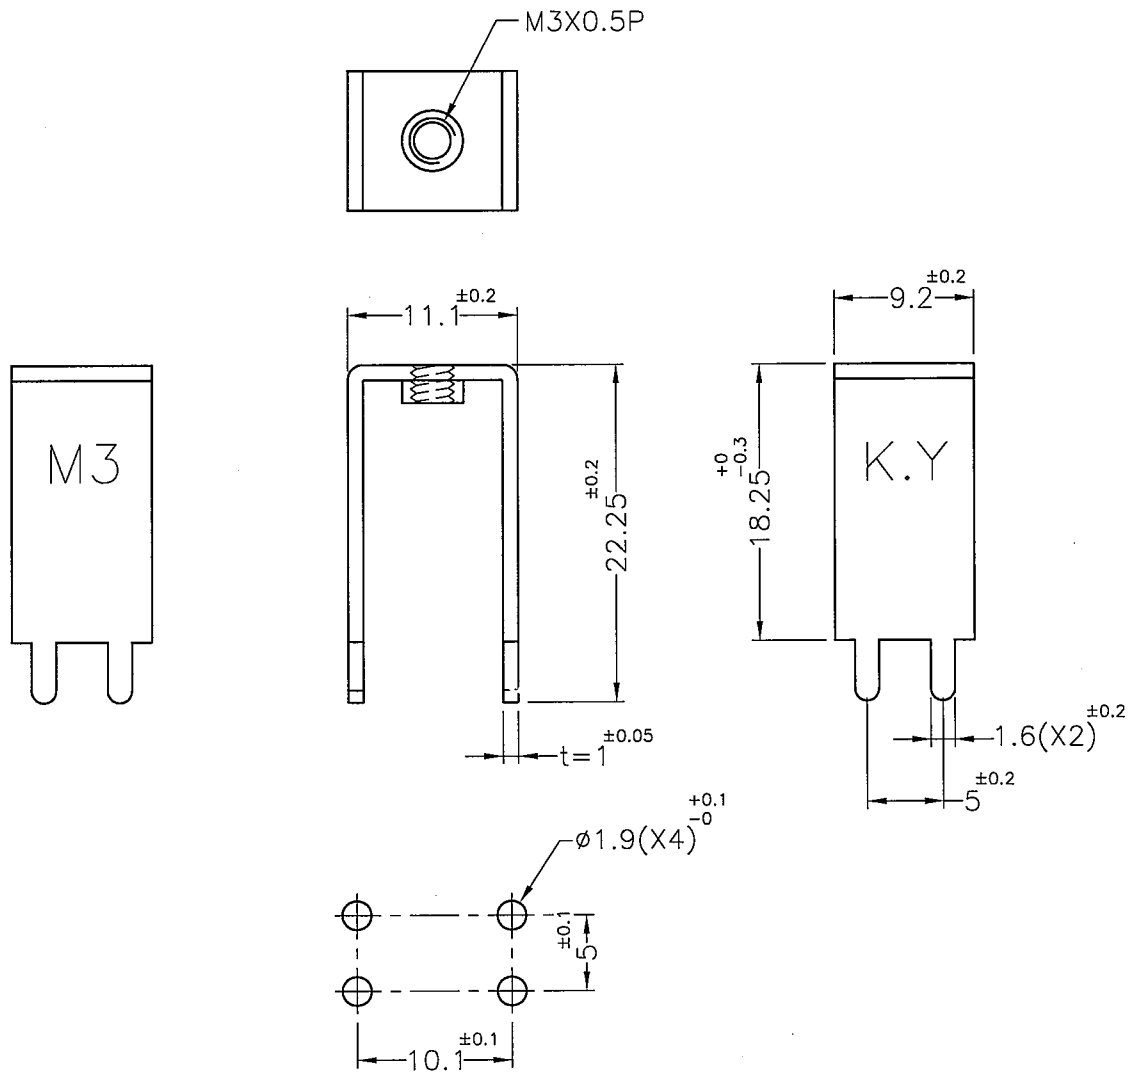

MOUNTING HOLE

NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間, 為製造日起3個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫, 未使用完畢時, 產品請密封。

3. LOAD CURRENT: 20A

負載電流值: 20A



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE	TITLE		DWG. NO.		PART NO.	
	2019.08.01	P.C.B TERMINAL		PCB-106		PCB-106	
	DRAWN	MATERIAL		SIZE		SPEC. DWG.	
	C.S.L	BRASS					
	CHECKED	COLOR	FINISH	REV			
李柏甯		TIN PLATED	A				
DO NOT SCALE DRAWING	APPROVED	UNLESS OTHERWISE SPECIFIED TOLERANCE:		SCALE: 2:1	UNIT	mm	SHEET 1 OF 1
		SEE ABOVE					