


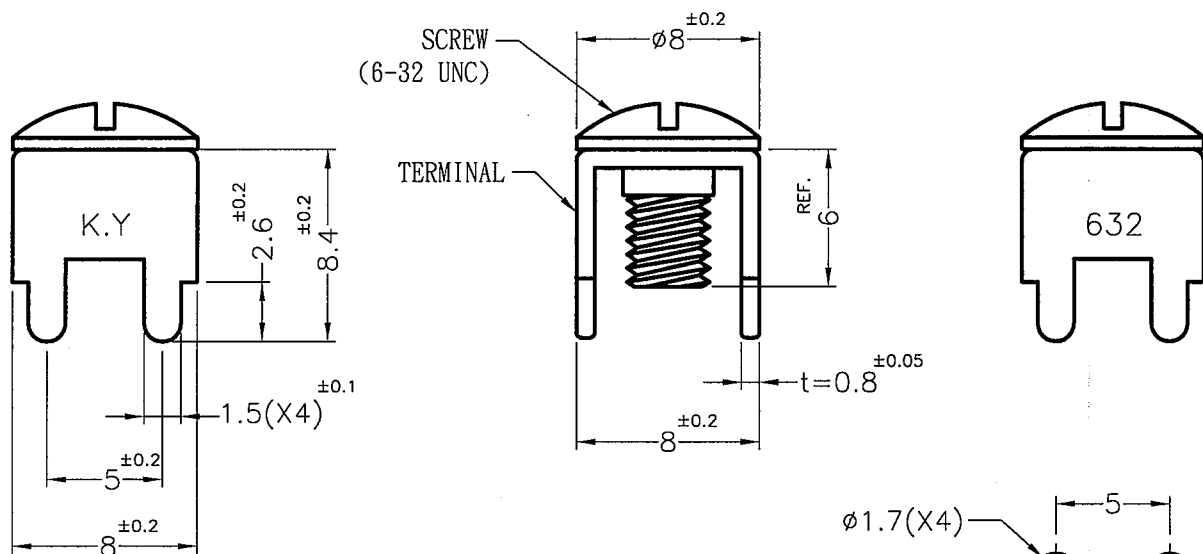

	MATERIAL	FINISH
TERMINAL	BRASS	TIN PLATED
SCREW	STEEL	NICKEL PLATED

MOUNTING HOLE

NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起 3 個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. SUGGEST RATED CURRENT: 15A.

建議額定電流：15A.



ISO 9001
ISO 14001
QC 080000
IATF 16949

康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN)CO.,LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2001.04.18	TITLE	P.C.B TERMINAL	DWG. NO.		PART NO.	
	DRAWN	S.J.C.	MATERIAL	SEE ABOVE				
	CHECKED	林祺翔	COLOR		SIZE	A4	SPEC. DWG.	REV
	APPROVED	Kang	FINISH	SEE ABOVE			B	
			UNLESS OTHERWISE SPECIFIED TOLERANCE:	SEE ABOVE	SCALE: 3:1	UNIT	mm	SHEET 1 OF 1