

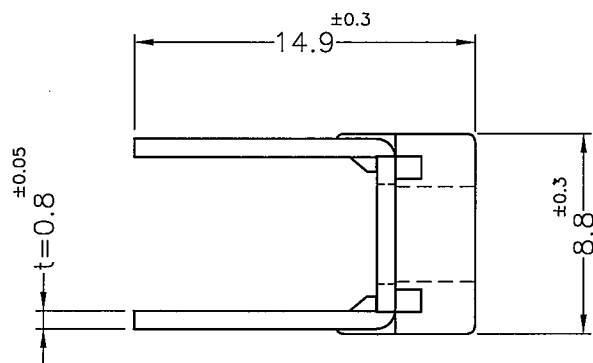


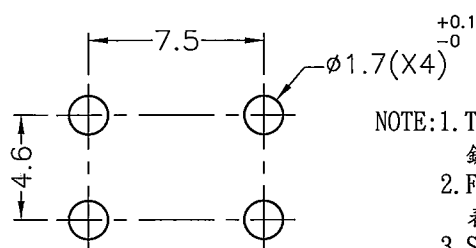

TERMINAL
BRASS
TIN PLATED

TERMINAL HOLEDR
NYLON 66 UL94V-2
BLACK

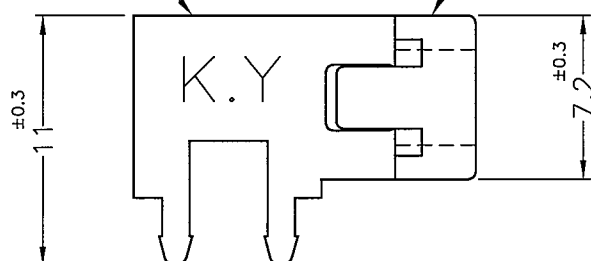

MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
鍍錫最佳使用時間，為製造日起3個月內。
2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
表面為鍍錫，未使用完畢時，產品請密封。
3. SUGGEST RATED CURRENT: 15A
建議額定電流：15A



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE	TITLE		DWG. NO.		PART NO.	
	2007.11.13	P.C.B TERMINAL		PCB-21(4.4)F		PCB-21(4.4)F	
	DRAWN	MATERIAL					
	BUNNY	SEE ABOVE					
CHECKED		COLOR	FINISH	SIZE A4	SPEC. DWG.	REV A	
		SEE ABOVE	SEE ABOVE				
APPROVED		UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SCALE: 3:1		UNIT mm	SHEET 1 OF 1
DO NOT SCALE DRAWING							