
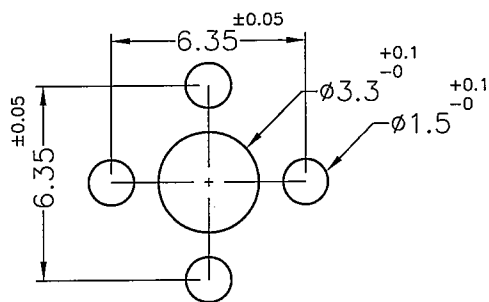

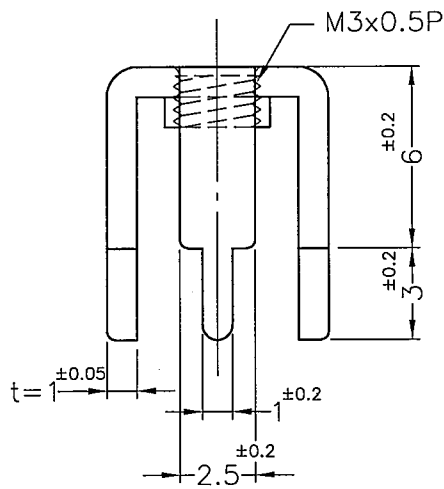


REVISIONS			
REV	DESCRIPTION	DATE	BY

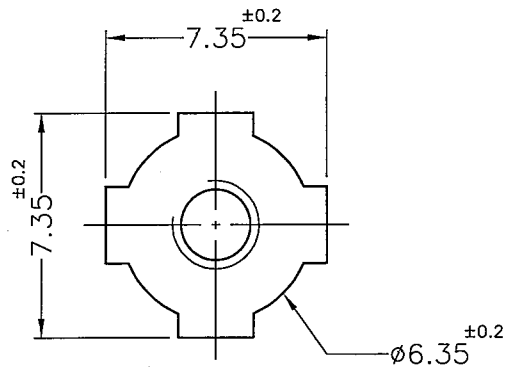

MOUNTING HOLE

NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起3個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. SUGGEST RATED CURRENT: 15A

建議額定電流：15A



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

PART NUMBER
PCB-49(M3)

DRAWING NUMBER
PCB-49(M3)

SIZE A4 SCALE 4:1 UNIT mm REV B

TITLE	P.C.B TERMINAL	SPEC. DWG.
MATERIAL	SPCC	DATE 2011.04.29
FINISH	TIN PLATED	DRAWN ROBERT
COLOR		CHECK
UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED