




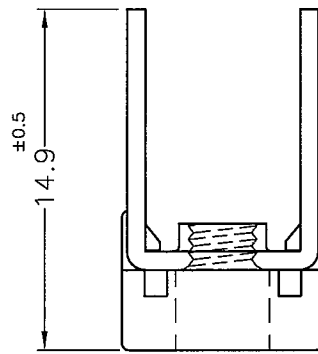


TERMINAL HOLEDR
NYLON 66 UL94V-2

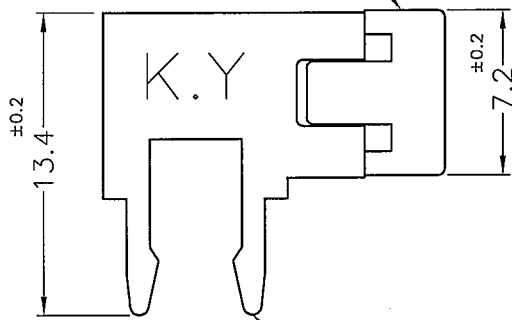


TERMINAL
BRASS
TIN PLATED

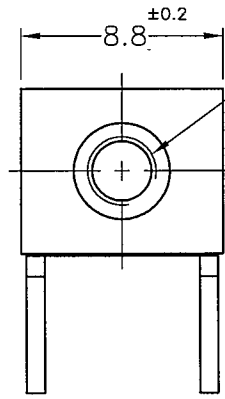

M4X0.7P

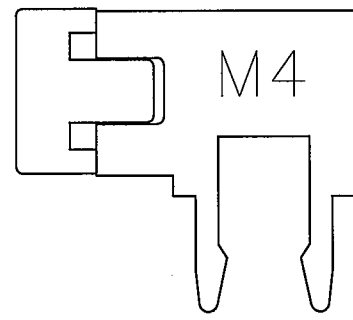

±0.05
t=0.8



MOUNTING HOLE

NOTE:1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起 3 個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. SUGGEST RATED CURRENT: 15A.

建議額定電流: 15A.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2004.02.17		TITLE	P.C.B TERMINAL		DWG. NO.		PART NO.			
	DRAWN	S.L		MATERIAL	SEE ABOVE		PCB-4(M4)F		PCB-4(M4)F			
	CHECKED			COLOR	BLACK	FINISH	SEE ABOVE	SIZE	A4	SPEC. DWG.	REV	B
	APPROVED			UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE			SCALE: 3:1		UNIT	mm	SHEET 1 OF 1	