



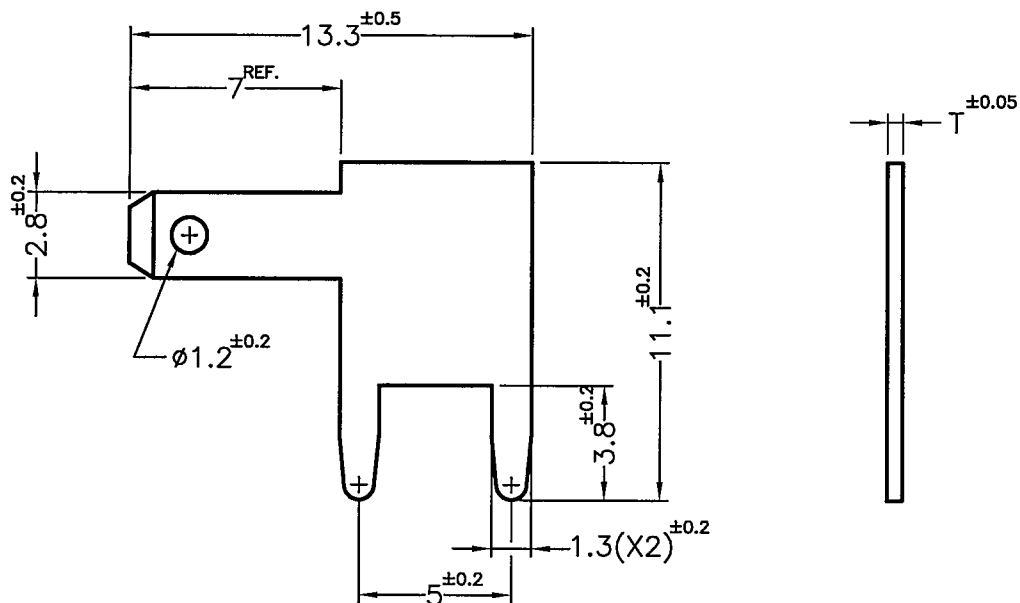

PART NO.	T	FINISH
PCF110	0.5	TIN PLATED
PCF110NI		NICKEL PLATED
PCF1108	0.8	TIN PLATED
PCF1108(GD)		GOLD PLATED

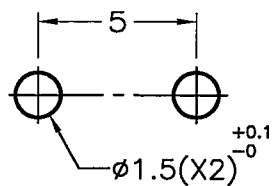

MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起3個月內。
2. THE BEST USE TIME FOR NICKEL PLATED PARTS ARE WITHIN 6 MONTHS SINCE MFG DATE.
 鍍鎳最佳使用時間，為製造日起6個月內。
2. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 未使用完畢時，產品請密封。



康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
1998.11.05

DRAWN
JASON

CHECKED
林漢翔

APPROVED
Kang

TITLE
P.C.B TERMINAL

MATERIAL
BRASS

COLOR

FINISH
SEE ABOVE

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.

PCF110H

SIZE
A4

SCALE: 4:1

PART NO.

SEE ABOVE

SPEC. DWG.

REV
C

UNIT
mm

SHEET 1 OF 1