
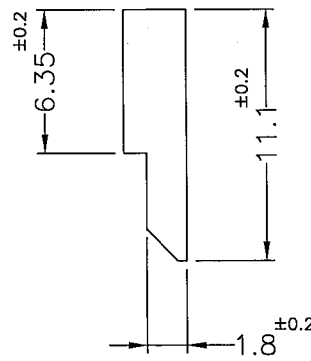
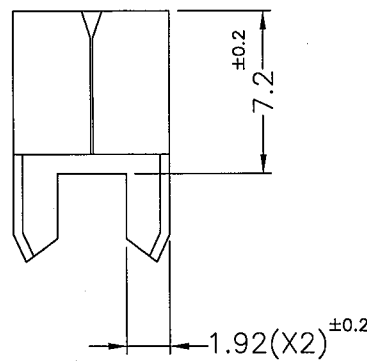
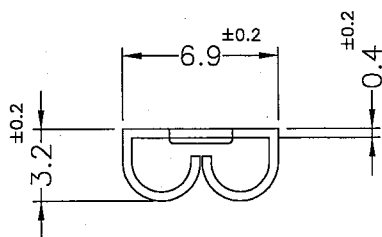


MOUNTING HOLE
(RECOMMEND FOR REFERENCE ONLY)

- NOTE:1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起3個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封。
 3. USE WITH A FUSE TERMINAL WITH A THICKNESS OF 0.6mm
 搭配厚度0.6mm的保險絲端子使用。
 3. SUGGEST RATED CURRENT: 30A.
 建議額定電流：30A.



康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

康揚塑膠五金(泰國)有限公司
 บริษัท สังก พยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด
 KANG YANG HARDWARE (THAILAND) CO., LTD.
 康揚越南有限公司
 CÔNG TY TNHH KANG YANG VIỆT NAM
 KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO., ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2009.06.29	TITLE P.C.B TERMINAL	DWG. NO. PCFS2509		PART NO. PCFS2509A	
	DRAWN JIM	MATERIAL BRASS	SIZE A4		SPEC. DWG.	
	CHECKED Yuping	COLOR SHINY TIN PLATED				
	APPROVED Kang	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE	SCALE: 3:1		UNIT mm	REV A
					SHEET 1 OF 1	