

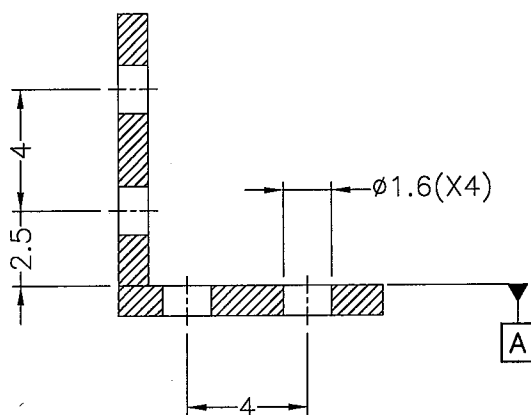
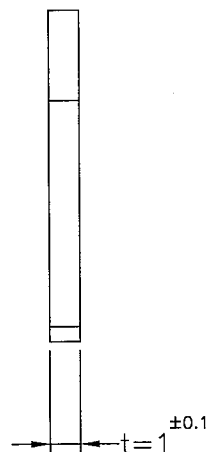


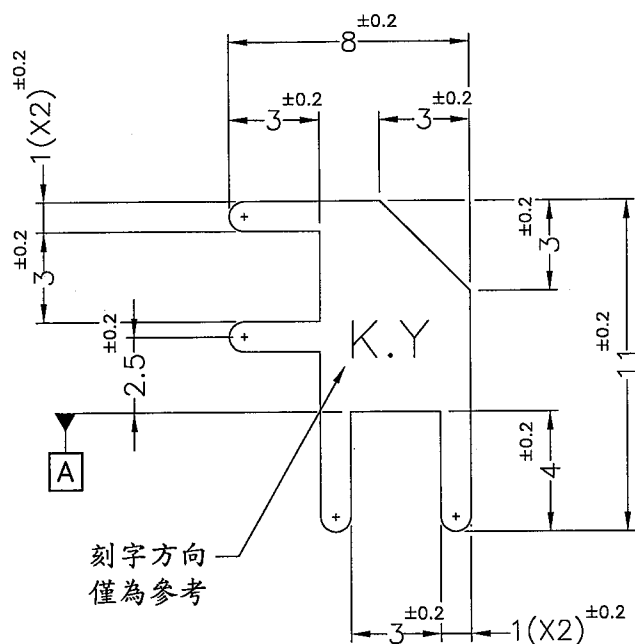

MOUNTING HOLE
(RECOMMEND FOR REFERENCE ONLY)

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間, 為製造日起3個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫, 未使用完畢時, 產品請密封。
 3. SUGGEST RATED CURRENT: 15A.
 建議額定電流: 15A.



康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

康揚塑膠五金(泰國)有限公司
 บริษัท คง ยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด
 KANG YANG HARDWARE (THAILAND) CO., LTD.
 康揚越南有限公司
 CÔNG TY TNHH KANG YANG VIỆT NAM
 KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	TITLE	DWG. NO.		PART NO.	
	2003.12.31	P.C.B TERMINAL	PCLT-11		PCLT-11NT	
	DRAWN	MATERIAL	SIZE		SPEC. DWG.	
	Linda	BRASS	A4		REV	
	CHECKED	COLOR	SCALE: 4:1		UNIT mm	
	Yuping	MATTED TIN PLATED OVER NICKEL BASE			B	
	APPROVED	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE			SHEET 1 OF 1	
	Kang					