


REVISIONS			
REV	DESCRIPTION	DATE	BY

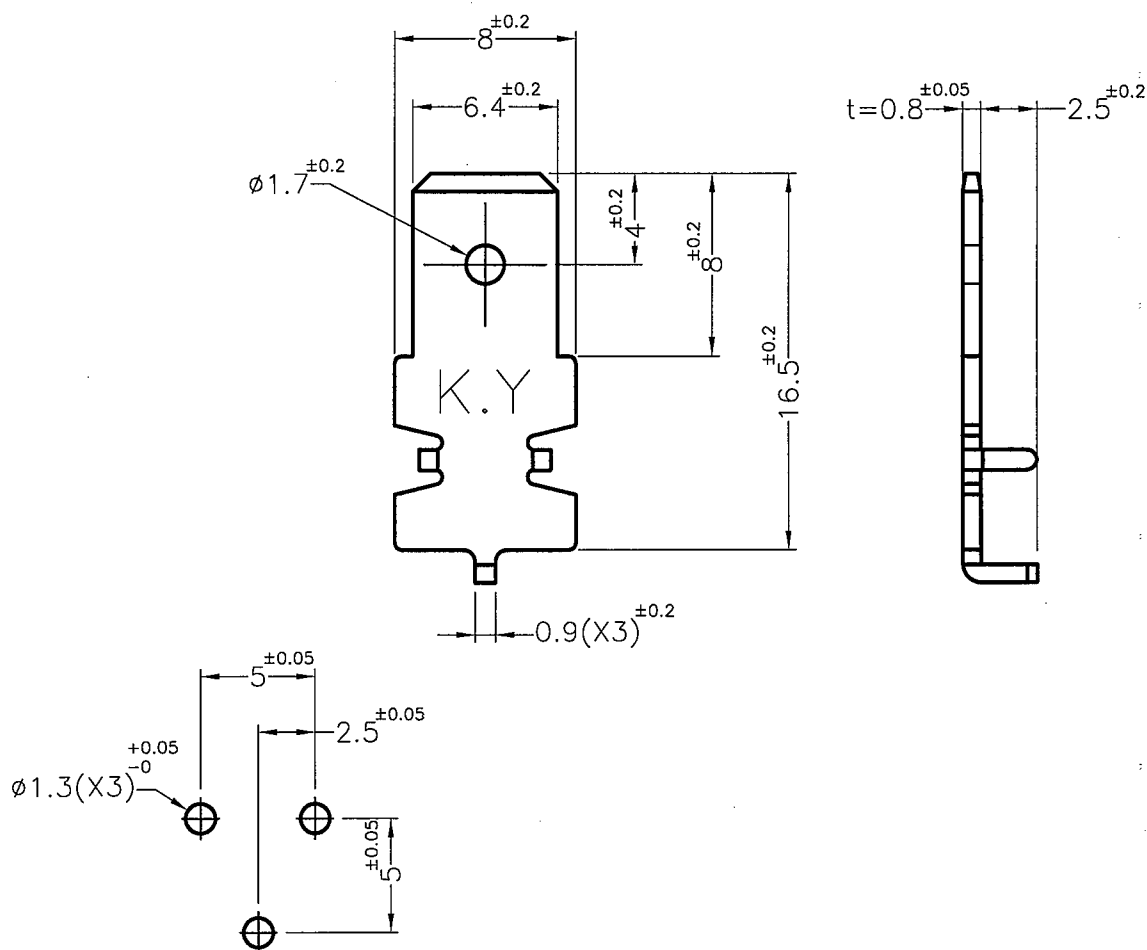

MOUNTING HOLE

NOTE:1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起3個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. LOAD CURRENT: 10A.

負載電流值10A.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.		TITLE	P. C. B TERMINAL	SPEC. DWG.	
		MATERIAL	BRASS	DATE	2013.04.10
		FINISH	TIN PLATED	DRAWN	ROBERT
		COLOR		CHECK	
PART NUMBER		DRAWING NUMBER		UNLESS OTHERWISE SPECIFIED TOLERANCE	
PCLT-250		PCLT-250		SEE ABOVE	
SIZE	SCALE	UNIT	REV	APPROVED	
A4	3:1	mm	A	Kang	