




WITH HALOGEN
有鹵料件

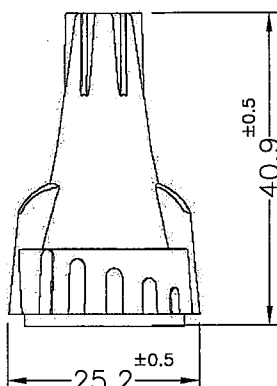

- NOTE: 1. VOLTAGE : 600V Max.
2. WORKING TEMPERATURE : 105°C
3. SPRING INSERT : STEEL
4. WIRE RANGE : #20-#10AWG Max. 3#12 Min. 2#20



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2022.12.19

DRAWN
Y.C.P

CHECKED
Yuping

APPROVED

TITLE WATERPROOF WIRE
CONNECTOR
MATERIAL TOUGH THERMOPLASTIC
FLAME-RETARDANT

COLOR BLUE / RED FINISH

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.

R3

PART NO.

R3

SIZE
A4

SPEC. DWG

REV
A

SCALE: NONE UNIT mm

SHEET 1 OF 1