


WITH HALOGEN
有鹵料件



- NOTE: 1. VOLTAGE : 600V Max.
2. WORKING TEMPERATURE : 105°C
3. SPRING INSERT : STEEL
4. WIRE RANGE : #20-#8AWG Max. 4#10 Min. 3#16

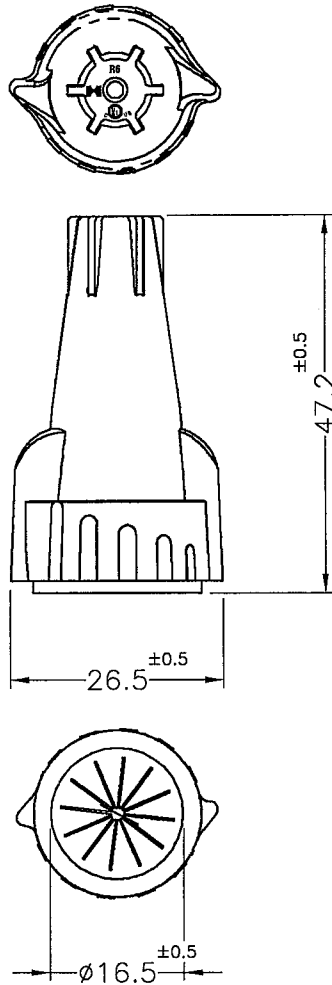

ISO 9001
ISO 14001
QC 080000
IATF 16949

康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

康揚塑膠五金(泰國)有限公司

บริษัท คัง หยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด
KANG YANG HARDWARE (THAILAND) CO., LTD.

康揚越南有限公司

CÔNG TY TNHH KANG YANG VIỆT NAM
KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2024.03.28	TITLE WATERPROOF WIRE CONNECTOR	DWG. NO. R6		PART NO. R6	
	DRAWN FORSEN	MATERIAL TOUGH THERMOPLASTIC FLAME-RETARDANT	SIZE A4		SPEC. DWG.	
	CHECKED Yuping	COLOR BLUE / BLACK				
	APPROVED 	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE	SCALE: NONE		UNIT mm	REV A
					SHEET 1 OF 1	