





HOLE IN P.C.B: $\phi 0.9\text{mm}$ $\begin{smallmatrix} +0.1 \\ -0 \end{smallmatrix}$

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間, 為製造日起3個月內.
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫, 未使用完畢時, 產品請密封.

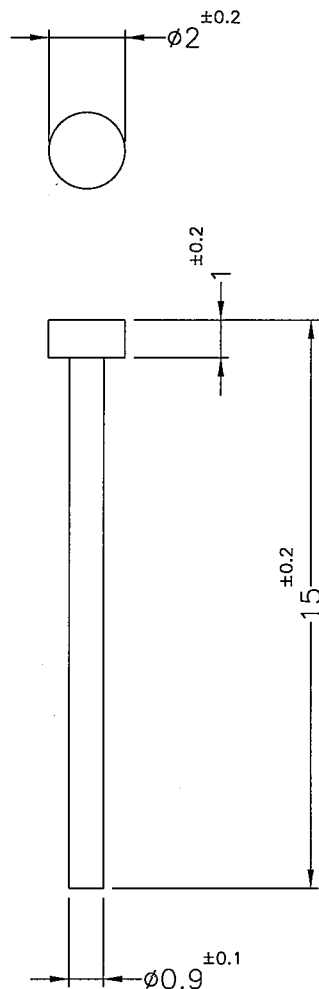

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2002.05.31	TITLE TEST PIN	DWG. NO. TEST-24		PART NO. TEST-24	
	DRAWN JASON	MATERIAL BRASS	SIZE A4		SPEC. DWG.	
	CHECKED 	FINISH BRIGHT-TIN PLATED	SCALE: 5:1		UNIT mm	
	APPROVED 	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE	REV A		SHEET 1 OF 1	