


- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間, 為製造日起3個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫, 未使用完畢時, 產品請密封。
 3. SHRINKING IS NORMAL STATUS.
 內縮為正常現象。

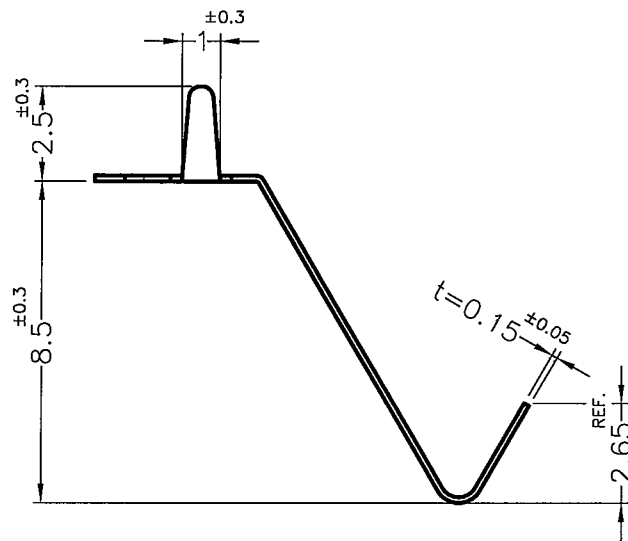

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE	TITLE	DWG. NO.		PART NO.	
	2005.11.01	CLAMP	TRMC-11		TRMC-11	
	DRAWN	MATERIAL	SIZE		REV	
	James	PHOSPHOR BRONZE	A4		B	
CHECKED	李柏翹	COLOR	FINISH		SPEC. DWG	
			TIN PLATED			
APPROVED	Kang	UNLESS OTHERWISE SPECIFIED		SCALE: 5:1		UNIT
		TOLERANCE: SEE ABOVE		mm		SHEET 1 OF 1

DO NOT SCALE DRAWING