


REVISIONS			
REV	DESCRIPTION	DATE	BY

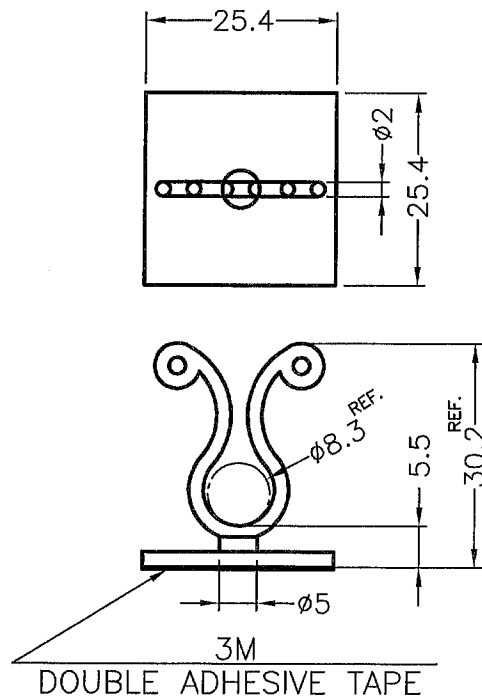

NOTE: The Height is not include the releasing paper and adhesive tape's thickness.

The adhesive tape is cut by hand, It is normal if there is a not unified edge.

PART NO.	DOUBLE ADHESIVE TAPE
KLS-1	THICKNESS=1.1mm
KLS-1(3M)	THICKNESS=0.9mm

Component - Plates

E41938

E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 90713, WILMINGTON DE 19880
101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", finished as pellets

Color	Min Thk (mm)	Flame Class	HWT	HAI	RTI Elec	RTI Imp	RTI Str
ALL	9.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HATR): 6

Dimensional Stability (%): -

Inclined Plane Tracking (IP-T): -

Volume Resistivity (10⁴ ohm-cm): 14

High Volt, Low Current Arc Resis (D485): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746G.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be modified by "ZYT" for Zytel or "MIL" for Milon or "DEL" for Delrin or "GRA" for Graplon or "RYN" for Rynite or "ETPV" for ETPV grades.

rs - Virgin and regrid up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thicknesses 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regrid according 25% is limited to V-2 Flammability for WT, RD, BK.


AMRUL 66 semi-scale test data does not pertain to building materials, assemblies and related contents. AMRUL 66 semi-scale test data is intended solely for determining the flammability of plastic materials used in the competence and parts of end-product divisions and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1993-07-29

Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.

UL US

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE MOTOR COUPLING		SPEC. DWG.	
				MATERIAL NYLON 66 UL94V-2		DATE 2004.11.24	
				FINISH		DRAWN S. L .	
				COLOR NATURAL		CHECK 	
				UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.3		APPROVED 	
PART NUMBER SEE ABOVE		DRAWING NUMBER KLS-1					
SIZE A4	SCALE 2:1	UNIT mm	REV A				