




DIM	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

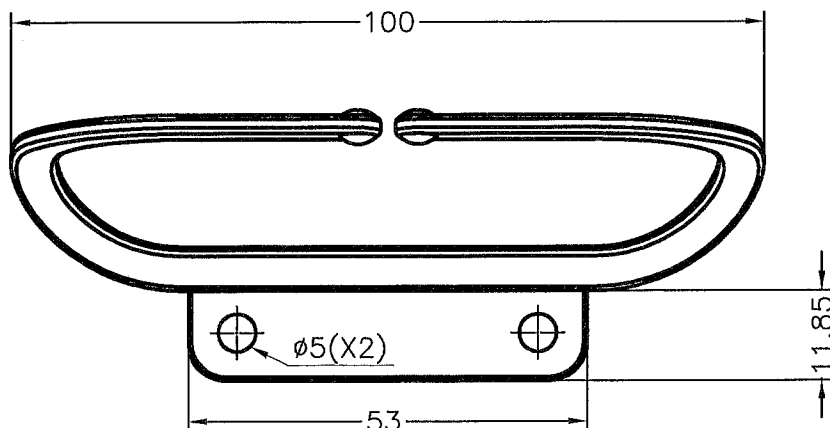

PART NO.	COLOR
WUCDF-100	NATURAL
WUCDF100(B)	BLACK

Inner shrinking is normal phenomenon.

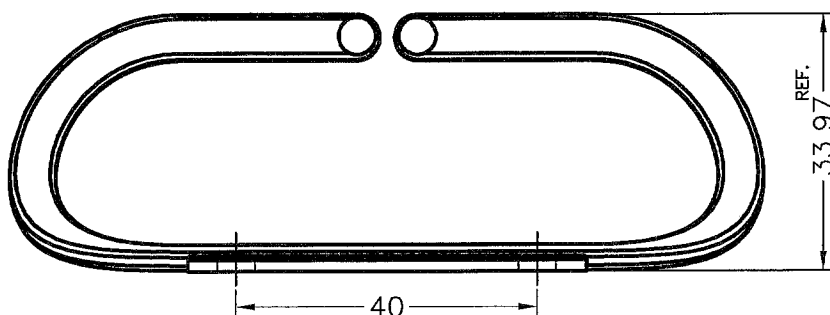

Component - Plastics

E130155

NAN YA PLASTICS CORP PLASTICS 4TH DIV
3RD FL, 201 TUNG HWA NORTH RD, TAIPEI, TW

3117(F1)

Polypropylene (PP), furnished as pellets, sheets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	1.5	HB	3	0	125	125	125
	3.0	HB	2	0	125	125	125

Comparative Tracking Index (CTI): 0

Inclined Plane Tracking (IPT): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁹ ohm-cm): -

High-Voltage Arc Tracking Rate
(HVTAR): 0

High Volt, Low Current Arc Resis (D495): 4

Dimensional Stability (%): -

(F1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1991-01-28

Last Revised: 2012-11-15

© 2013 UL LLC.



 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE	WIRE MOUNT	SPEC. DWG.
				MATERIAL	P.P.	DATE 2006.09.19
				FINISH		DRAWN JOHNNY
				COLOR	SEE ABOVE	CHECK
PART NUMBER SEE ABOVE	DRAWING NUMBER WUCDF-100			UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED
SIZE A4	SCALE 1:1	UNIT mm	REV A			