
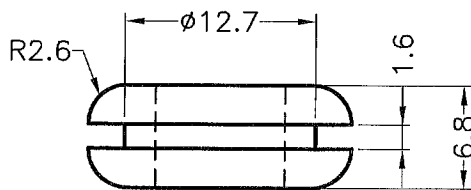



REVISIONS			
REV	DESCRIPTION	DATE	BY

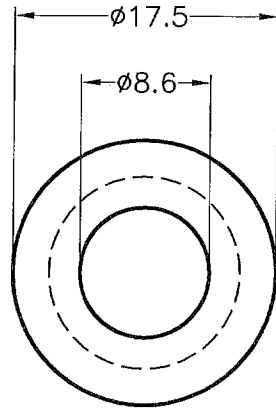

MOUNTING HOLES

QMFZ2 Component - Plastics
 SHIN-ETSU SILICONE TAIWAN CO LTD
 SHIN CHU IND PARK NO 25 KUANG FU S RD SHIN CHU TW
 Material Designation: KE-9X1**
 Product Description: Silicone (SI), furnished as uncured w/one or two catalysts.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	HB	-	-	150	150	150	-	-

CTI: - HVTR: - D495: - IEC Ball Pressure (C): -
 Dielectric Strength (kV/mm): - Volume Resistivity (10¹⁰ohm-cm): - Dimensional Stability(%): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (C): -
 ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -
 ** May be followed by the suffix U
 X One digit, maybe 3 ~ 8

Report Date: 1/20/1999

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN)CO.,LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.</p>				TITLE	GROMMET	SPEC. DWG.	
				MATERIAL	SILICON RUBBER	DATE	2009.02.02
				FINISH		DRAWN	Ken
				COLOR	BLACK	CHECK	
PART NUMBER	GM-62	DRAWING NUMBER	GM-62	UNLESS OTHERWISE SPECIFIED TOLERANCE	±0.4	APPROVED	
SIZE	A4	SCALE	2:1	UNIT	mm	REV	A