


IP68 認證 IP68 Certificate

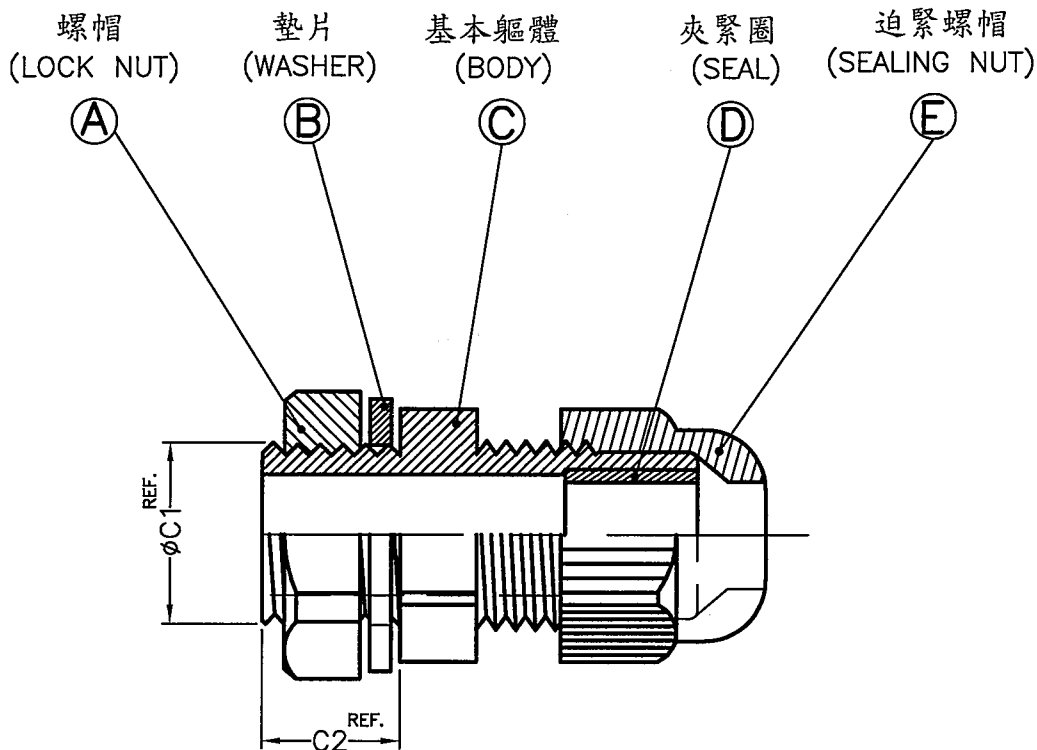

標準螺牙 THREADED ENTRY METRIC	適用電纜 CABLE RANGE Ø	螺紋外徑 THREADED O. D. ØC1	機板口徑 PANEL MOUNTING HOLE	螺紋長度 THREADED LENGTH C2	板手徑 SPANNER SIZE A & E
M32X1.5	Ø25~Ø18	Ø32.0	Ø32~Ø32.4	10.5	41/42

ITEM.	MATERIAL
A , C , E	NYLON 66 UL94V-2
B , D	EPDM

NOTE:1. SHRINKING IS NORMAL STATUS.

內縮為正常現象。

2. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質。

3. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.

色母環保檢測報告, 僅提供原始測試報告。



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2014.04.17	TITLE CABLE GLANDS	DWG. NO. KGB32-25-ST		PART NO. KGB32-25-ST	
	DRAWN Y.C.P	MATERIAL SEE ABOVE				
	CHECKED 林祺翔	COLOR BLACK	FINISH	SIZE A4.	SPEC. DWG	REV A
	APPROVED Kang	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SCALE: NONE	UNIT mm	SHEET 1 OF 1