
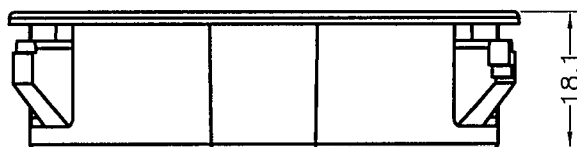
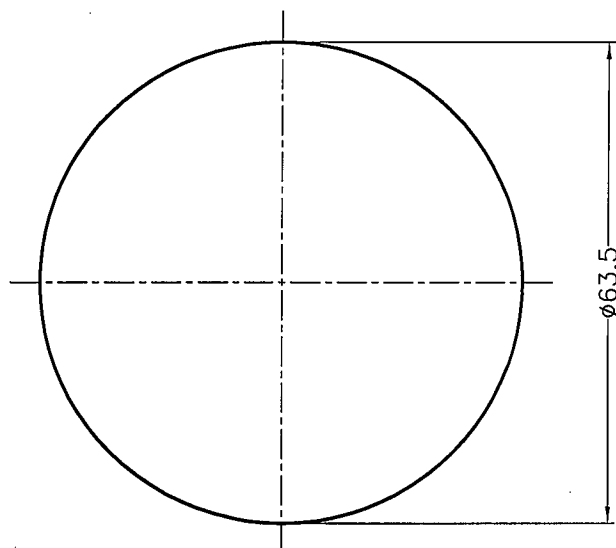


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

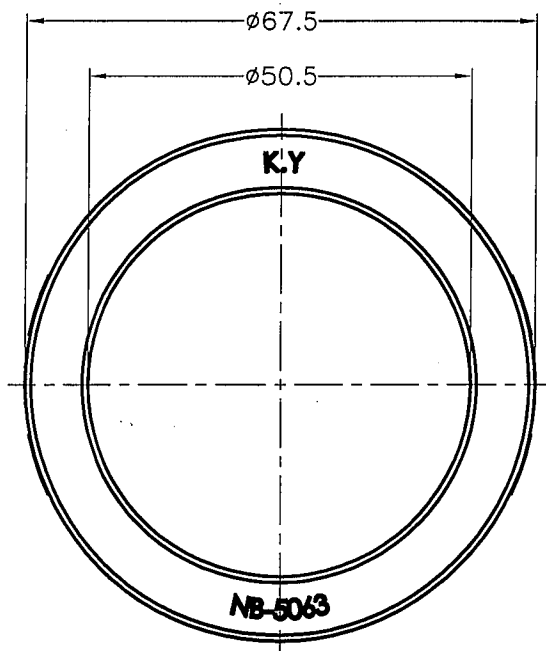

MOUNTING HOLE: $\phi 63.5\text{mm}$
CHASSIS THICKNESS: 6.35mm

QM722 Component - Plastics		Wednesday		E41938					
E I DUPONT DE NEMOURS & CO INC		ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 80713 WILMINGTON DE 19880							
Material Designation: 101(+)(f1), 101F(+)(f1), 101L(+)(f1), E101(+)(f1), E101L(f1), 132F(+)(f1), 135F(+)(f1)		Product Description: Polyamide 66 (PA66), designated "Zytel" furnished as pellets.							
Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.71	V-2	4	0	130	75	85	725	960
	1.5	V-2	3	0	130	75	85	750	960
	3	V-2	2	0	130	75	85	800	960
	6	V-2	2	0	130	75	85	800	960
CTI: 0		HVTR: 0		D495: 6				IEC Ball Pressure (Cr.)	
Strength $\phi 1\text{mm} \times 13$		Volume Resistivity (10 ¹² ohm-cm): 14						Dimensional Stability(%)	
Strength $\phi 0.04\text{mm}$		ISO Flexural Strength (MPa)						Deflection (°) Cr.	
ISO Tensile Impact $\phi 1\text{mm} \times 13$		ISO Izod Impact $\phi 1\text{mm} \times 13$						ISO Charpy Impact $\phi 1\text{mm} \times 13$	
(+) Virgin and grindup to 50% by weight inclusive, have the same basic material characteristics.									
(f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.									
NOTE (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" or "MIN" or "ZEN" or "DEL" or "CRA" or "RYN".									
Report Date: 7/29/1996		Underwriters Laboratories Inc@							
UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a									