


REVISIONS			
REV	DESCRIPTION	DATE	BY

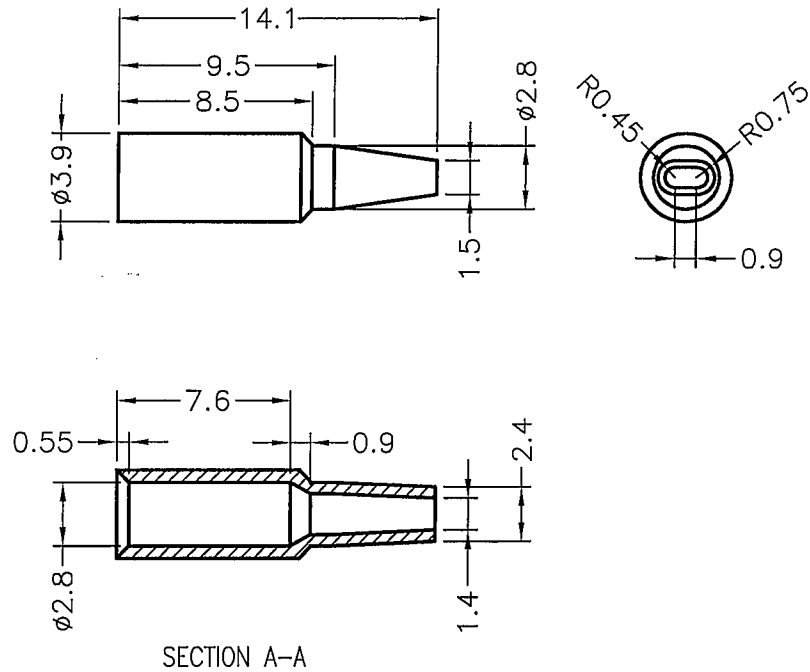

QMFZ2 Component - Plastics
 SHIN-ETSU SILICONE TAIWAN CO LTD
 SHIN CHU IND PARK NO 25 KUANG FU S RD SHIN CHU TW
 Material Designation: KE-9X1**
 Product Description: Silicone (SD), furnished as uncured w/one or two catalysts.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	HB	-	-	150	150	150	-	-

CTI: - HVTR: - D495: -
 Dielectric Strength (kV/mm): - Volume Resistivity (10¹⁰ohm-cm): - IEC Ball Pressure (C): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - Dimensional Stability(%): -
 ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Heat Deflection (C): -
 ISO Charpy Impact (kJ/m²): -
 ** May be followed by the suffix U
 X One digit, maybe 3 ~ 8

Report Date: 1/20/1999

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE 矽膠護線環		產品規格圖面	
				MATERIAL SILICON RUBBER		DATE 2007.06.15	
				HARDNESS 50°~60°		DRAWN BUNNY	
				COLOR BLACK		CHECK 	
PART NUMBER TF-395I		DRAWING NUMBER TF-395I		UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.4		APPROVED 	
SIZE A4	SCALE 3:1	UNIT mm	REV B				