


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

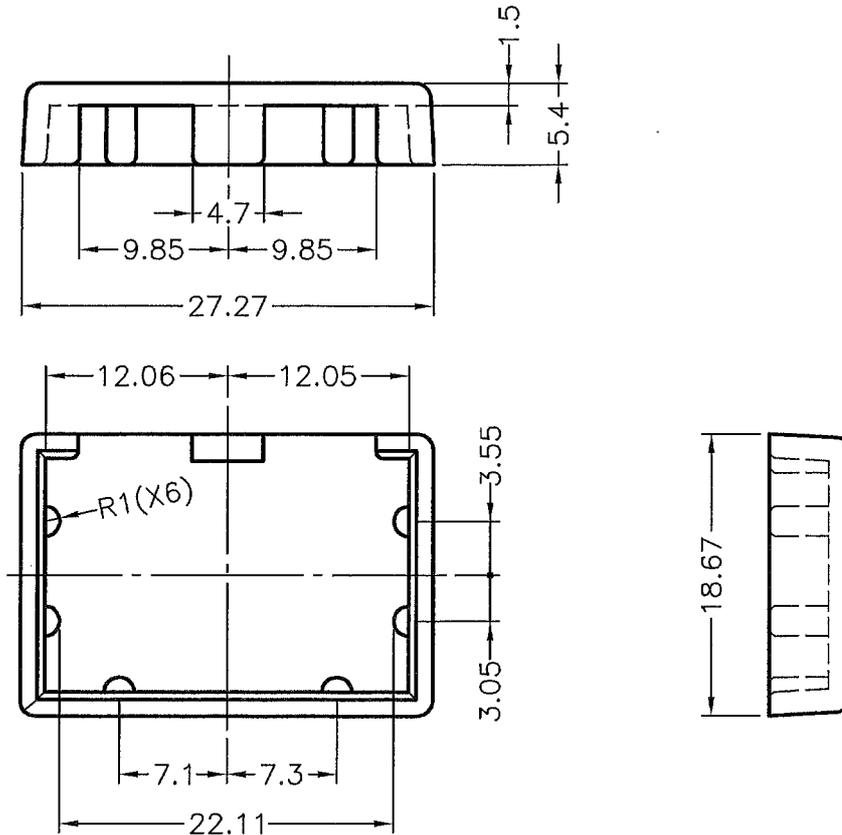

Component - Plastics

E44716

**RHODIA ENGINEERING PLASTICS**

QUARTIER BELLE-ETOILE, AVE RAMBOZ, BOITE POSTALE 64, ST FONS CEDEX 69192 FR

**B 50H1(r1)**

Polyamide 66.6 (PA66.6), unfilled, "Technyl", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWM	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.38	V-0	4	0	120	-	-
	0.75	V-0	4	0	120	90	95
BK	1.0	V-0, 5VB	4	0	120	90	95
	1.5	V-0	4	0	120	90	95
	3.0	V-0	3	0	120	90	95

Comparative Tracking Index (CTI): 0  
 Dielectric Strength (kV/mm): -  
 High-Voltage Arc Tracking Rate (HVTR): 0  
 Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -  
 Volume Resistivity (10<sup>11</sup> ohm-cm): -  
 High Volt, Low Current Arc Resis (D495): 6

(r1) - Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

NOTE - Materials designated "Technyl" may be prefixed by the letters "TY".

ANSI/UL94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1993-10-21

Last Revised: 2013-02-13

© 2013 UL LLC



NOTE: NYLON 66 UL94V-0 or EQUIVALENT

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>		TITLE	COVER	SPEC. DWG.			
		MATERIAL	NYLON 66 UL94V-0	DATE	2003.04.02		
		FINISH		DRAWN	S.J.C.		
		COLOR	BLACK	CHECK			
PART NUMBER	CDELT-3	DRAWING NUMBER	CDELT-3	UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED	
SIZE	A4	SCALE	1:1	UNIT	mm	REV	A