


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

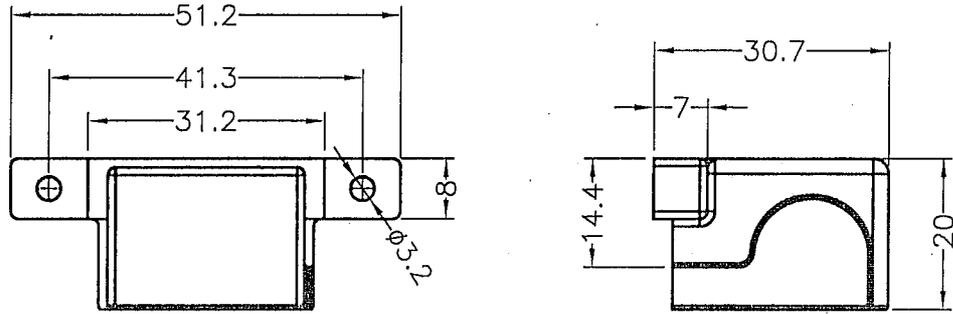

QMFZ2 Component - Plastics

Friday, October 24, 2003

E44716

RHODIA ENGINEERING PLASTICS

QUARTIER BELLE-ETOILE AVE RAMBOZ BOITE POSTALE 64 69192 ST FONS CEDEX FRANCE

Material Designation: B 50H1(r1)

Product Description: Polyamide 66/6 (PA66/6), designated "Technyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elcc	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.38	V-0	4	0	120	-	-	-	-
	0.75	V-0	4	0	120	90	95	-	-
BK	1	V-0, 5VB	4	0	120	90	95	-	-
	1.5	V-0	4	0	120	90	95	-	-
	3	V-0	3	0	120	90	95	-	-

CTI: 0 HVTR: 0 D495: 6 IEC Ball Pressure (C): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁹ohm-cm): -

Dimensional Stability(%): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

(r1) Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

Report Date: 10/21/1993

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>		TITLE	電源蓋	產品規格圖面			
		MATERIAL	NYLON 66 UL94V-0	DATE	2011.11.08		
		FINISH		DRAWN	SAI		
PART NUMBER	CVA-8V0B	DRAWING NUMBER	CVA-8V0B	COLOR	BLACK	CHECK	
SIZE	A4	SCALE	1:1	UNIT	mm	REV	A
				UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED	