


REVISIONS			
REV	DESCRIPTION	DATE	BY

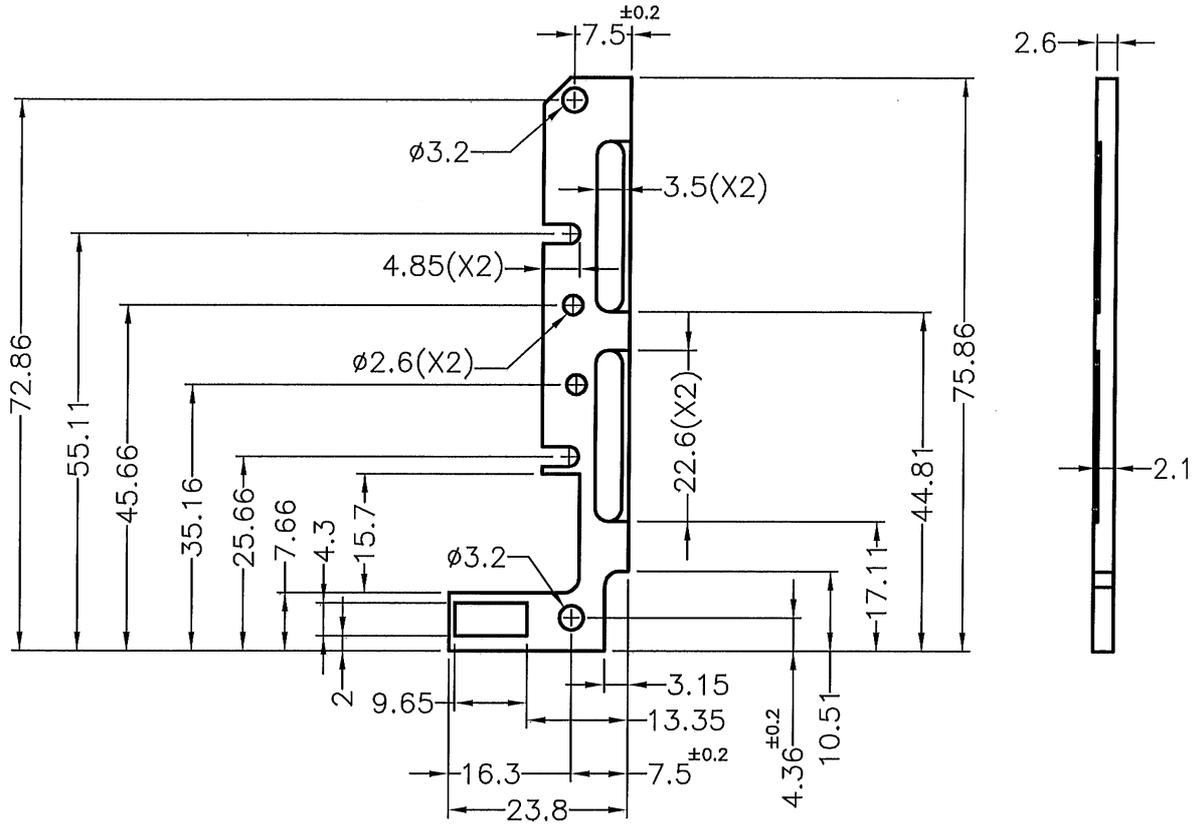

QMPZ2 Component - Plastics
 DSM ENGINEERING PLASTICS B V
 POSTBUS 43 6130 AA SITTARD THE NETHERLANDS
 Material Designation: TE250F6(h1)(J)

Tuesday, May 25, 2004

E47960

Product Description: Polyamide 4/6 (PA4/6), glass reinforced, flame retardant, designated "Stanyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.35	V-0	-	-	-	-	-	-	-
	0.75	V-0	0	0	140	110	120	-	-
	1.5	V-0	0	0	140	125	125	-	-
	3	V-0	0	0	140	130	130	-	-

IEC CTI:

CTI: 2

HVTR: 1

D495: 6

IEC Ball Pressure (C₂ - Dimensional Stability)(%): 60

Dielectric Strength (kV/mm): 23

Volume Resistivity (Ω²cm): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (C₂ - ISO Charpy Impact (kJ/m²): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

(h1)

Virgin and regrind, up to 50% by weight inclusive, in thicknesses of 0.75mm and greater, have the same basic material characteristics, except for CTI.

(i)

Virgin and regrind, up to 100% by weight inclusive, have the same basic material characteristics with respect to Flammability in the 0.75mm thickness and greater.

Report Date: 1/1/2003

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE	絕緣片	產品規格圖面
				MATERIAL	NYLON 46 UL94V-0+GF	DATE
PART NUMBER				FINISH	DRAWN	
EML-13(B)				COLOR	Eric	
DRAWING NUMBER				UNLESS OTHERWISE SPECIFIED TOLERANCE	CHECK	
EML-13(B)				BLACK	董智遠	
SIZE	SCALE	UNIT	REV	APPROVED	Kang	
A4	1:1	mm	A	±0.3		