

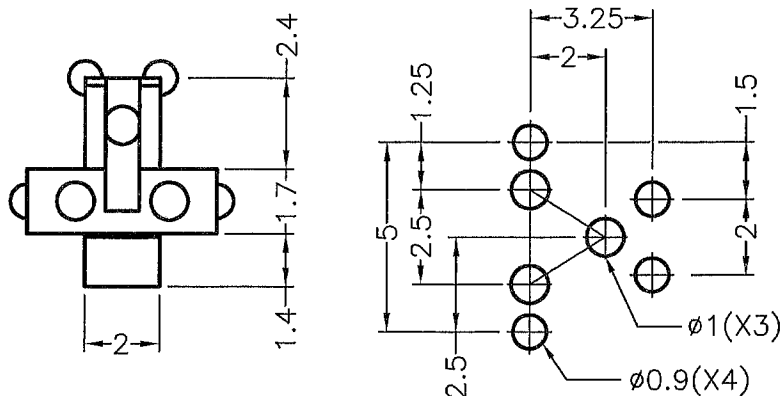


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

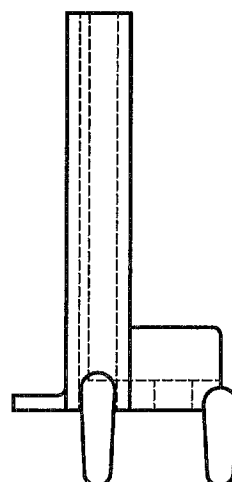

MOUNTING HOLE

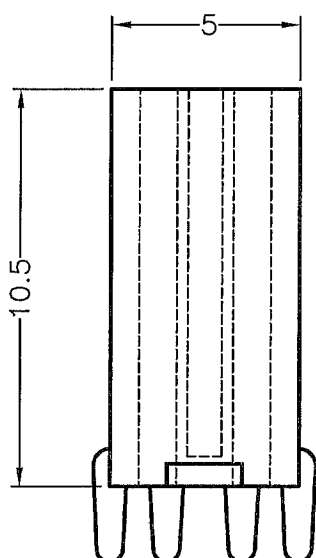

NOTE: All measurement does not include gate which raises under 1.2mm.

Component - Plaques

E41938

E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19860

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thick (mm)	Flame Class	HWI	HAI	Elec Eleg	Imp Imp	Str Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HVT): 0

Dimensional Stability (%): -

(Infrared Flame Tracking (IFT): -

Volume Resistivity (10¹⁰ ohm-cm): 14

High Volt, Low Current Arc Res (B485): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "Zytel" for Zytel or "HAI" for HAI or "DEL" for Delrin or "CRA" for Crastin or "RVP" for Rynite or "ETPV" for ETPV grades.

(3) Virgin and reground up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.7mm. For thicknesses 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTIs for all properties and Regrind exceeding 20% is limited to V-2 flameability for WT, RD, BK.

ANSI/UL 64 small-scale test data does not pertain to building materials, furnishings and related products. ANSI/UL 64 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1965-07-29
Last Revised: 2010-07-27

© 2011 DuPont Performance Laboratories Inc.

UL US

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE		SPEC. DWG.	
				MATERIAL		DATE	
				FINISH		DRAWN	
				COLOR		CHECK	
				UNLESS OTHERWISE SPECIFIED TOLERANCE		APPROVED	
PART NUMBER		DRAWING NUMBER					
HLS-2(W)		HLS-2(W)					
SIZE	SCALE	UNIT	REV				
A4	5:1	mm	A	SEE ABOVE		Kang	