



DTM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

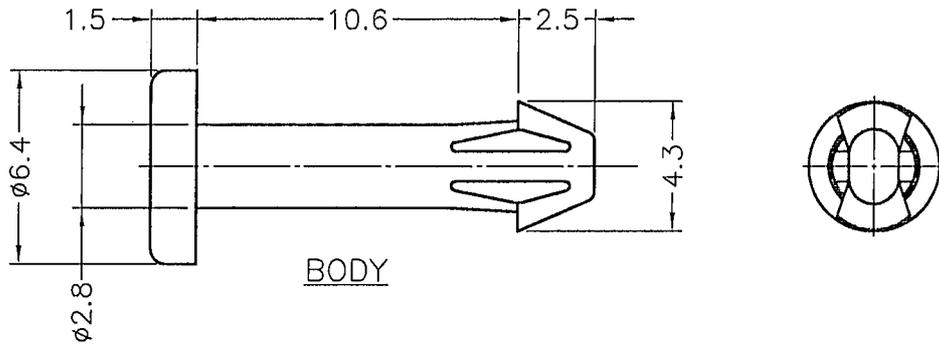

Loop Number	4.5
Direction	To Right
Spring Diameter	ø0.45
Outside Diameter	ø4.2
Total Length	8.0 ^{REF.}

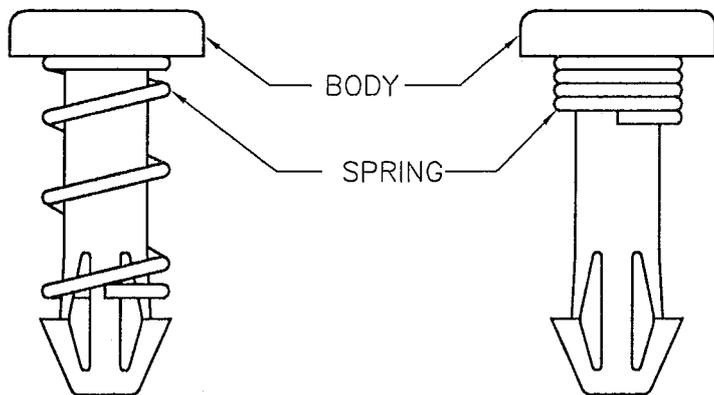

PART NO.	COLOR
HSR-7	BLACK
HSR-7(N)	NATURAL
HSR-7(W)	WHITE

Component - Plastics

E41938

E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 60713, WILMINGTON DE 19080
101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0
Dielectric Strength (kV/mm): 13
High-Voltage Arc Tracking Rate (HVTR): 0
Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -
Volume Resistivity (10⁸ ohm-cm): 14
High Volt, Low Current Arc Roofs (D495): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "GRA" for Gracilin or "RYL" for Rylite or "ETPV" for ETPV grades.


r9 - Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTIs for all properties and Regrind exceeding 25% is limited to V-2 Flammability for V7, RD, B4.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related products. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1996-07-29
Last Revised: 2010-07-27

© 2011 DuPont Performance Plastics Inc.

USA

 <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>	TITLE		FAN SNAP RIVET		SPEC. DWG.		
	MATERIAL		NYLON 66 UL94V-2		DATE		2005.04.13
	SPRING MATERIAL		SWP		SPRING FINISH		NICKEL
	DRAWN		S.J.C.		CHECK		
PART NUMBER		DRAWING NUMBER		COLOR		SEE ABOVE	
SEE ABOVE		HSR-7		UNLESS OTHERWISE SPECIFIED TOLERANCE		SEE ABOVE	
SIZE	A4	SCALE	NONE	UNIT	mm	REV	B
APPROVED				APPROVED			