


REVISIONS			
REV	DESCRIPTION	DATE	BY

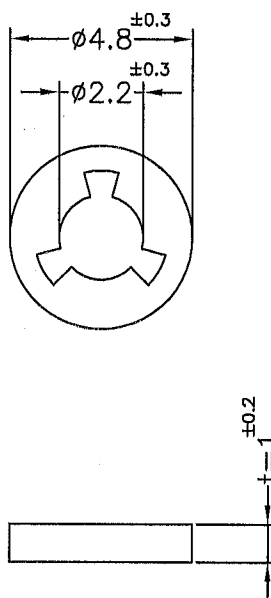

Component - Plastics [Quick Info]

E41871

BASF SE

Performance Materials Europe, E-PME410 - H201, Ludwigshafen 67058 DE

B40, B33 L

Polyamide 6 (PA6), "Ultramid", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
NC	0.80	HB	4	0	65	65	65
	1.6	HB	3	0	65	65	65
	3.0	HB	2	0	65	65	65

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HVT): 0

Dimensional Stability (%): 0

Inclined Plane Tracking (IPT): -

Volume Resistivity (10⁹ ohm-cm): 10

High Volt, Low Current Arc Resis (D496): 6


ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1983-05-19

Last Revised: 2009-10-05

© 2016 UL LLC



 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE SCREW WASHER		SPEC. DWG.	
				MATERIAL NYLON 6 UL94HB		DATE 2007.08.09	
				FINISH		DRAWN BUNNY	
				COLOR NATURAL		CHECK 	
PART NUMBER KWS-2.6-1		DRAWING NUMBER KWS-2.6-1		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
SIZE A4	SCALE 5:1	UNIT mm	REV A				