

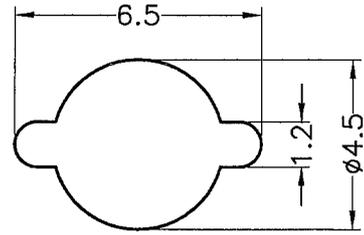


成型尺寸	公差
5mm 以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm 以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

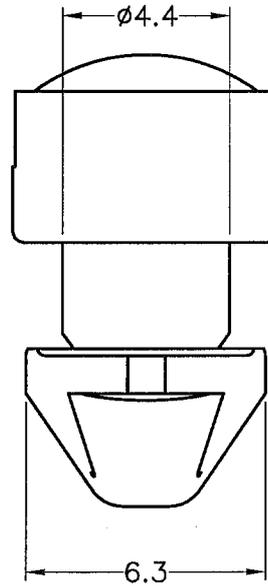

MOUNTING HOLE  
CHASSIS THICKNESS: 3.5~3.8

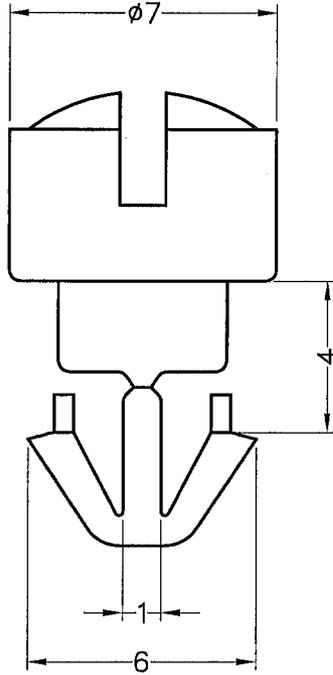

QMF22 Component - Plastics Wednesday  
E.I. DUPONT DE NEMOURS & CO INC  
ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 80713 WILMINGTON DE 19880  
Material Designation: 101(+)(f1), 101F(+)(f1), 101L(+)(f1), E101(+)(f1), E101L(f1), 132F(+)(f1), 135F(+)(f1)  
Product Description: Polyamide 66 (PA66), designated "Zytel" furnished as pellets.

B4193i

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.71	V-2	4	0	130	75	85	725	960
	1.5	V-2	3	0	130	75	85	750	960
	3	V-2	2	0	130	75	85	800	960
	6	V-2	2	0	130	75	85	800	960

CTI: 0	HVTR: 0	D495: 6	IEC Ball Pressure (C): -
Strength (kV/mm): 13	Volume Resistivity (10 <sup>10</sup> ohm-cm): 14		Dimensional Stability(%): -
ISO Tensile Strength (MPa): -	ISO Flexural Strength (MPa): -		ISO Heat Deflection (C): -
ISO Tensile Impact (kJ/m <sup>2</sup> ): -	ISO Izod Impact (kJ/m <sup>2</sup> ): -		ISO Charpy Impact (kJ/m <sup>2</sup> ): -

(+) Virgin and grind up to 50% by weight inclusive, have the same basic material characteristics.  
(f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.  
NOTE (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" or "MIN" or "ZEN" or "DEL" or "CRA" or "RYN".

Report Date: 7/29/1996 Underwriters Laboratories Inc®  
UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined.

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>	TITLE		鉚釘	產品規格圖面		
	MATERIAL		NYLON 66 UL94V-2	DATE		2009.12.02
	FINISH			DRAWN		Eric
	COLOR		BLACK	CHECK		
PART NUMBER	DRAWING NUMBER		UNLESS OTHERWISE SPECIFIED TOLERANCE			
LEFS-2(B)	LEFS-2		SEE ABOVE			
SIZE	SCALE	UNIT	REV	APPROVED		
A4	5:1	mm	A			