
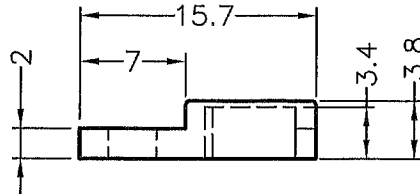


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

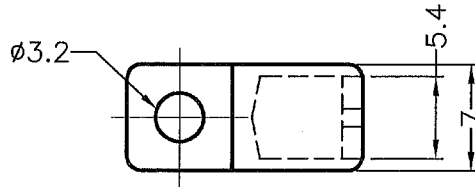

NOTE: All measurement does not include gate which raises under 0.3mm.

Component - Plastics

E44716

RHODIA ENGINEERING PLASTICS

QUARTIER BELLE-ETOILE, AVE RAMBOZ, BOITE POSTALE 64, ST FONS CEDEX 69192 FR

A 60G1 V30

Polyamide 66 (PA66), "Technyl", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.8	V-0	0	0	130	105	120
	1.5	V-0, 5VA	0	0	130	115	130
	3.0	V-0, 5VA	0	0	130	115	130

Comparative Tracking Index (CTI): 0

Dimensional Stability (%): -

High-Voltage Arc Tracking Rate
(HVT): -

High Volt; Low Current Arc Resis (D485): 5

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁶ ohm-cm): -

NOTE - Materials designated "Technyl" may be prefixed by the letters "TY".

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by Underwriters Laboratories Inc.

Report Date: 2004-11-29

Last Revised: 2008-01-06

Underwriters Laboratories Inc®



NYLON 66 UL94V-0+GF or EQUIVALENT

K ISO 9001 ISO 14001 QC 080000 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE PARTS HOUSING		SPEC. DWG.	
				MATERIAL NYLON 66 UL94V-O+GF	DATE 2008.09.08		
				HARDNESS	DRAWN Ken		
PART NUMBER PH-23LBNZ		DRAWING NUMBER PH-23LBNZ		COLOR BLACK	CHECK 		
SIZE A4	SCALE 2:1	UNIT mm	REV B	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED 		