


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

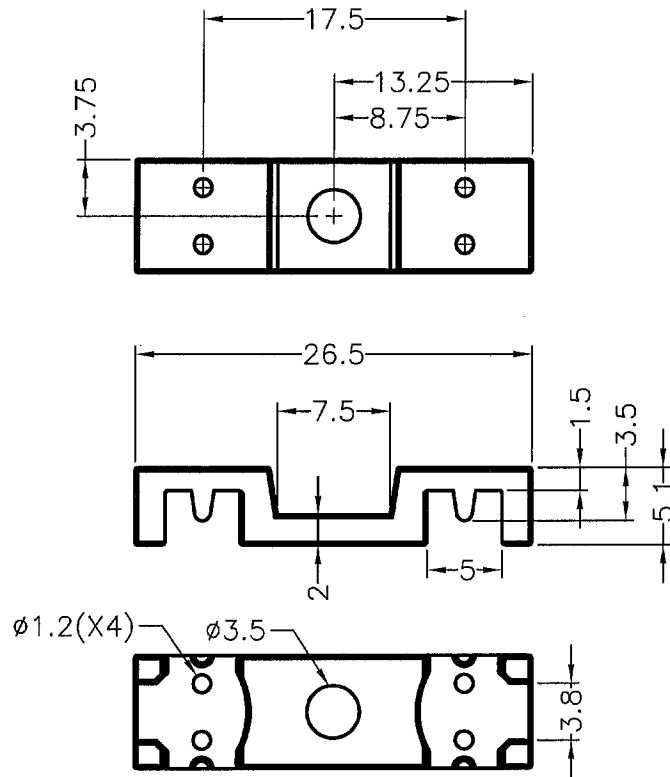

QMFZ2 Component - Plastics
NAN YA PLASTICS CORP

Friday, October 24, 2003

E130155

PLASTICS 4TH DIV 3RD FL 201 TUNG HWA NORTH RD TAIPEI TAIWAN
Material Designation: 1403G6

Product Description: Polybutylene Terephthalate (PBT), furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	3	0	130	130	140	-	-
	1.5	V-0	2	0	130	130	140	-	-
	3	V-0	2	0	130	130	140	-	-
CTI: 2		HVTR: 1		D495: 6		IEC Ball Pressure (C): -			

Dielectric Strength (kV/mm): 33

Volume Resistivity (10¹⁰ohm-cm): 14

Dimensional Stability(%): 0

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

Report Date: 1/11/1991

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE 零件墊座		產品規格圖面	
				MATERIAL PBT UL94V-0		DATE 2010.12.17	
				FINISH		DRAWN SAI	
				COLOR NATURAL		CHECK 	
PART NUMBER PH-37		DRAWING NUMBER PH-37		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
SIZE A4	SCALE 2:1	UNIT mm	REV A				