

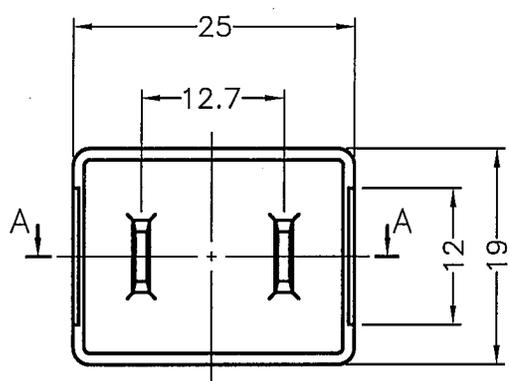
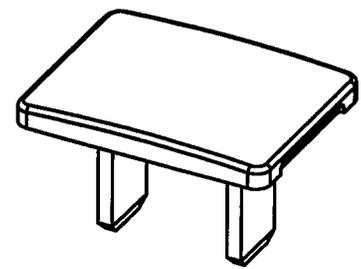


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

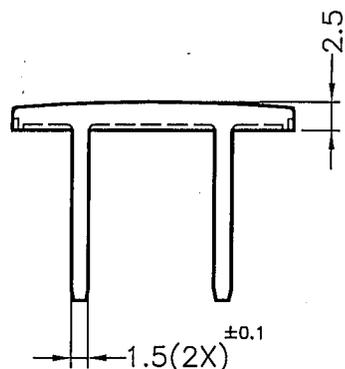

QMFZ2 Component - Plastics
 FORMOSA CHEMICALS & FIBRE CORP
 PLASTICS DIV 201 TUNG HWA N RD TAIPEI 105 TAIWAN
 Material Designation: AG15E1

Friday, October 24, 2003

E162823

Product Description: Acrylonitrile Butadiene Styrene (ABS), designated "TAIRILAC" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	1.6	HB	5	0	60	60	60	-	-
	3	-	-	-	60	60	60	-	-
	CTI: 0		HVTR: 0			D495: 6			

Dielectric Strength (kV/mm): - Volume Resistivity (10¹⁰ohm-cm): - Dimensional Stability(%): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (C): -
 ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -

Report Date: 11/1/1995

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.		TITLE POWER CONNECTOR COVER		SPEC. DWG.	
MATERIAL ABS		DATE 2008.03.18		DRAWN JOHNNY	
FINISH BLACK		CHECK 		APPROVED 	
PART NUMBER PLCC-3(ABS)		DRAWING NUMBER PLCC-3(ABS)		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
SIZE A4	SCALE 3:2	UNIT mm	REV A		