
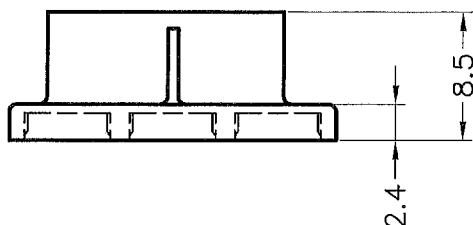
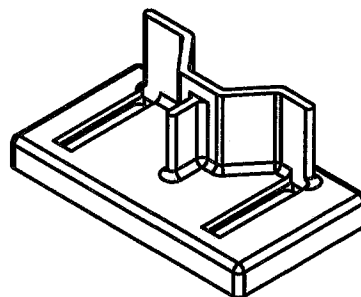


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

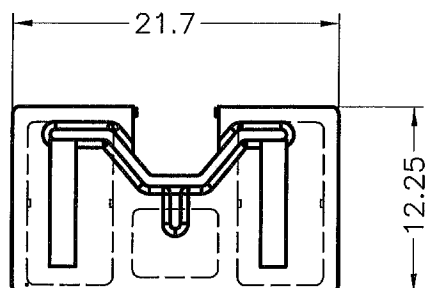

QMFZ2 Component - Plastics
 RHODIA ENGINEERING PLASTICS
 QUARTIER BELLE-ETOILE AVE RAMBOZ BOITE POSTALE 64 69192 ST FONS CEDEX FRANCE
 Material Designation: B 50H1(r1)

Friday, October 24, 2003

B44716

Product Description: Polyamide 66/6 (PA66/6), designated "Technyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IBC GWIT	IBC GWFI
ALL	0.38	V-0	4	0	120	-	-	-	-
	0.75	V-0	4	0	120	90	95	-	-
BK	1	V-0, 5VB	4	0	120	90	95	-	-
	1.5	V-0	4	0	120	90	95	-	-
	3	V-0	3	0	120	90	95	-	-

CTI: 0

HVTR: 0

D495: 6

IBC Ball Pressure (Ck -

Dielectric Strength (kV/mm) -

Volume Resistivity (10⁹ohm-cm) -

Dimensional Stability(%) -

ISO Tensile Strength (MPa) -

ISO Flexural Strength (MPa) -

ISO Heat Deflection (Ck -

ISO Tensile Impact (kJ/m²) -

ISO Izod Impact (kJ/m²) -

ISO Charpy Impact (kJ/m²) -

(r1) Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

Report Date: 10/21/1993

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

K
 康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN) CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE	SOCKET COVER	SPEC. DWG.
MATERIAL	NYLON 66 UL94V-0	DATE 2008.11.11
FINISH		DRAWN JIM
COLOR	BLACK	CHECK
UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED

PART NUMBER	DRAWING NUMBER
PLCD-4V0B	PLCD-4V0B
SIZE	SCALE
A4	2:1
UNIT	REV
mm	A