

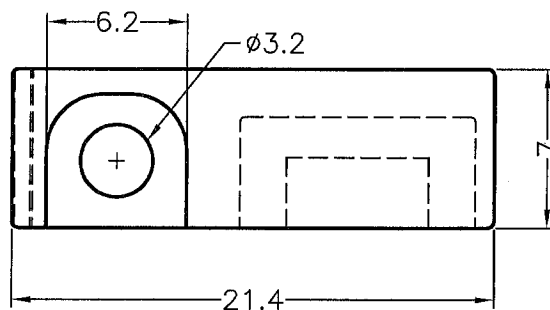


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

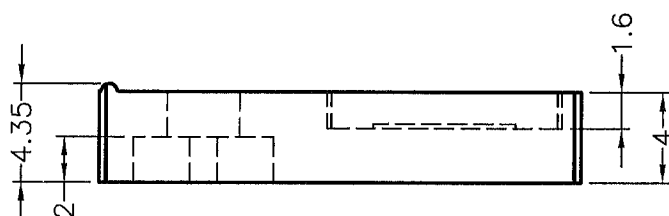

Component - Plastics

E44716

RHODIA ENGINEERING PLASTICS

QUARTIER BELLE-ETOILE, AVE RAMBOZ, BOITE POSTALE 64, ST FONS CEDEX 69192 FR

A 60G1 V30

Polyamide 66 (PA66), "Technyl", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Efec	RTI Imp	RTI Str
ALL	0.8	V-0	0	0	130	105	120
	1.5	V-0, 5VA	0	0	130	115	130
	3.0	V-0, 5VA	0	0	130	115	130

Comparative Tracking Index (CTI): 0

Dimensional Stability (%): -

High-Voltage Arc Tracking Rate
(H-VTR): -

High Volt, Low Current Arc Resis (D495): 5

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁸ ohm-cm): -

NOTE - Materials designated "Technyl" may be prefixed by the letters "TY".

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by Underwriters Laboratories Inc.

Report Date: 2004-11-29

Last Revised: 2009-01-06

Underwriters Laboratories Inc®



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE 電晶體蓋		產品規格圖面	
MATERIAL NYLON 66 UL94V-0+GF		DATE 2010.12.09	
FINISH		DRAWN SAI	
COLOR NATURAL		CHECK 	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	

PART NUMBER TC-31NZ		DRAWING NUMBER TC-31NZ	
SIZE A4	SCALE 3:1	UNIT mm	REV A