


成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

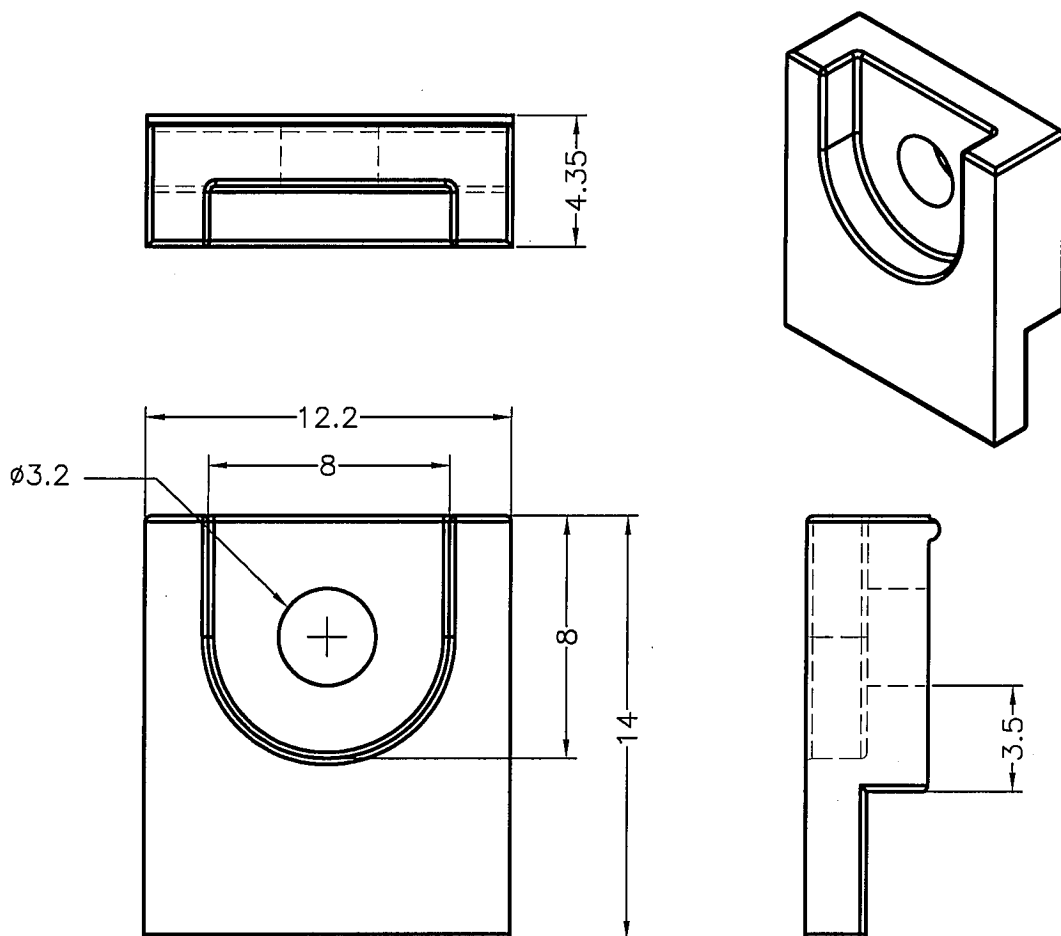

Component - Plastics

E44716

RHODIA ENGINEERING PLASTICS

QUARTIER BELLE-ETOILE, AVE RAMBOZ, BOITE POSTALE 64, ST FONS CEDEX 69192 FR

A 60G1 V30

Polyamide 66 (PA66), "Technyl", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.8	V-0	0	0	130	105	120
	1.5	V-0, 5VA	0	0	130	115	130
	3.0	V-0, 5VA	0	0	130	115	130

Comparative Tracking Index (CTI): 0

Dimensional Stability (%): -

High-Voltage Arc Tracking Rate
(HVTR): -

High Volt, Low Current Arc Resis (D485): 5

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁹ ohm-cm): -

NOTE - Materials designated "Technyl" may be prefixed by the letters "TY".

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by Underwriters Laboratories Inc.

Report Date: 2004-11-29

Last Revised: 2008-01-05

Underwriters Laboratories Inc®



 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE 電晶體蓋		產品規格圖面	
				MATERIAL NYLON 66 UL94V-0+GF	DATE 2011.09.28		
				FINISH	DRAWN T.C		
				COLOR NATURAL	CHECK 		
PART NUMBER TC-41NNHA		DRAWING NUMBER TC-41NNHA		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE			
SIZE A4	SCALE 4:1	UNIT mm	REV A	APPROVED 			