
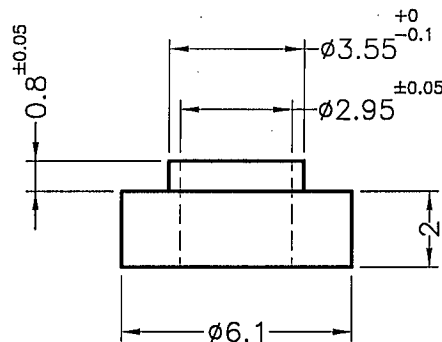


REVISIONS			
REV	DESCRIPTION	DATE	BY



QMFZ2 Component - Plastics
 DSM ENGINEERING PLASTICS B V
 POSTBUS 43 6130 AA SITTARD THE NETHERLANDS
 Material Designation: TE250F6(h1)(j)

Tuesday, May 25, 2004

E47960

Product Description: Polyamide 4/6 (PA4/6), glass reinforced, flame retardant, designated "Stanyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.35	V-0	-	-	-	-	-	-	-
	0.75	V-0	0	0	140	110	120	-	-
	1.5	V-0	0	0	140	125	125	-	-
	3	V-0	0	0	140	130	130	-	-

IEC CTI:

CTI: 2

HVTR: 1

D495: 6

IEC Ball Pressure (C):
Dimensional Stability (C):
100

Dielectric Strength (kV/mm): 25

Volume Resistivity (10¹²ohm-cm):

ISO Tensile Strength (MPa):

ISO Flexural Strength (MPa):

ISO Heat Deflection (C):

ISO Tensile Impact (kJ/m²):

ISO Iod Impact (kJ/m²):

ISO Charpy Impact (kJ/m²):

(h1)

Virgin and reground, up to 50% by weight inclusive, in thicknesses of 0.75mm and greater, have the same basic material characteristics, except for CTI.


(j)

Virgin and reground, up to 100% by weight inclusive, have the same basic material characteristics with respect to Flammability in the 0.75mm thickness and greater.

Report Date: 1/1/2003

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULL.

 ISO 9001 ISO 14001 QC 080000 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE 電晶體墊片		產品規格圖面	
				MATERIAL N46 UL94V-0+GF	DATE 2010.07.22		
				FINISH	DRAWN T.C		
				COLOR	CHECK 		
PART NUMBER TW-153N46		DRAWING NUMBER TW-153N46		UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.2			
SIZE A4	SCALE 5:1	UNIT mm	REV A	APPROVED 