


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

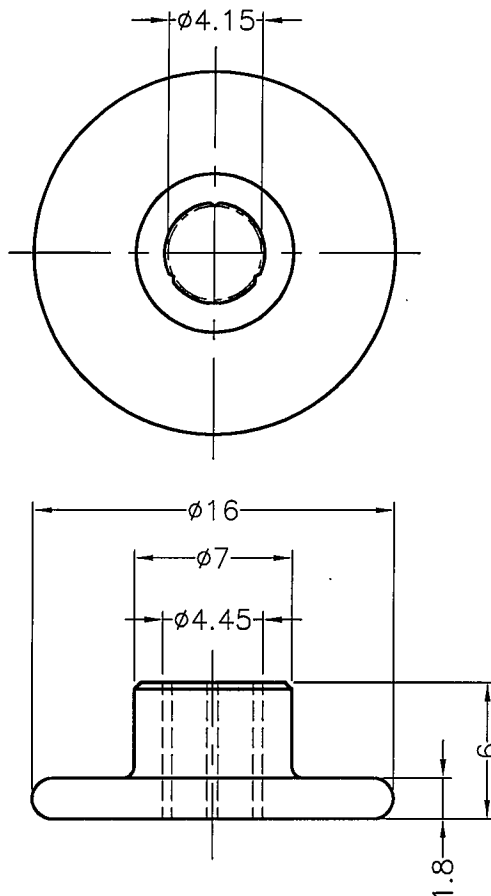

QMF22 Component - Plastics

Friday, October 24, 2003

EI30155

NAN YA PLASTICS CORP

PLASTICS 4TH DIV 3RD FL 201 TUNG HWA NORTH RD TAIPEI TAIWAN

Material Designation: 6410G3

Product Description: Polyamide 66 (PA66), furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	3	0	120	105	105	-	-
	1.5	V-0	3	0	120	105	105	-	-
	3	V-0	1	0	120	105	105	-	-

IEC CTI:

CTI: 2

HVTR: 1

D495: 6

IEC Ball Pressure (C): -

Dielectric Strength (kV/mm): 12

Volume Resistivity (10⁹ohm-cm): 13

Dimensional Stability(%): 0

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

Report Date: 1/30/1991

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE 電晶體墊片		產品規格圖面	
				MATERIAL NYLON 66 UL94V-0+GF		DATE 2012.03.30	
PART NUMBER TW-178NGV0B				FINISH		DRAWN ROBERT	
DRAWING NUMBER TW-178NGV0B				COLOR BLACK		CHECK  	
SIZE A4	SCALE 3:1	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 